

LCLS-II Undulator Segment Measurement Results

HXU-022

LCLS-II HXU Measurement Results

This report is intended to document the results of HXU segment tuning at LBNL and ANL. It should be sent to SLAC for approval before the HXU segment gets shipped.

Serial number from manufacturers label:	HXU-022
---	---------

Measurement Procedure:

The measurements have been carried out after the undulator segment had been fully tuned according to the “LCLS-II Undulator Test Plan” (LCLS-TN-17-1).

General Hall Probe Scan Evaluation Parameters


Undulator Temperature (should be 20.0)	20.22± 0.069	°C
First core pole #	8	
Last core pole #	253	
Tuning Gap	9.000	mm

Evaluation of Hall Probe Scans at Commissioning Gap

Commissioning Gap Temperature (should be 20.0)	20.15±0.29	°C
$rms(B_{pk} / B_{pk} - 1)$	0.001781	
K_{eff} at Commissioning Gap (should be 2.3400)	2.3394	
Commissioning Gap	7.9251	mm
$I1X$ (over 4.012667 m) (should be within ±40)	6.8	μTm
$I2X$ (over 4.012667 m) (should be within ±150)	-40	μTm^2
$I1Y$ (over 4.012667 m) (should be within ±40)	-25.4	μTm
$I2Y$ (over 4.012667 m) (should be within ±150)	0	μTm^2
Phase Shake (rms phase fluctuations over core poles (< 4.0))	3.07	degXray
Cell Phase Advance (over 4.012667 m)	48,603.3 (135×360+3.27)	degXray
Undulator Entrance Phase ¹	2,252.8 (25×90+2.77)	degXray
Undulator Exit Phase ²	2,250.5 (25×90+0.51)	degXray

¹Phase advance from cell start (undulator center -2.006334 m) to center of physical pole 8.

²Phase advance from physical pole 253 to cell end (undulator center +2.006334 m).

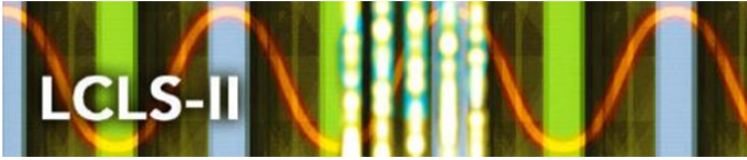

LCLS-II Undulator Segment Measurement Results

HXU-022

Undulator Encoder Settings

USGapEncoderOffset	-1781.3142
DSGapEncoderOffset	-33.8429
USWLinearEncoder.AOFF	92.0659
DSWLinearEncoder.AOFF	92.0124
USALinearEncoder.AOFF	92.7182
DSALinearEncoder.AOFF	92.0124

Undulator Load Cell Readings at Tuning Gap


LC.DAL_FORCE	-312.2022
LC.DAU_FORCE	-269.9185
LC.DWL_FORCE	-354.9667
LC.DWU_FORCE	-187.7119
LC.UAL_FORCE	-257.3422
LC.UAU_FORCE	-322.2767
LC.UWL_FORCE	-228.8326
LC.UWU_FORCE	-311.4778

Undulator Load Cell Readings at 100 mm Gap

LC.DAL_FORCE	0.0
LC.DAU_FORCE	0.0
LC.DWL_FORCE	0.0
LC.DWU_FORCE	0.0
LC.UAL_FORCE	0.0
LC.UAU_FORCE	0.0
LC.UWL_FORCE	0.0
LC.UWU_FORCE	0.0




Evaluation of Hall Probe Scans: K_{eff} vs. gap

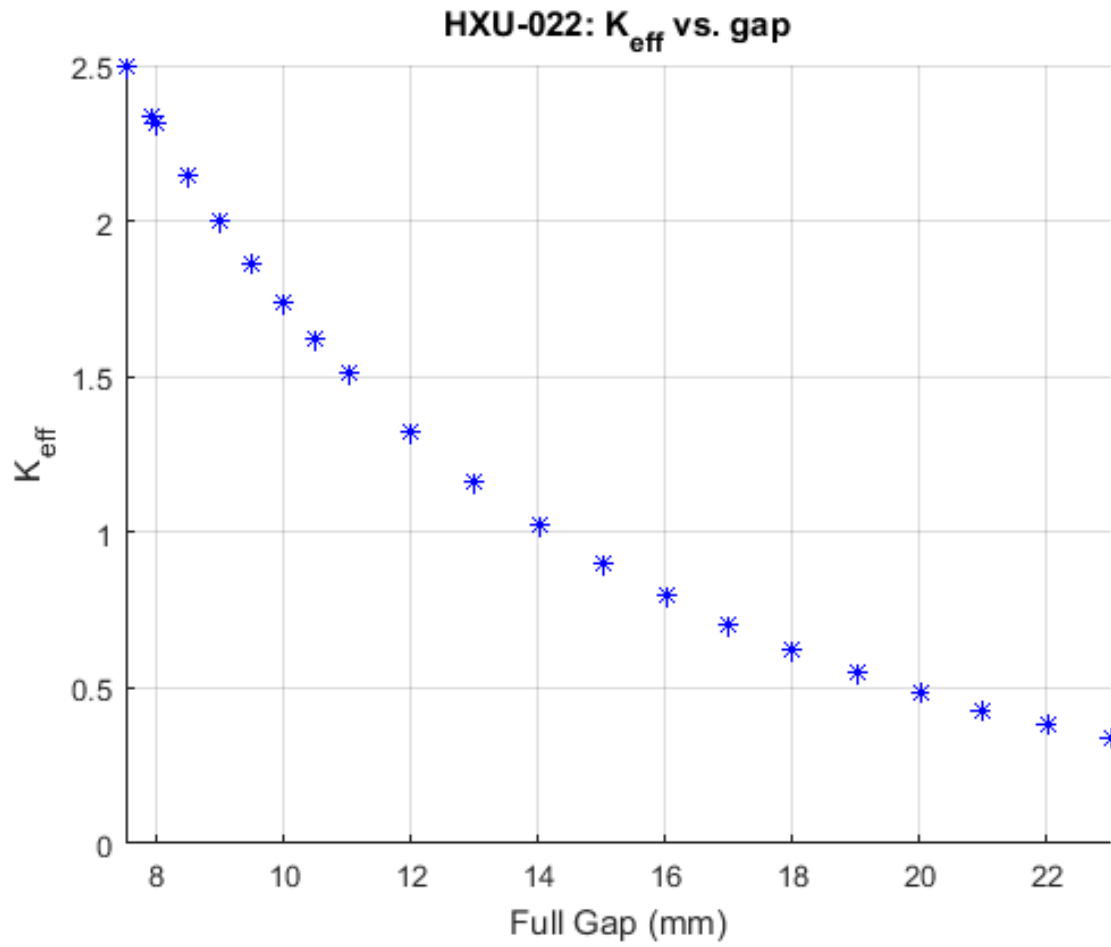



Evaluation of Hall Probe Scans: K_{eff} Hysteresis

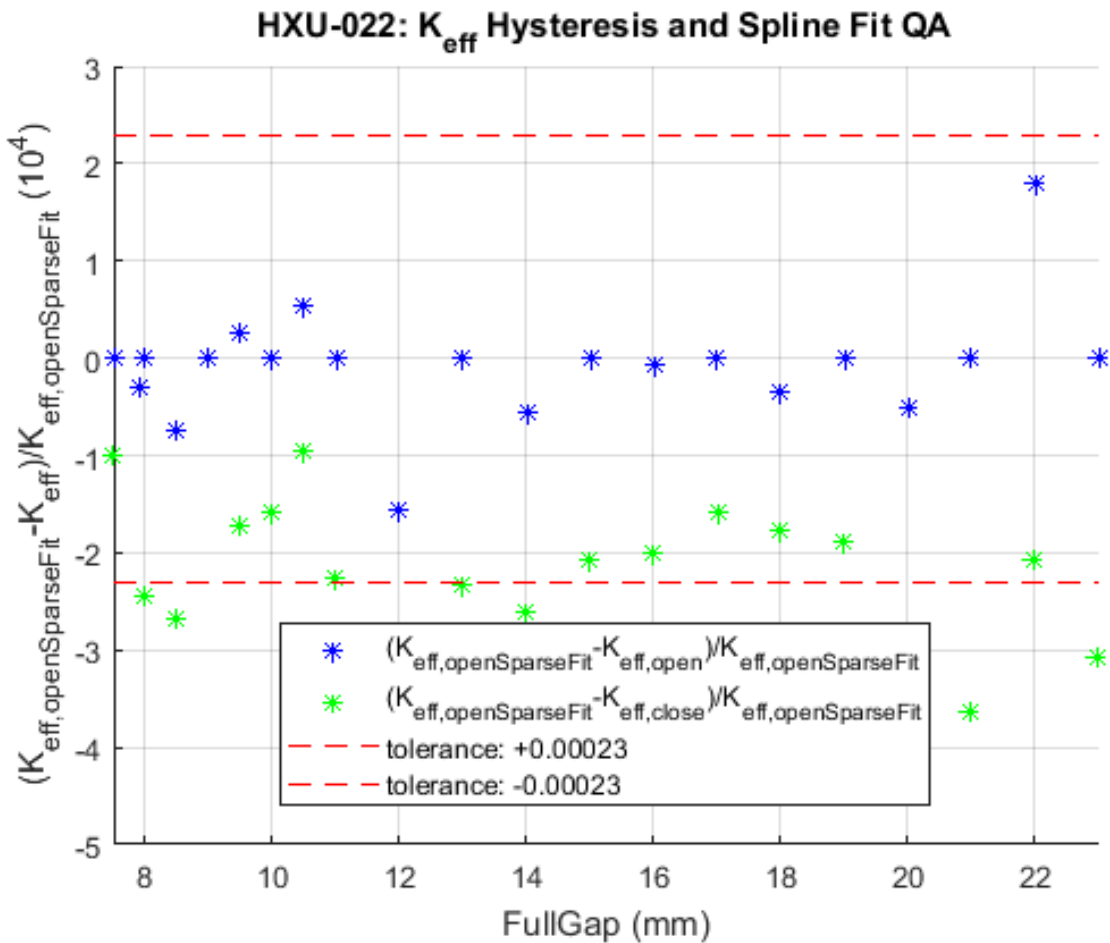


Plotted functions have been calculated from measured values openKeff (opengap) and closeKeff (closegap) using the following Matlab calculations:

- Blue Stars: `1-openKeff ./ spline(opengap(1:2:end),openKeff(1:2:end),opengap)`
- Green Stars: `1-closeKeff ./ spline(opengap(1:2:end),openKeff(1:2:end),closegap)`




Evaluation of Hall Probe Scans: Phase Shake vs gap

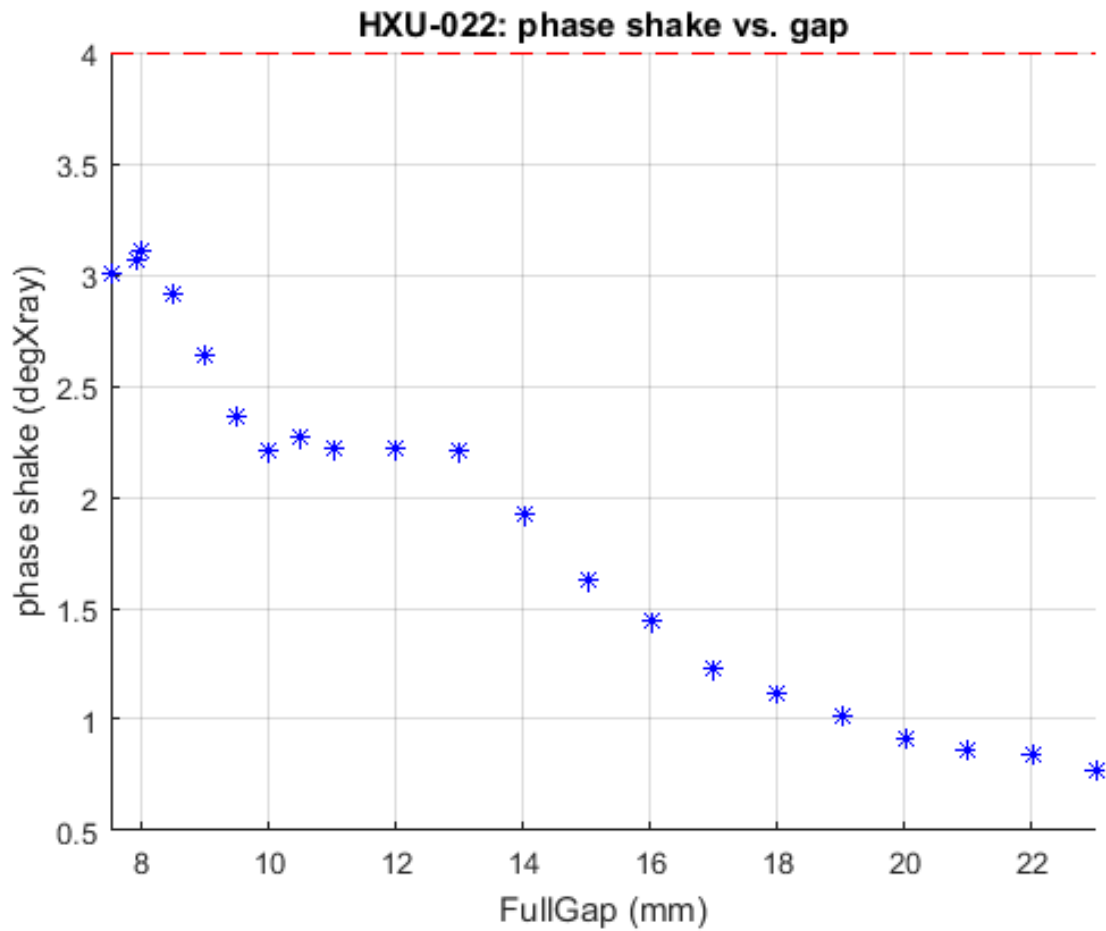




Evaluation of Hall Probe Scans: K_{eff} vs x at Tuning Gap

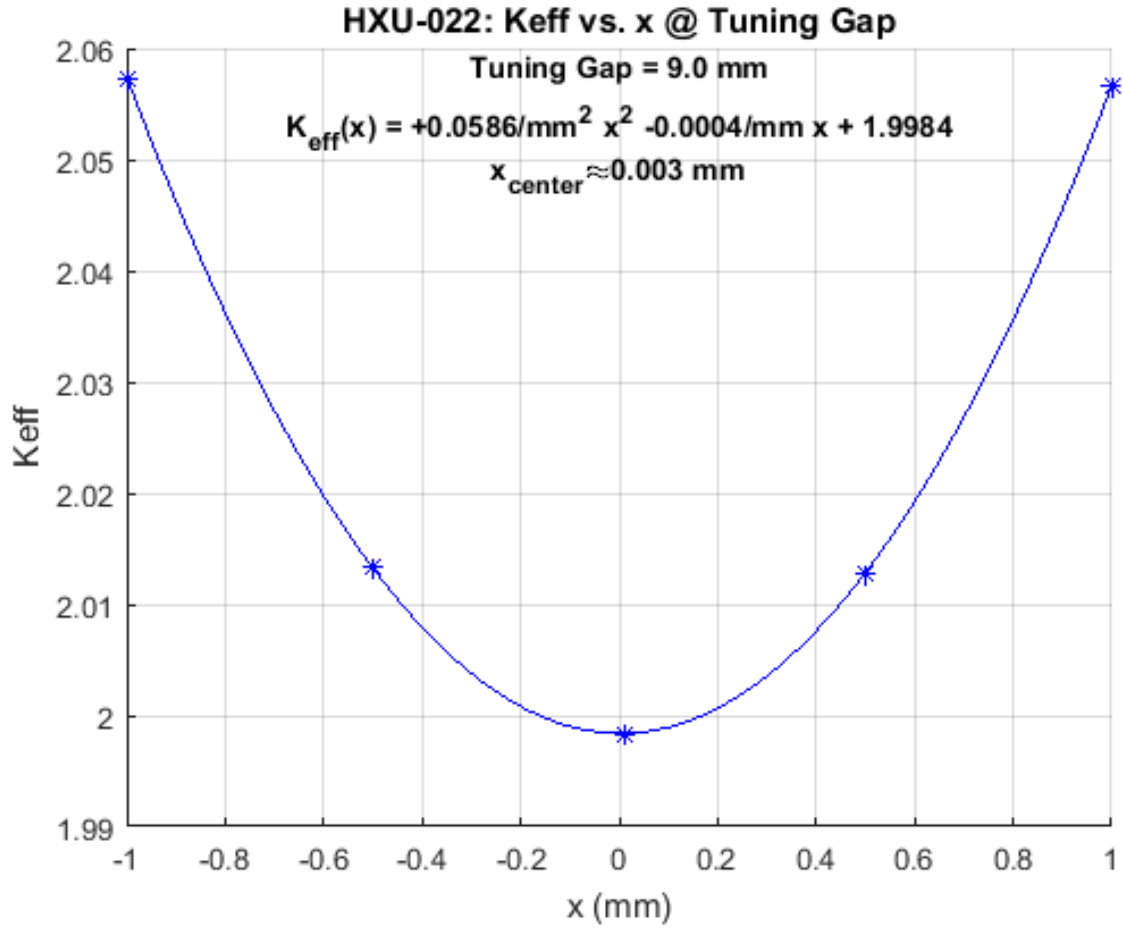





Evaluation of Hall Probe Scans: K_{eff} vs Y at Tuning Gap

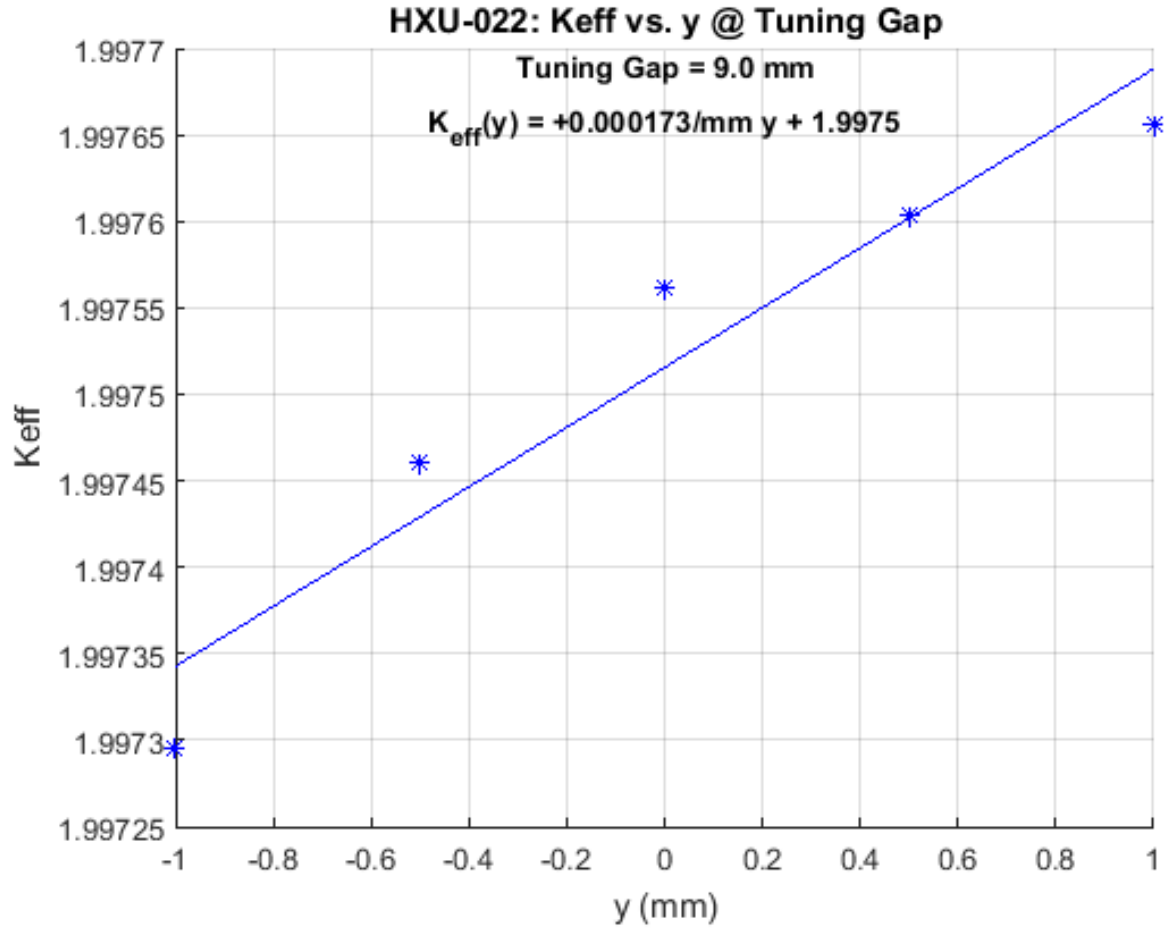




Long Coil Measurement of the On-Axis First Horizontal Field Integrals

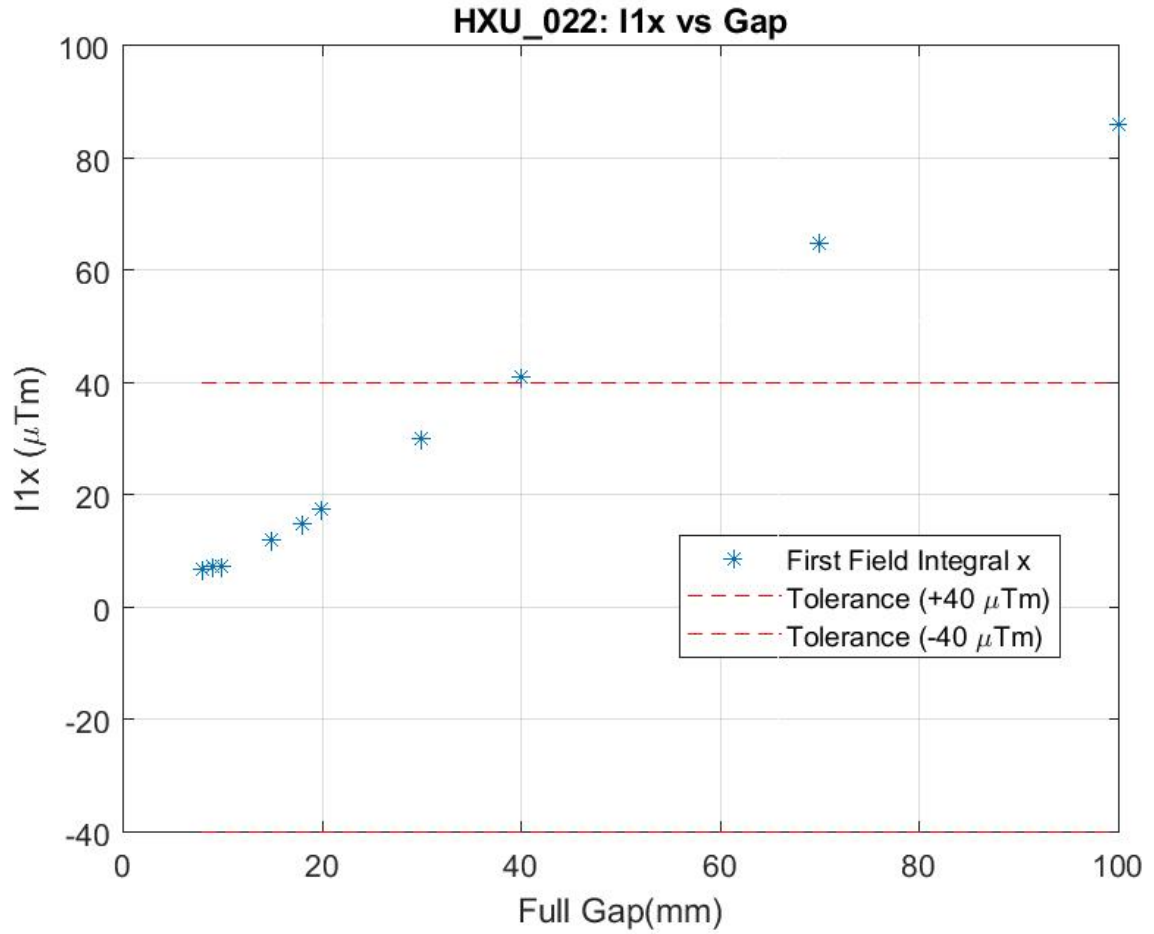

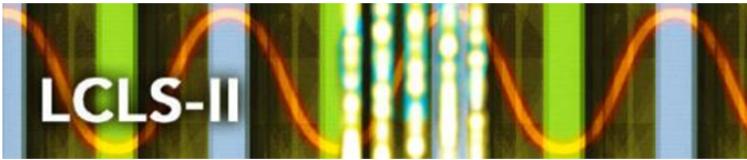



Long Coil Measurement of the On-Axis Second Horizontal Field Integrals

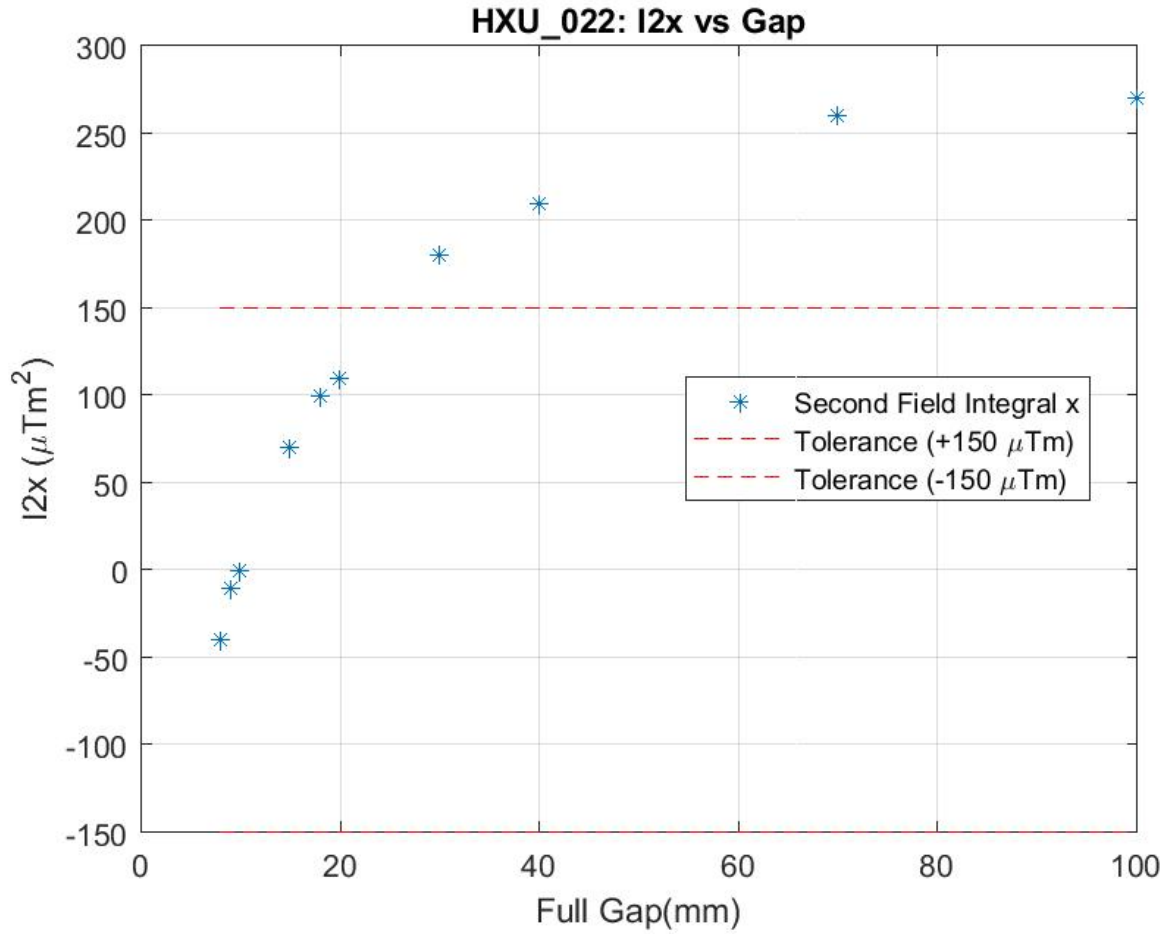




Long Coil Measurement of the On-Axis First Vertical Field Integrals

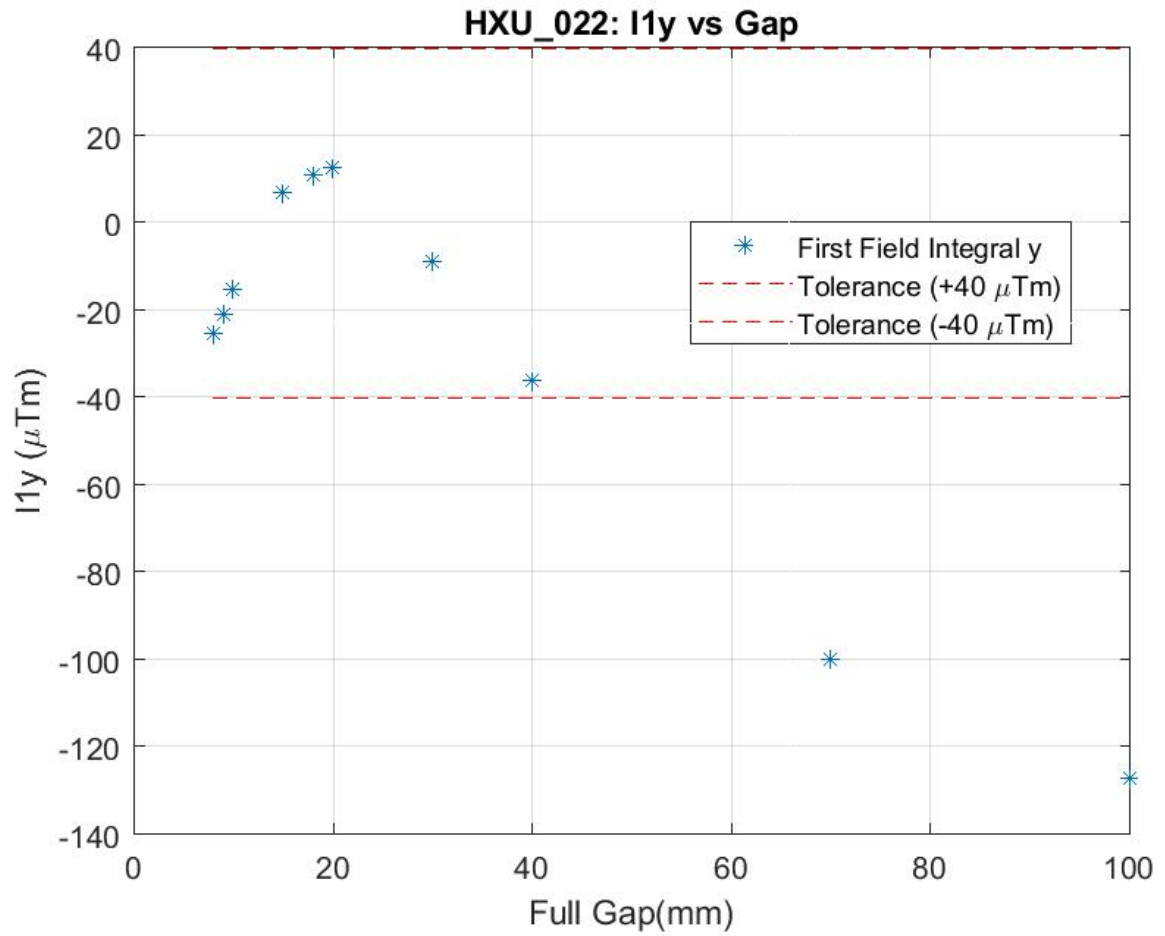

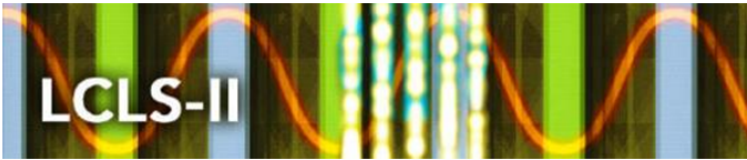


Long Coil Measurement of the On-Axis Second Vertical Field Integrals

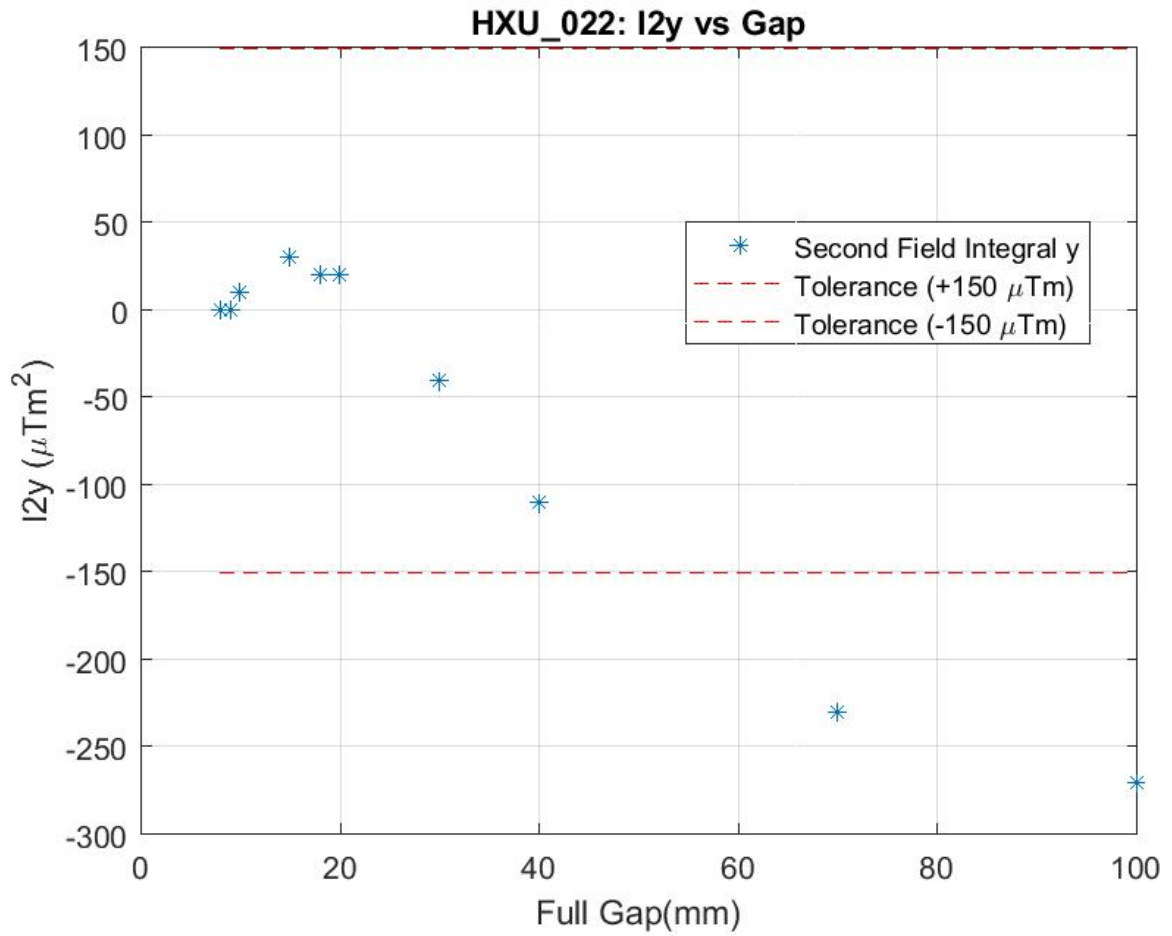




Capacitive Sensor Arrangement

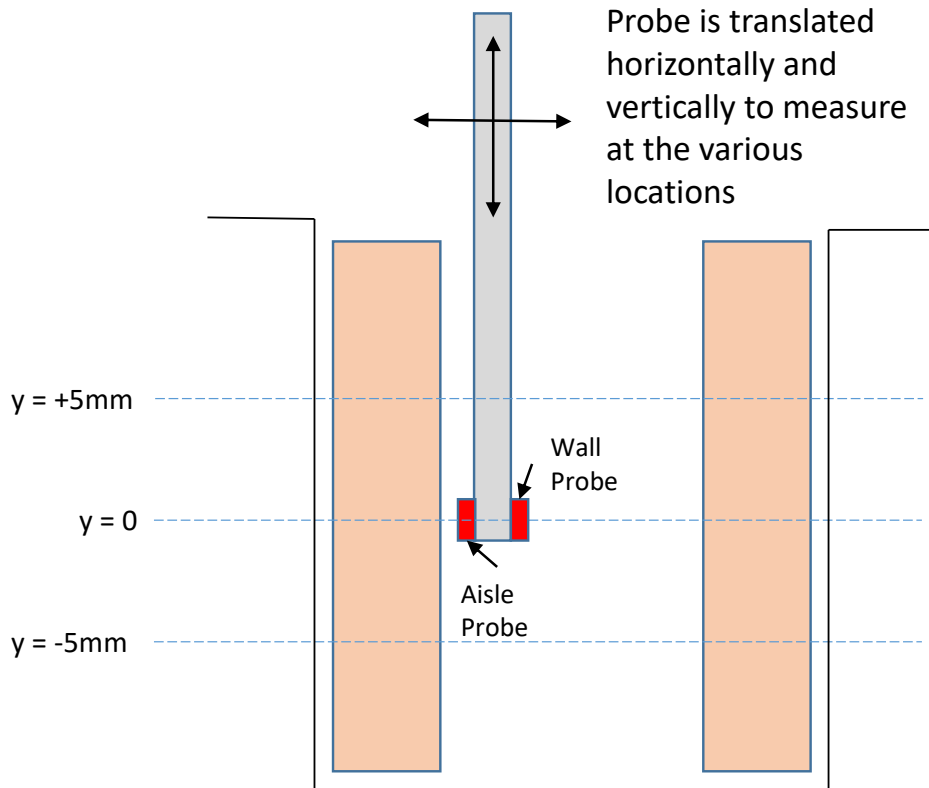

The following plots show the pole and magnet position measurements. The ANL system has two back-to-back capacitive probes on one probe holder. The x and y stages on the bench are positioned so that the probe is in the proper location for each of the 6 scan locations.




Probe1 Capacitive Sensor Readings $y = +5\text{mm}$

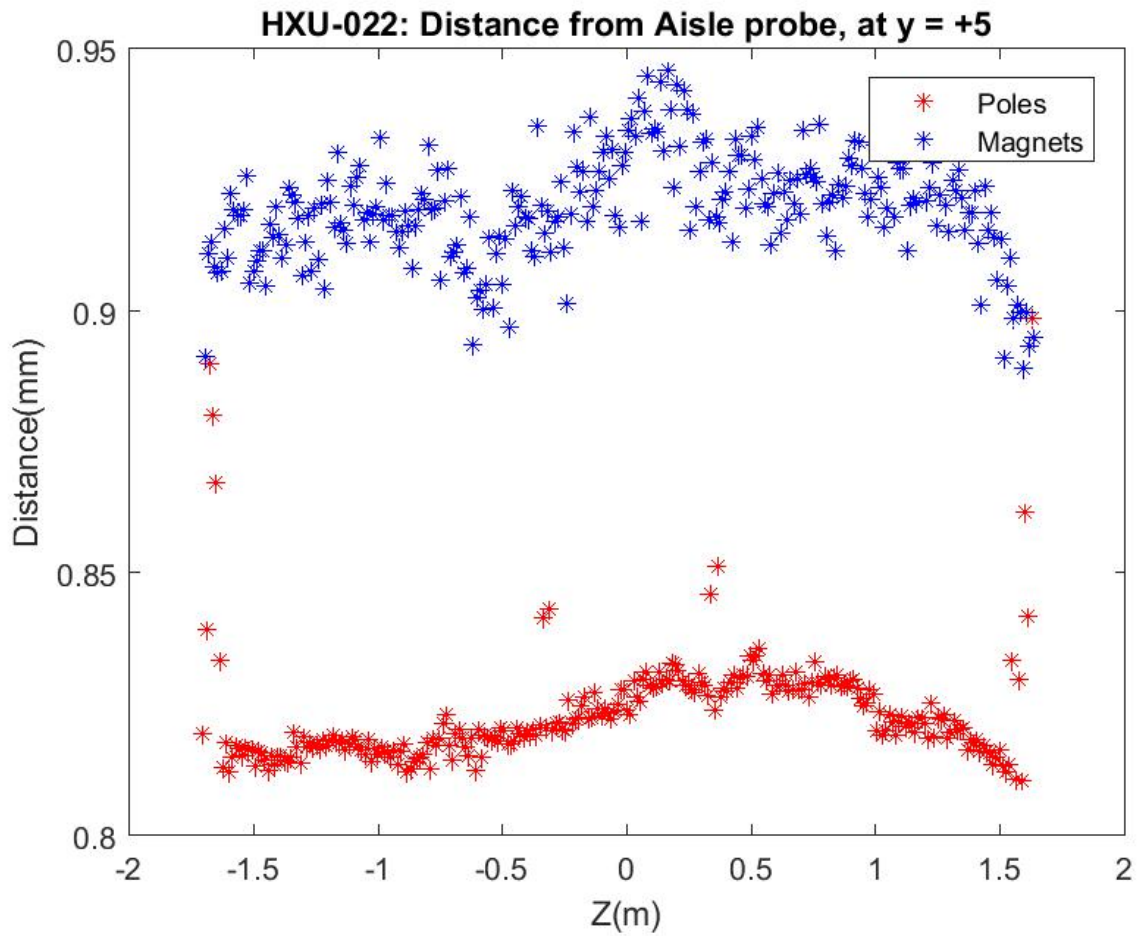




Probe2 Capacitive Sensor Readings $y = +5\text{mm}$

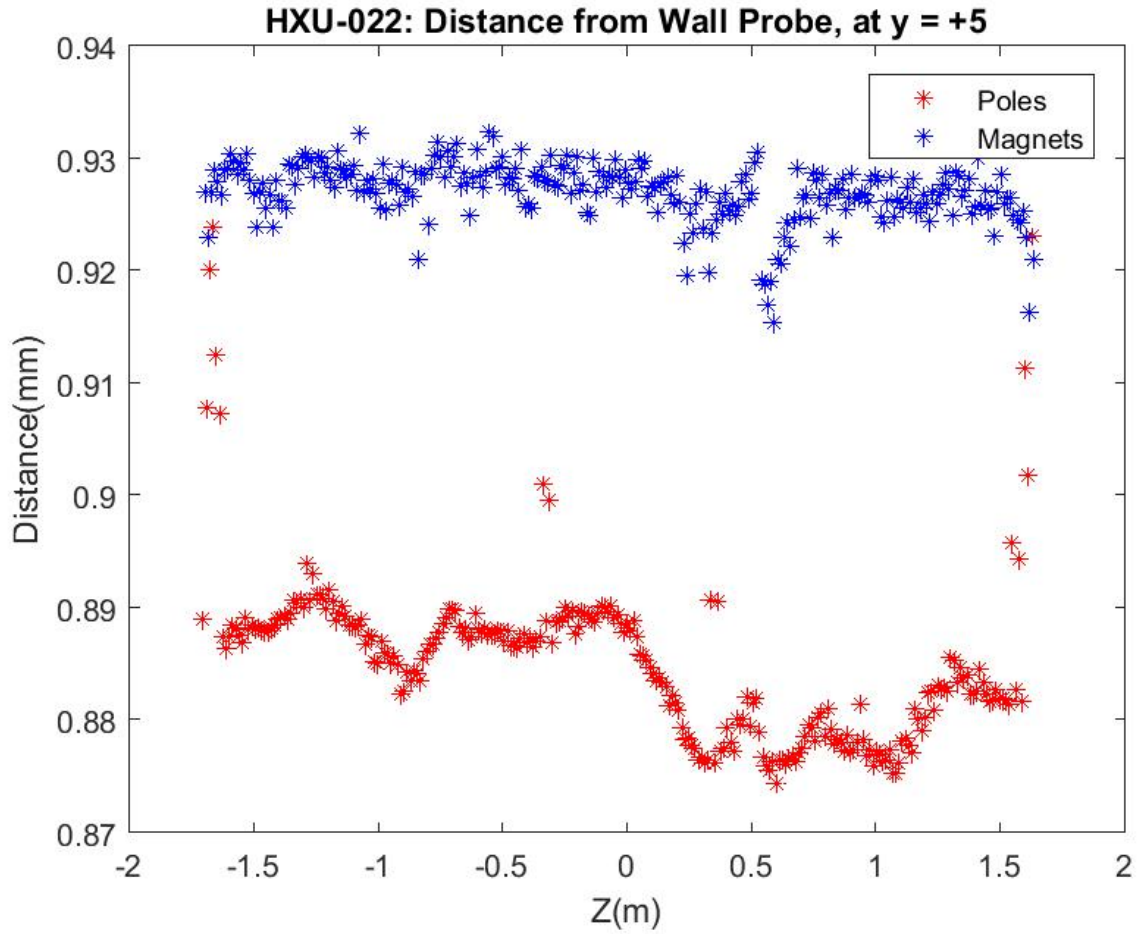




Probe1 Capacitive Sensor Readings $y = 0\text{mm}$

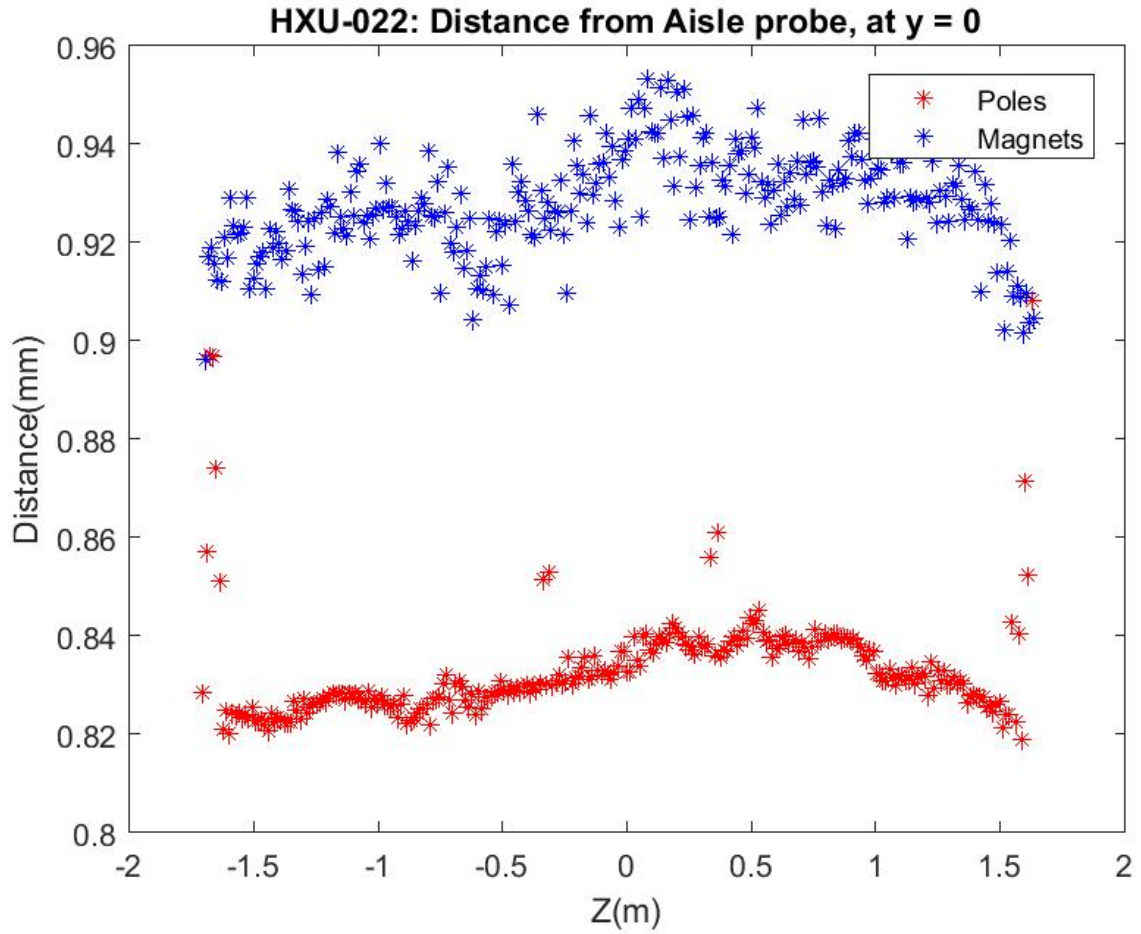




Probe2 Capacitive Sensor Readings $y = 0\text{mm}$

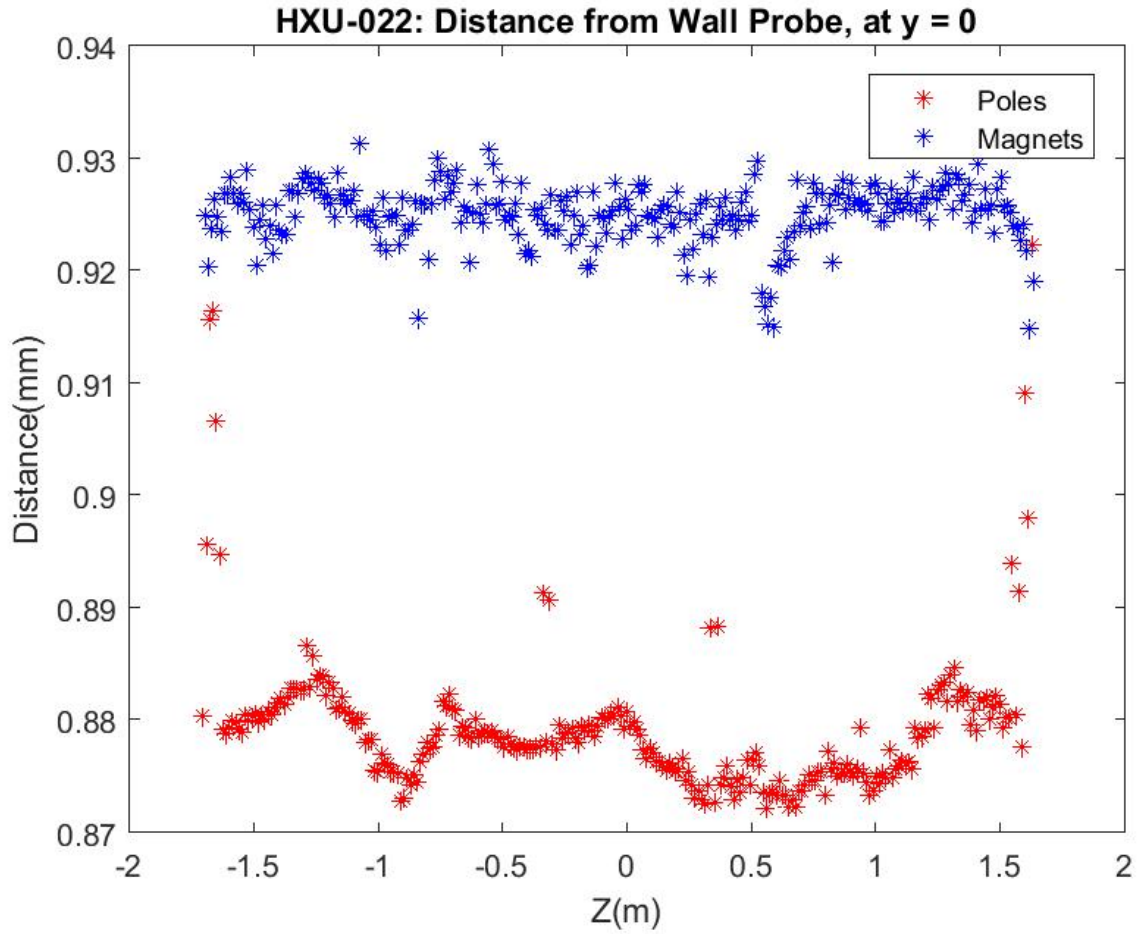




Probe1 Capacitive Sensor Readings $y = -5\text{mm}$

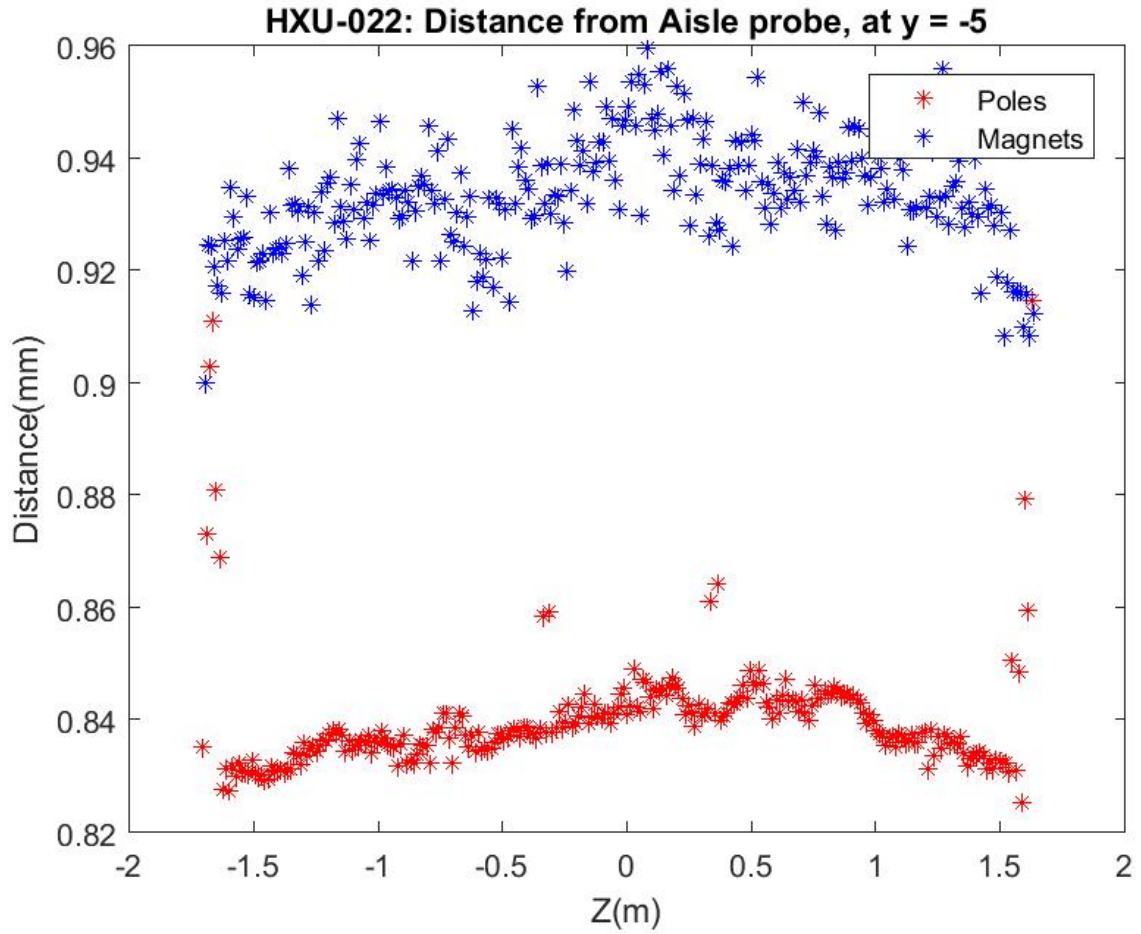




Probe2 Capacitive Sensor Readings $y = -5\text{mm}$

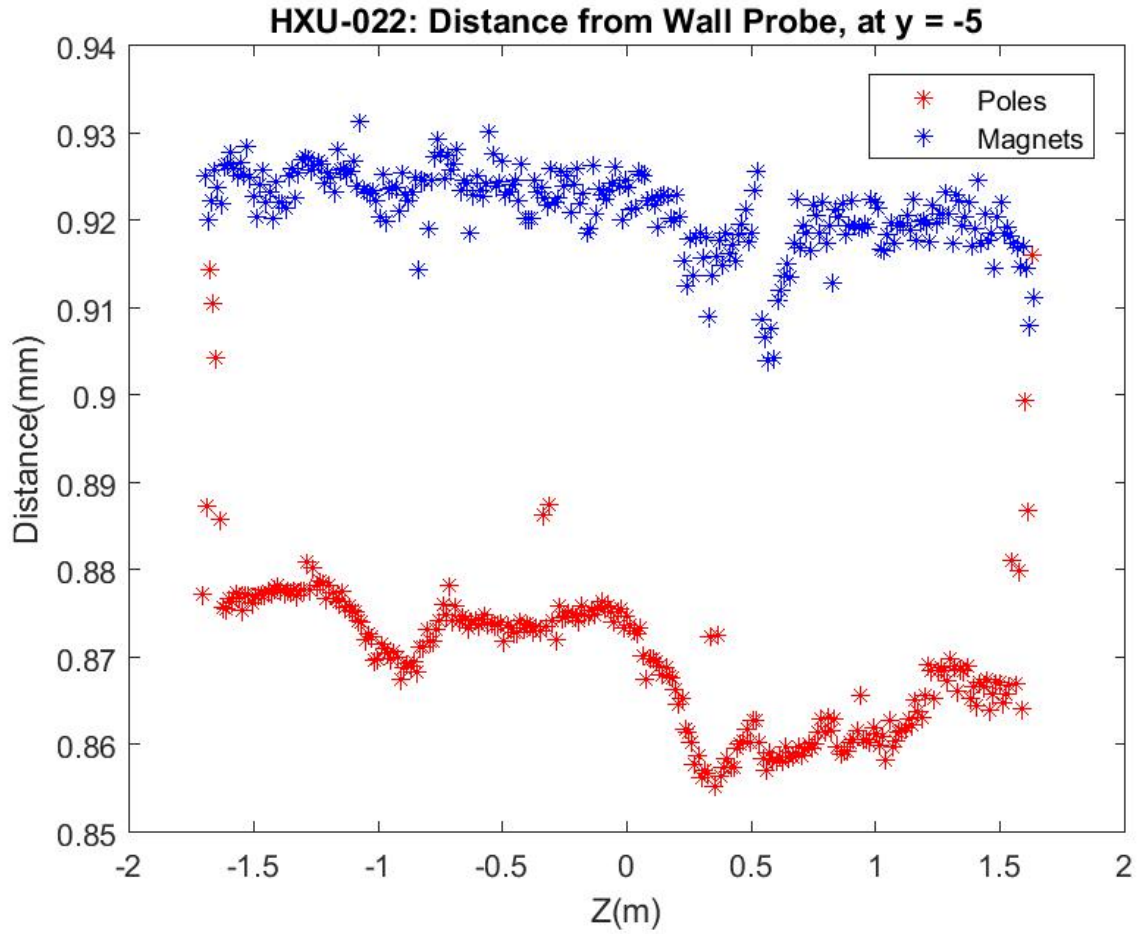




Undulator Gap Measurement

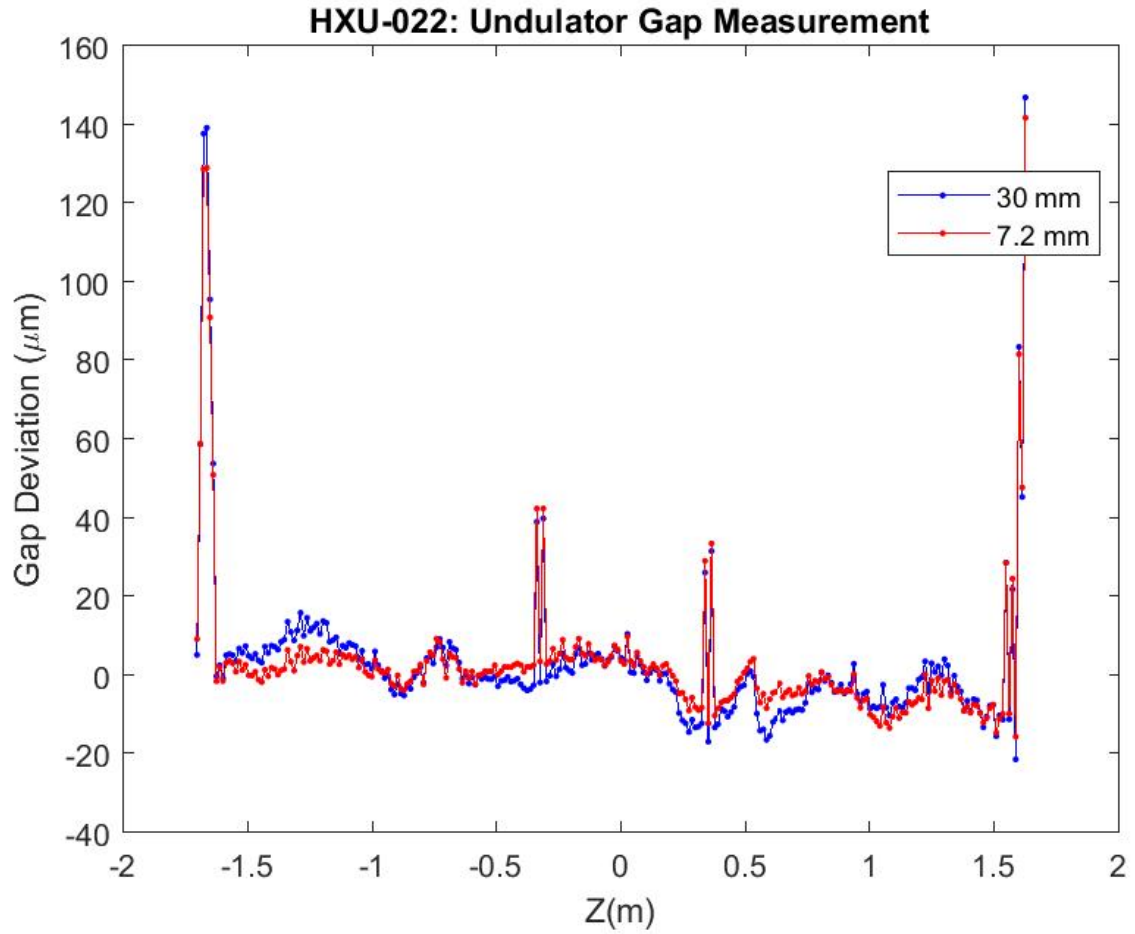





Undulator Gap Difference

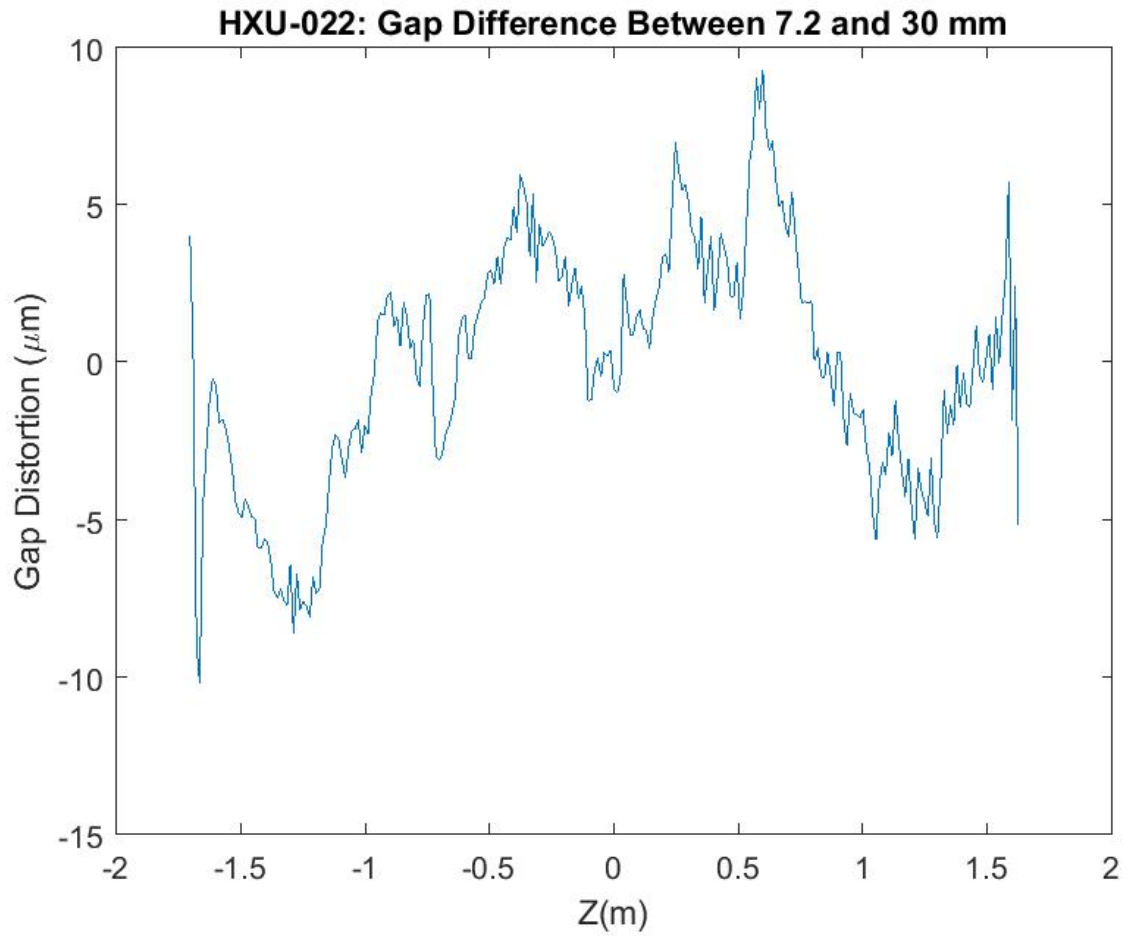





Drive Loads (Gap Opening)

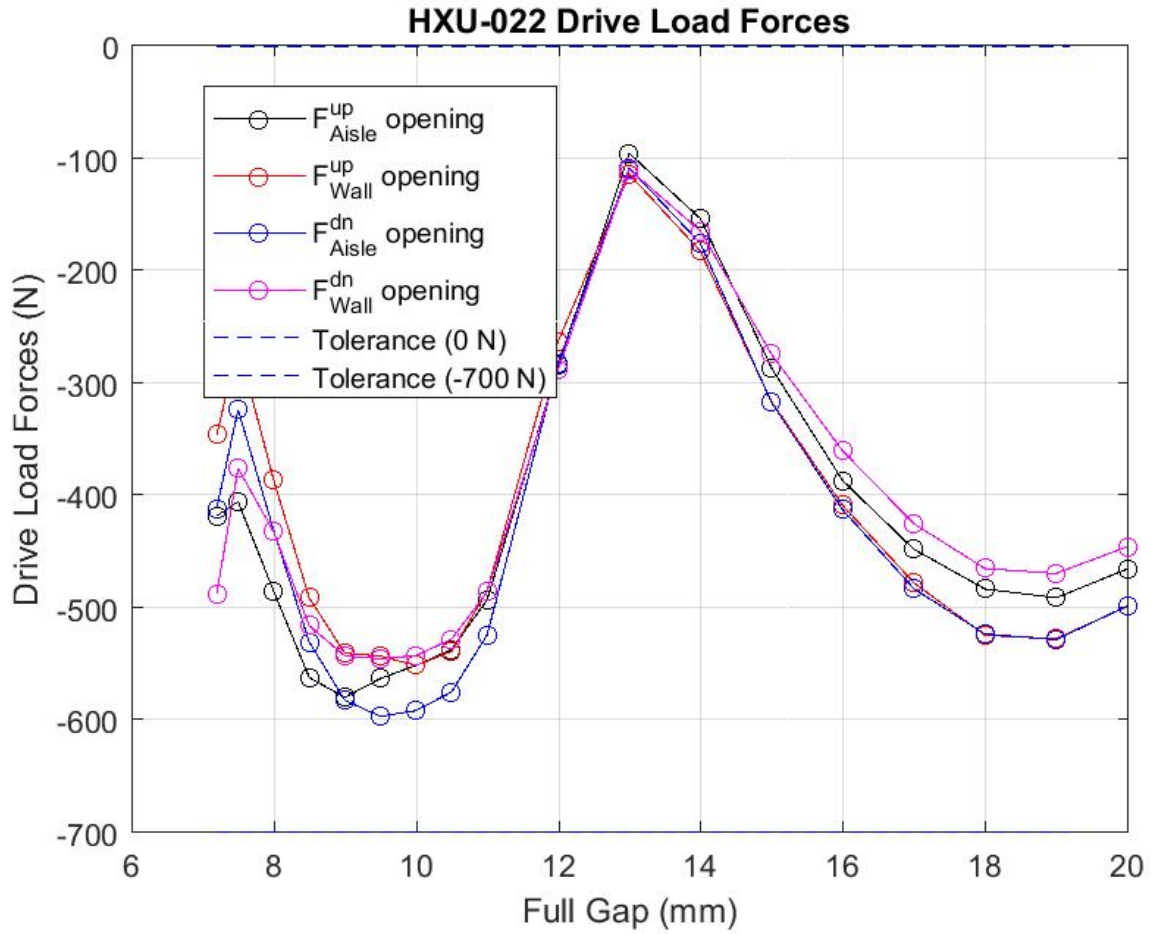

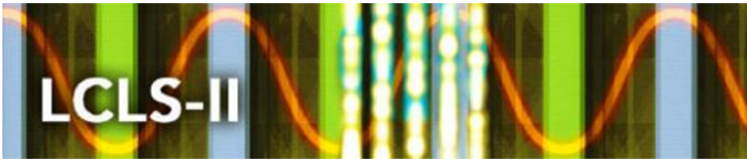



Drive Load Differences (Gap Opening and Closing)

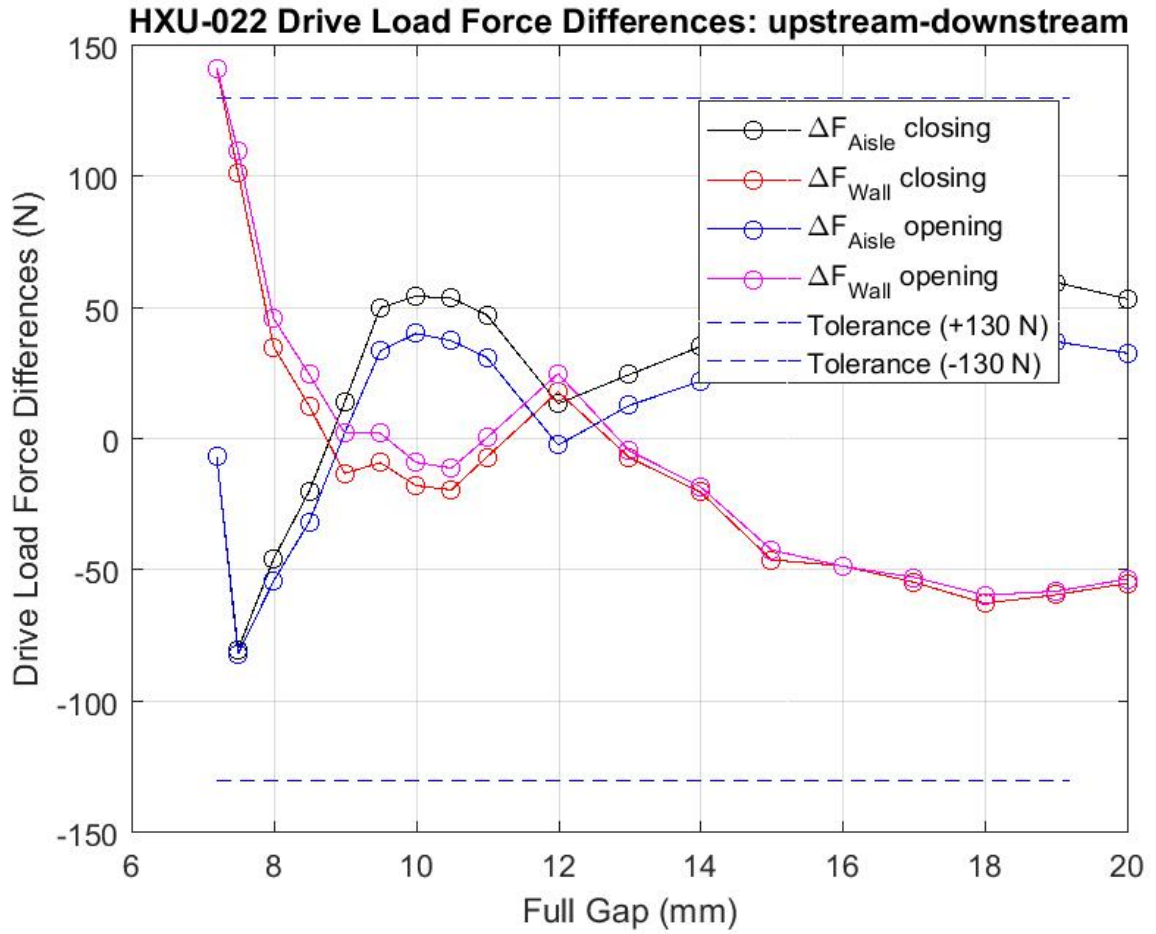

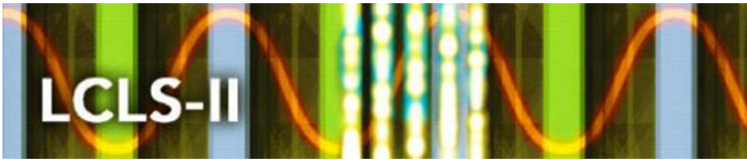

Strongback Forces, Gap Opening and Closing)

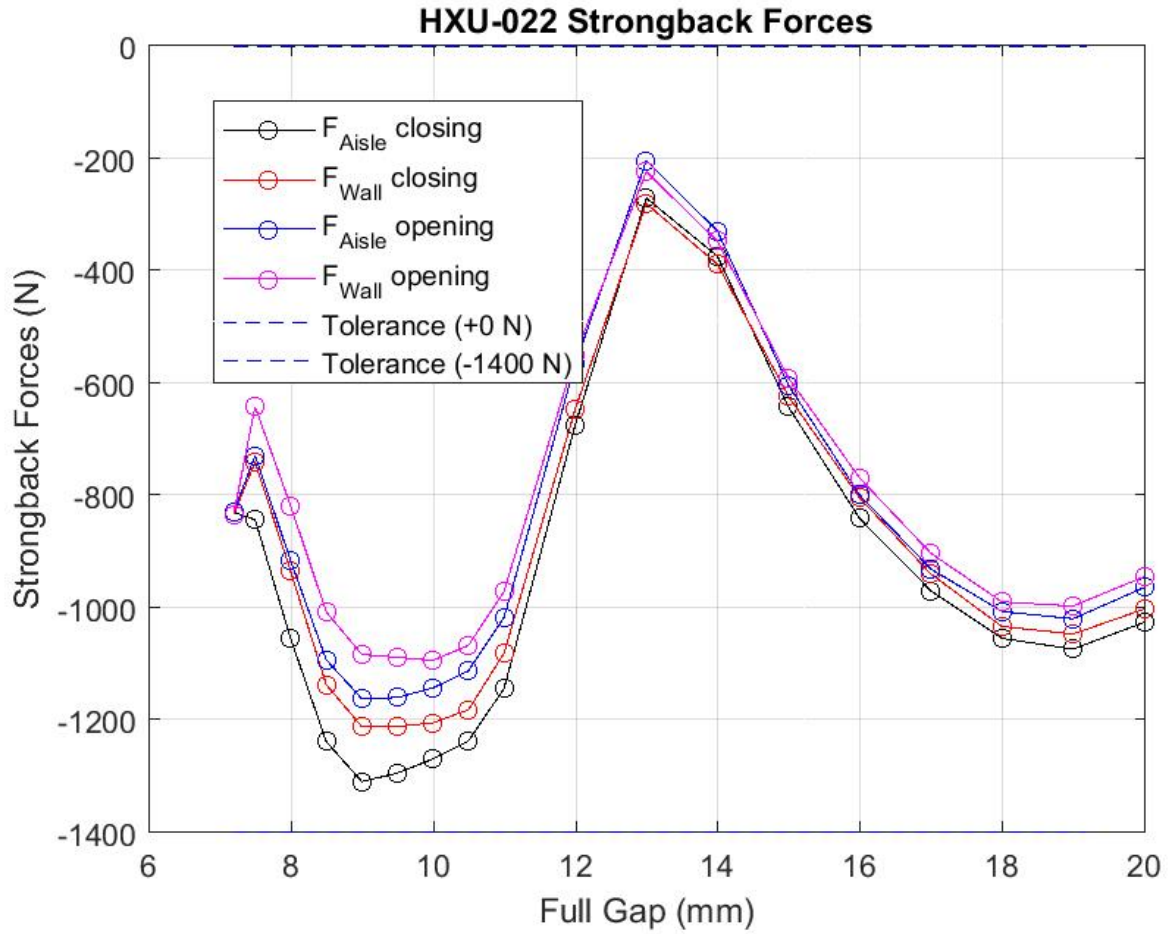

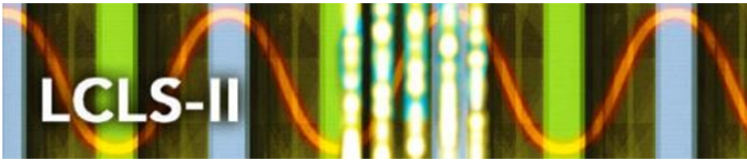

Strongback Force Differences, Gap Opening and Closing

