


SSRL  
BL9 BREAKOUT

3/05

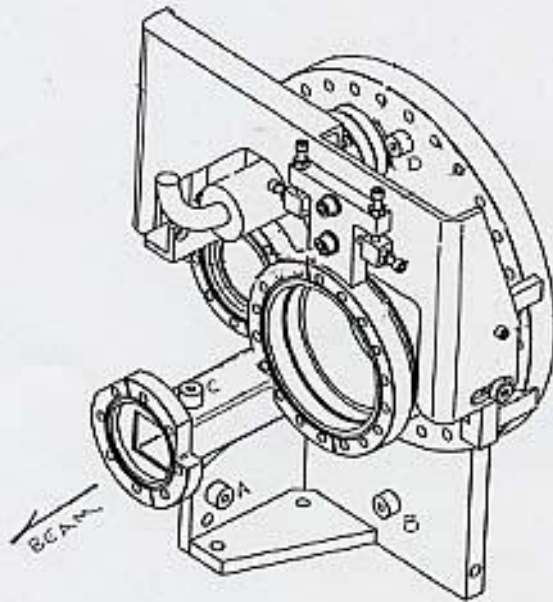

	X	Y	Z
A	-1.494	-7.709	+574.870
B	+0.979	-7.849	+572.436
C	-0.074	+1.774	+579.115
D	+0.915	+6.584	+572.627

Check JM

LAB DATA

SSRL BL 9. BREAKOUT

3-14-05  
J.M., L.G.

Y

GUN 1  
18,400 READ  
1,196 PIN RAD

18,596  
(-) 1,500 to WIG. LINE  
20,096 HI C & D

GUN 2  
4,008  
1,196

4,204  
(-) 1,500 to B/L  
-2,704 HI A)

GUN 3  
8,834  
1,196

9,030  
(-) 1,500 to B/L  
-7,530 HI B)

A) 4,005  
1,000

-5,005  
-2,704

-7,709

B) -.069 to Top  
.250 TIB

1,319  
7,530

-7,849

C) 18,322  
1,000

19,322  
20,096

+7,774

D) 12,512  
1,000

13,512  
20,096

+6,584

X) 27,993  
6,625 RAD

34,618

(+) 1,500 to B/L  
+35,118 LOS

SIDE OF 9-3  
TOP BOT

TOP

BOT

21,045  
34,618

+3,573  
3,591 5/8

-0,18

31,045  
34,618

+3,573  
3,591 5/8

-0,18

A) 35,612  
1,000

36,612  
35,118

-1,494

B) 33,139  
1,000

34,139  
35,118

+979

C) 34,192  
1,000

35,192  
35,118

-0,74

D) 33,203  
1,000

34,203  
35,118

+915

SSRL BL 9 BREAKOUT

LAB DATA

3-14-05  
J.M., L.G.

(Z)

check  
Jm

570.000 u/s FACE OF B.O. FL.  
1.125 TO D/S FACE

25.282

571.125  
25.282 READ

+ 596.407 LOS

A) 12.980  
8.557

B) 15.414  
8.557

C) 10.392  
6.900

D) 15.223  
8.557

21.537

23.971

17.292

23.780

596.407

596.407

596.407

596.407

+ 574.870

+ 572.436

+ 579.115

+ 572.627

9-1

9-2

21.897

15.286

596.407

596.407

+ 574.510

+ 581.121

(Y)

# SSRL BL 9 BREAKOUT

3-11-05  
J.M., L.G.

Roll

Check  
JMI

-	18.396	+	18.393
	18.402		18402

38.617	9-1	9-2
4.625		4.475
2.313		2.238 RAD

GUN 1

18.402  
+ .196 RAD PINS

9-1	9-2
-2.705 HI	+20.098 HI
2.313 RAD	2.238 RAD

TUBE 9-2

1.665 Y  
1.860 X

18.598  
(+) 1.500 FLANGE TO B/L  
+20.098 HI

.392  
(+) .700 to B/L

17.860  
(-) 1.583 to B/L

1.092  
1.095

19.443  
19.425

+003

+018

GUN 2

4.009

.196

-4.205

(+) 1.500

-2.705 HI

1.095 RAD  
2.313 RAD

19.425 RAD  
2.238 RAD

3.408

-2.705 HI

+ .703

21.663

20.098 HI

-1.565

(X) +35.118 LOS

9-1  
12.857 RAD  
17.619 FT

30.456  
(-) .250 1/16

30.206  
10" spline

40.206 to (-) SIDE  
2.313 RAD

37.893 &  
+35.118 LOS

-2.775

9-2

33.165 RAD  
2.238 RAD

35.403

35.118

-1.285

.391

.392

# SSRL BL 9 BREAKOUT

3-14-05  
J.M., L.G.

Classic  
sm

Roll

(+)

(-)

18.400 40 18.400

.196

18.596 HI CEN. OF BREAKOUT FL.

MOLY PLATE

9-3

(+)

(-)

17.202 READ 17.202

18.596

+1.394

1.395 S/B

+1.001

9-1

19.303 READ

18.596

-.707

-.697 S/B

-.010

(X)