


SSRL BEAMLINE 10 WIGGLER

10-1
8-27-01

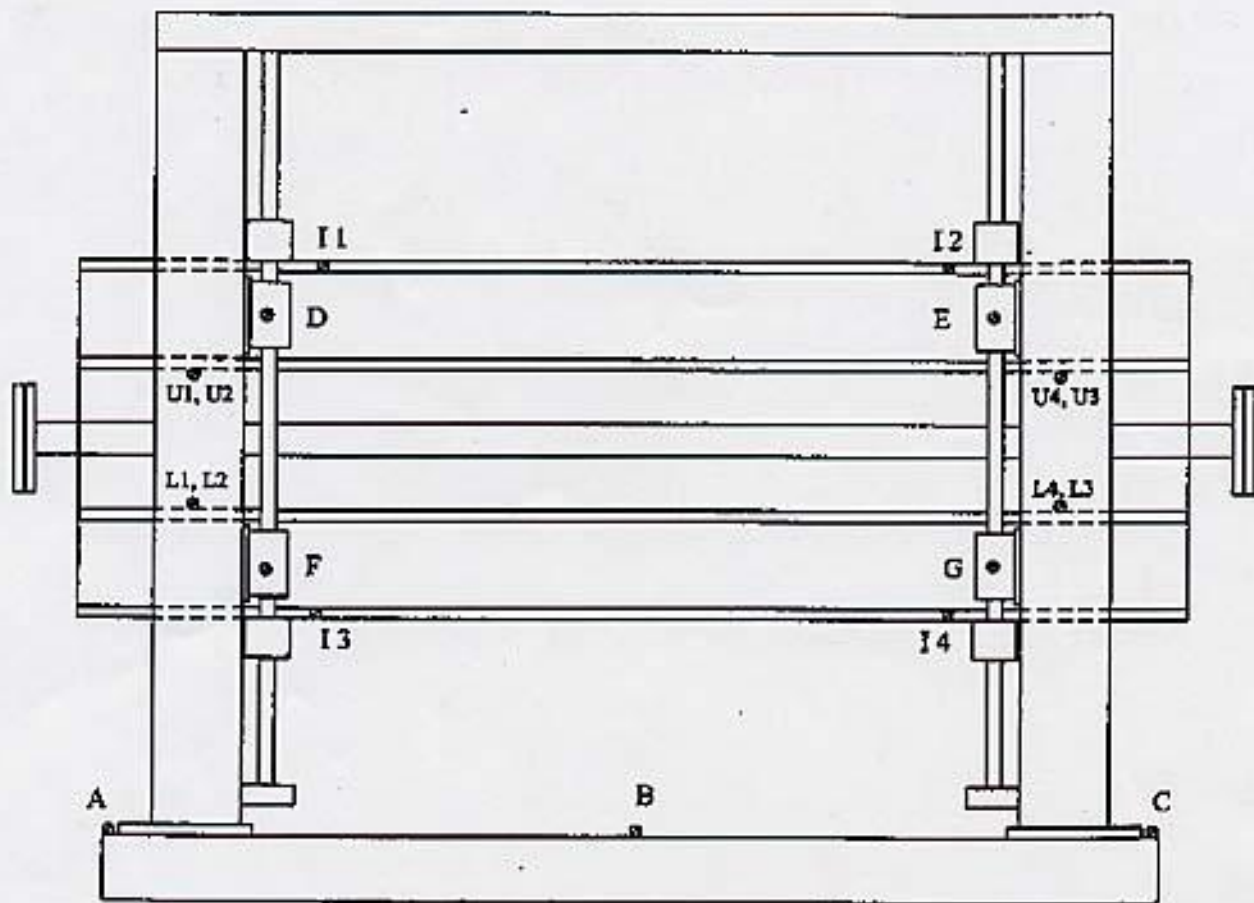

BEAM →

	X	Y	Z
A	21.937	-32.971	39.757
B	---	-33.085	---
C	21.898	-33.005	-39.764
D	22.966	14.800	22.075
E	23.002	14.775	-22.057
F	23.022	-14.692	22.081
G	23.013	-14.727	-22.051
I1	5.015	---	---
I2	5.024	---	---
I3	5.055	---	---

	X	Y	Z
I4	5.055	---	---
L1	---	-19.036	---
L2	---	-19.064	---
L3	---	-19.051	---
L4	---	-19.037	---
U1	---	19.071	---
U2	---	19.044	---
U3	---	19.042	---
U4	---	19.077	---

Y's ON L & U 1-4 ARE AT 20.7 mm GAP

1" TOOLING BALLS 8/2001

SSRL B-L 10 WIGGLER
CHAMBER

Handwritten: 8-8-01



BEAM

	X	Y	Z
1	- 5.994	- .993	- 33.103
2	+ 9.002	- .993	- 33.100
3	+ 9.000	- .978	+ 33.074
4	- 5.996	- .994	+ 33.096

1" TOOLING BALLS 8/7/01