


Included Angle Between Pole Tips

Pole Tip Num. ----->

Angle of Symmetry Line between Pole Tips to Tuning Gap ZX Plane

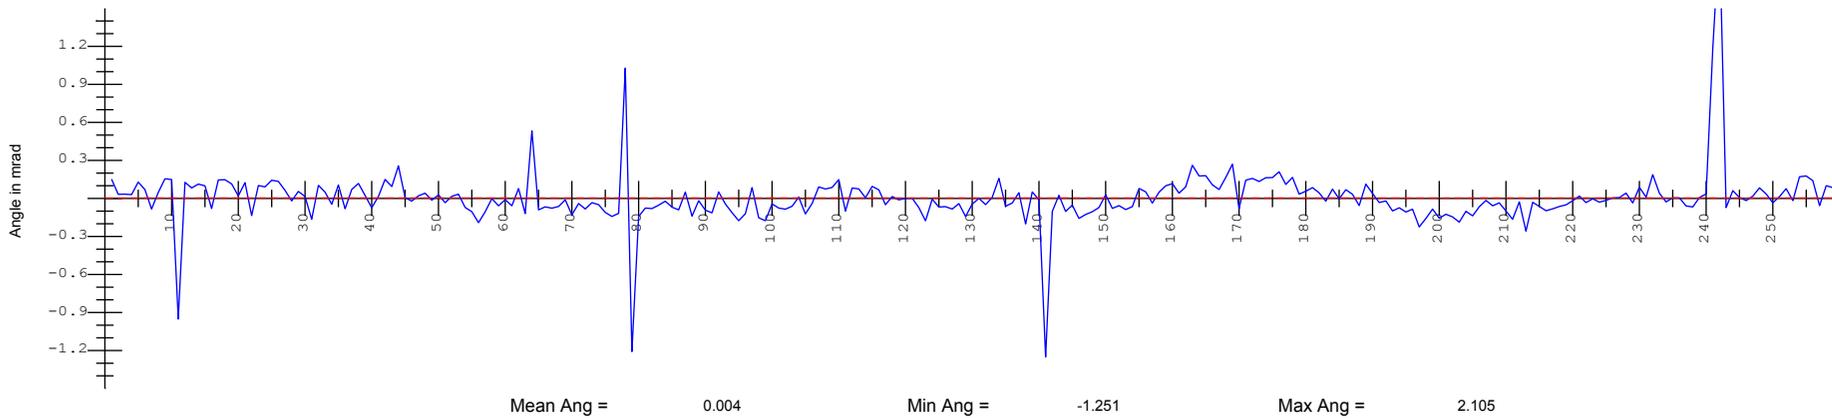

Dimensions in MM, Angles in Milliradians



HGVPU - Pole Tip Angles

Nominal Gap :	8.000	US Full :	7.9999	DS Full :	7.9999
Nom. Taper :	0.000	US Wall Half :	4.0018	DS Wall Half :	4.0028
		US Aisle Half :	4.0034	DS Aisle Half :	4.0017

S/N	: HXU_008
Date	: 12-NOV-2019
Data Set	: 0001
Run	: FINAL
Cam Pos.	: B

Aisle Pole Mean = 4.001 Aisle Pole Min. = 3.966 Aisle Pole Max. = 4.073 Reg. Line Ang. = 0.008




Aisle Pole Tips at Nom. Beam Height

Blue = Pole Tip points
Green = Mean line
Red = Regression line thru points

Pole Tip Num. ----->

Wall Pole Tips at Nom. Beam Height

Minimum Clearance Gap = 7.893

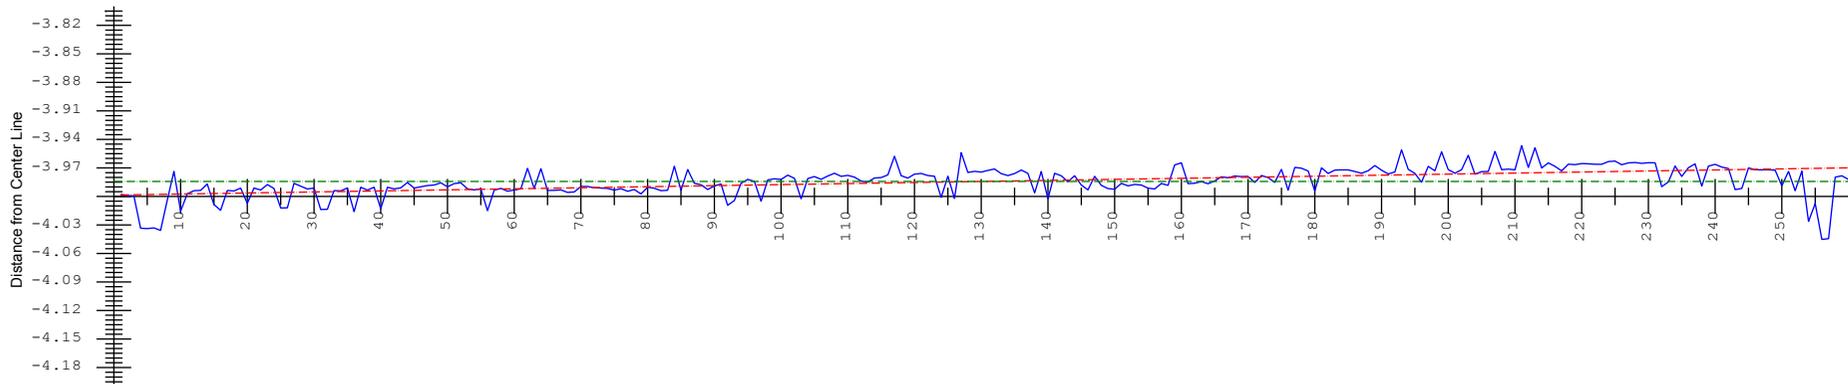

Wall Pole Mean = -3.984 Wall Pole Min. = -4.045 Wall Pole Max. = -3.947 Reg. Line Ang. = 0.008

Girder centerline in reference to Pointed Magnets

Dimensions in MM, Angles in Milliradians



HGVPU - Pole Tip Location from Girder Centerline

Nominal Gap :	8.000	US Full :	7.9999	DS Full :	7.9999
Nom. Taper :	0.000	US Wall Half :	4.0018	DS Wall Half :	4.0028
		US Aisle Half :	4.0034	DS Aisle Half :	4.0017

S/N	: HXU_008
Date	: 12-NOV-2019
Data Set	: 0001
Run	: FINAL
Cam Pos.	: B

Values Calculated from Regression Line End Points

Dimension	X Value	Y Value	Z Value	Calc. Value
US Aisle Pole Tip(1)	3.987	0.000	8.750	
US Wall Pole Tip(1)	-3.998	0.000	8.750	
US Sym. Pt.	-0.006			
US Gap				7.986
DS Aisle Pole Tip(260)	4.015	0.000	3375.750	
DS Wall Pole Tip(260)	-3.970	0.000	3375.750	
DS Sym. Pt.	0.023			
DS Gap				7.985
Taper				-0.001


Dimensions in MM



HGVPU - Gap Calc. from Regression Line End Points

Nominal Gap :	8.000	US Full :	7.9999	DS Full :	7.9999
Nom. Taper :	0.000	US Wall Half :	4.0018	DS Wall Half :	4.0028
		US Aisle Half :	4.0034	DS Aisle Half :	4.0017

S/N	: HXU_008
Date	: 12-NOV-2019
Data Set	: 0001
Run	: FINAL
Cam Pos.	: B

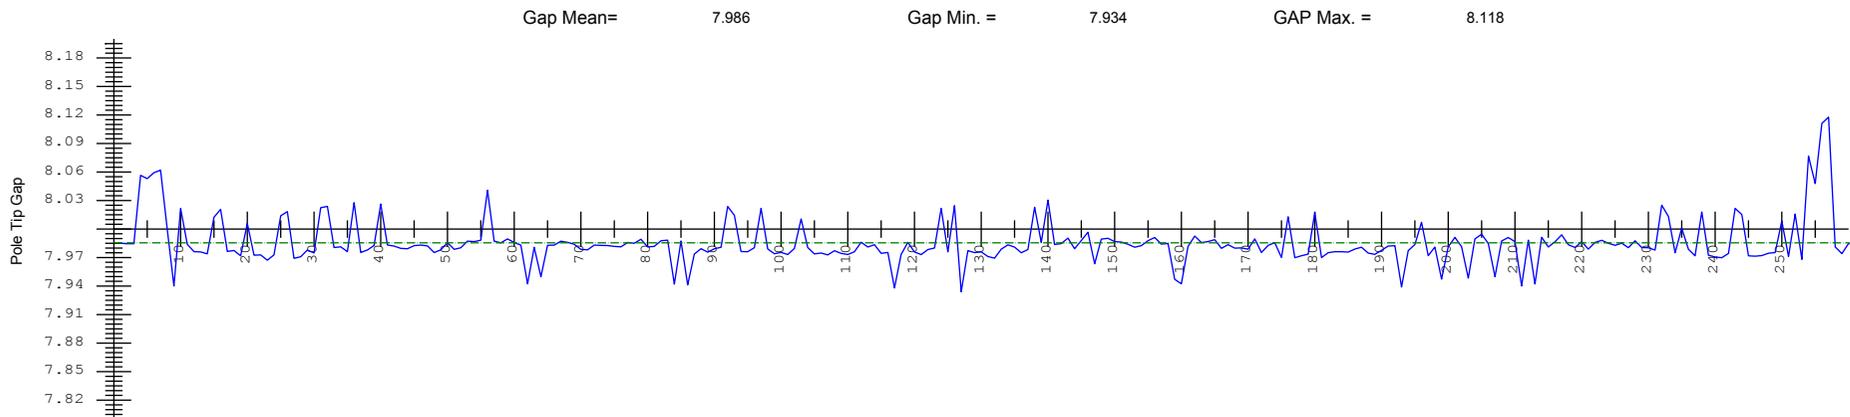


Pole Tip Gap at Nom. Beam Height

Blue = Pole Tip points
 Green = Mean line
 Red = Regression line thru points

Pole Tip Num. ----->

Pole Tip Symmetry Point at Nom. Beam Height

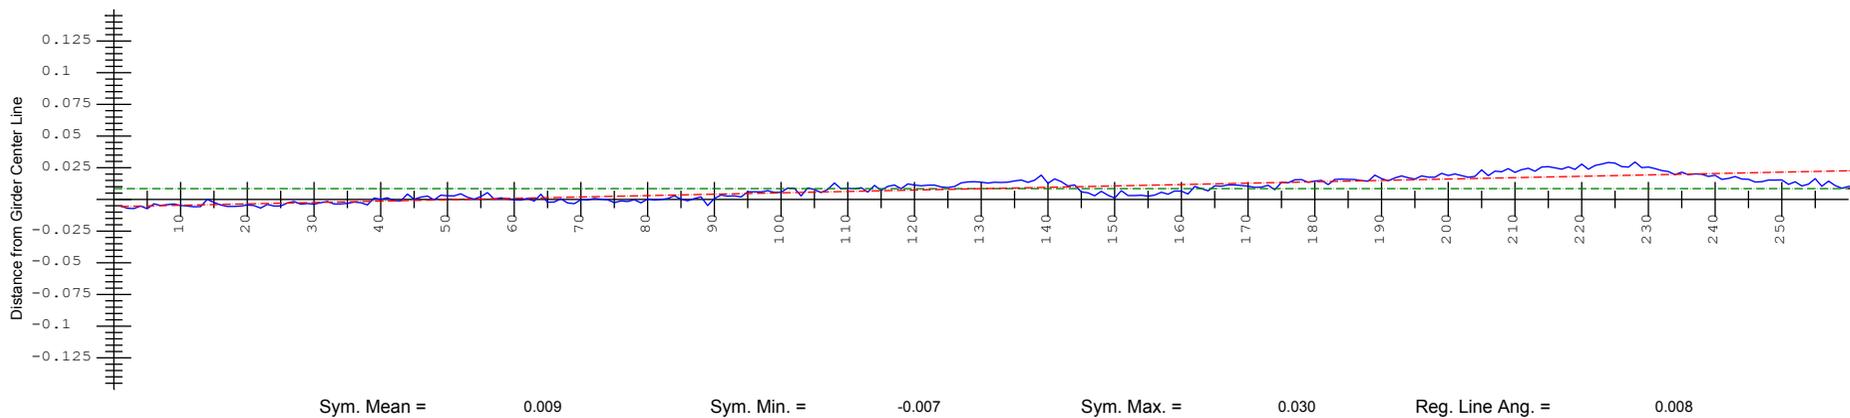

Girder centerline in reference to Pointed Magnets


Dimensions in MM, Angles in Milliradians



HGVPU - Pole Tip Gap and Symmetry Point Location

Nominal Gap :	8.000	US Full :	7.9999	DS Full :	7.9999
Nom. Taper :	0.000	US Wall Half :	4.0018	DS Wall Half :	4.0028
		US Aisle Half :	4.0034	DS Aisle Half :	4.0017


S/N	: HXU_008
Date	: 12-NOV-2019
Data Set	: 0001
Run	: FINAL
Cam Pos.	: B

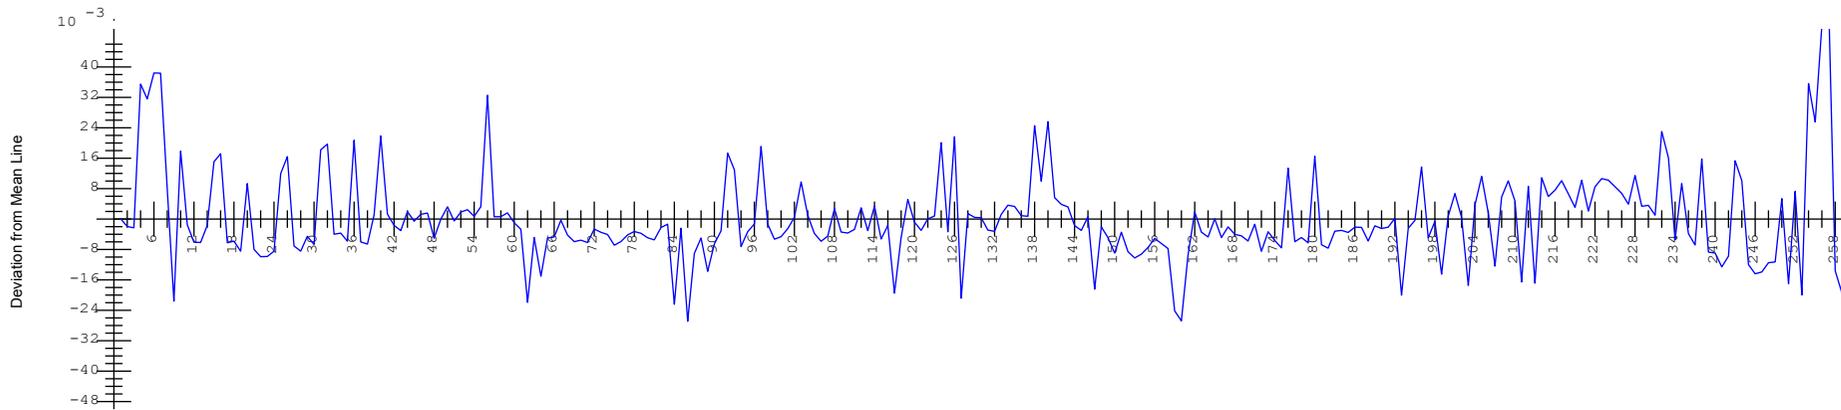

Aisle Pole Tips

Pole Tip Num. ----->

Wall Pole Tips

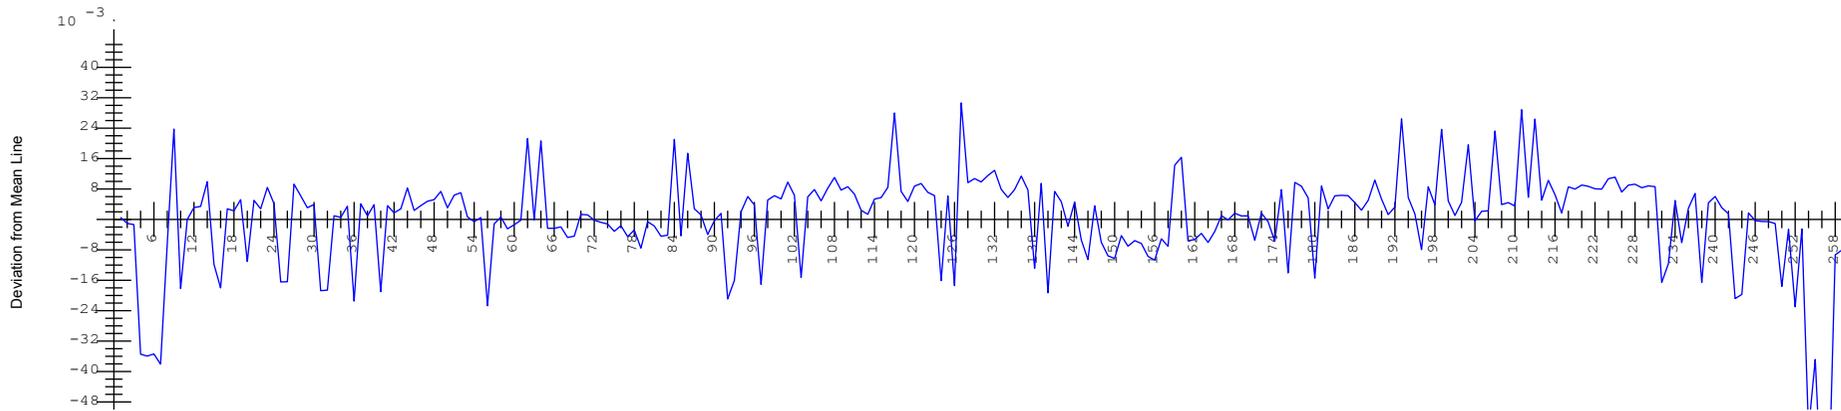

Pole Tip Deviations from Jaw Mean Lines when aligned to actual Gap Sym. Plane

Dimensions in MM



HGVPU - Pole Tip Deviation from Mean Line

Nominal Gap :	8.000	US Full :	7.9999	DS Full :	7.9999
Nom. Taper :	0.000	US Wall Half :	4.0018	DS Wall Half :	4.0028
		US Aisle Half :	4.0034	DS Aisle Half :	4.0017

S/N	: HXU_008
Date	: 12-NOV-2019
Data Set	: 0001
Run	: FINAL
Cam Pos.	: B