


Included Angle Between Pole Tips

Pole Tip Num. ----->

Angle of Symmetry Line between Pole Tips to Tuning Gap ZX Plane

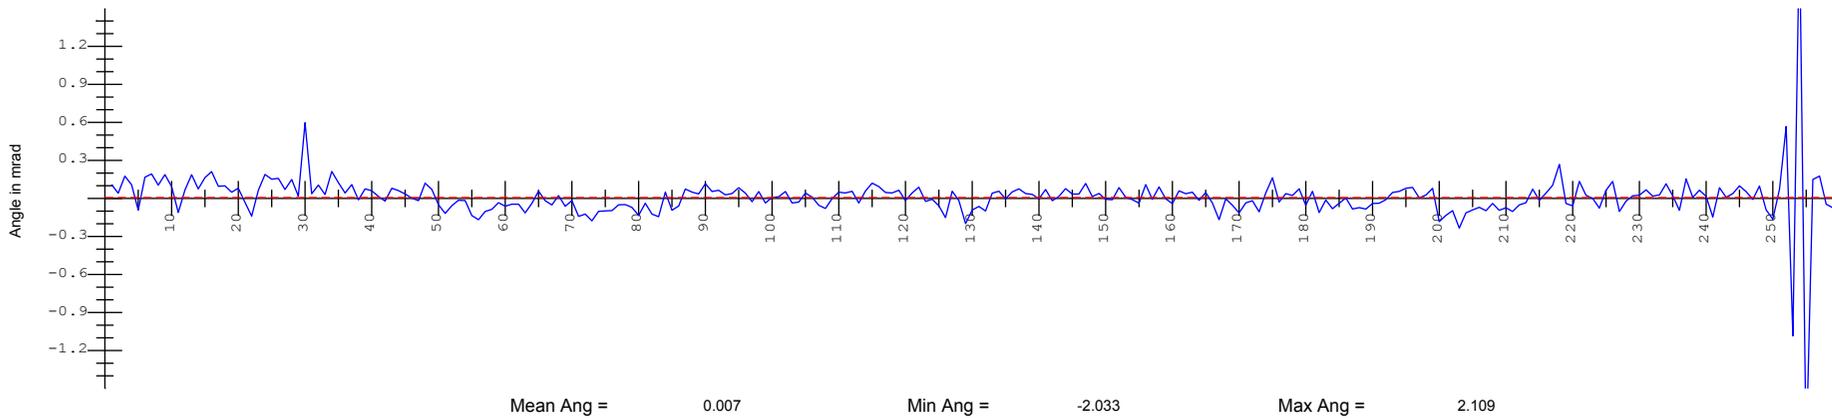

Dimensions in MM, Angles in Milliradians




HGVPU - Pole Tip Angles

Nominal Gap :	8.000	US Full :	7.9996	DS Full :	7.8995
Nom. Taper :	-0.100	US Wall Half :	4.0020	DS Wall Half :	3.9519
		US Aisle Half :	4.0034	DS Aisle Half :	3.9483

S/N	: HXU_019
Date	: 10-SEP-2019
Data Set	: 0002
Run	: FINAL
Cam Pos.	: B

Aisle Pole Mean = 3.987 Aisle Pole Min. = 3.934 Aisle Pole Max. = 4.049 Reg. Line Ang. = -0.010

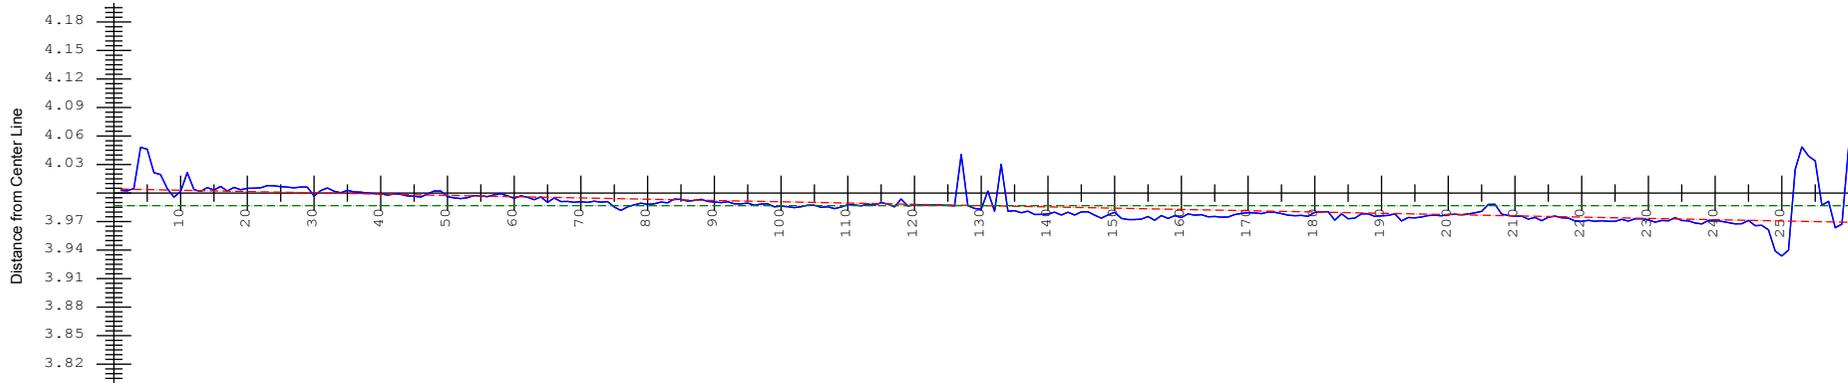


Aisle Pole Tips at Nom. Beam Height

Blue = Pole Tip points
Green = Mean line
Red = Regression line thru points

Pole Tip Num. ----->

Wall Pole Tips at Nom. Beam Height

Minimum Clearance Gap = 7.846

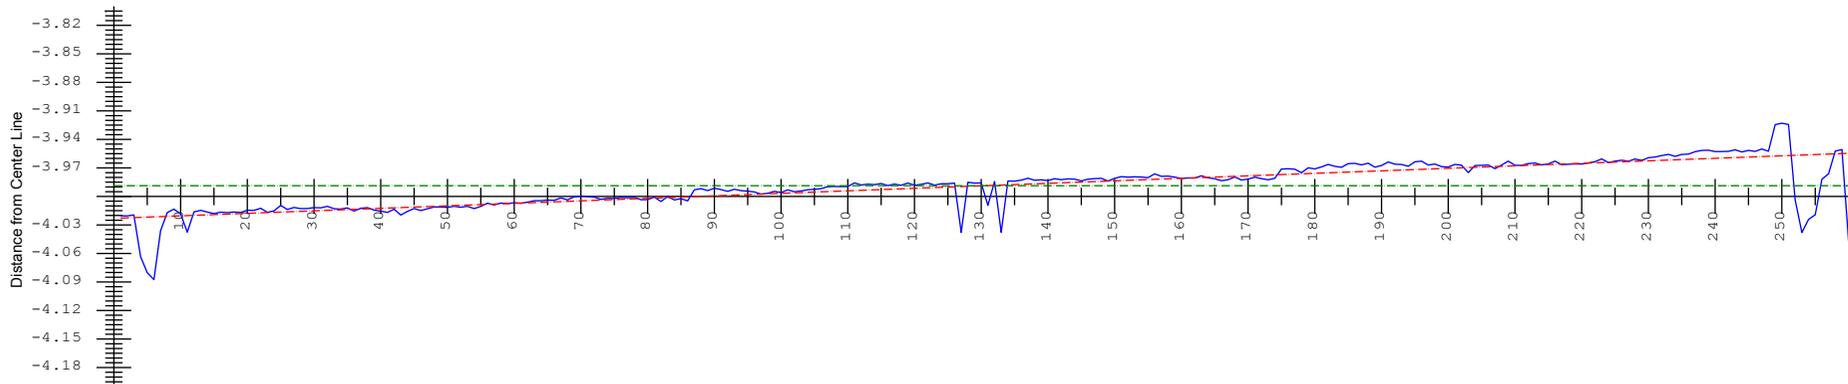

Wall Pole Mean = -3.989 Wall Pole Min. = -4.087 Wall Pole Max. = -3.923 Reg. Line Ang. = 0.020

Girder centerline in reference to Pointed Magnets

Dimensions in MM, Angles in Milliradians



HGVPU - Pole Tip Location from Girder Centerline

Nominal Gap :	8.000	US Full :	7.9996	DS Full :	7.8995
Nom. Taper :	-0.100	US Wall Half :	4.0020	DS Wall Half :	3.9519
		US Aisle Half :	4.0034	DS Aisle Half :	3.9483

S/N	: HXU_019
Date	: 10-SEP-2019
Data Set	: 0002
Run	: FINAL
Cam Pos.	: B

Values Calculated from Regression Line End Points

Dimension	X Value	Y Value	Z Value	Calc. Value
US Aisle Pole Tip(1)	4.004	0.000	8.750	
US Wall Pole Tip(1)	-4.023	0.000	8.750	
US Sym. Pt.	-0.009			
US Gap				8.027
DS Aisle Pole Tip(260)	3.969	0.000	3375.750	
DS Wall Pole Tip(260)	-3.955	0.000	3375.750	
DS Sym. Pt.	0.007			
DS Gap				7.924
Taper				-0.103


Dimensions in MM



HGVPU - Gap Calc. from Regression Line End Points

Nominal Gap :	8.000	US Full :	7.9996	DS Full :	7.8995
Nom. Taper :	-0.100	US Wall Half :	4.0020	DS Wall Half :	3.9519
		US Aisle Half :	4.0034	DS Aisle Half :	3.9483

S/N	: HXU_019
Date	: 10-SEP-2019
Data Set	: 0002
Run	: FINAL
Cam Pos.	: B

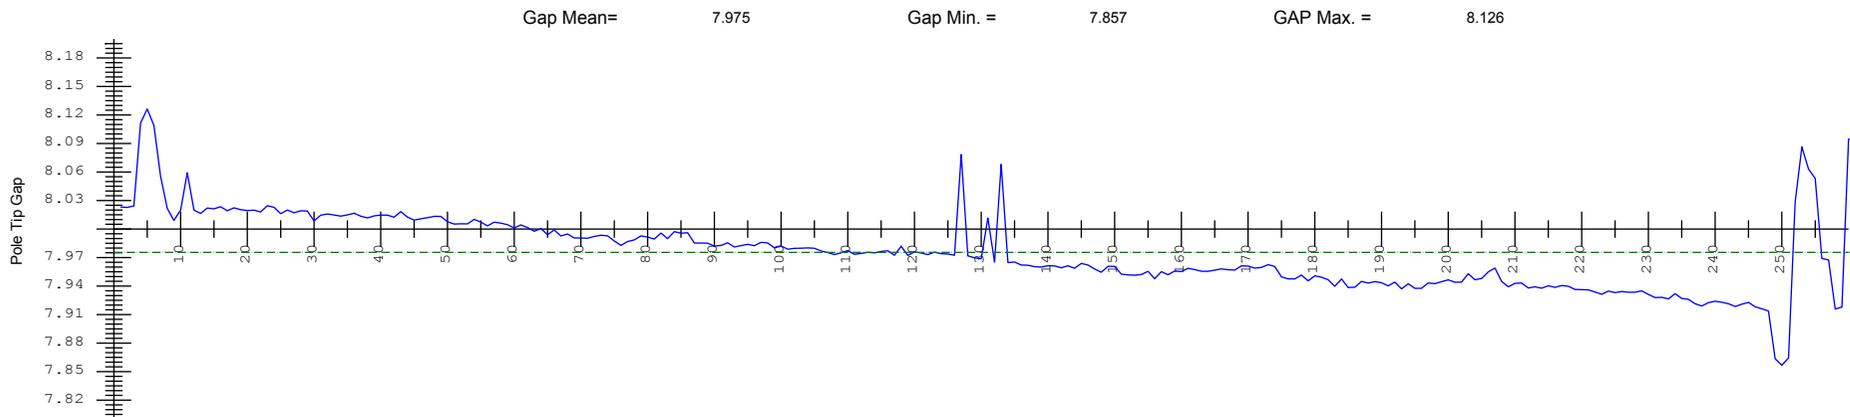


Pole Tip Gap at Nom. Beam Height

Blue = Pole Tip points
 Green = Mean line
 Red = Regression line thru points

Pole Tip Num. ----->

Pole Tip Symmetry Point at Nom. Beam Height

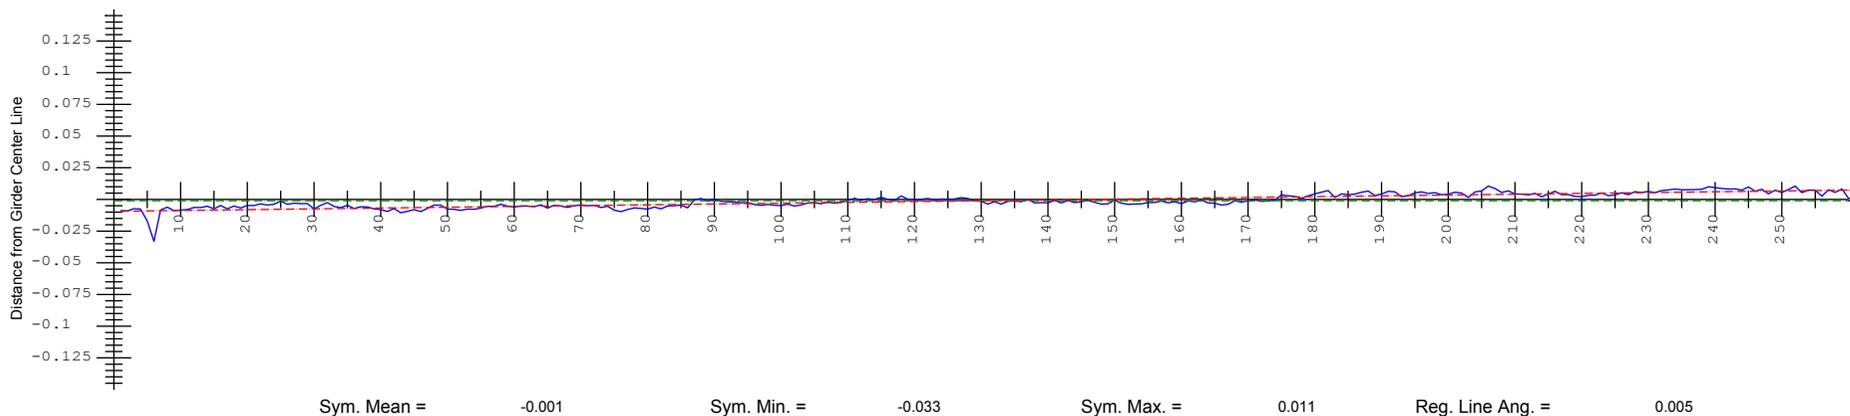

Girder centerline in reference to Pointed Magnets


Dimensions in MM, Angles in Milliradians



HGVPU - Pole Tip Gap and Symmetry Point Location

Nominal Gap :	8.000	US Full :	7.9996	DS Full :	7.8995
Nom. Taper :	-0.100	US Wall Half :	4.0020	DS Wall Half :	3.9519
		US Aisle Half :	4.0034	DS Aisle Half :	3.9483


S/N	: HXU_019
Date	: 10-SEP-2019
Data Set	: 0002
Run	: FINAL
Cam Pos.	: B

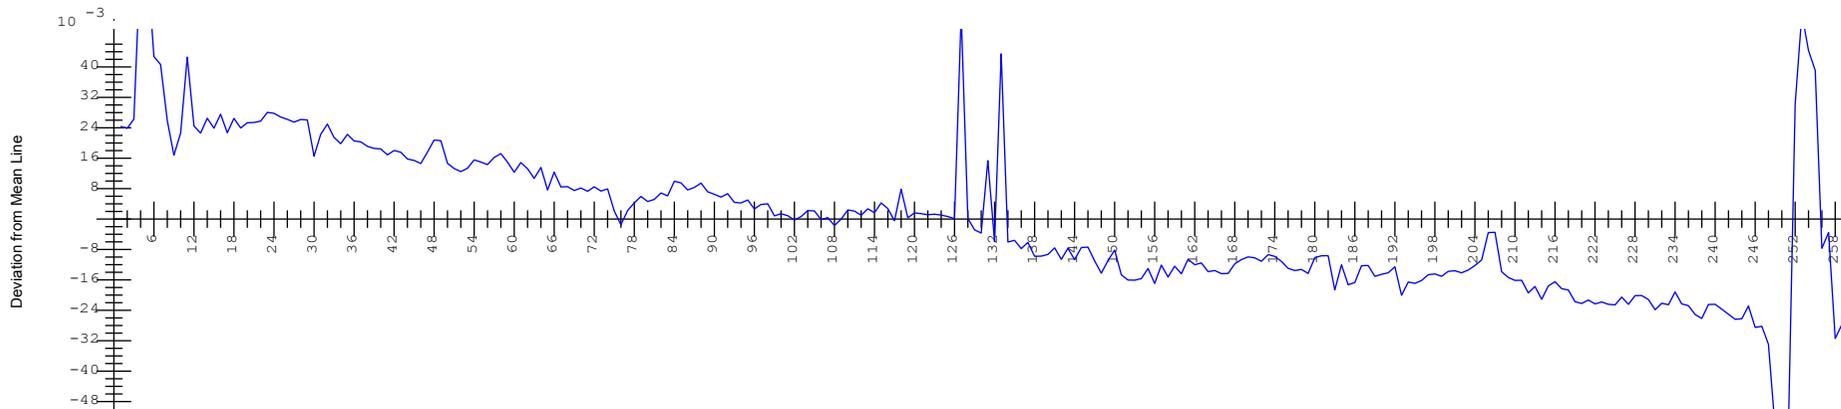

Aisle Pole Tips

Pole Tip Num. ----->

Wall Pole Tips

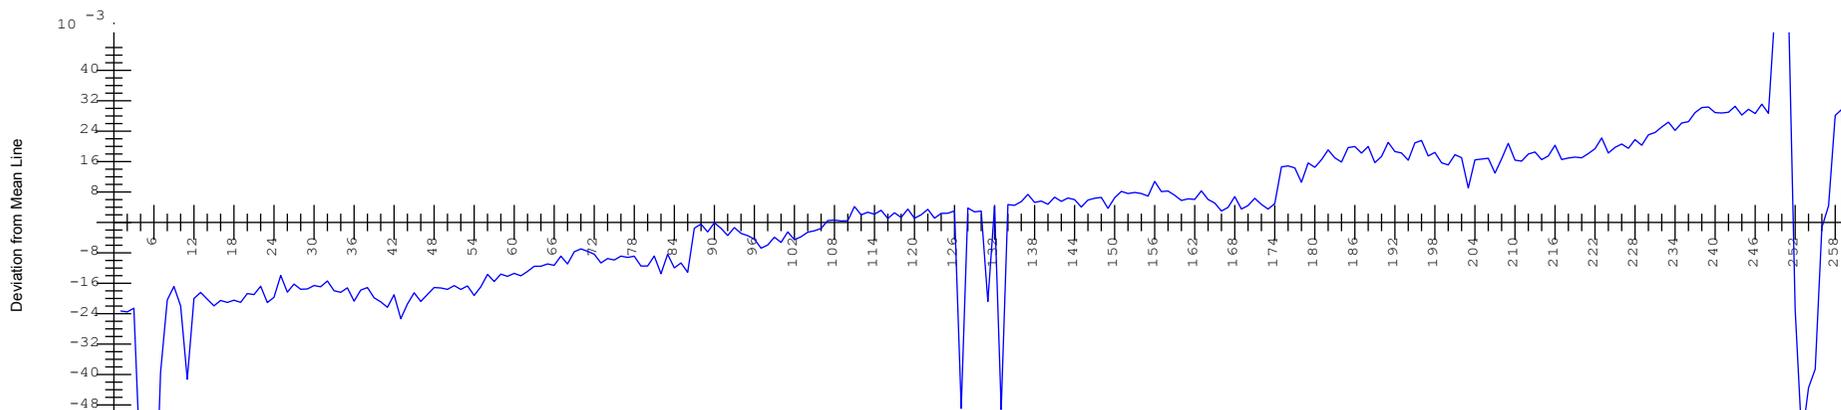

Pole Tip Deviations from Jaw Mean Lines when aligned to actual Gap Sym. Plane

Dimensions in MM



HGVPU - Pole Tip Deviation from Mean Line

Nominal Gap :	8.000	US Full :	7.9996	DS Full :	7.8995
Nom. Taper :	-0.100	US Wall Half :	4.0020	DS Wall Half :	3.9519
		US Aisle Half :	4.0034	DS Aisle Half :	3.9483

S/N	: HXU_019
Date	: 10-SEP-2019
Data Set	: 0002
Run	: FINAL
Cam Pos.	: B