SLAC Magnetic Measurements

EPU Analysis

Parameters:
INPUT-FILE-DIR =V:\MET\MagServe\MagData\DELTA\Delta Data 2015\New Measurements\Run 137 HD Spreadsheet 260 Meas\\I
INPUT-FILE-NAME =hall2-anal-probe1-field.dat
INPUT-FILE-TYPE =ZBXYZH
CORR-REQUIRED =0
GAMMA =26671.59
NOM-LAMBDA-U =0
NOM-K-VALUE =0
NOM-LAMBDA-R =0
NUM-POLES =196
NUM-END-POLES =4
CELL-LENGTH =3.656

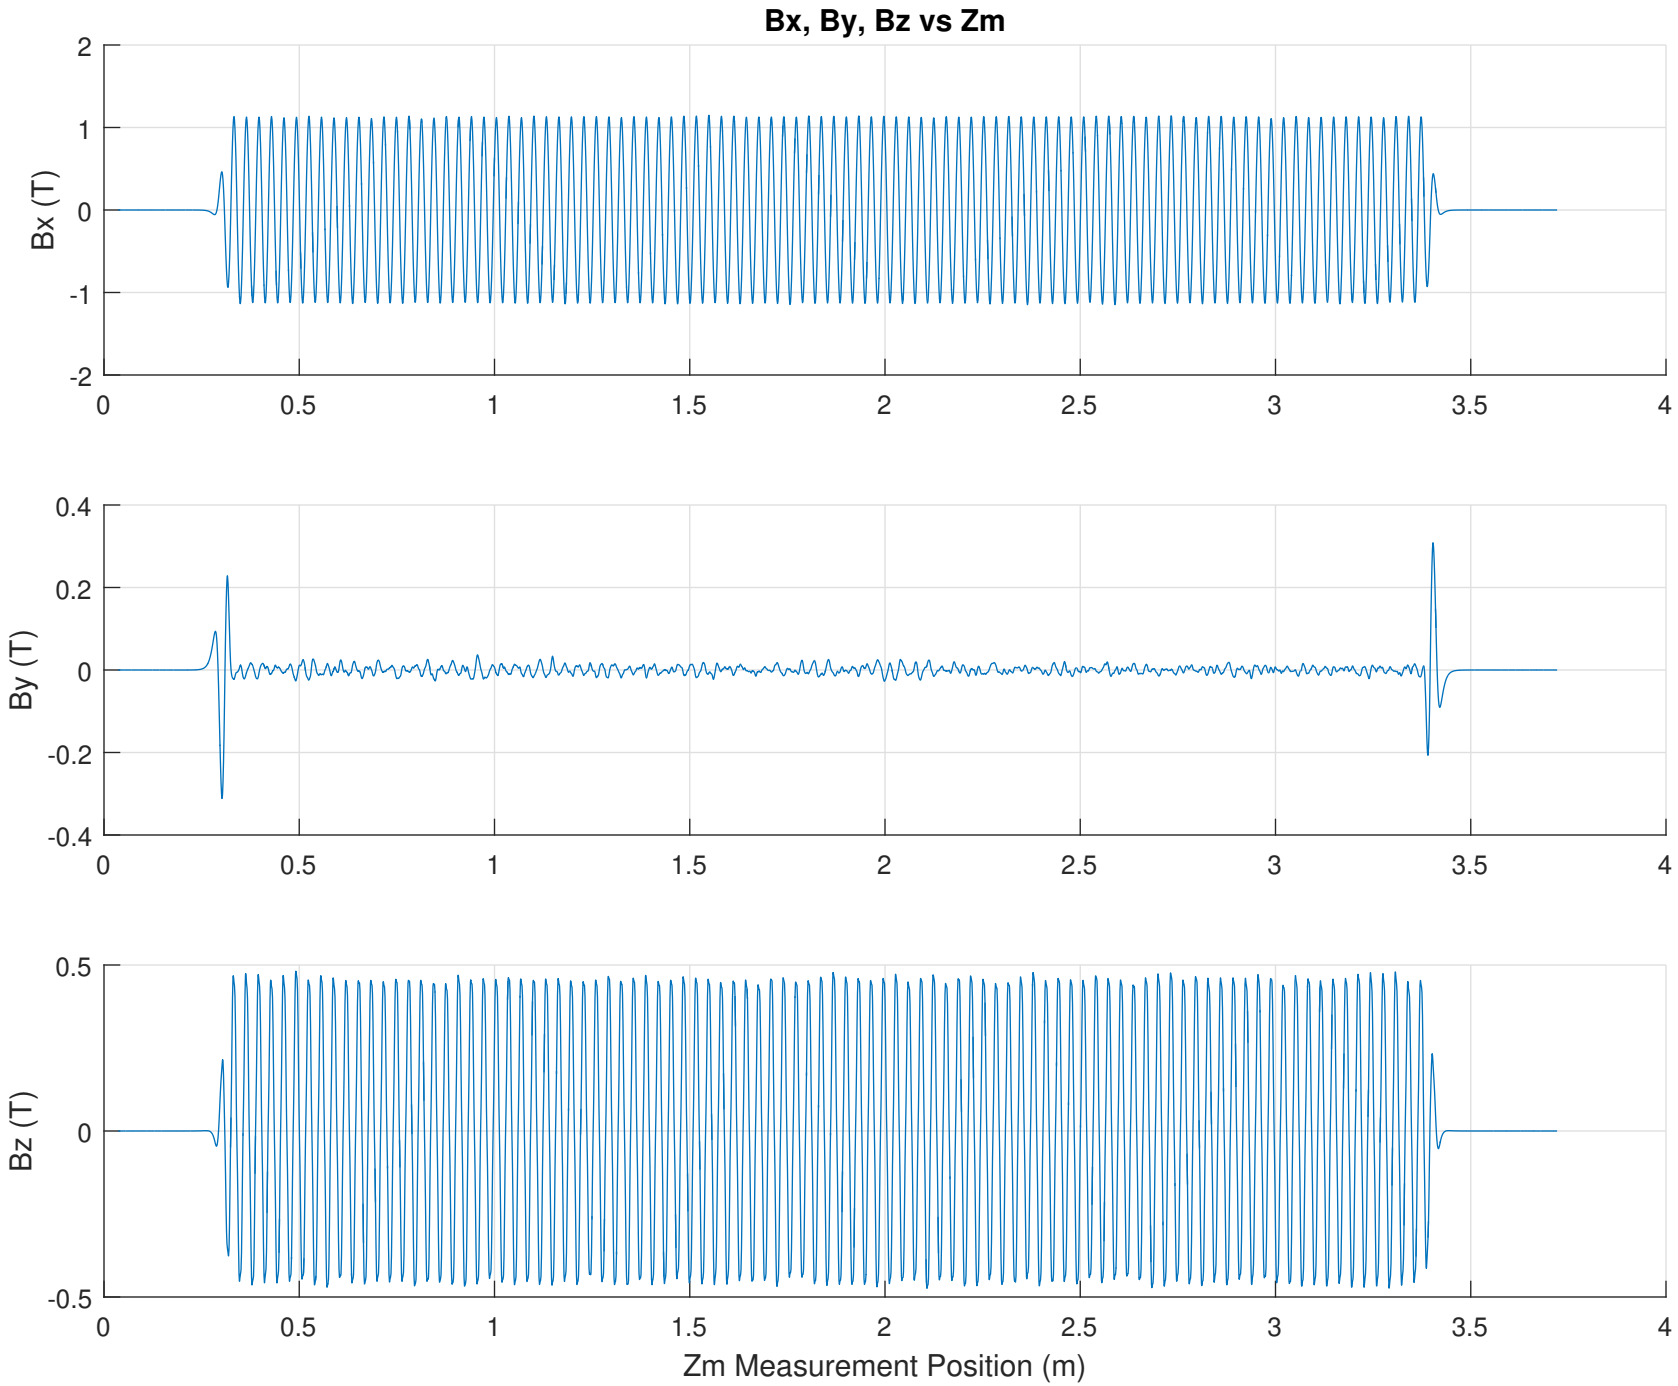
Bx, By, Bz vs Zm
Bx (T)
By (T)
Bz (T)
Zm Measurement Position (m)
2
1
0
-1
-2
0.4
0.2
0
-0.2
-0.4
0.5
0
-0.5
0
0.5
1
1.5
2
2.5
3
3.5
4

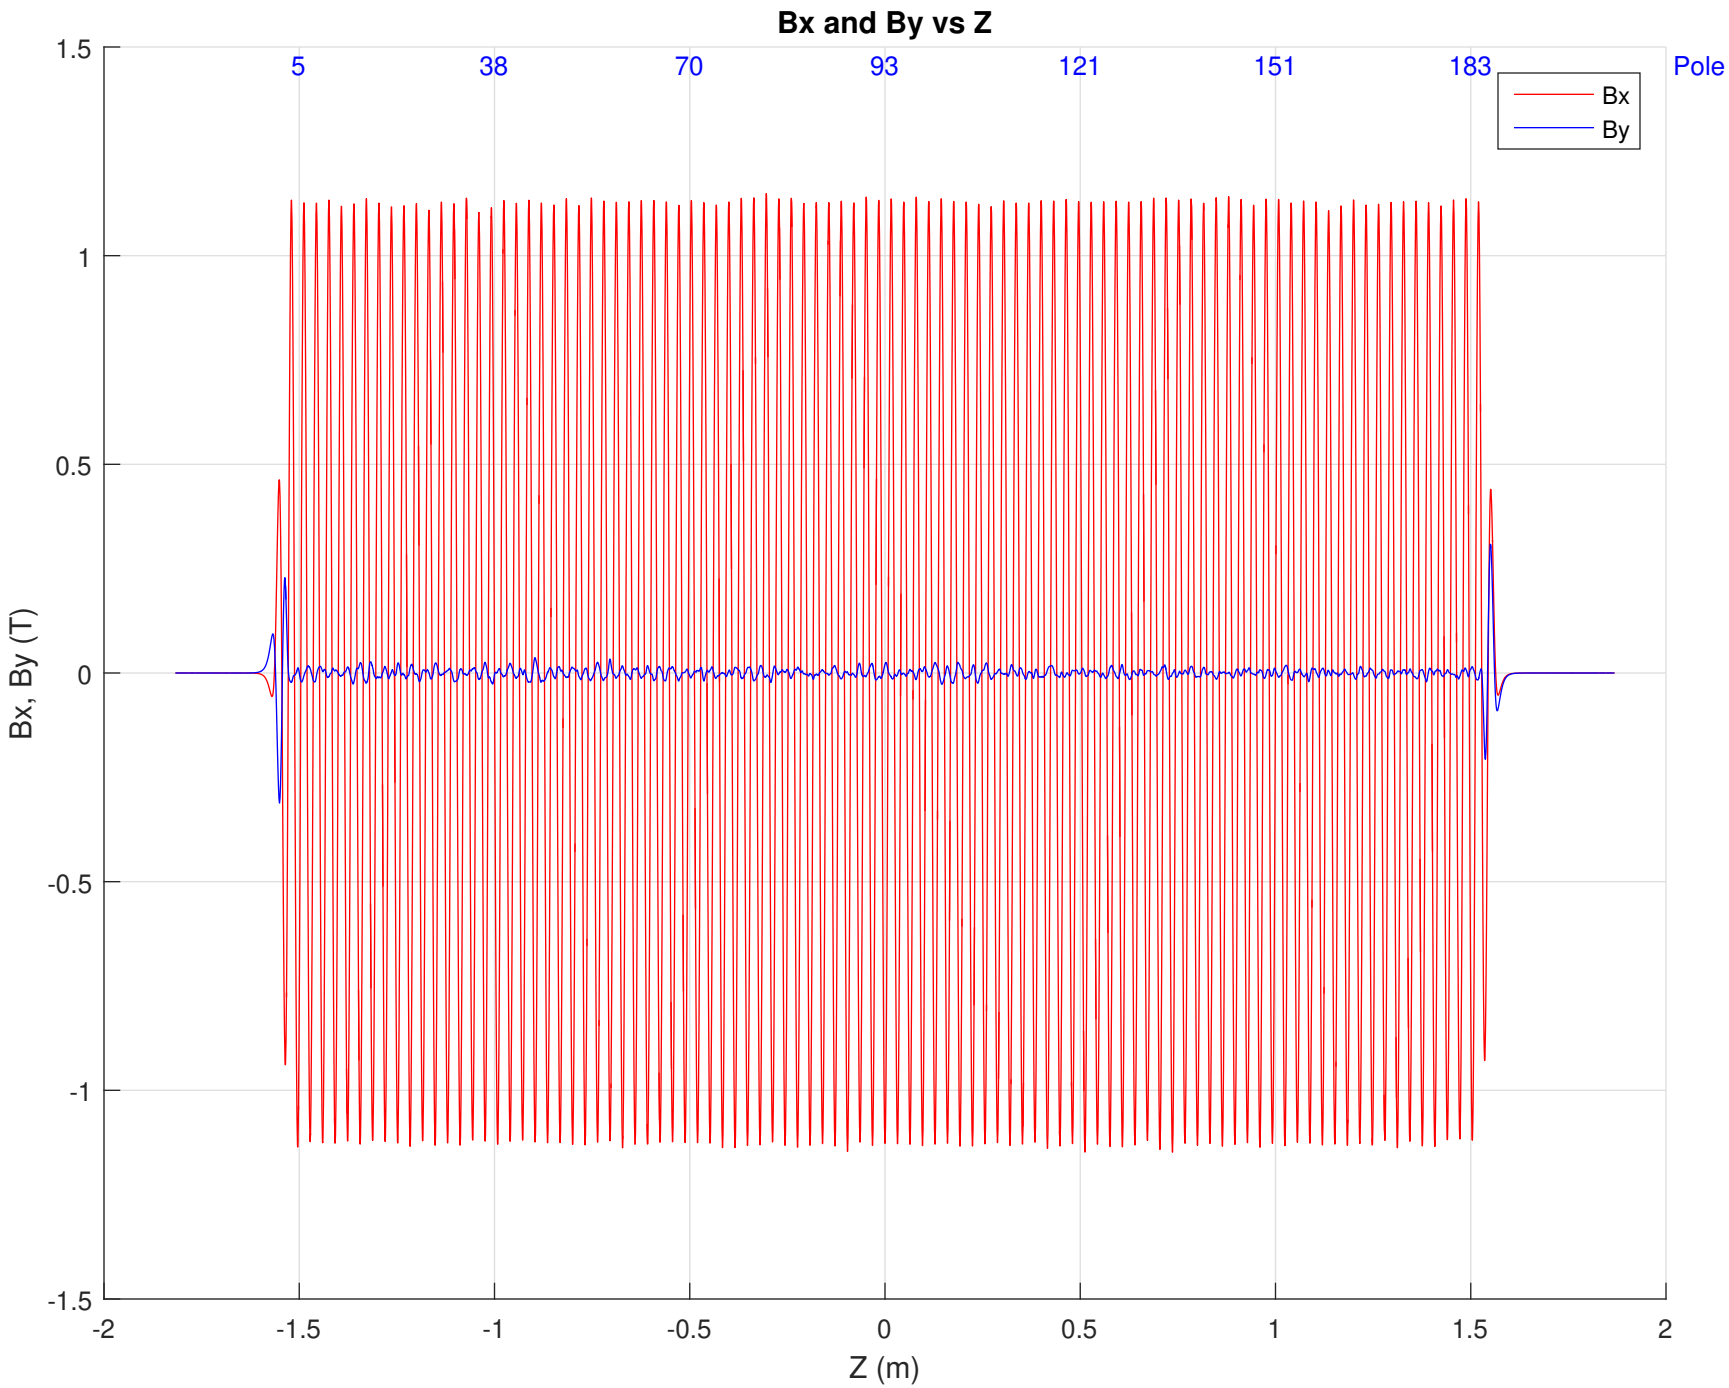
Bx and By vs Z
5
38
70
93
121
151
183
Pole
Bx
By
1.5
1
0.5
0
-0.5
-1
-1.5
Bx, By (T)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

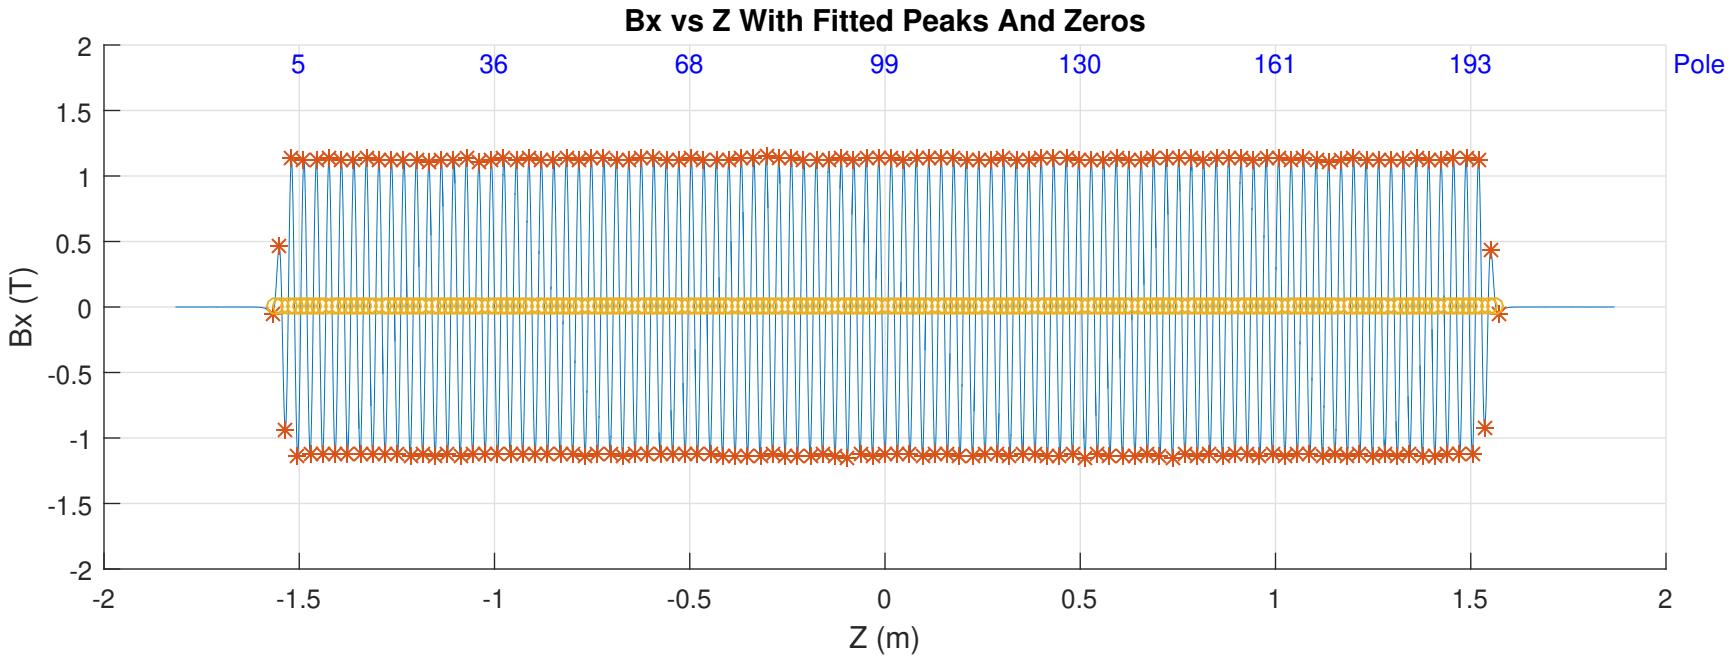
Bx vs Z With Fitted Peaks And Zeros
5
36
68
99
130
161
193
Pole
Bx (T)
Z (m)

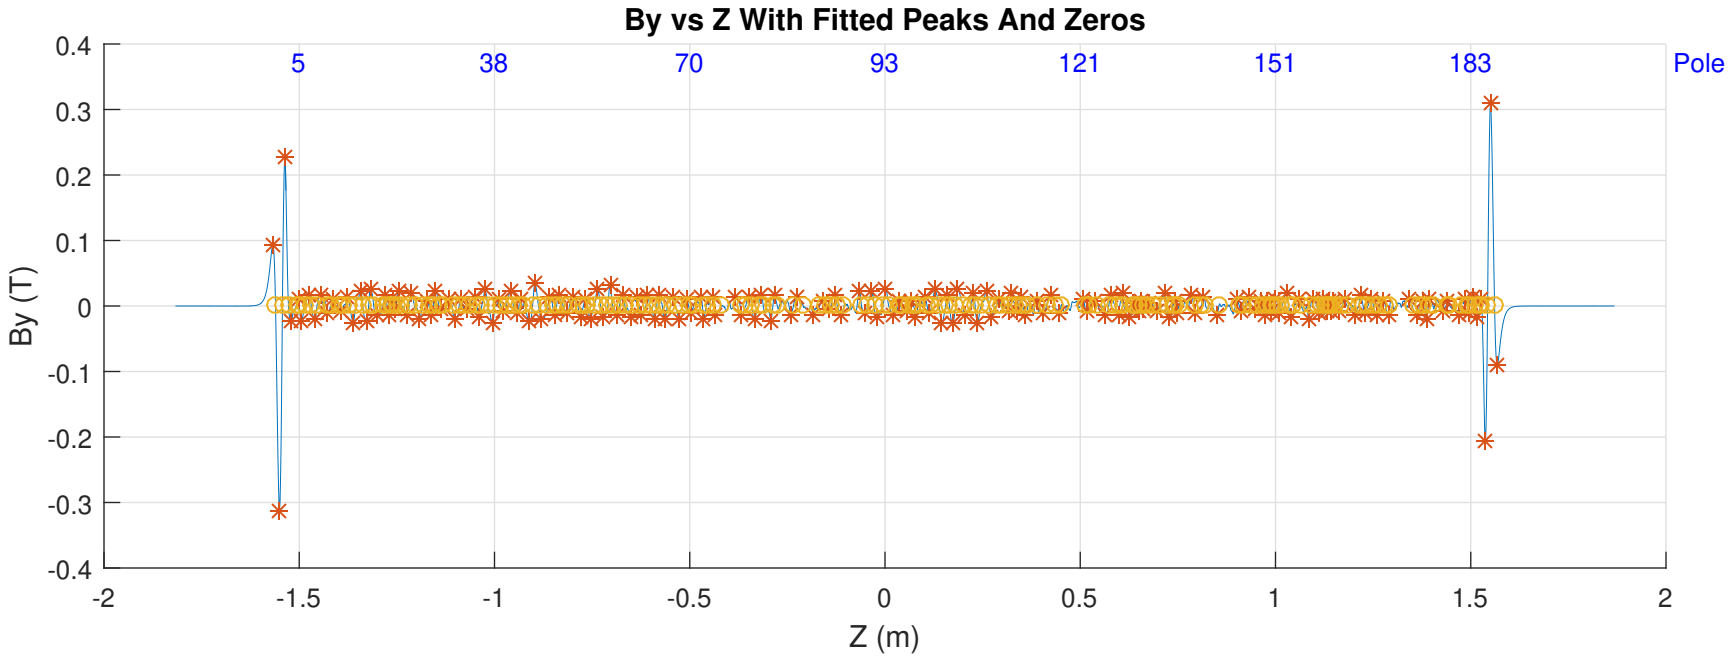
By vs Z With Fitted Peaks And Zeros
5
38
70
93
121
151
183
Pole
By (T)
Z (m)

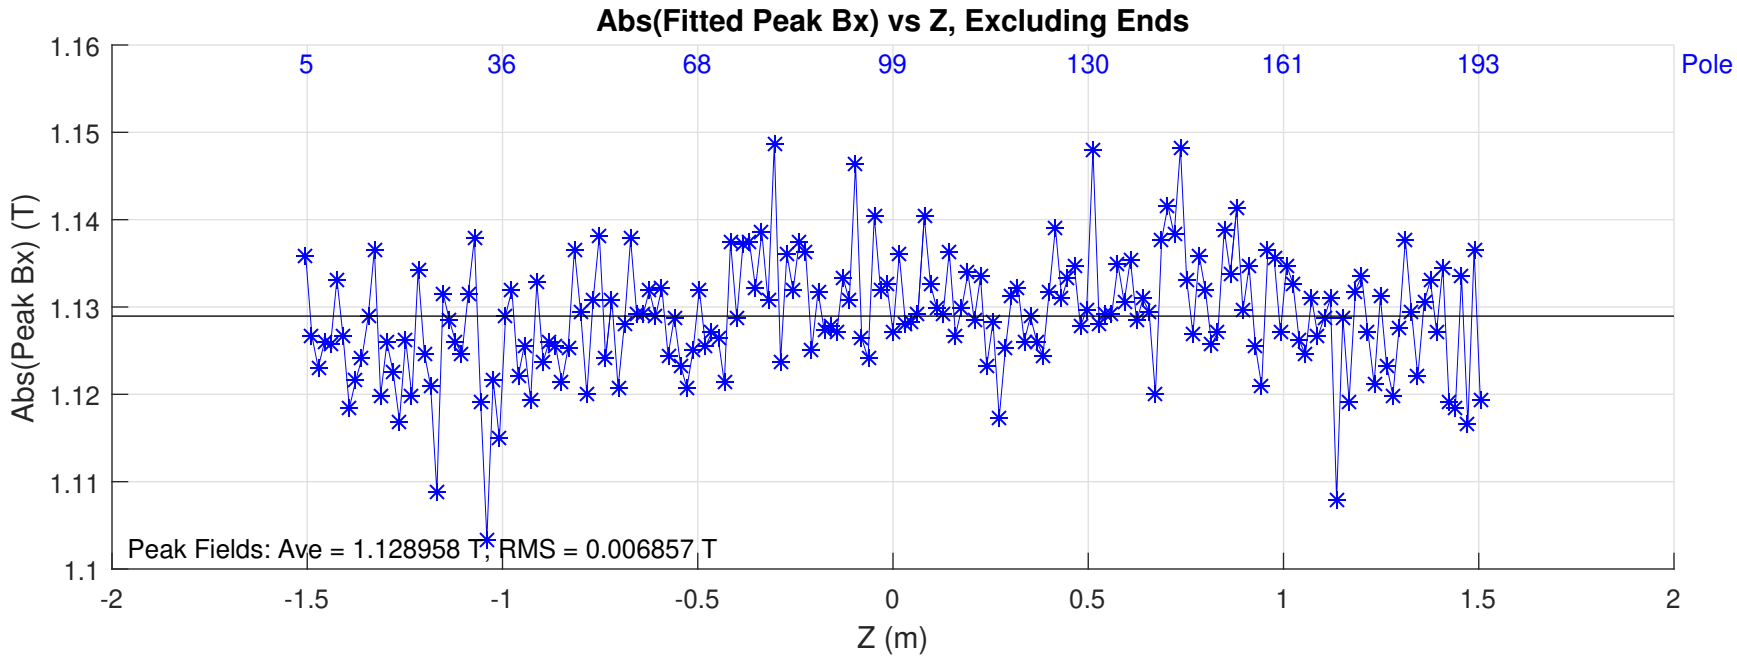
Abs(Fitted Peak Bx) vs Z, Excluding Ends
5
36
68
99
130
161
193
Pole
1.16
1.15
1.14
1.13
1.12
1.11
1.1
Abs(Peak Bx) (T)
Peak Fields: Ave = 1.128958 T, RMS = 0.006857 T
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

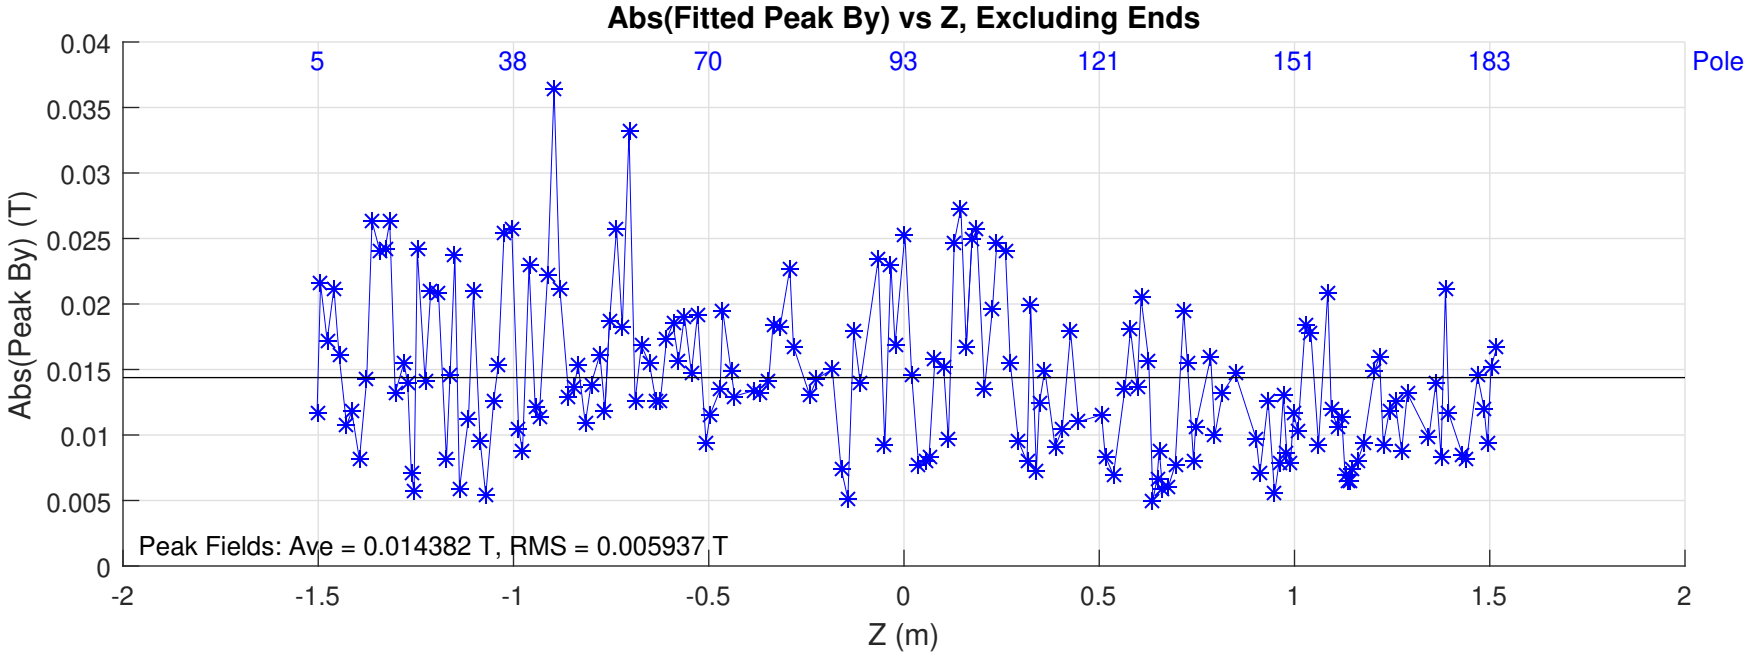
Abs(Fitted Peak By) vs Z, Excluding Ends
5
38
70
93
121
151
183
Pole
0.04
0.035
0.03
0.025
0.02
0.015
0.01
0.005
0
Abs(Peak By) (T)
Peak Fields: Ave = 0.014382 T, RMS = 0.005937 T
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

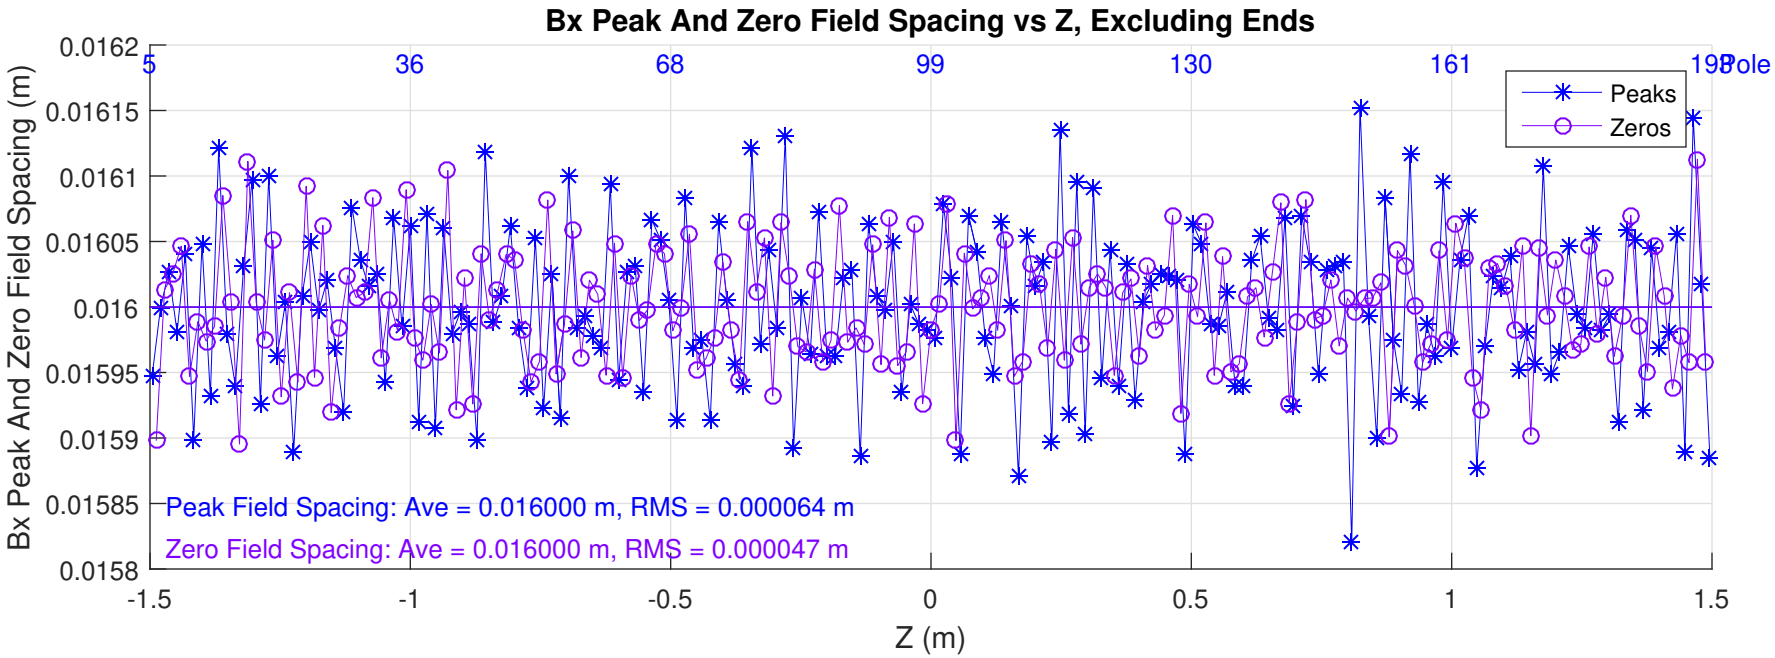
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016000 m, RMS = 0.000064 m
Zero Field Spacing: Ave = 0.016000 m, RMS = 0.000047 m

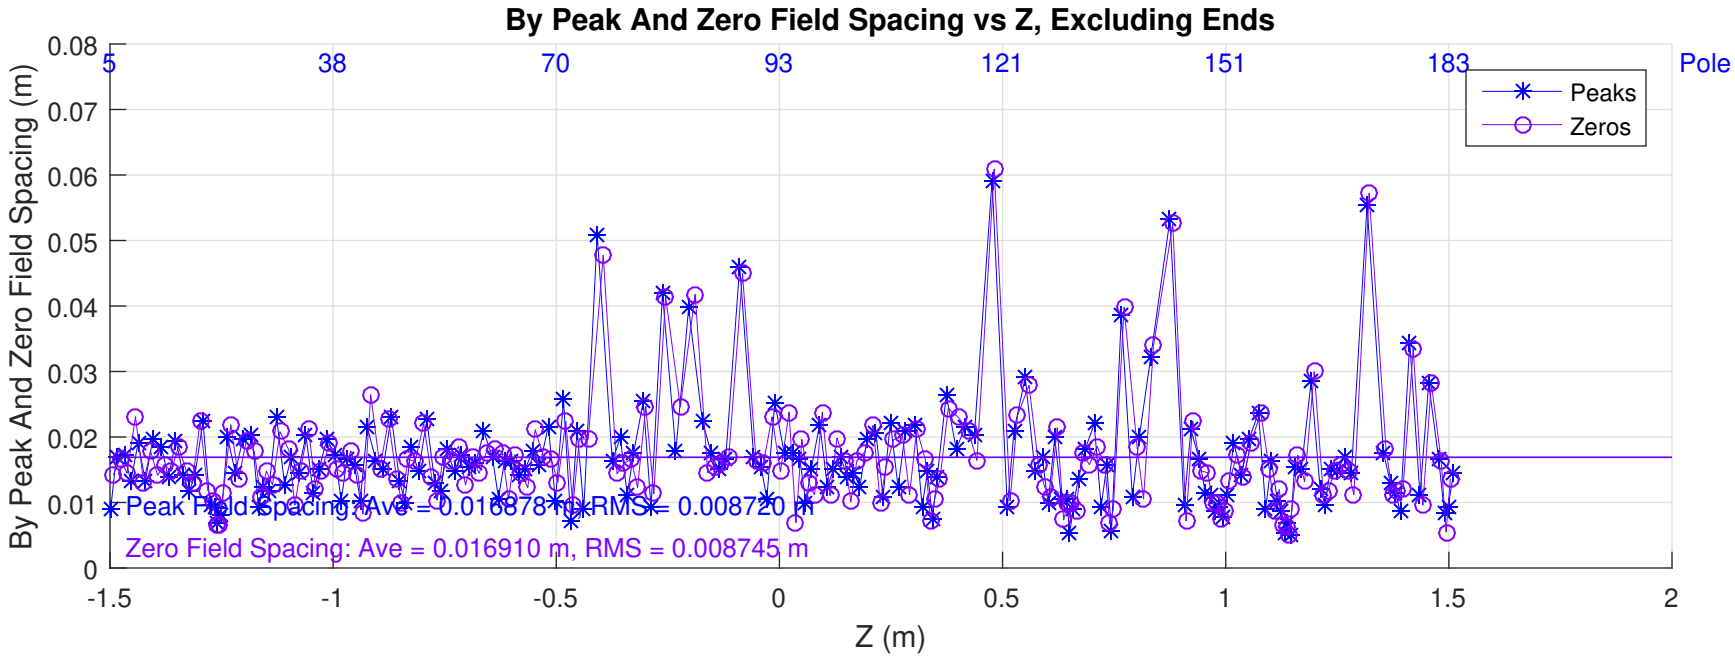
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016878 m, RMS = 0.008720 m
Zero Field Spacing: Ave = 0.016910 m, RMS = 0.008745 m

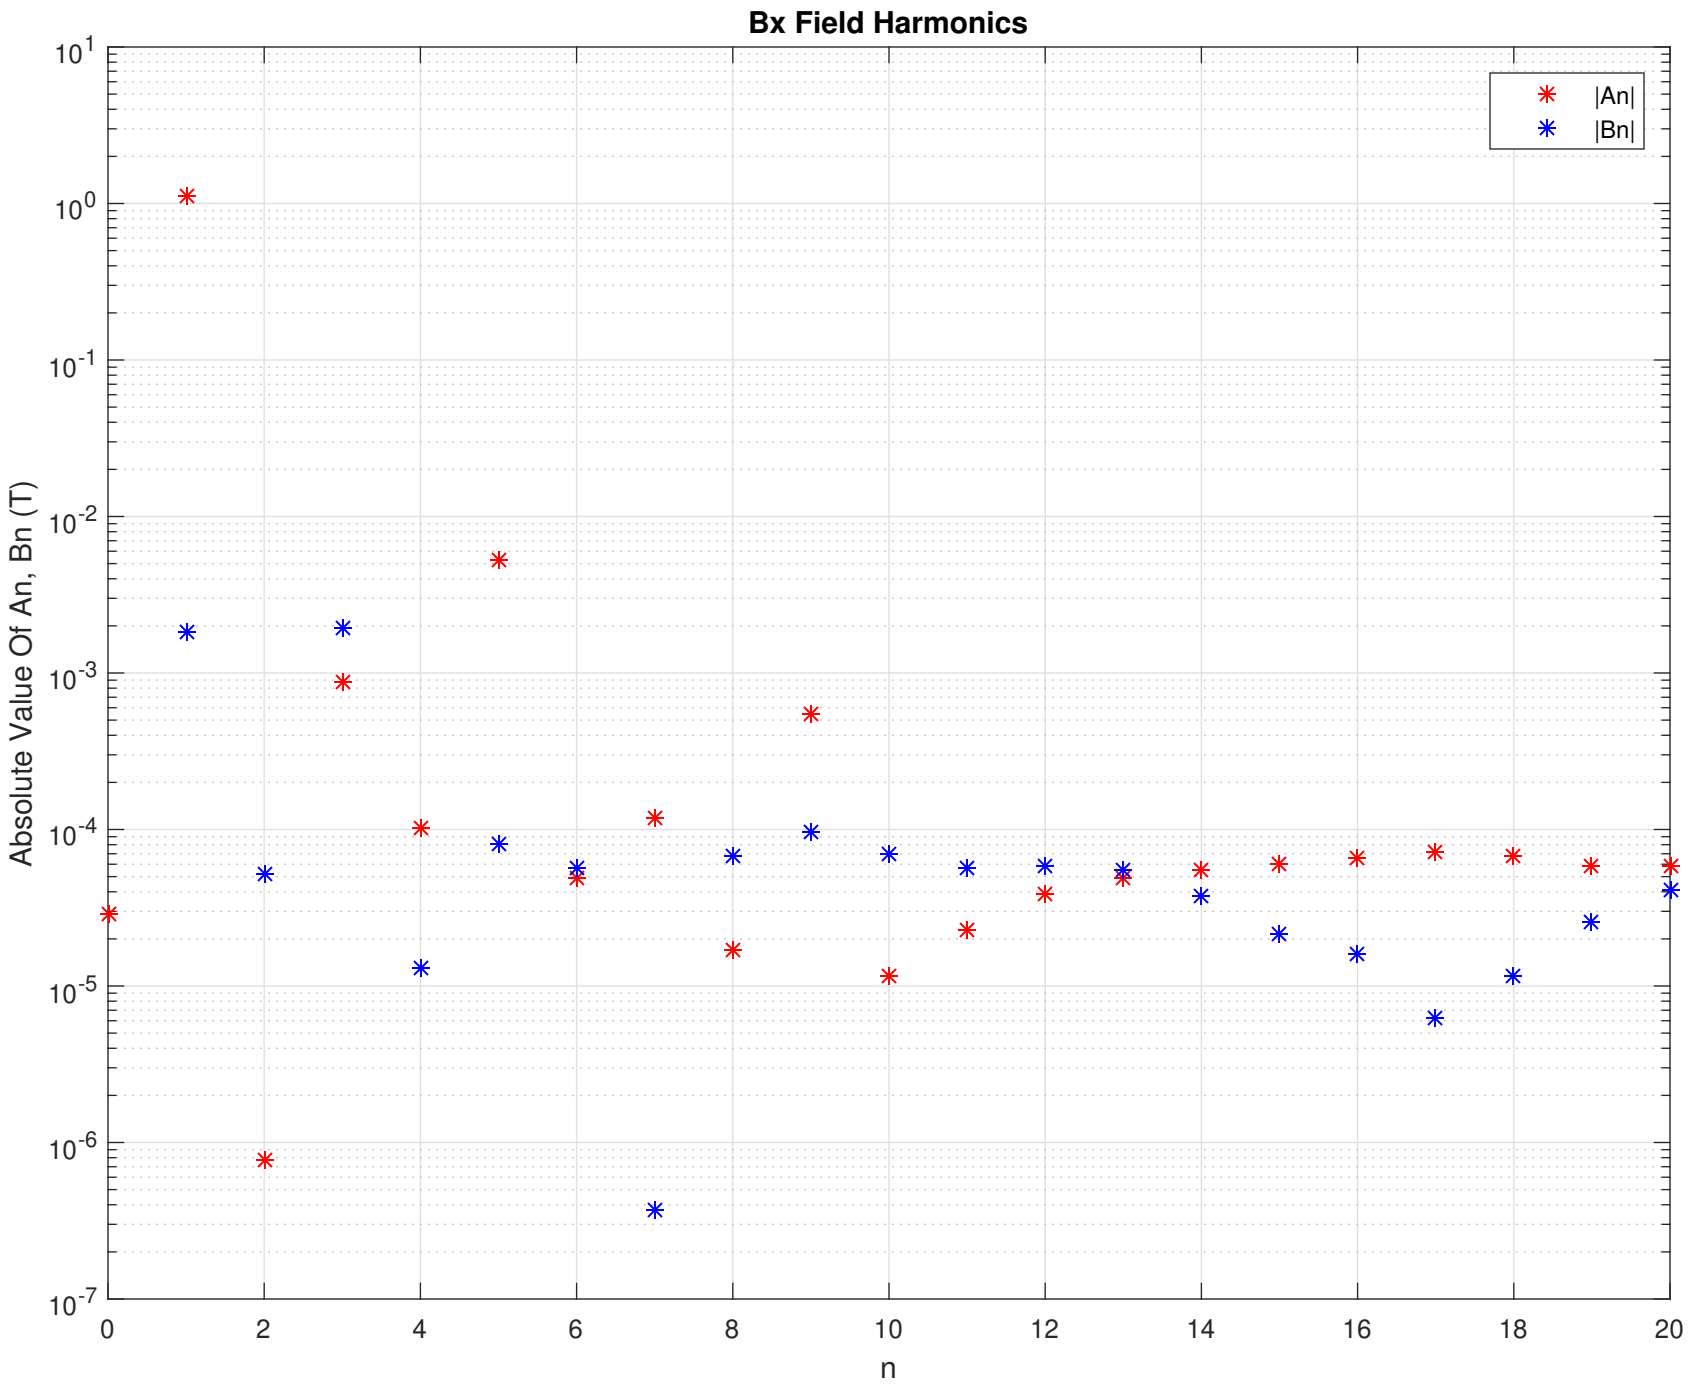
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
0
2
4
6
8
10
12
14
16
18
20

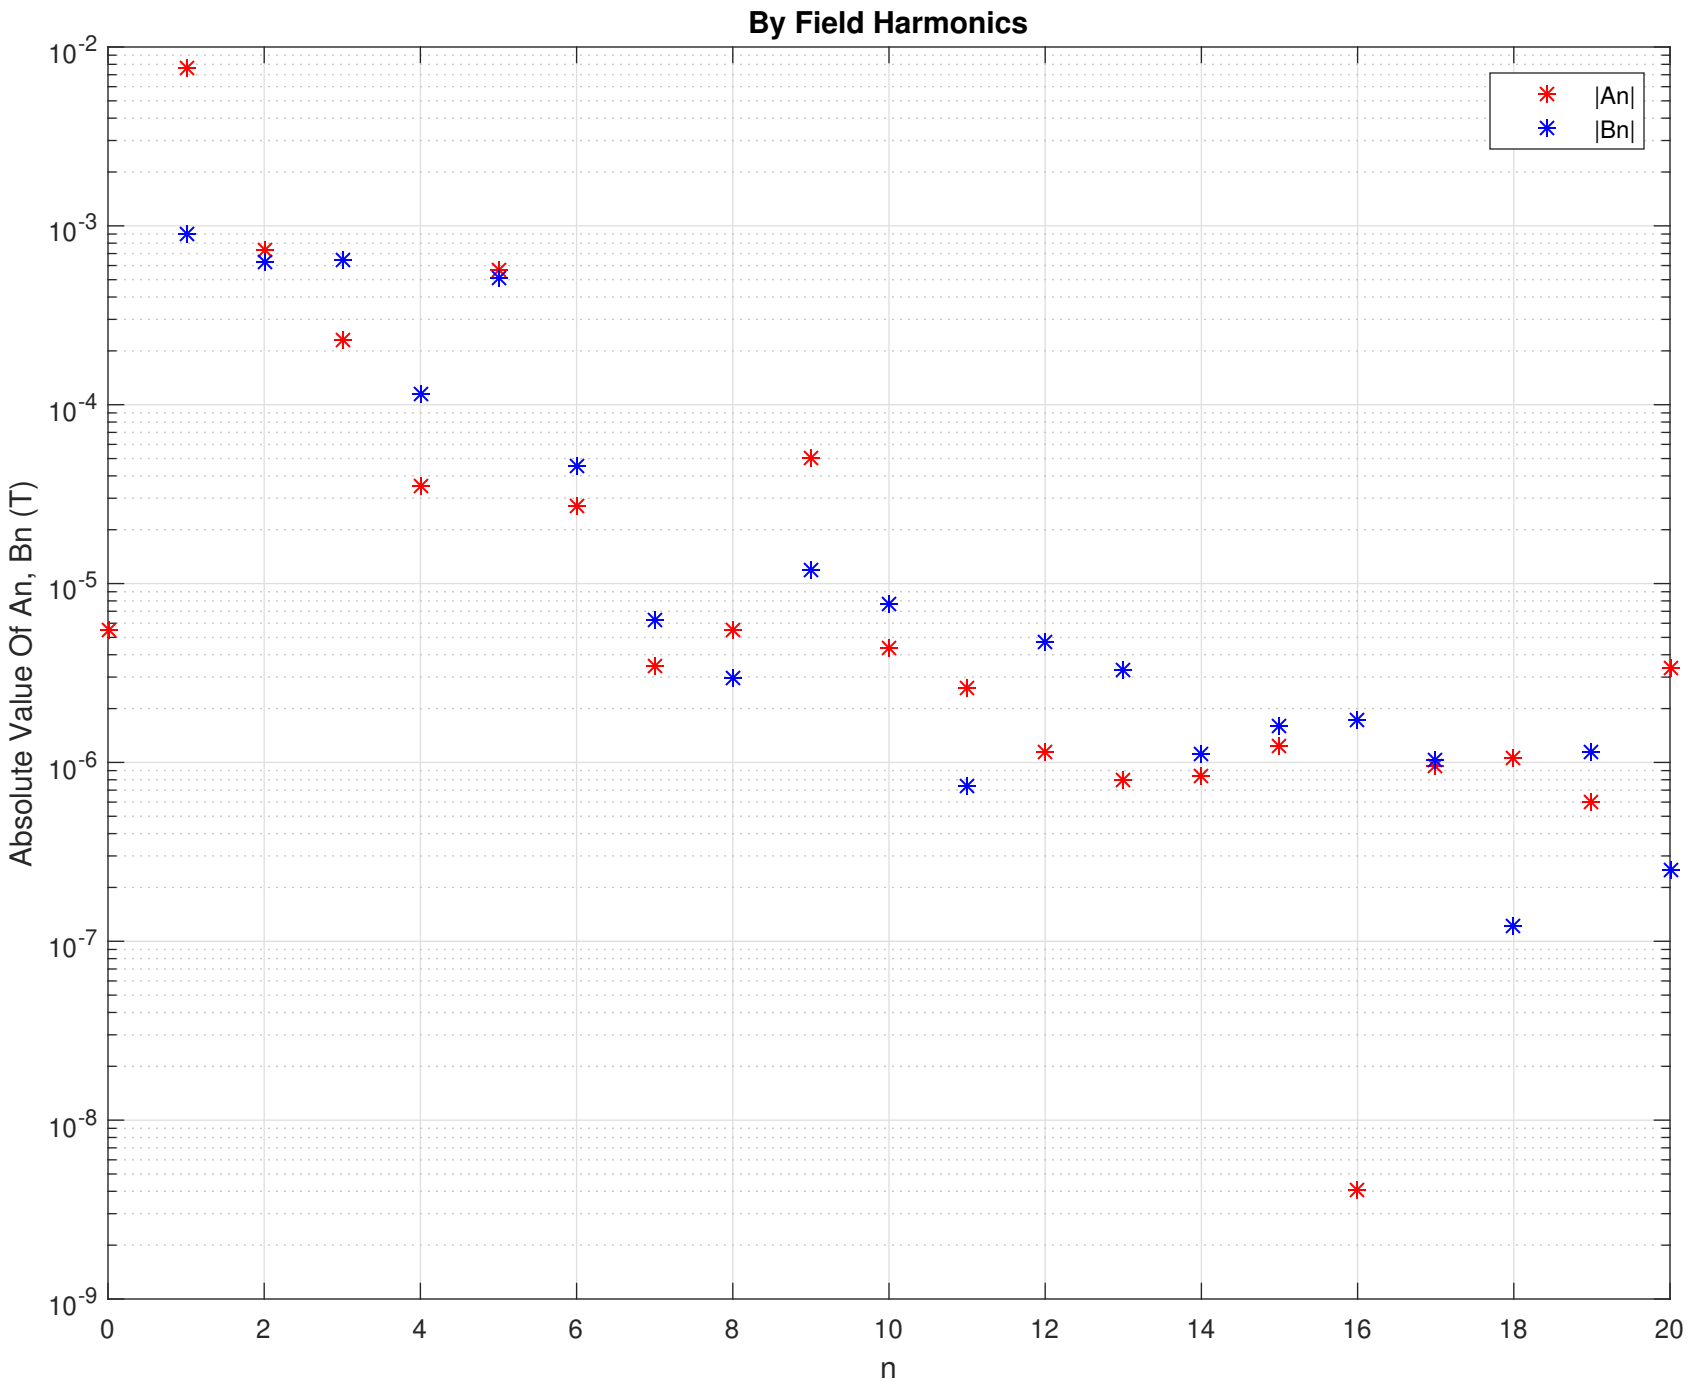
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^-2
10^-3
10^-4
10^-5
10^-6
10^-7
10^-8
10^-9
0
2
4
6
8
10
12
14
16
18
20

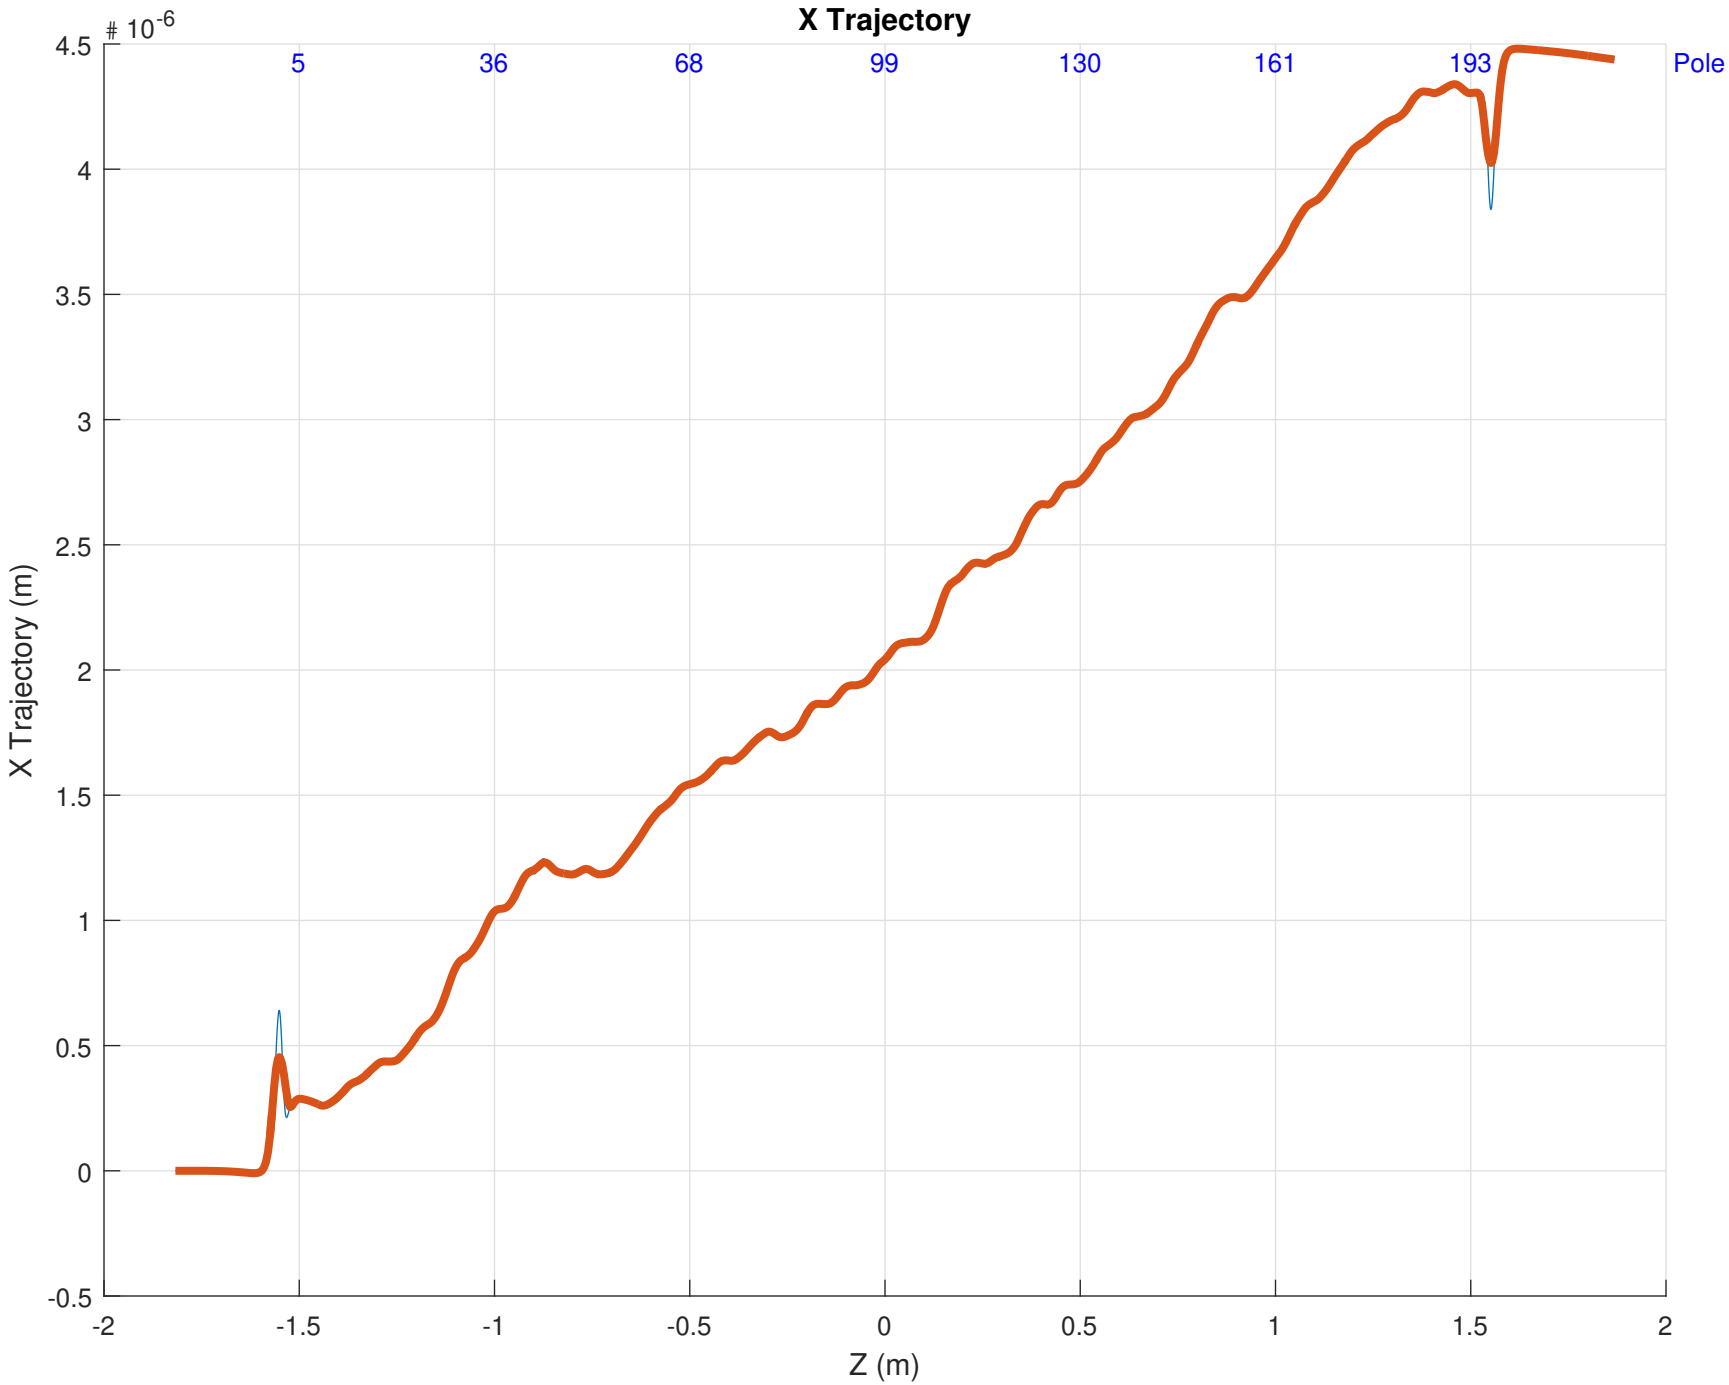
X Trajectory
10^-6
5
36
68
99
130
161
193
Pole
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
-0.5
X Trajectory (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

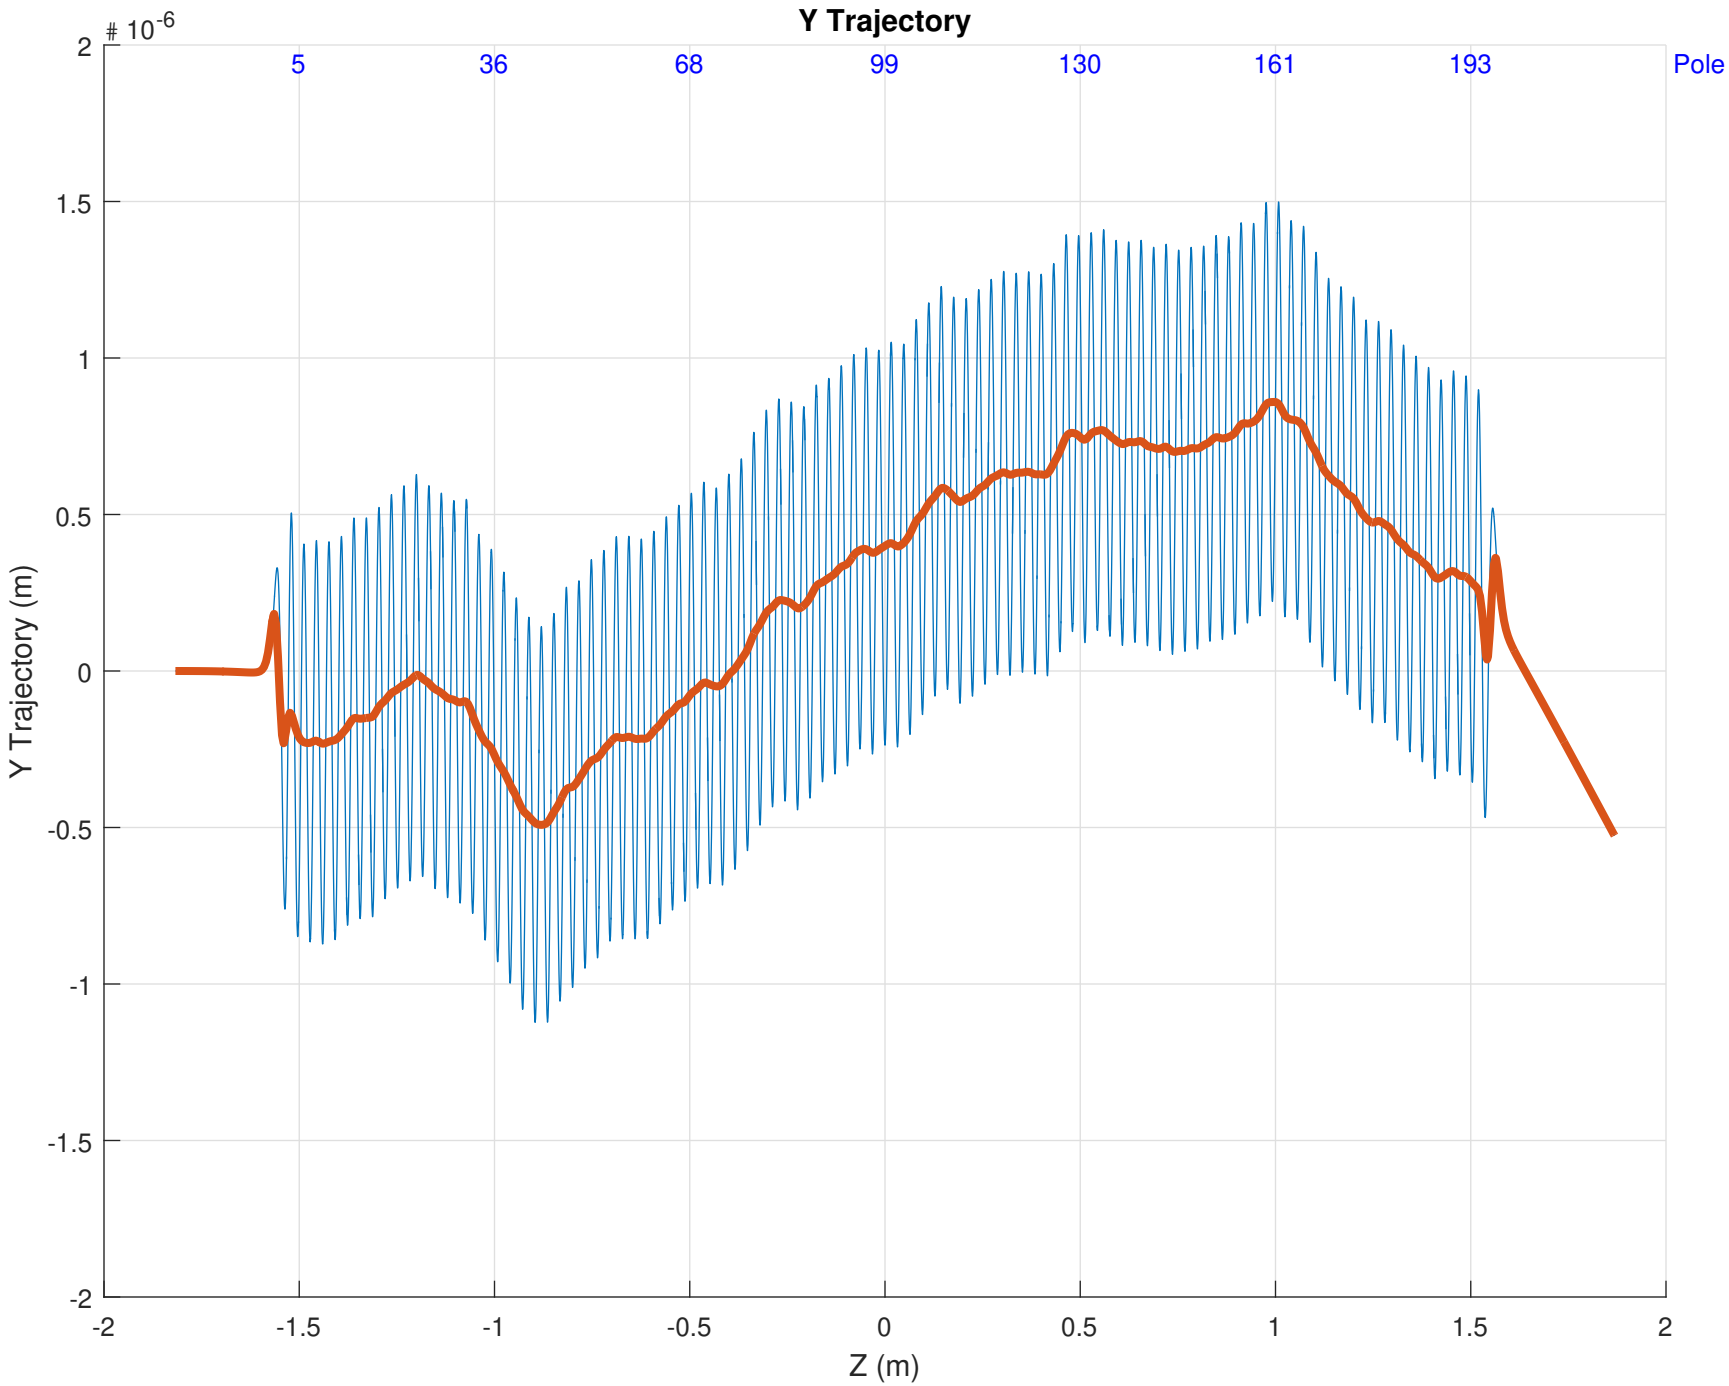
Y Trajectory
10^-6
5
36
68
99
130
161
193
Pole
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Y Trajectory (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

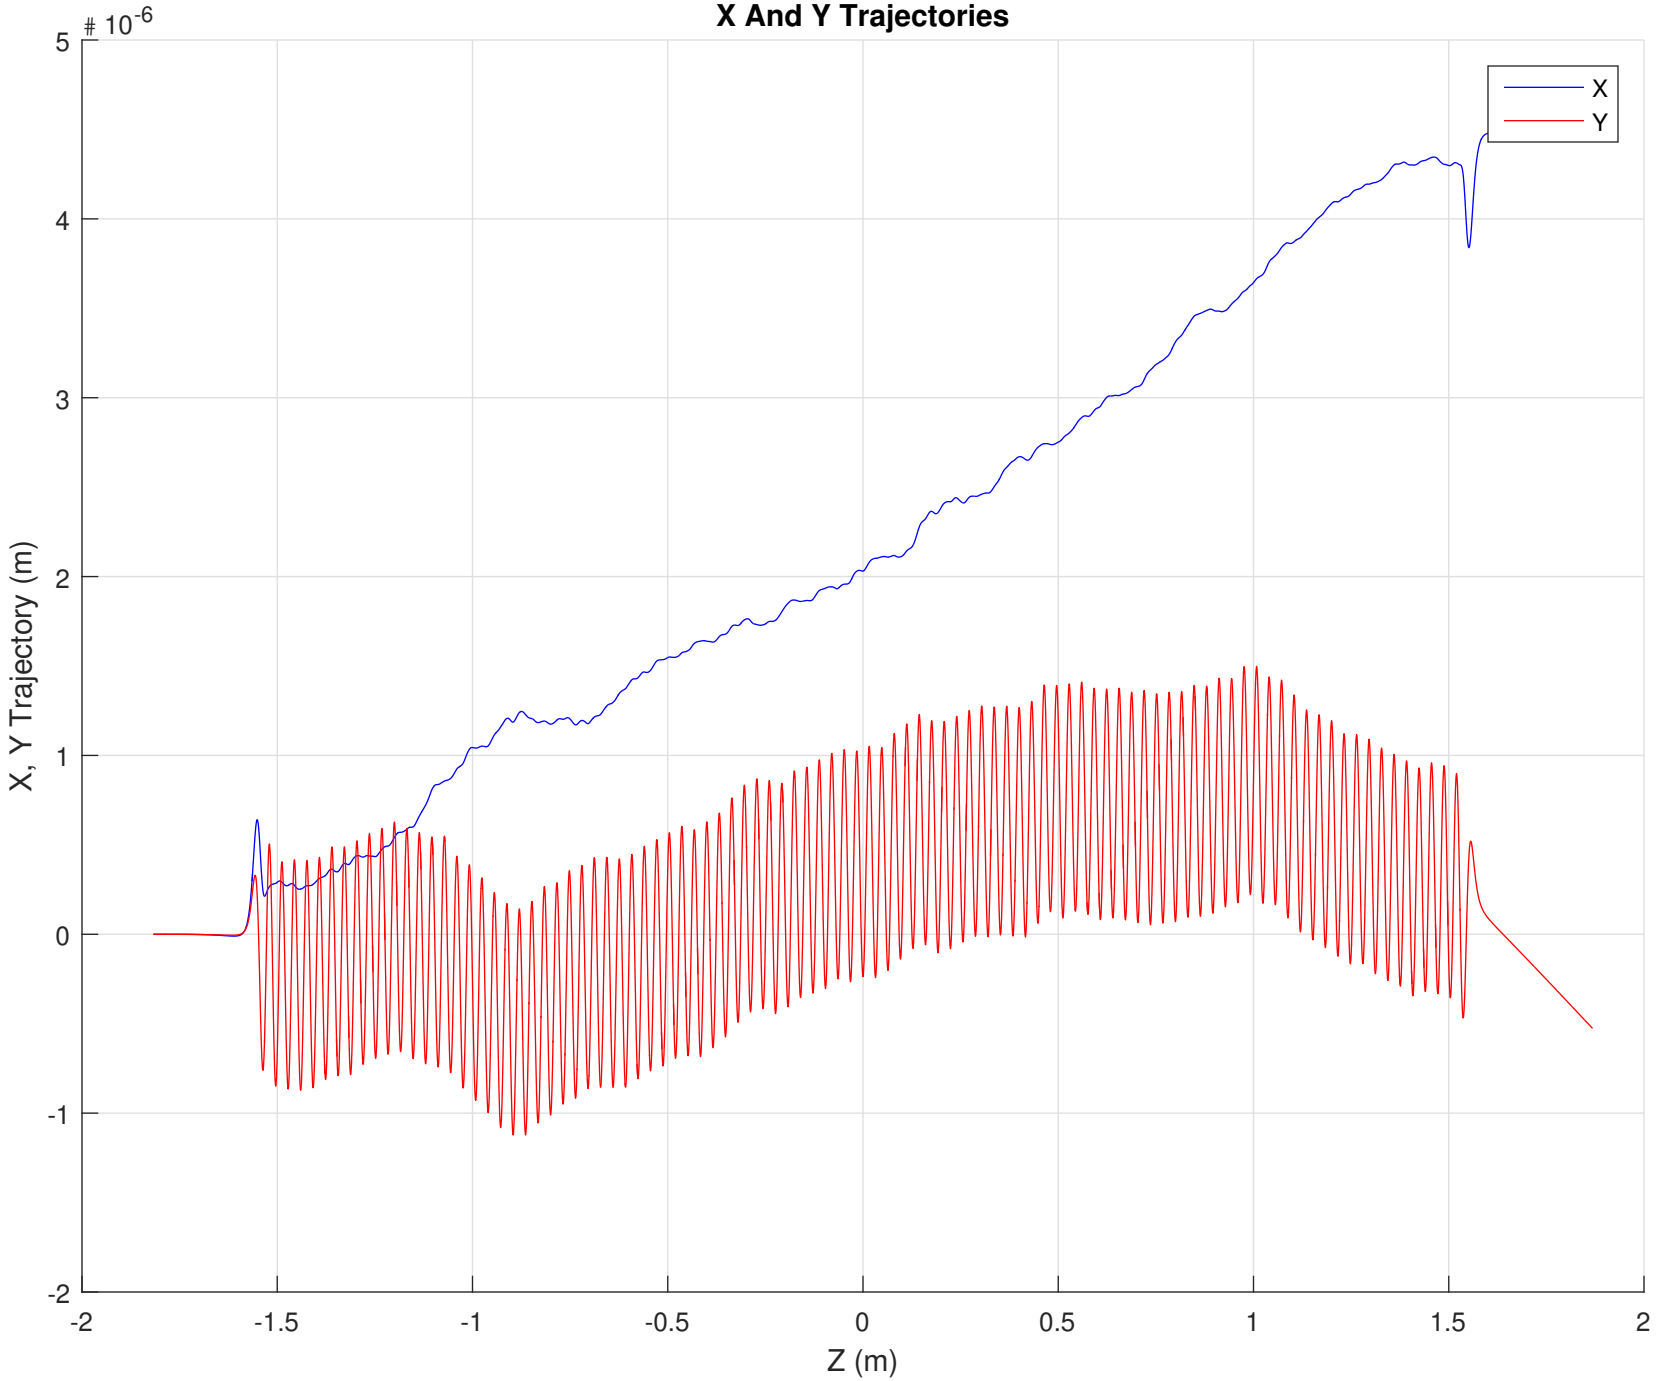
X And Y Trajectories
10^-6
X
Y
X, Y Trajectory (m)
Z (m)
5
4
3
2
1
0
-1
-2
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

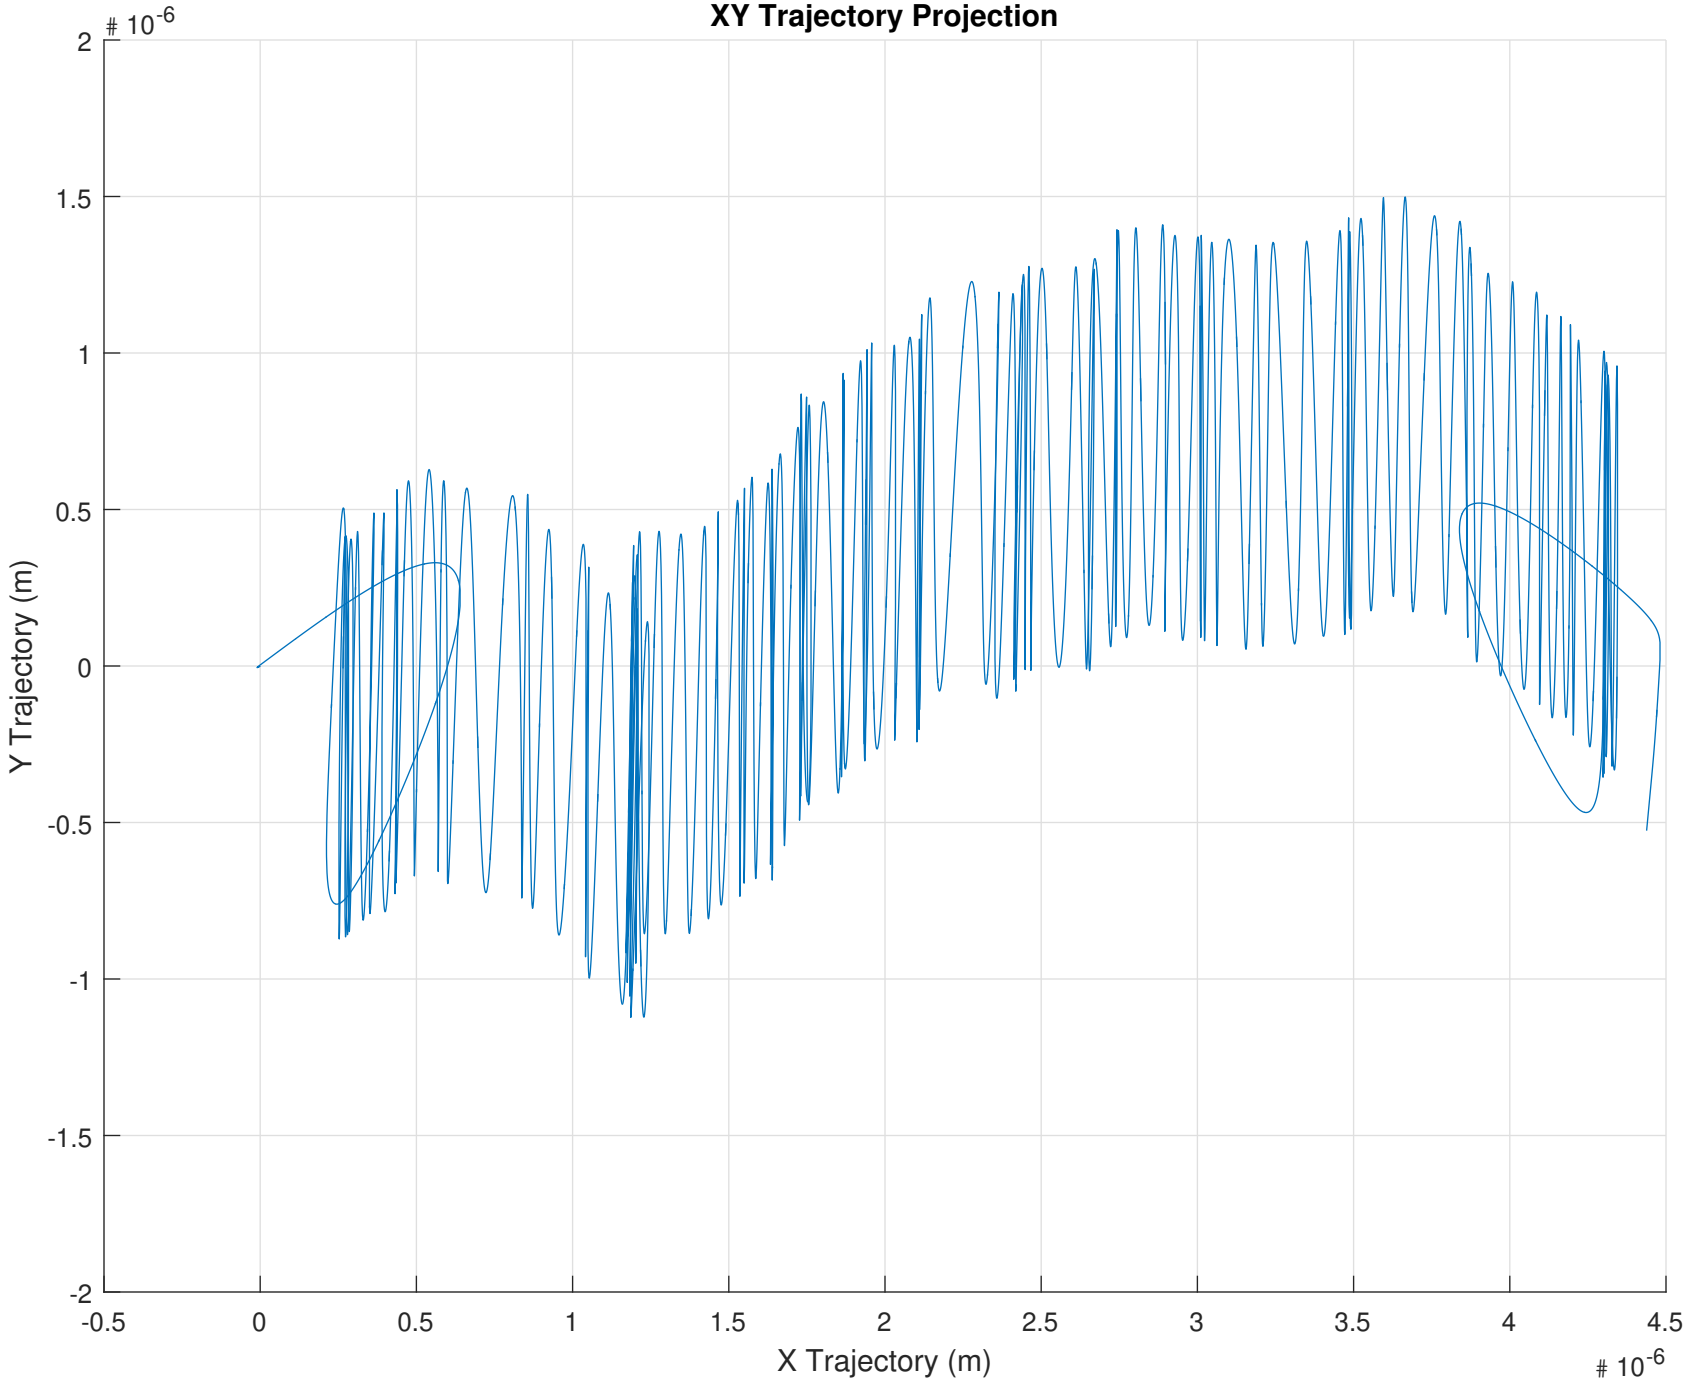
XY Trajectory Projection
10^-6
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Y Trajectory (m)
-0.5
0
0.5
1
1.5
2
2.5
3
3.5
4
4.5
X Trajectory (m)
10^-6

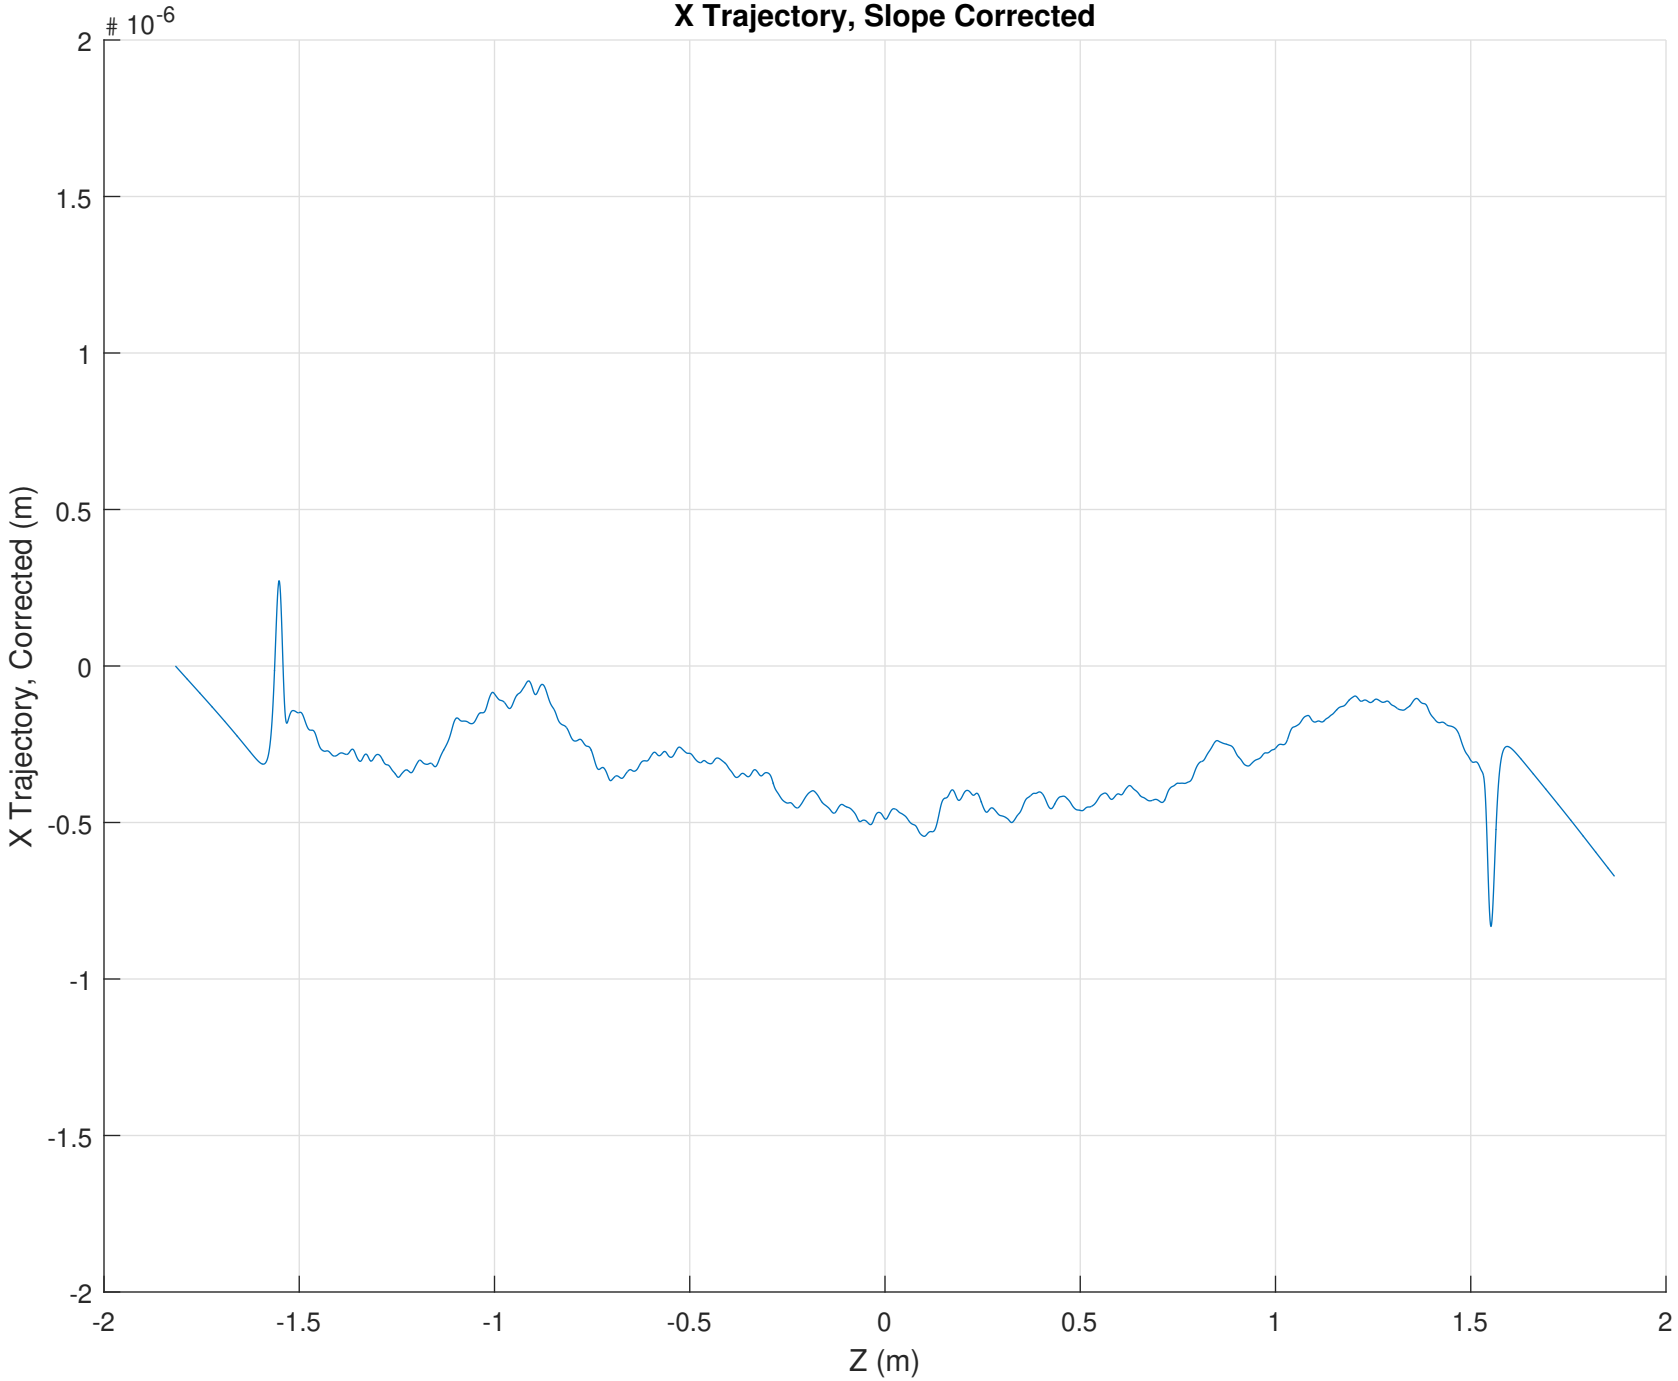
X Trajectory, Slope Corrected
10^-6
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
X Trajectory, Corrected (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

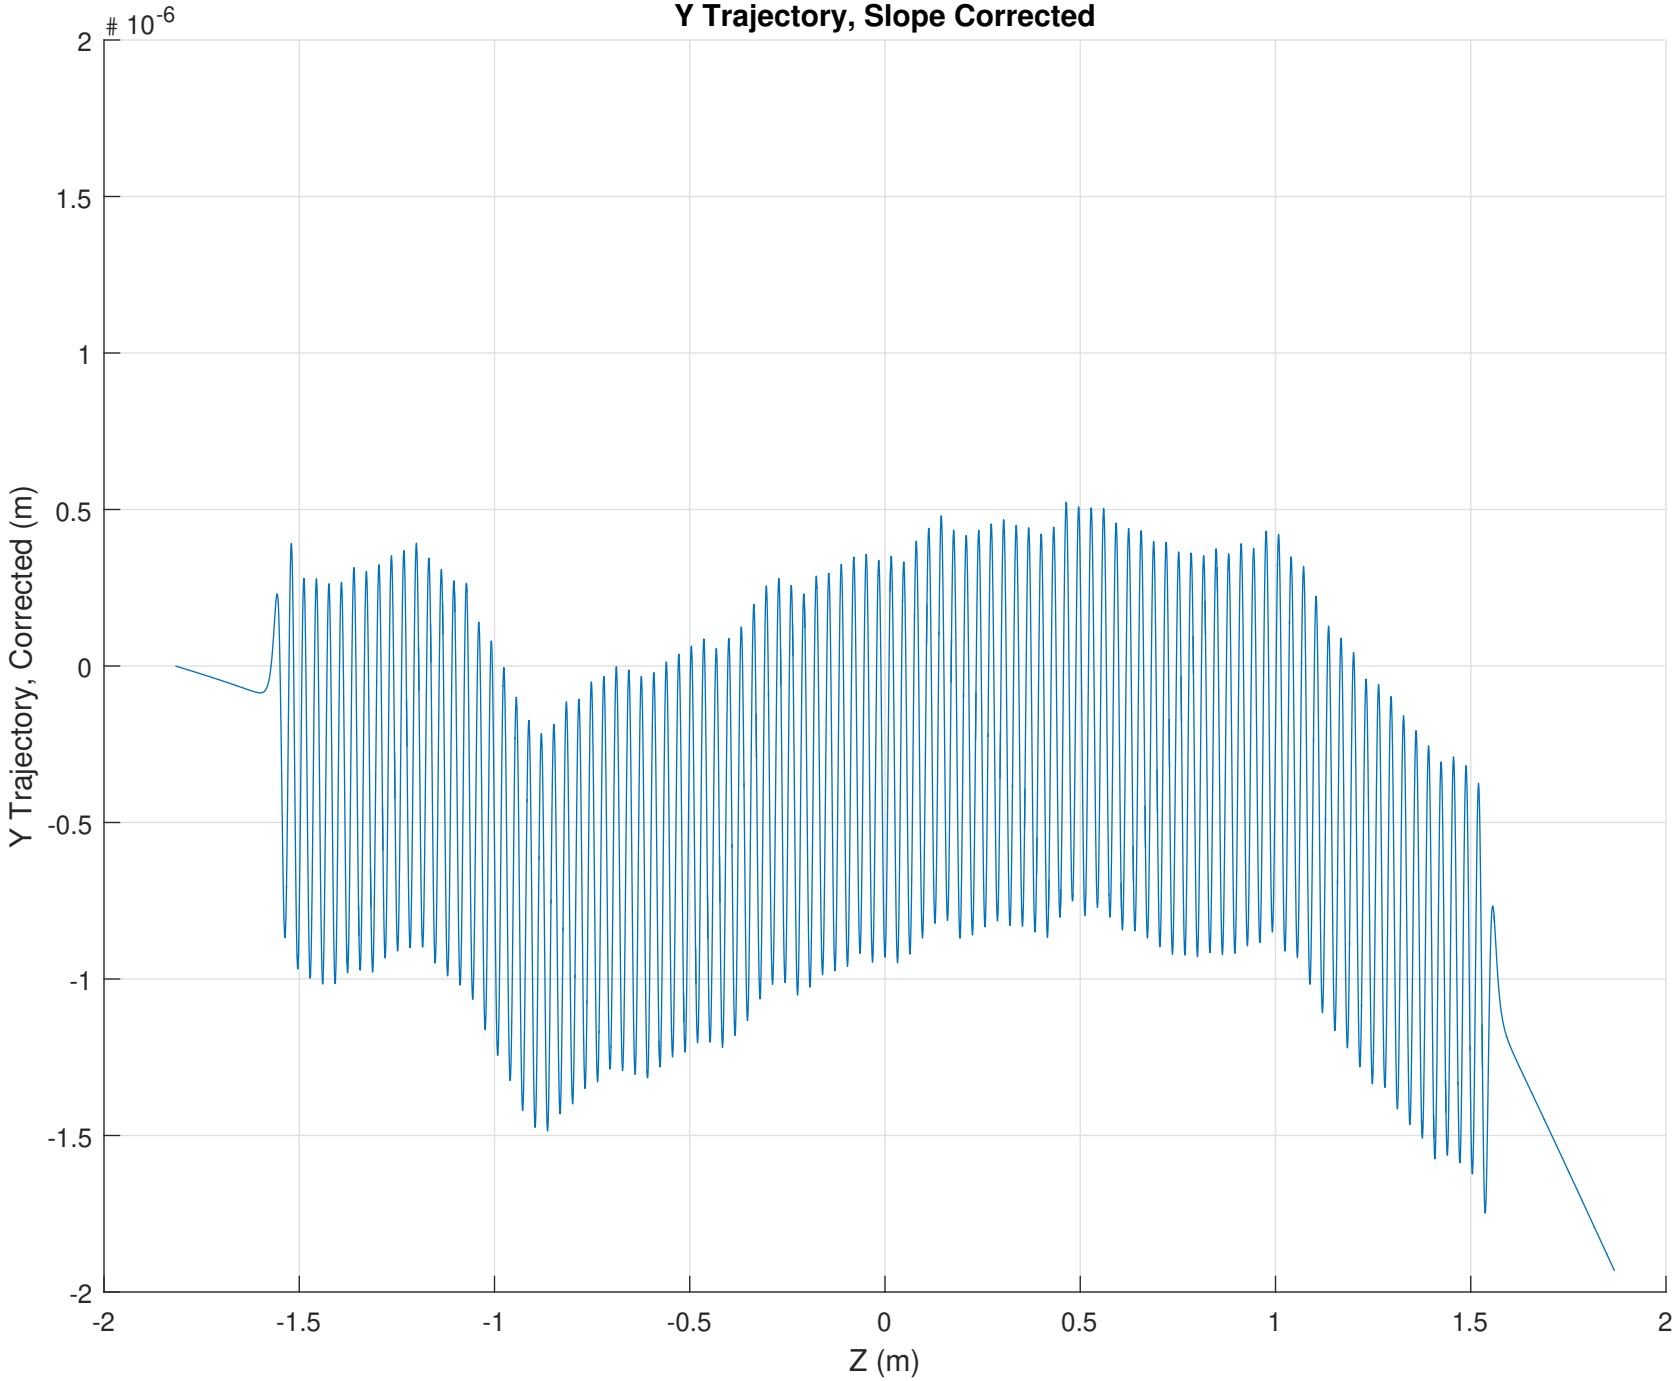
Y Trajectory, Slope Corrected
10^-6
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Y Trajectory, Corrected (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

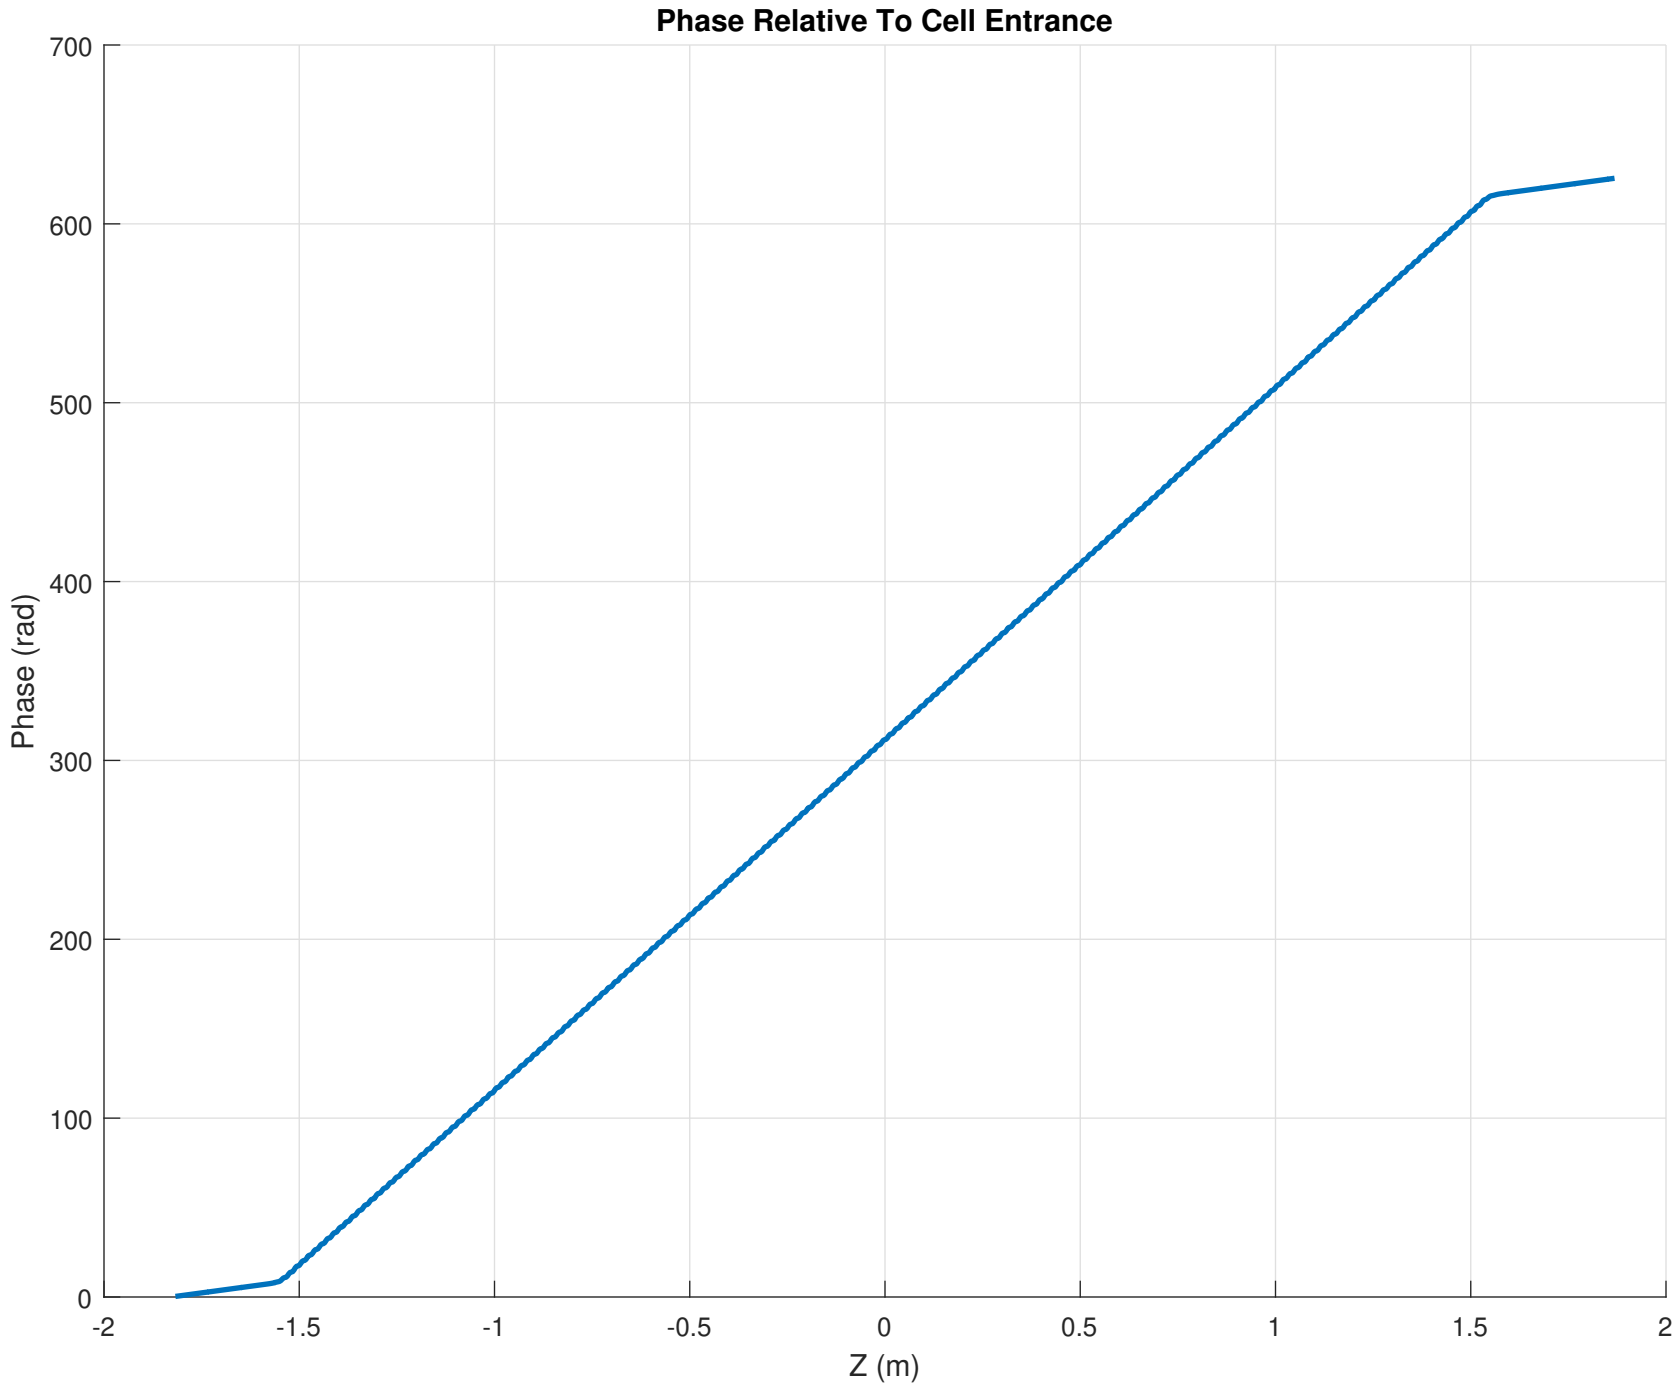
Phase Relative To Cell Entrance
700
600
500
400
300
200
100
0
Phase (rad)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

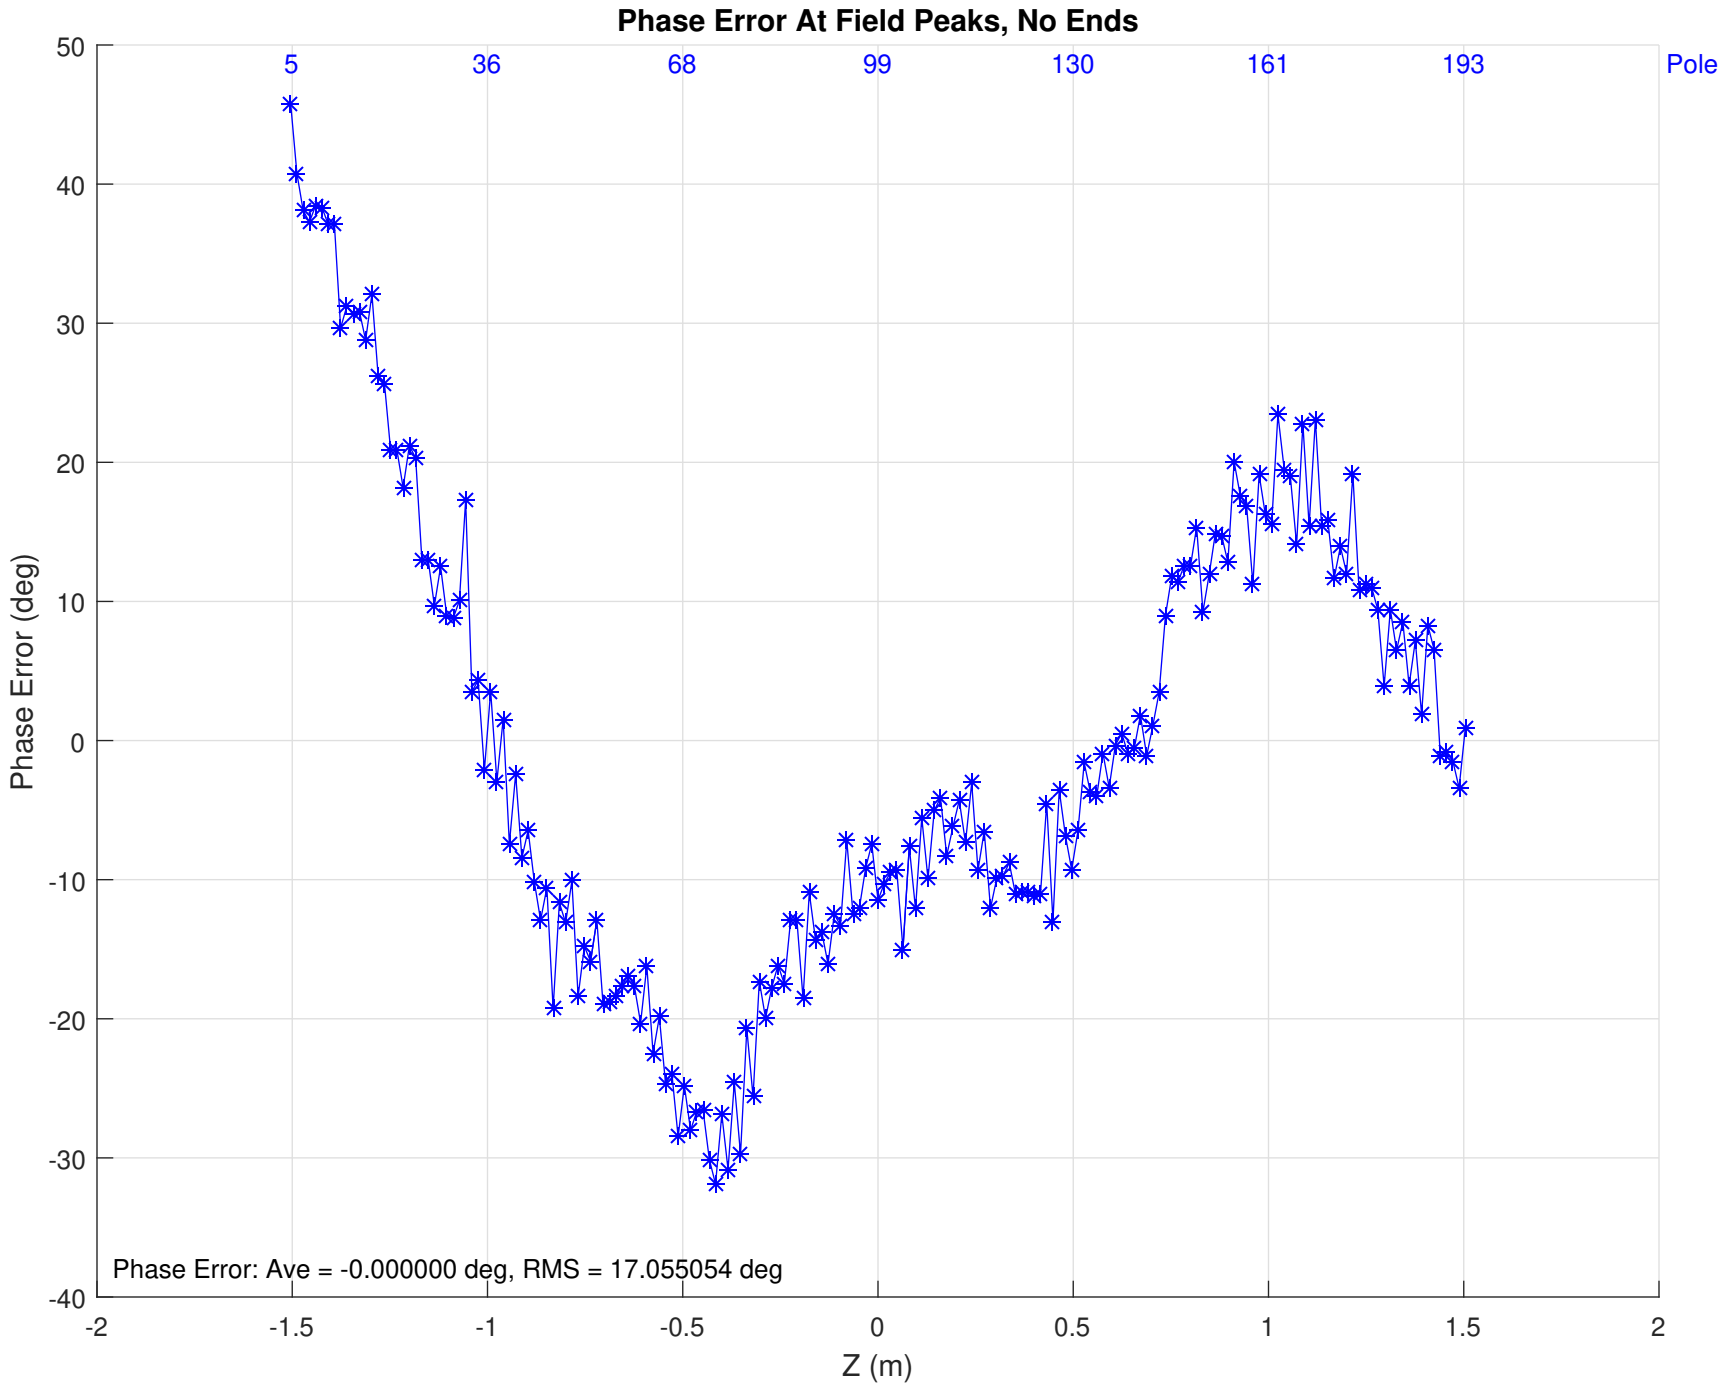
Phase Error At Field Peaks, No Ends
5
36
68
99
130
161
193
Pole
50
40
30
20
10
0
-10
-20
-30
-40
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)
Phase Error: Ave = -0.000000 deg, RMS = 17.055054 deg

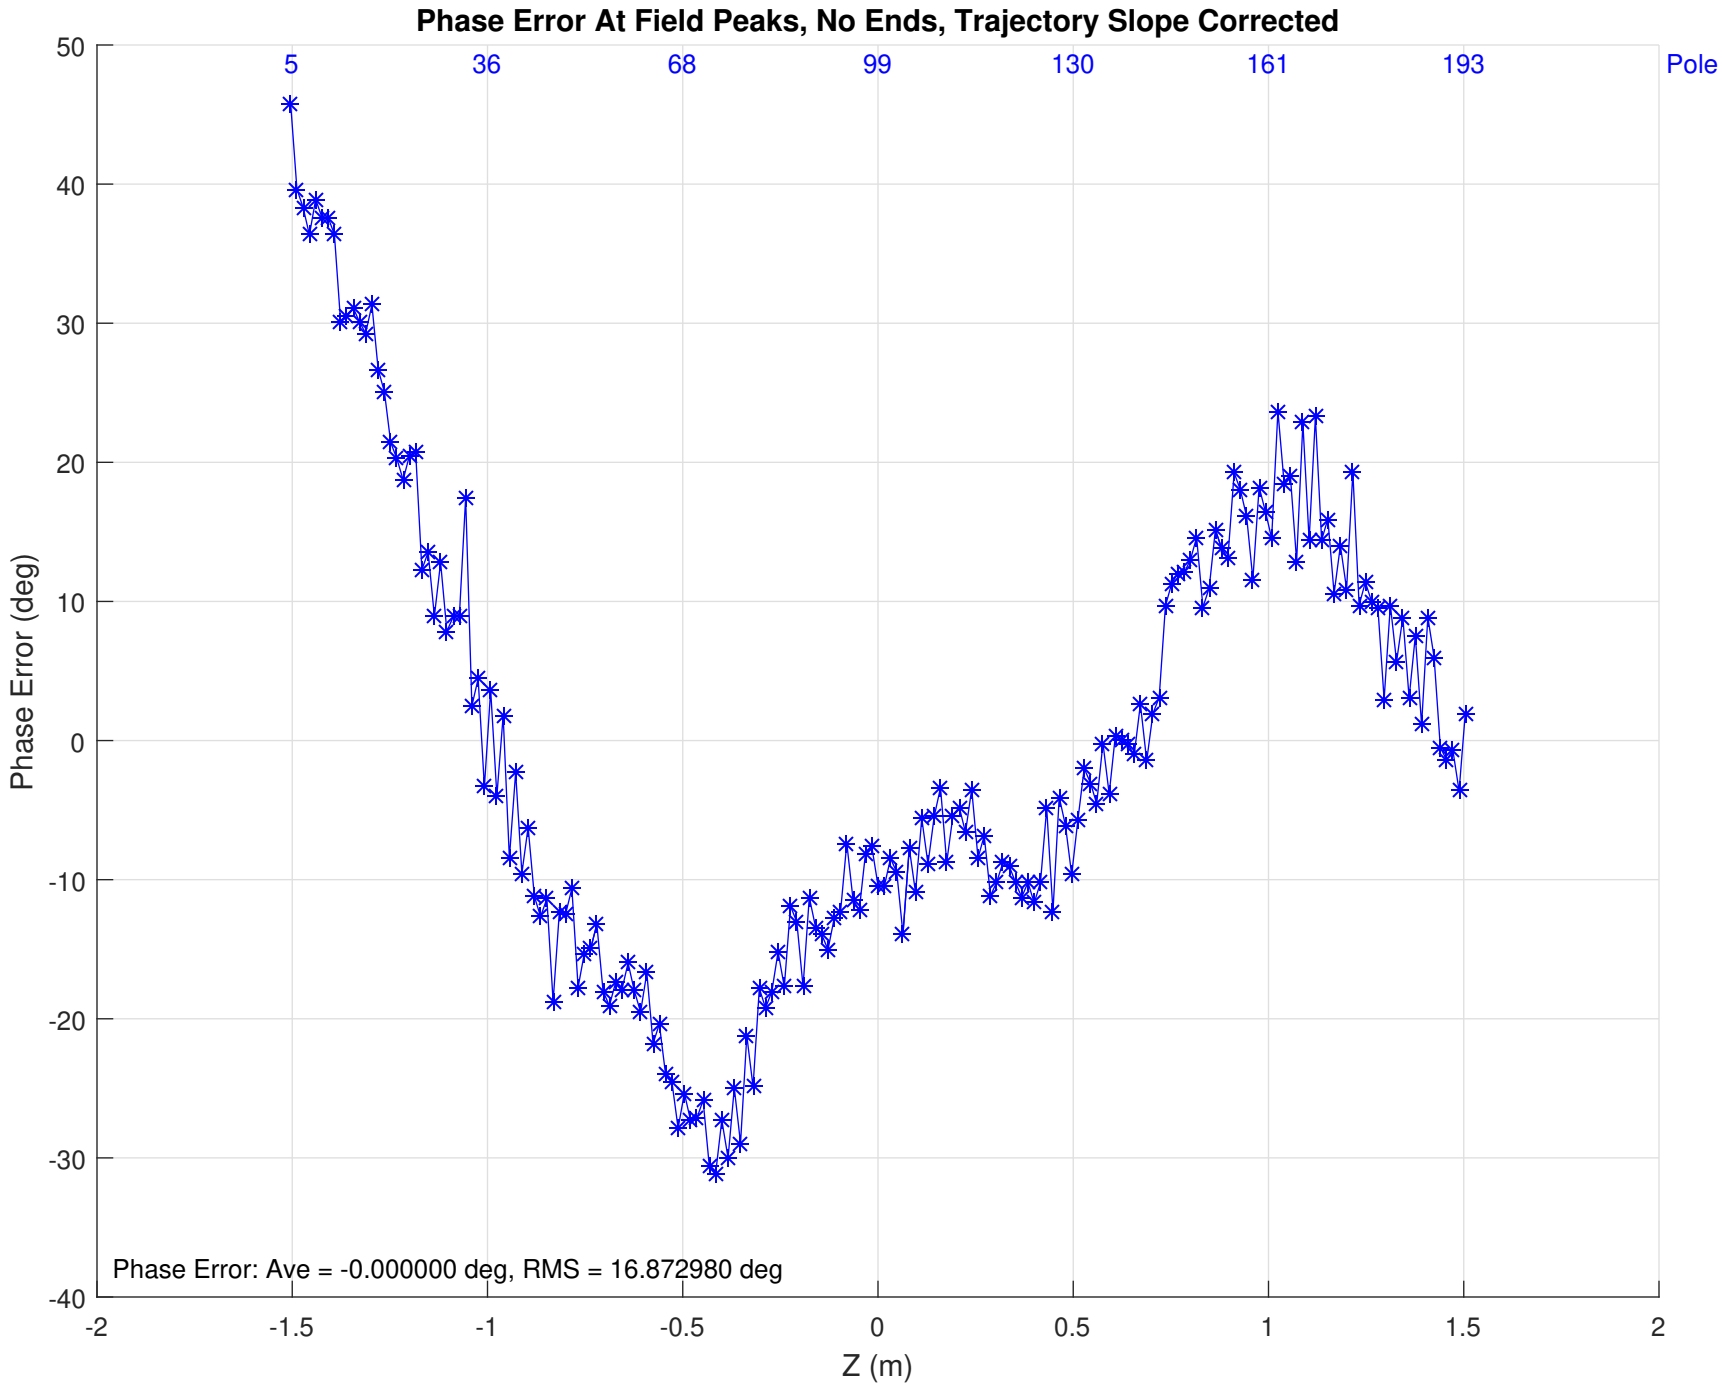
Phase Error At Field Peaks, No Ends, Trajectory Slope Corrected
5
36
68
99
130
161
193
Pole
50
40
30
20
10
0
-10
-20
-30
-40
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)
Phase Error: Ave = -0.000000 deg, RMS = 16.872980 deg

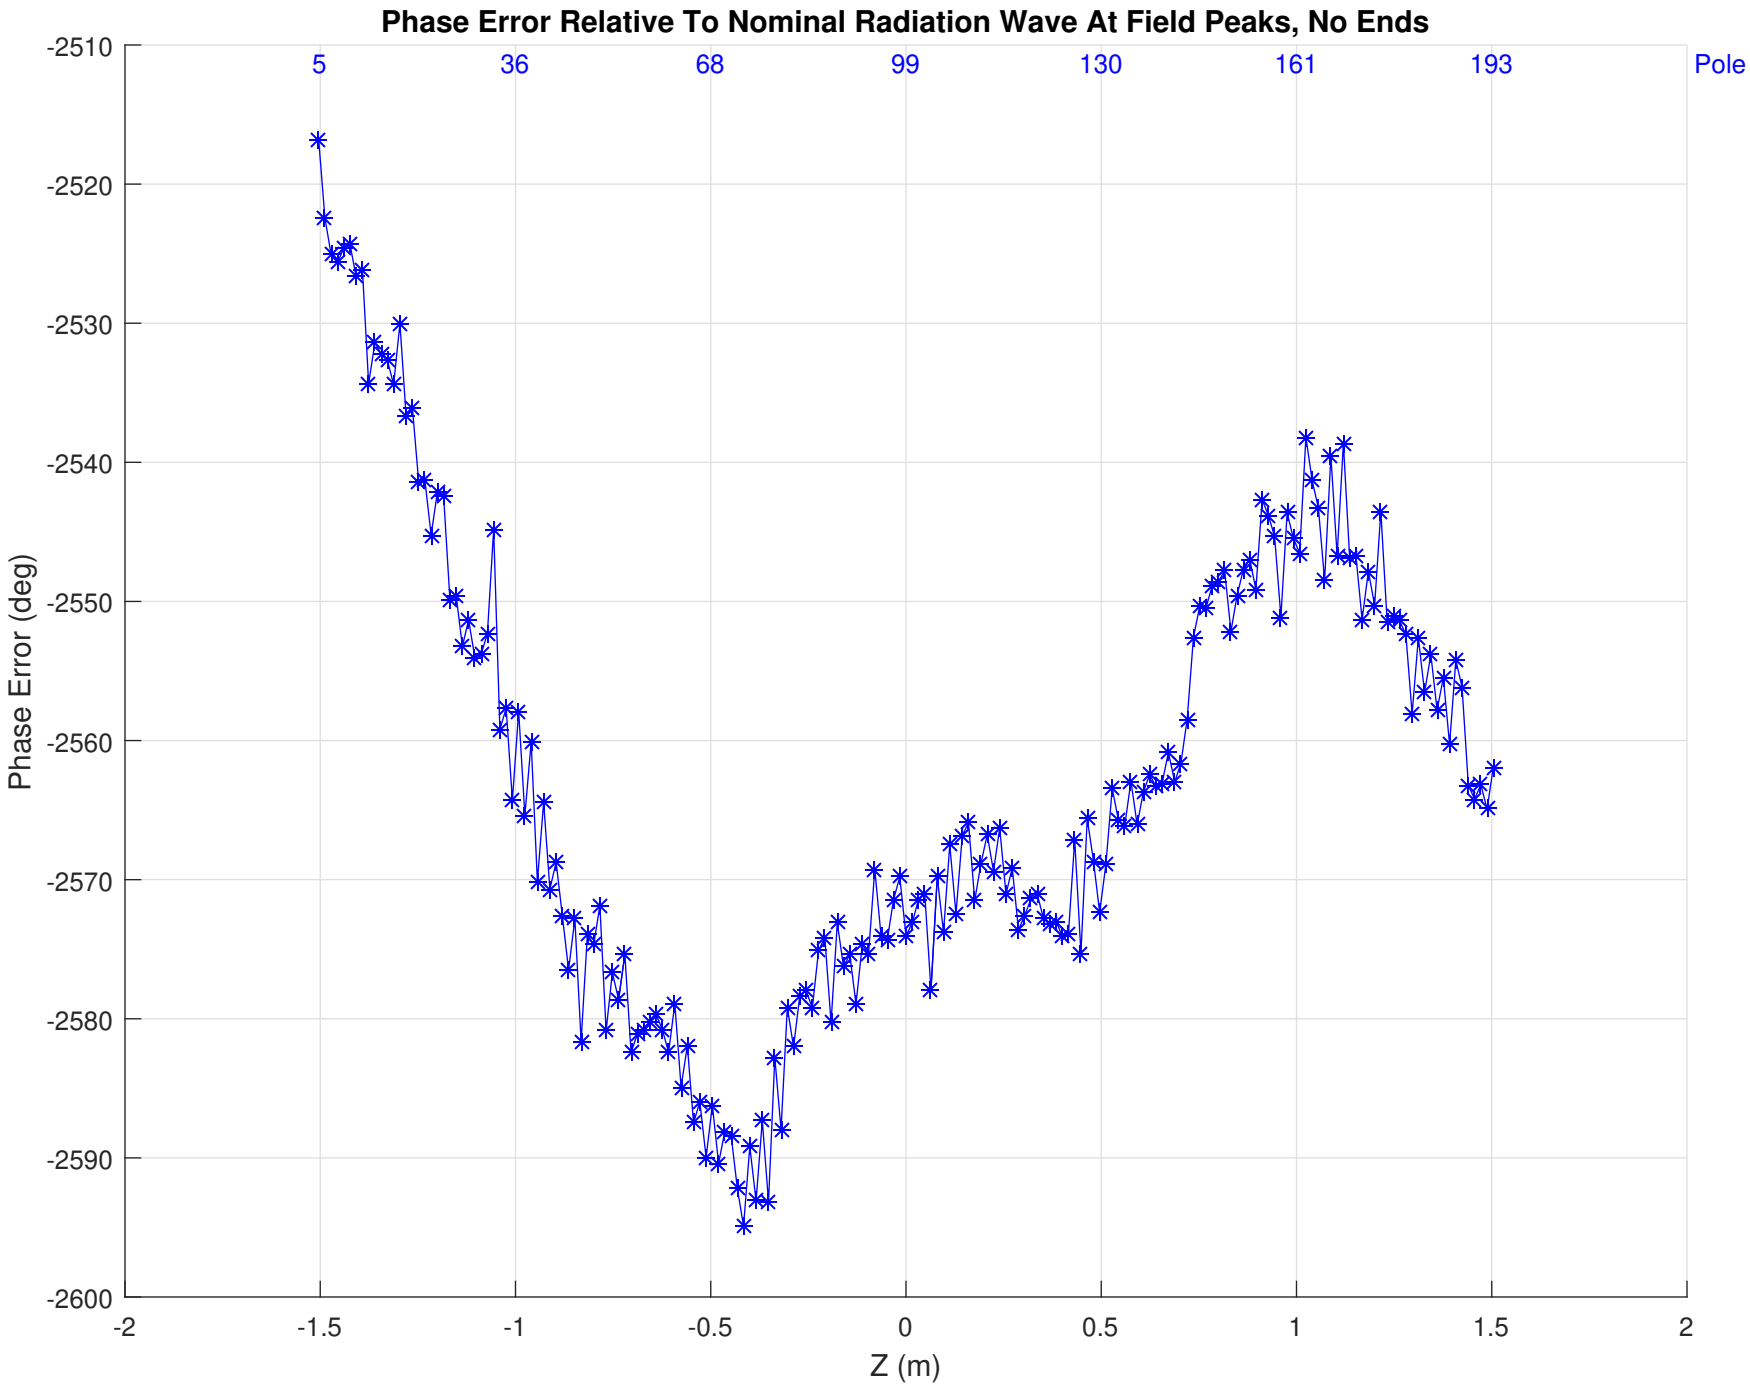
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
5
36
68
99
130
161
193
Pole
-2510
-2520
-2530
-2540
-2550
-2560
-2570
-2580
-2590
-2600
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

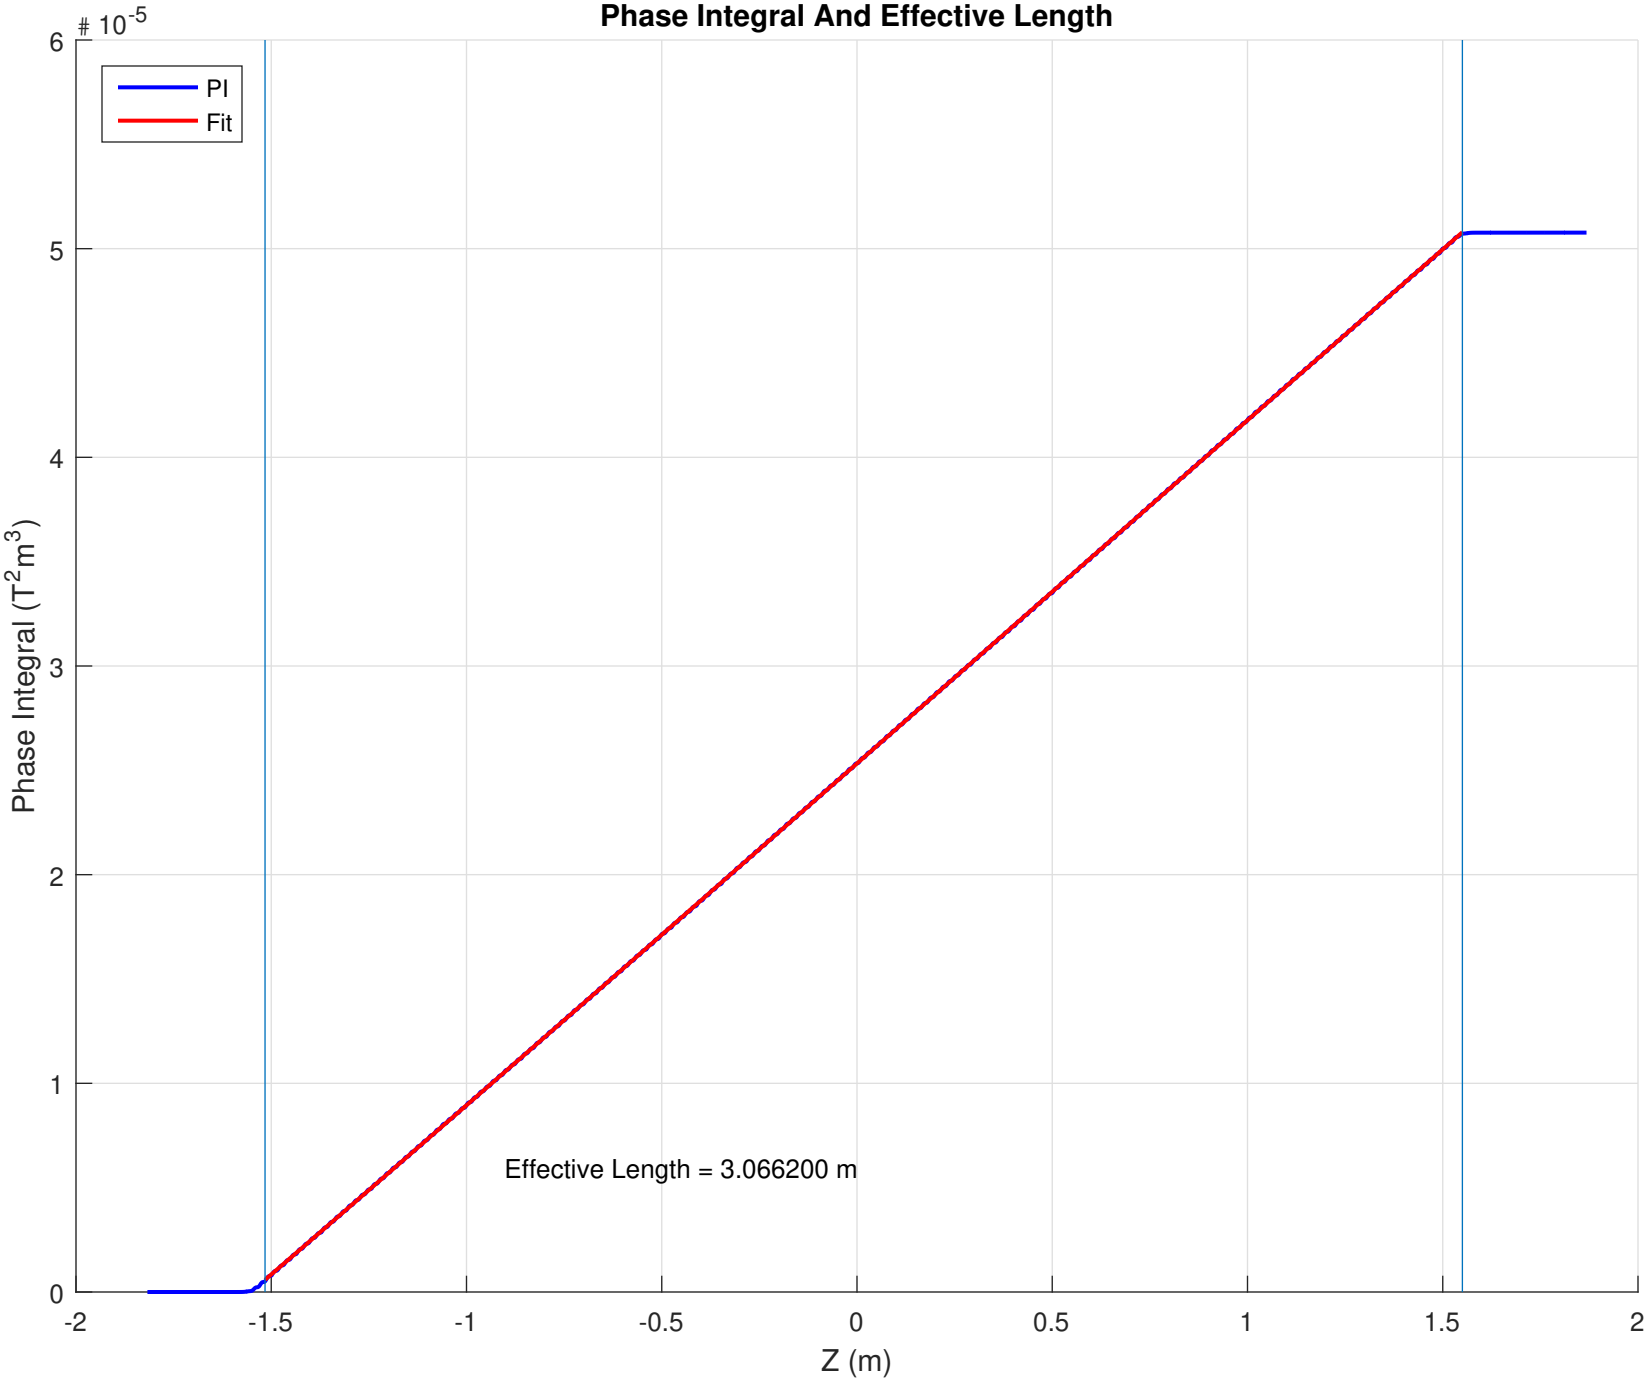
Phase Integral And Effective Length
10^-5
PI
Fit
Phase Integral (T^2m^3)
Z (m)
Effective Length = 3.066200 m
6
5
4
3
2
1
0
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

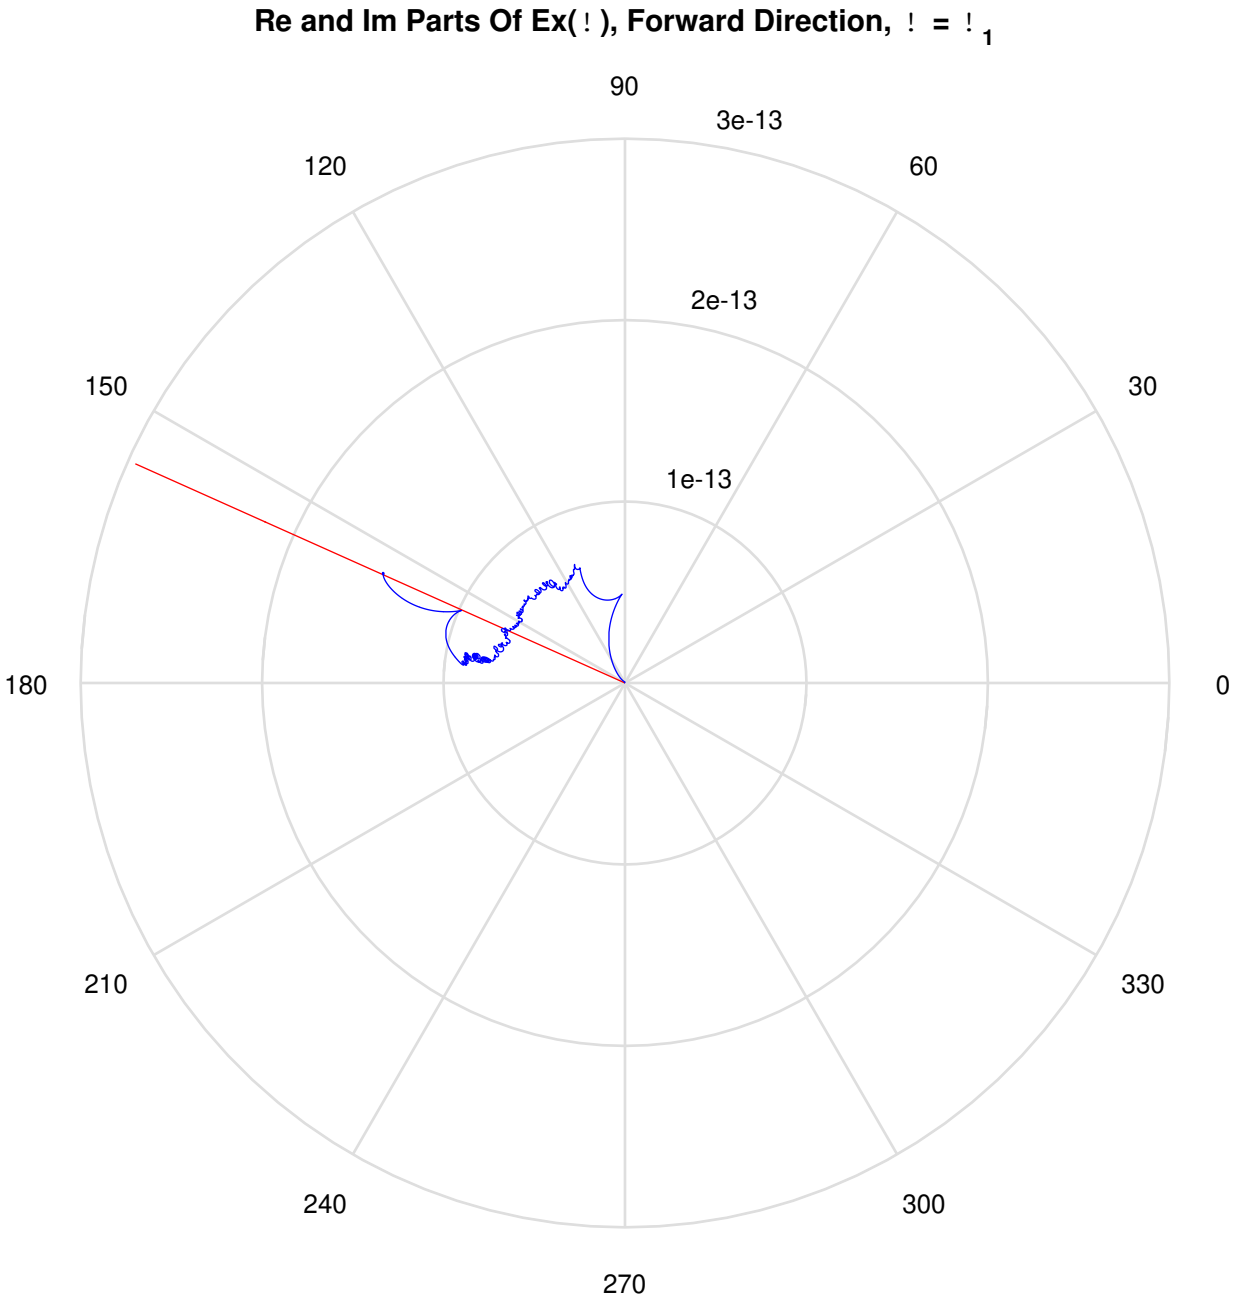
Re and Im Parts Of Ex(!), Forward Direction, ! = !1
90
3e-13
120
60
2e-13
150
30
1e-13
180
0
210
330
240
300
270

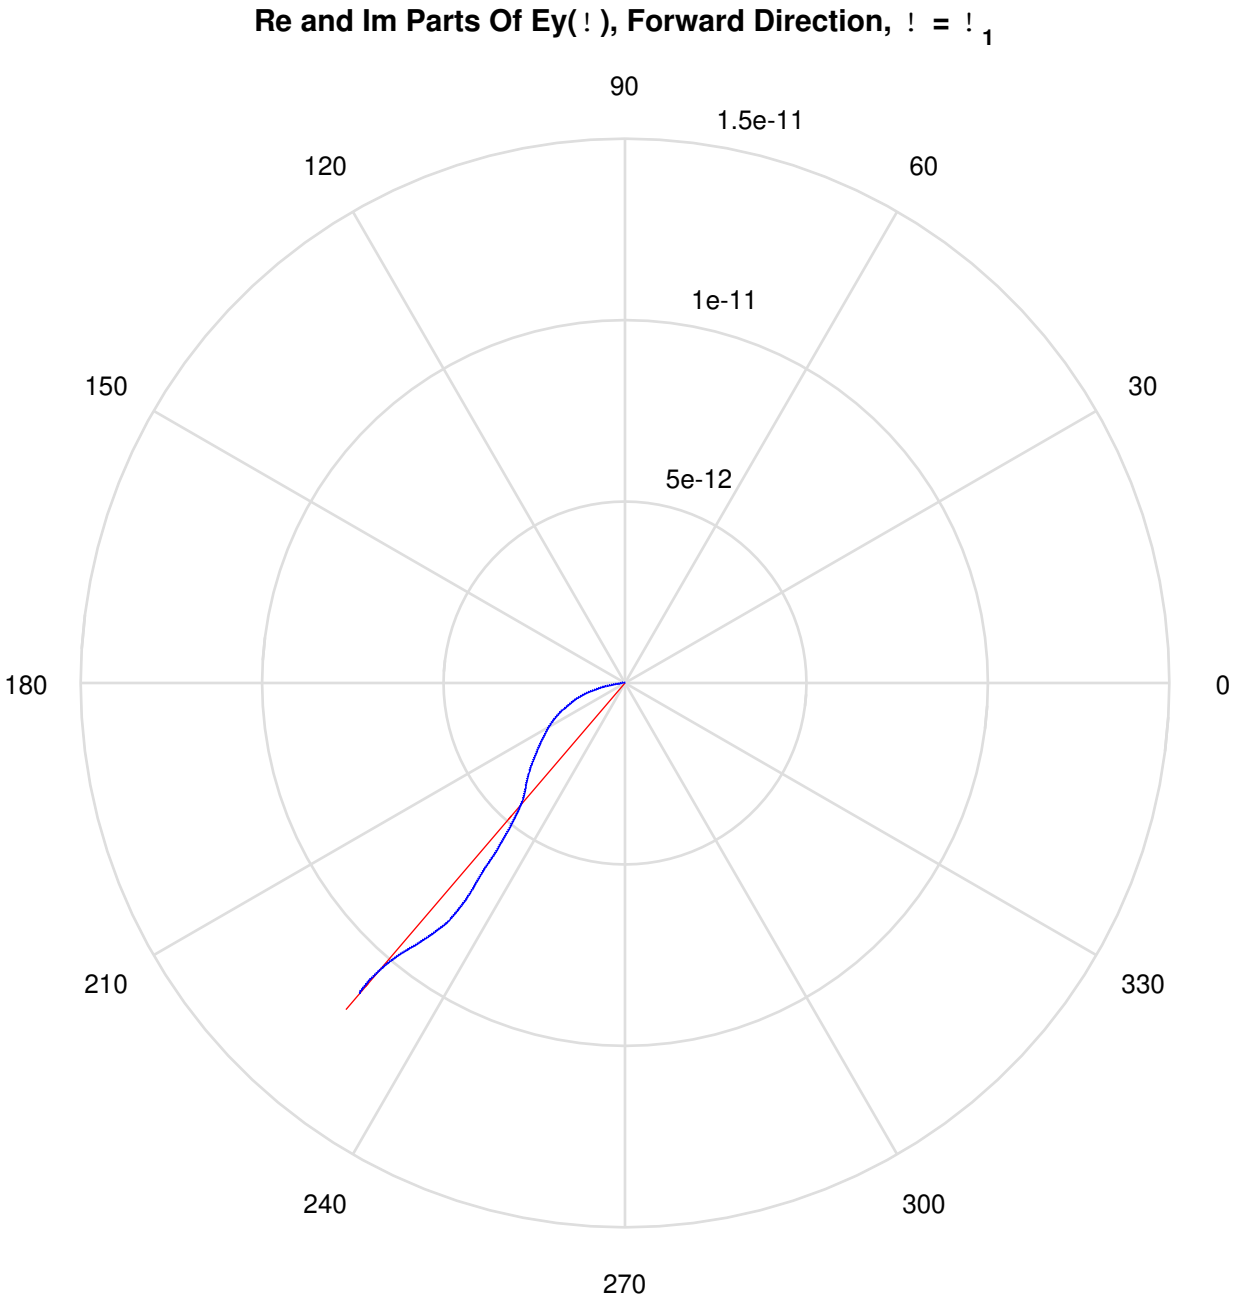
Re and Im Parts Of Ey(!), Forward Direction, ! = !1
90
1.5e-11
120
60
1e-11
150
30
5e-12
180
0
210
330
240
300
270

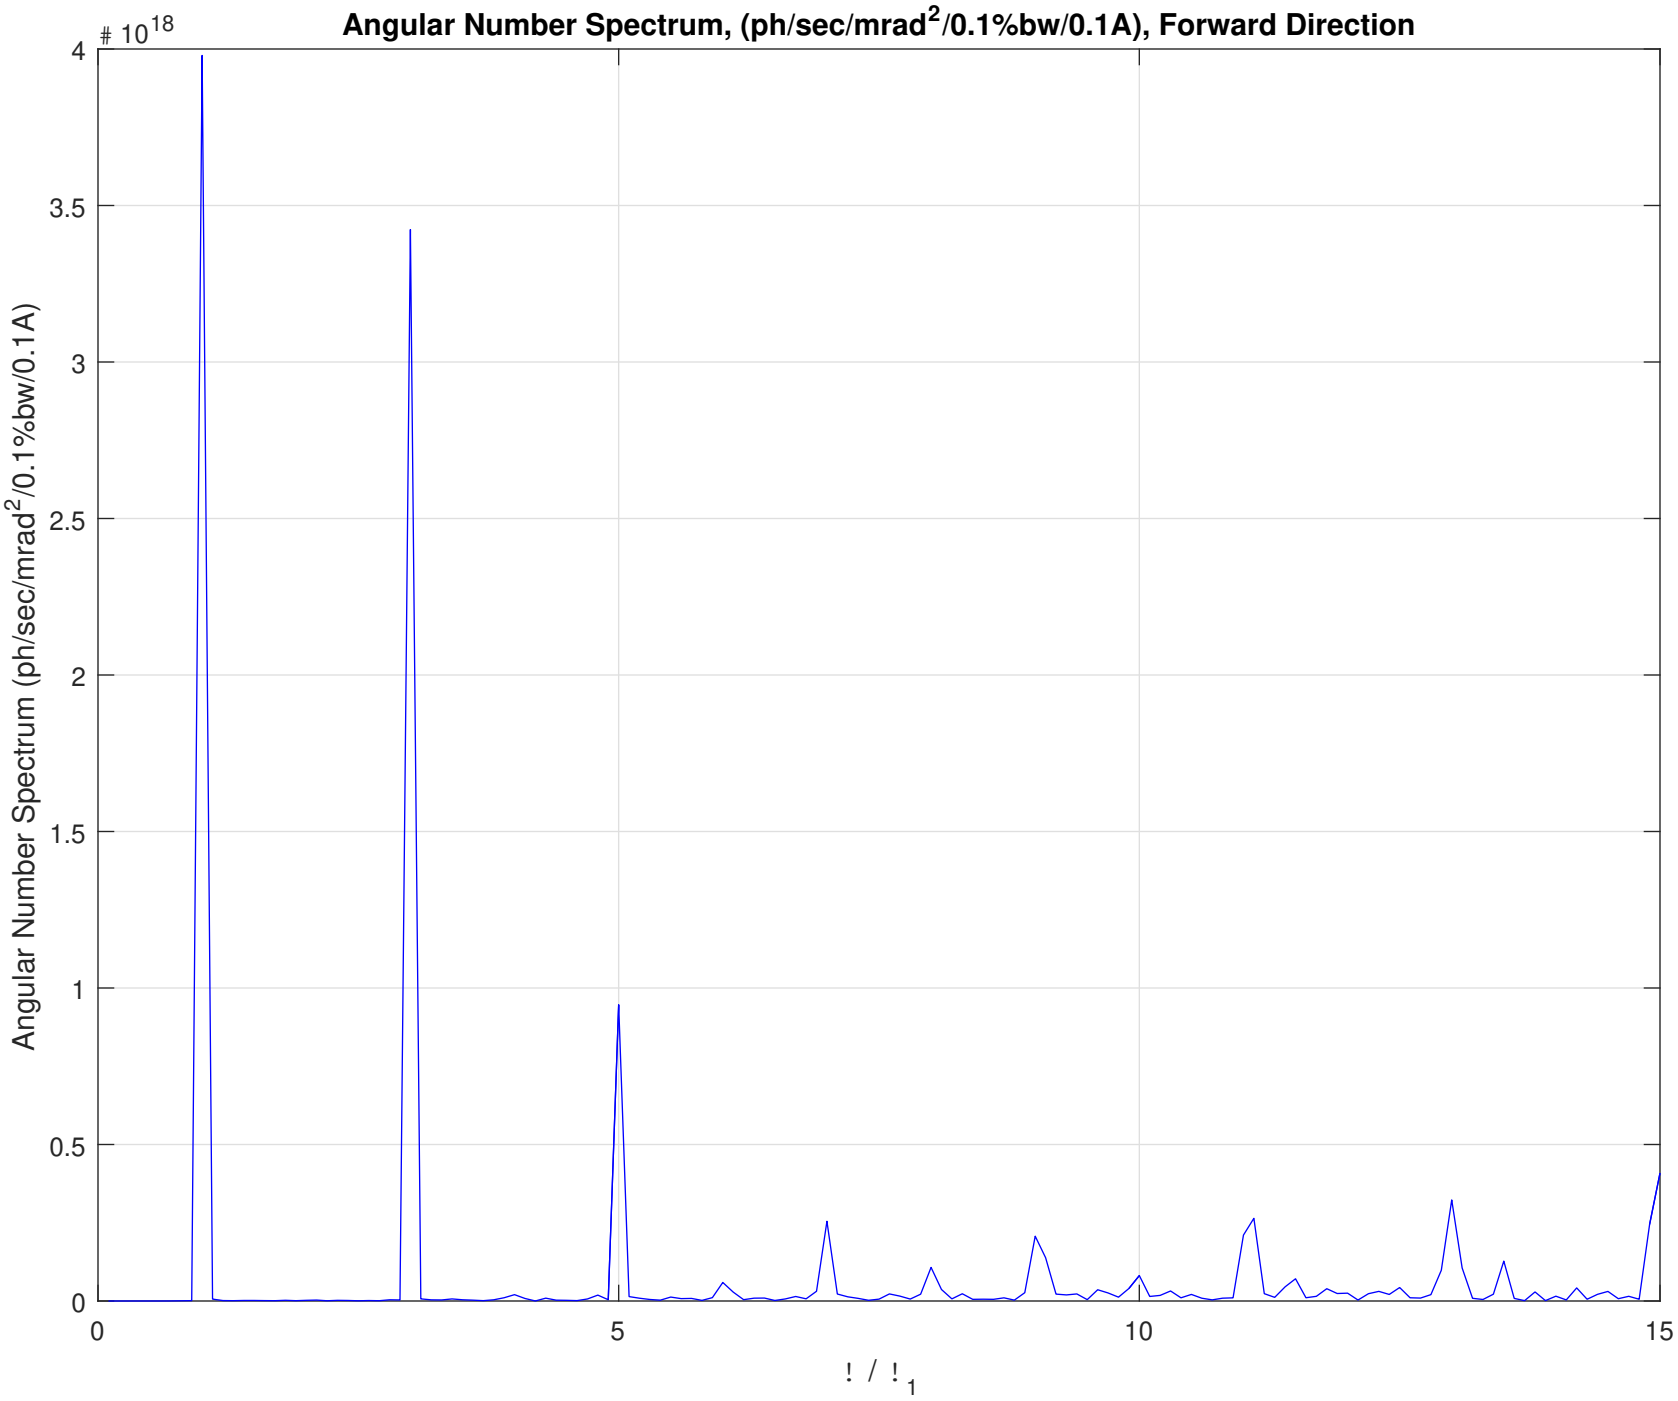
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
4
3.5
3
2.5
2
1.5
1
0.5
0
0
5
10
15
! / !$_1$

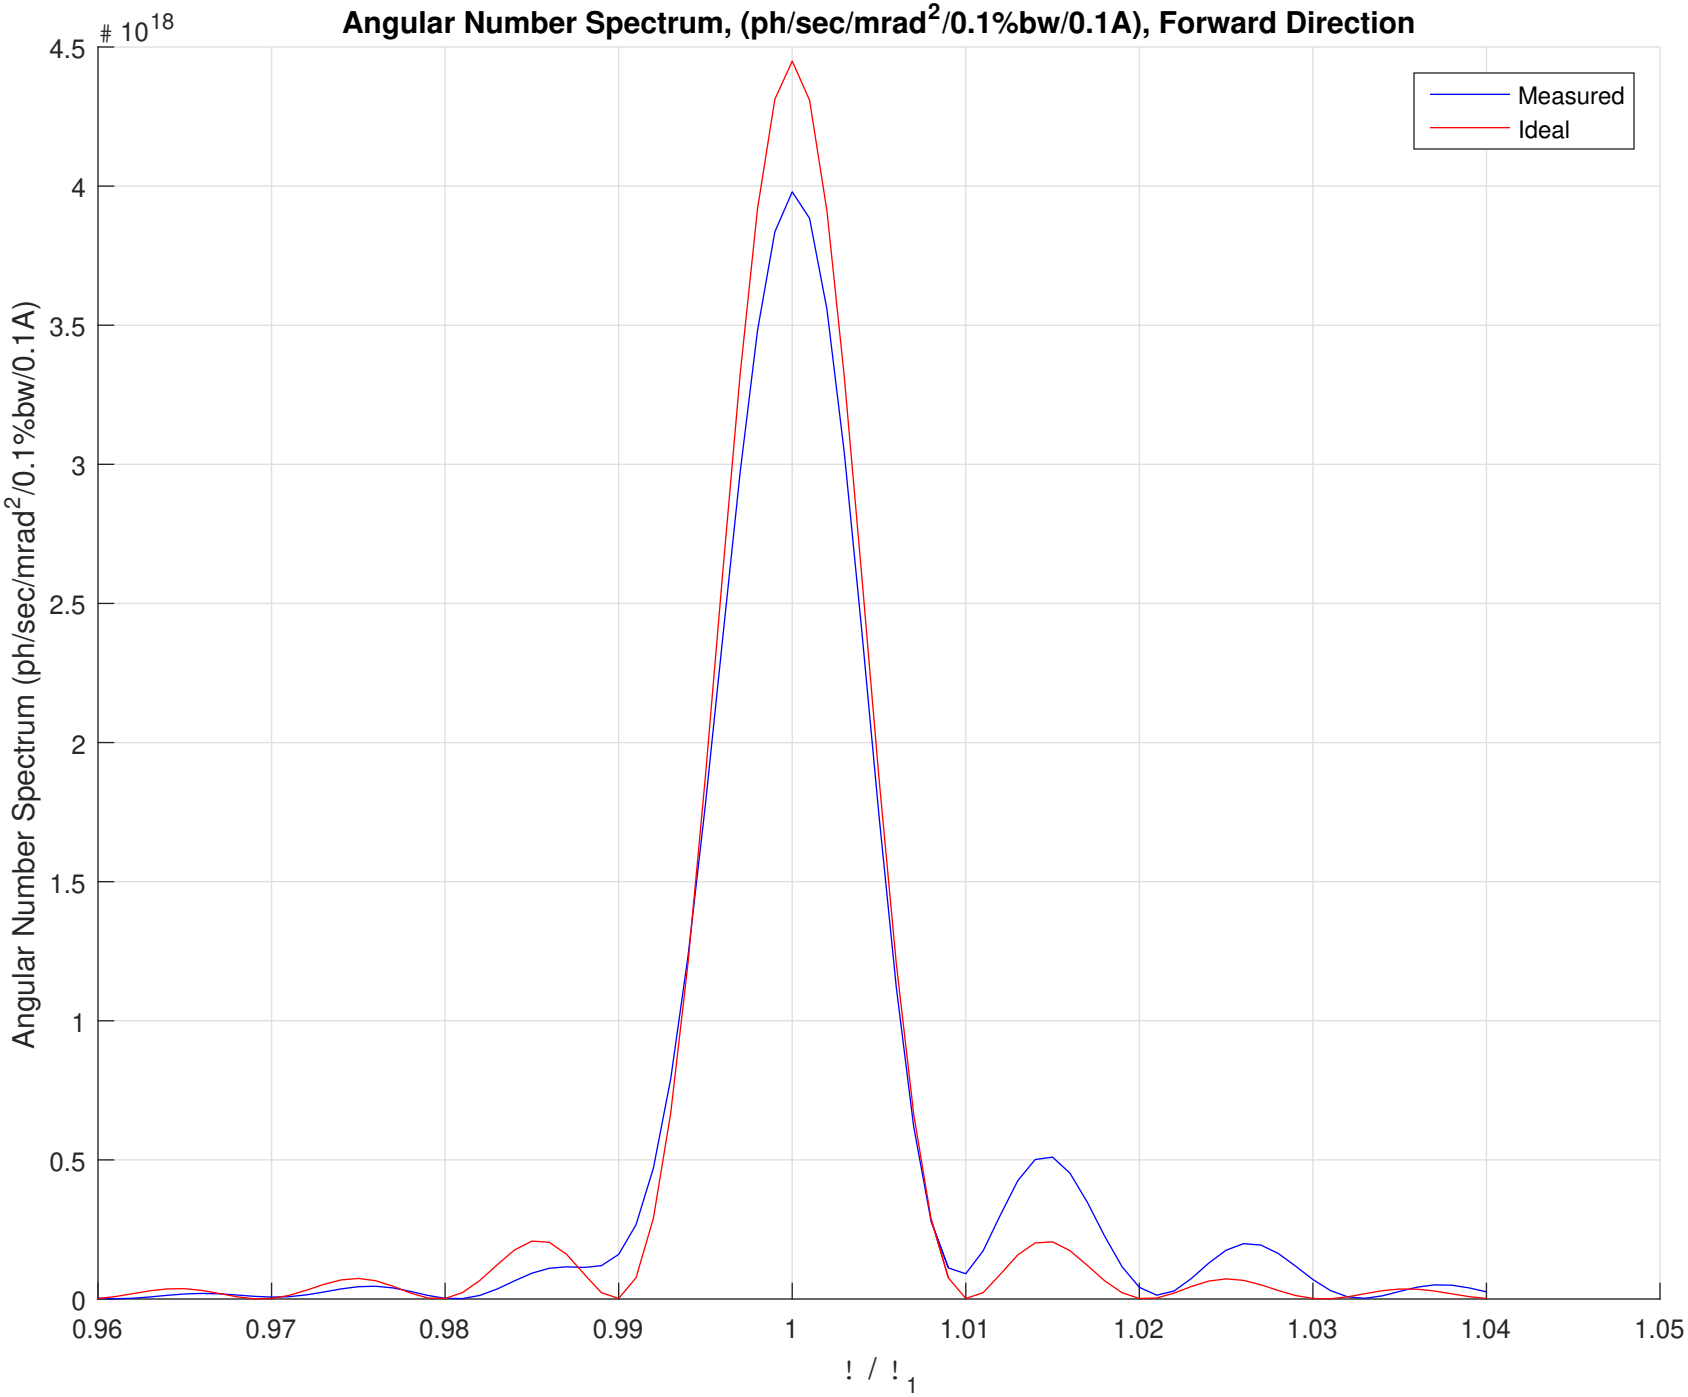
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05
! / !$_1$

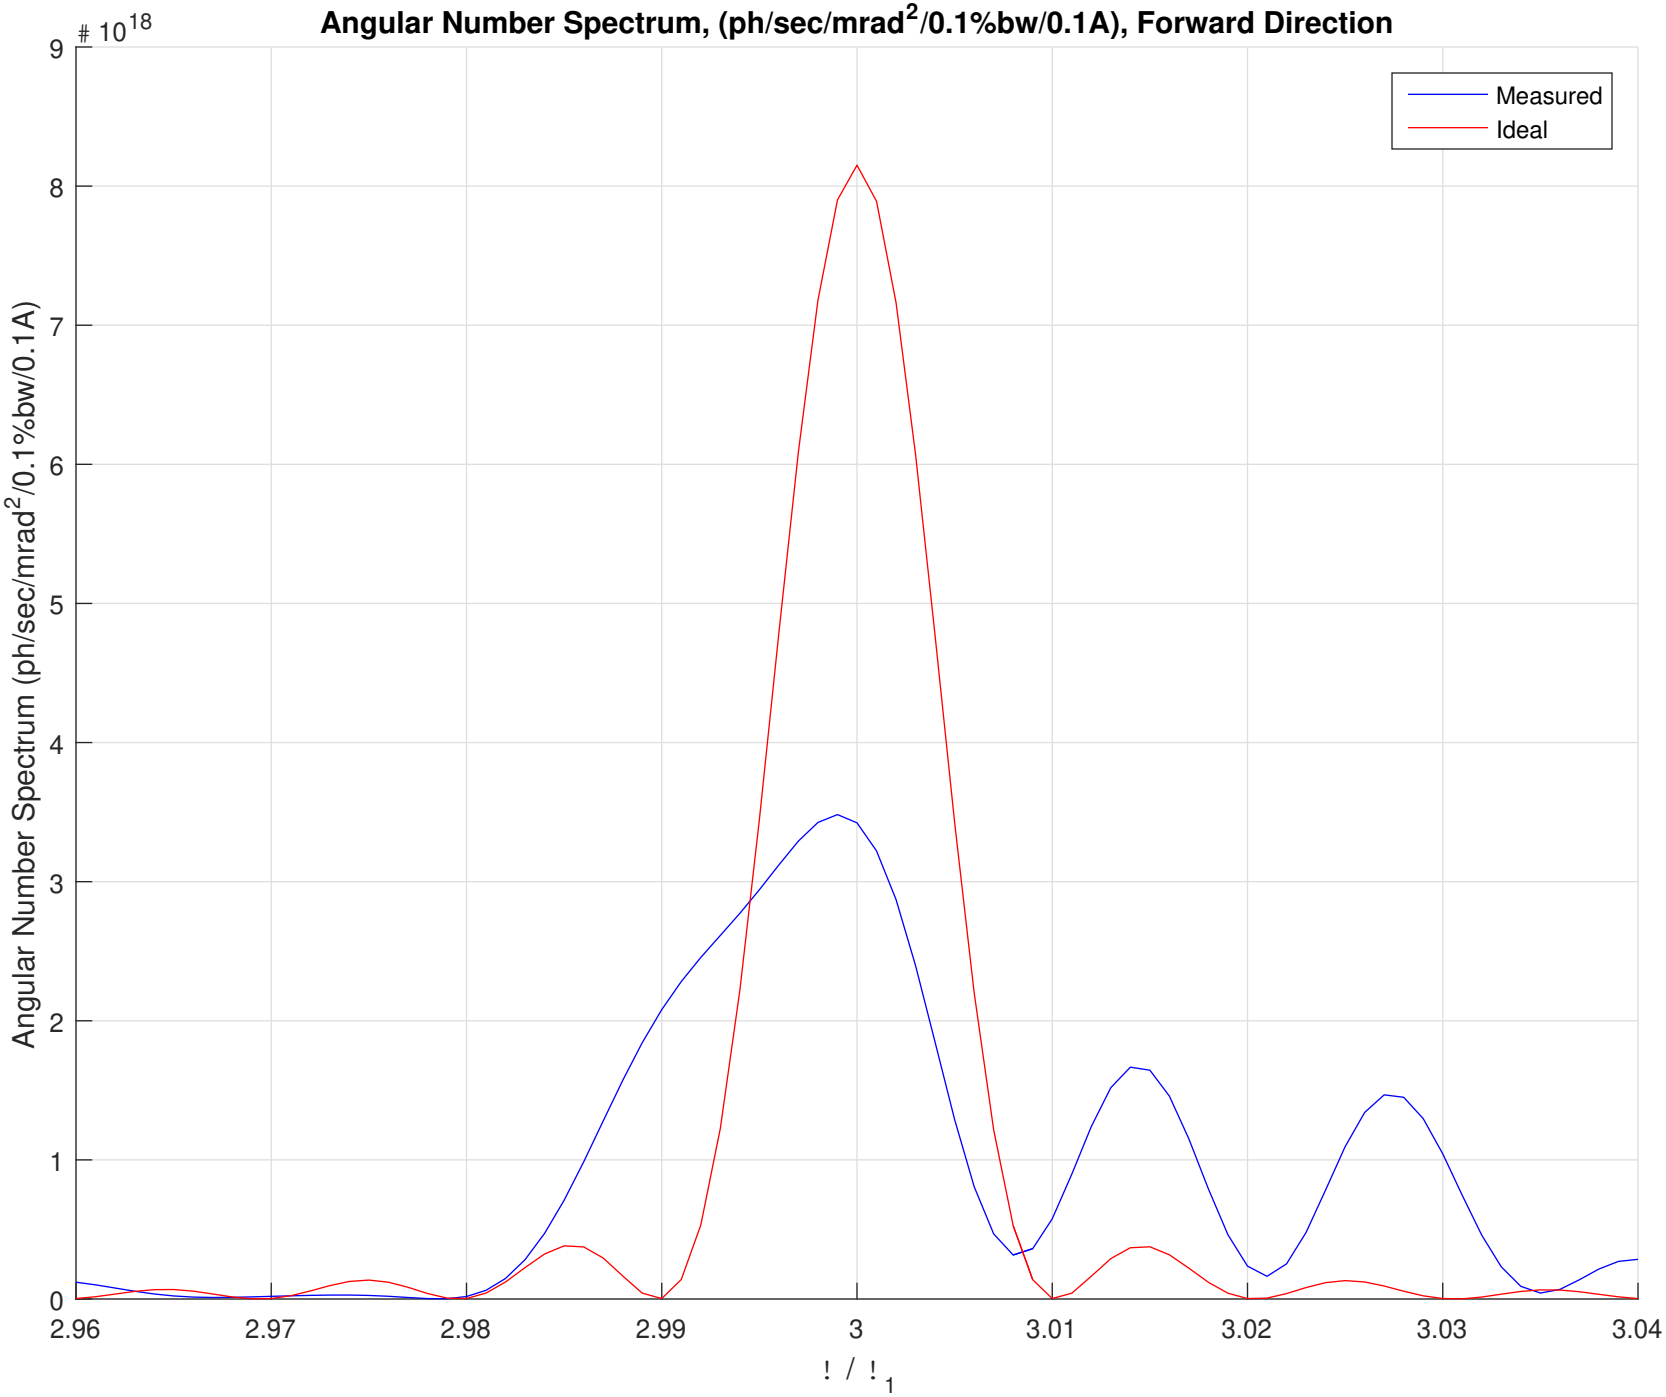
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
9
8
7
6
5
4
3
2
1
0
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
! / !$_1$

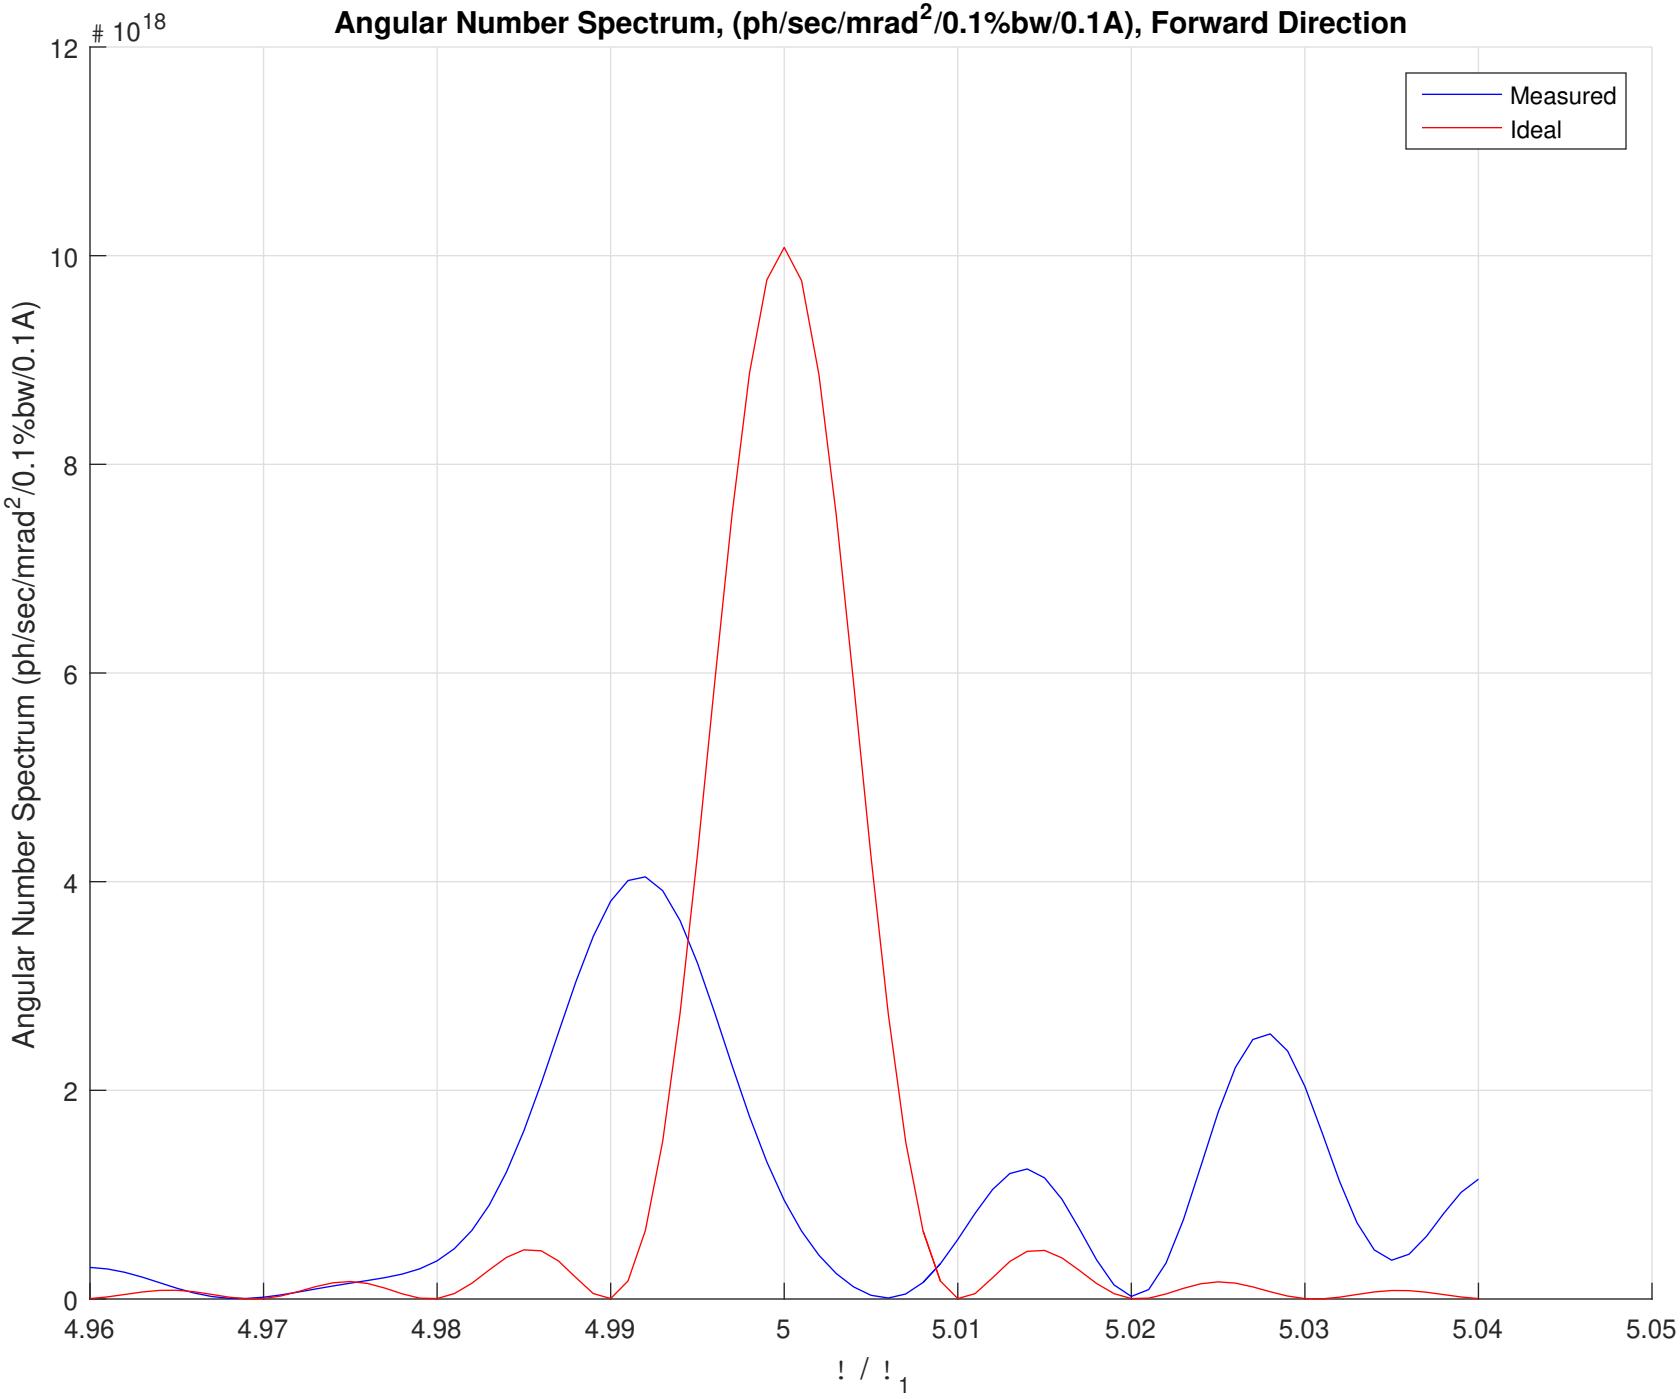
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
12
10
8
6
4
2
0
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05
! / !$_1$