SLAC Magnetic Measurements

EPU Analysis

Parameters:
INPUT-FILE-DIR =V:\MET\MagServe\MagData\DELTA\Delta Data 2015\New Measurements\Run 152 Main Modes Set Zeros For E
INPUT-FILE-NAME =hall2-anal-probe1-field.dat
INPUT-FILE-TYPE =ZBXYZH
CORR-REQUIRED =0
GAMMA =26671.59
NOM-LAMBDA-U =0
NOM-K-VALUE =0
NOM-LAMBDA-R =0
NUM-POLES =196
NUM-END-POLES =4
CELL-LENGTH =3.656

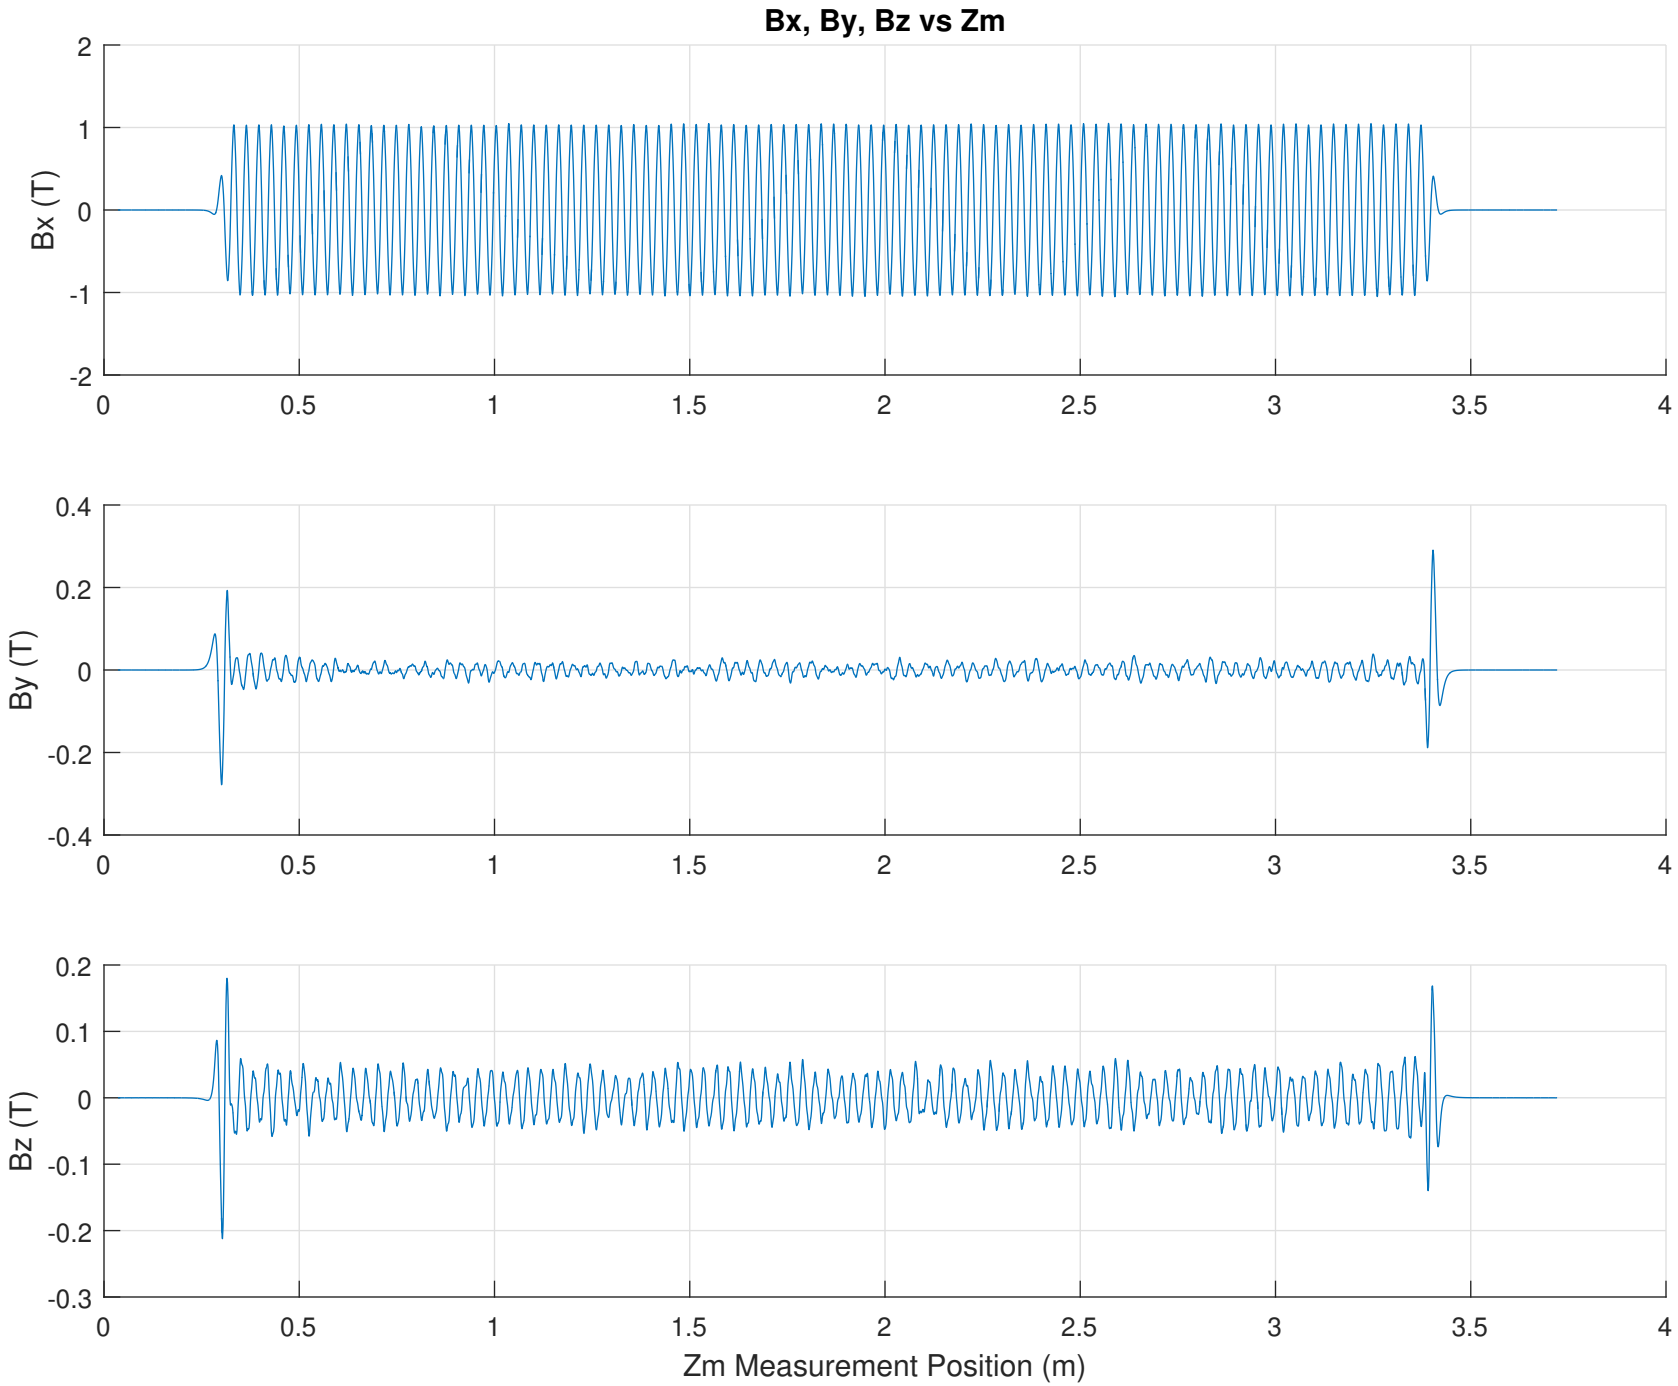
Bx, By, Bz vs Zm
Bx (T)
By (T)
Bz (T)
Zm Measurement Position (m)

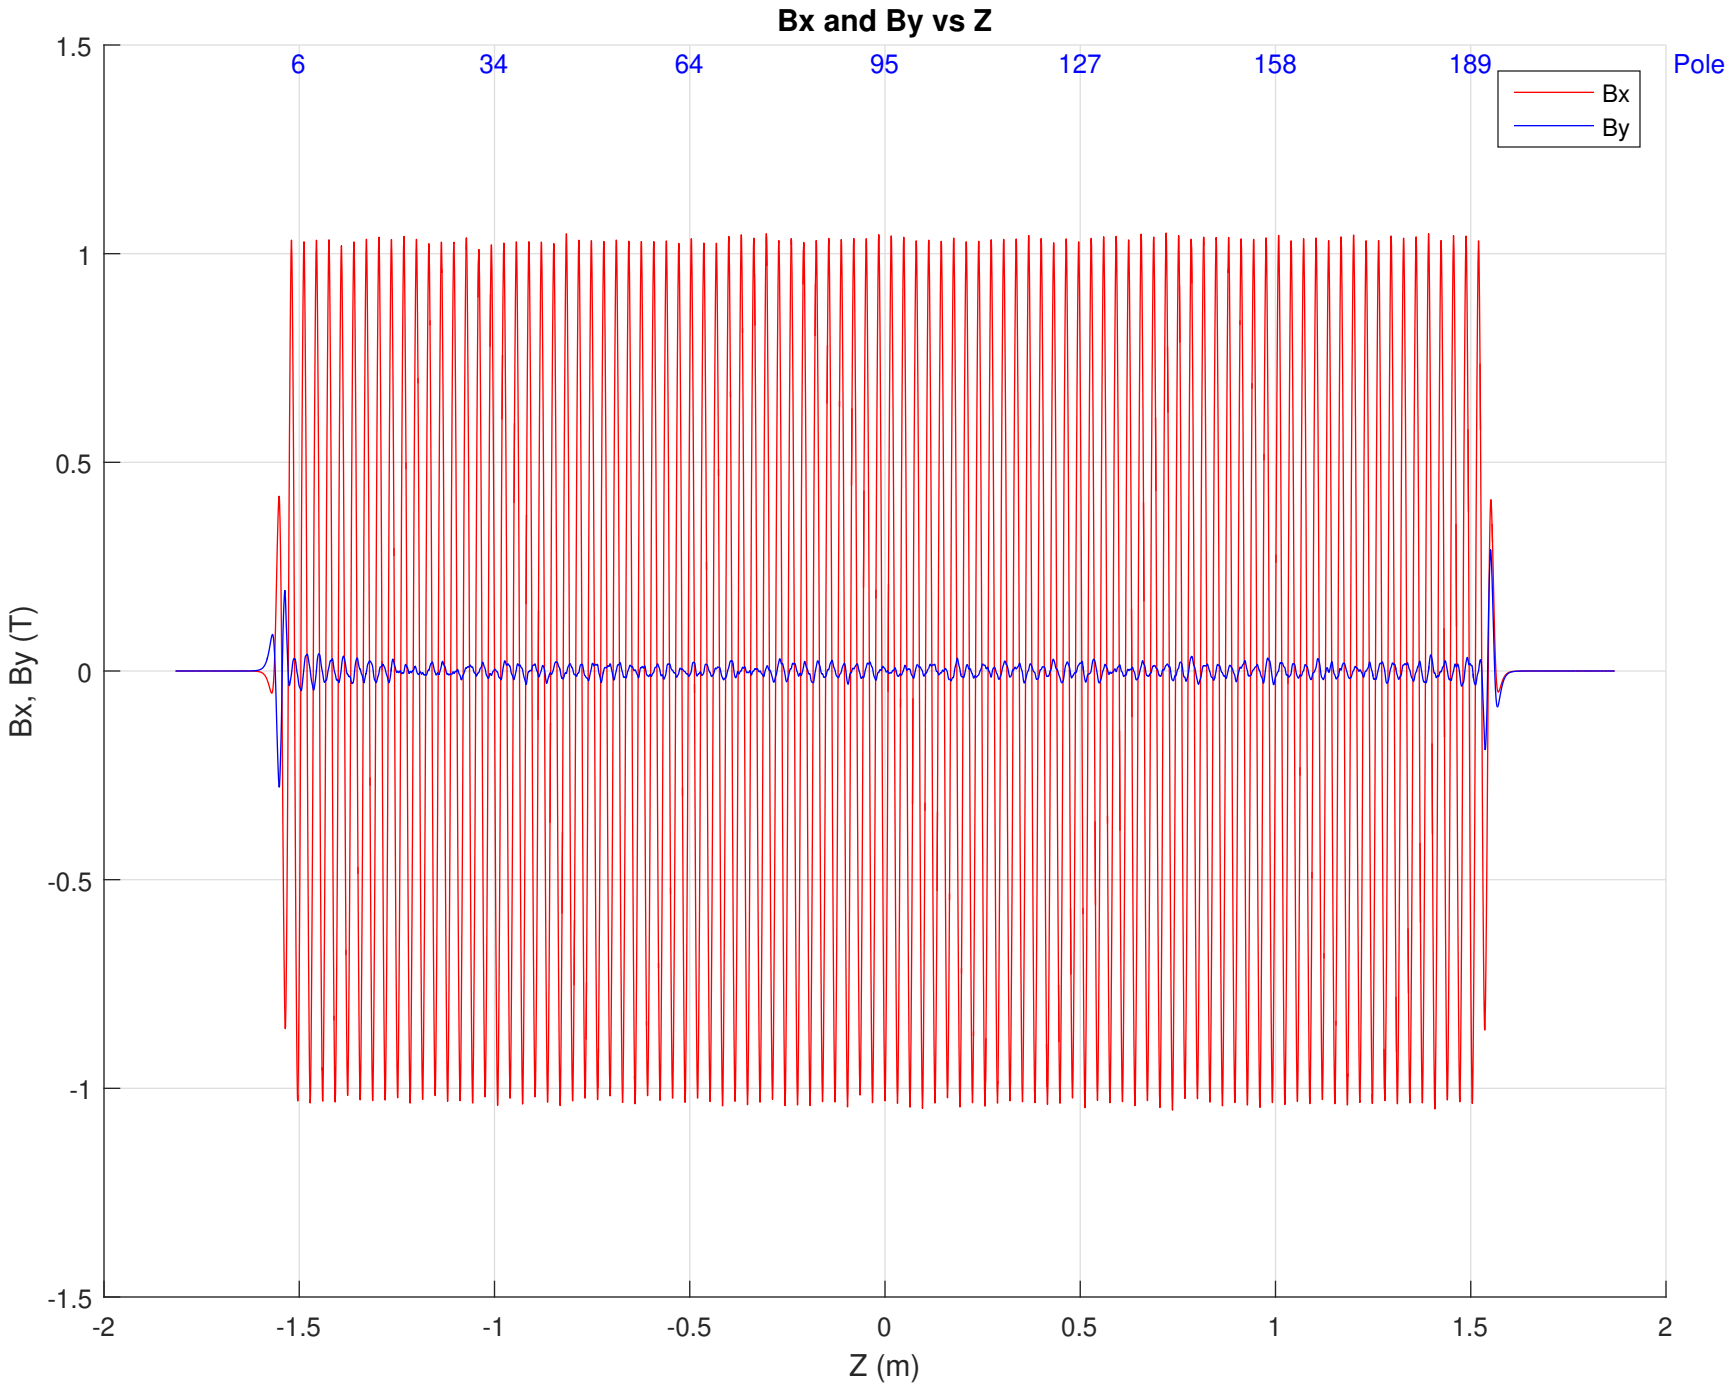
Bx and By vs Z
6
34
64
95
127
158
189
Pole
Bx
By
1.5
1
0.5
0
-0.5
-1
-1.5
Bx, By (T)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

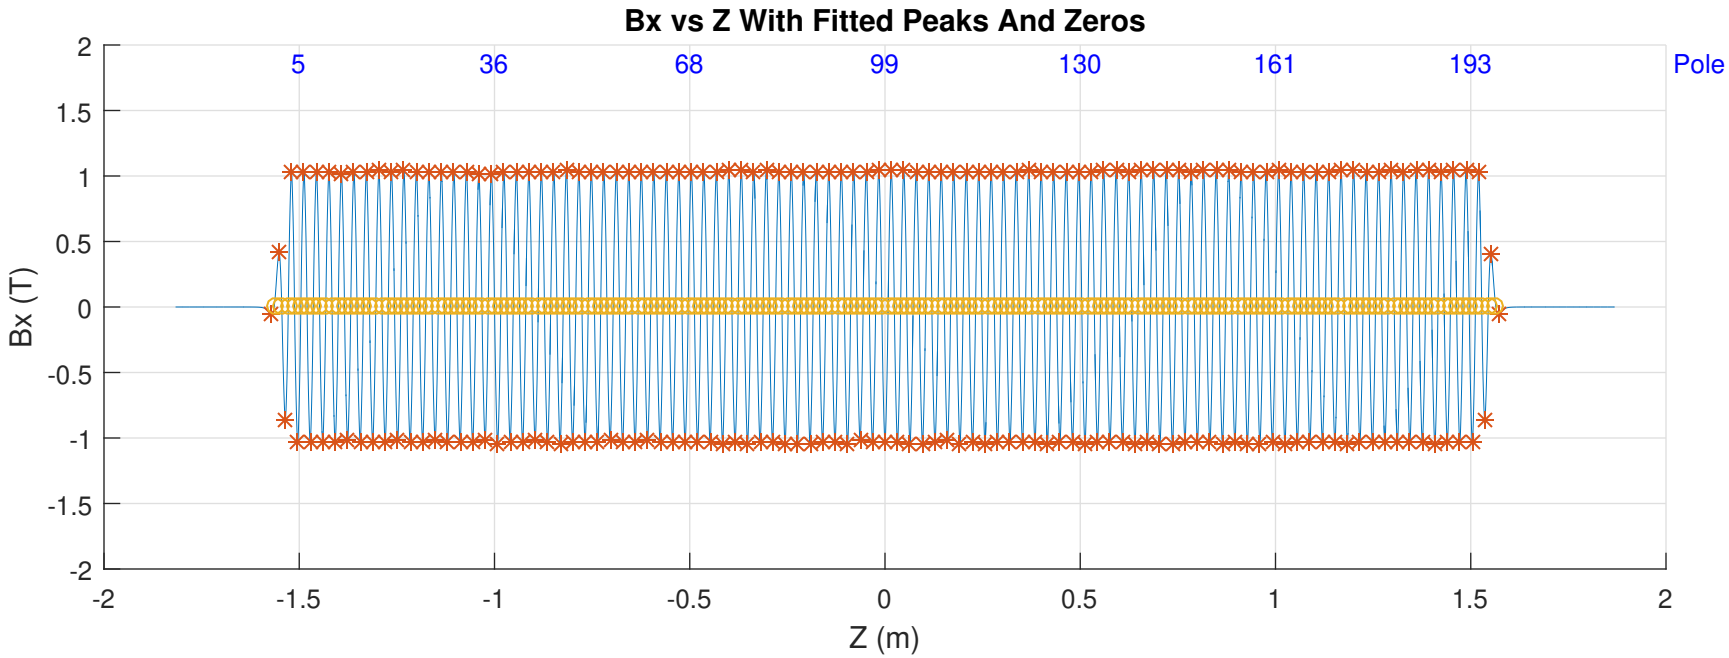
Bx vs Z With Fitted Peaks And Zeros
5
36
68
99
130
161
193
Pole
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Bx (T)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

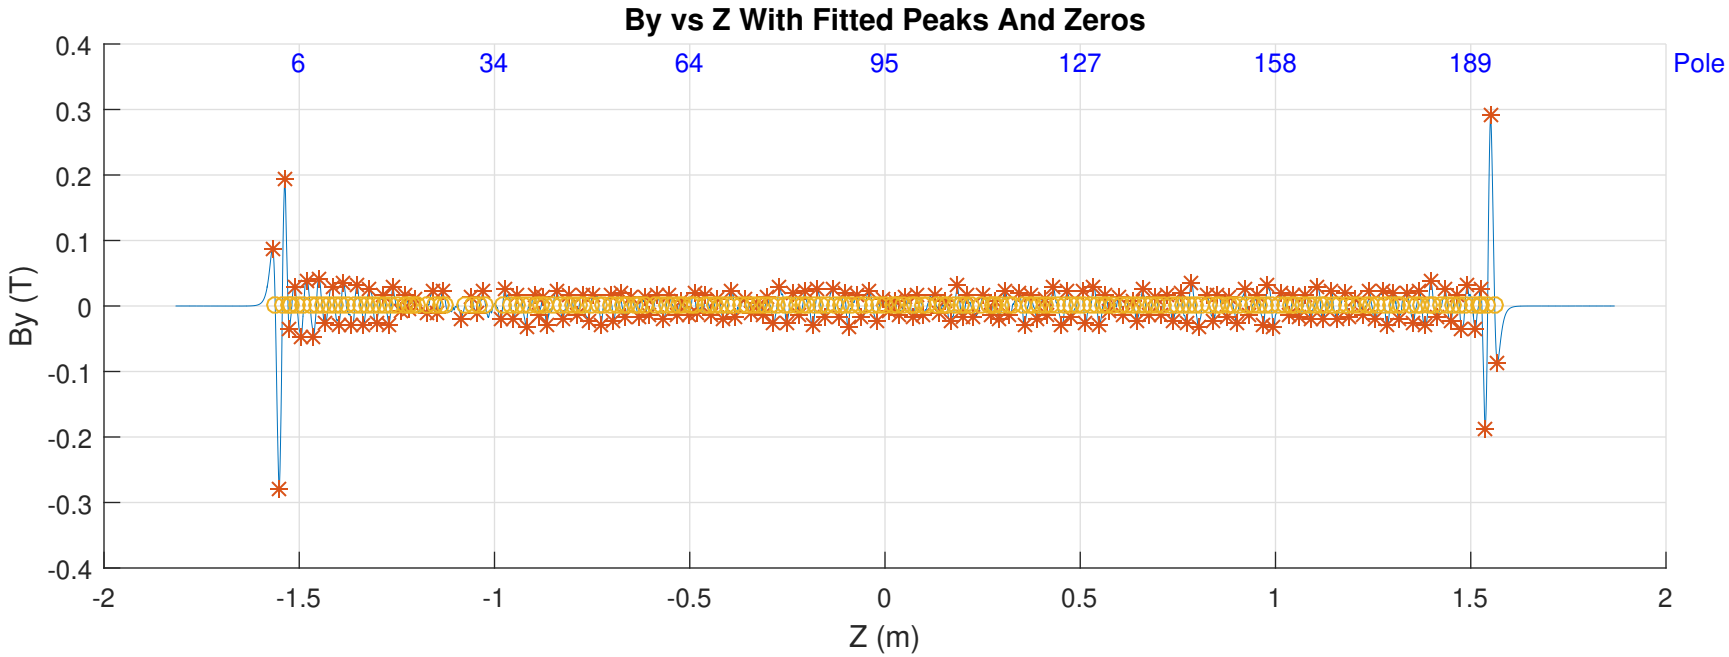
By vs Z With Fitted Peaks And Zeros
6
34
64
95
127
158
189
Pole
0.4
0.3
0.2
0.1
0
-0.1
-0.2
-0.3
-0.4
By (T)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

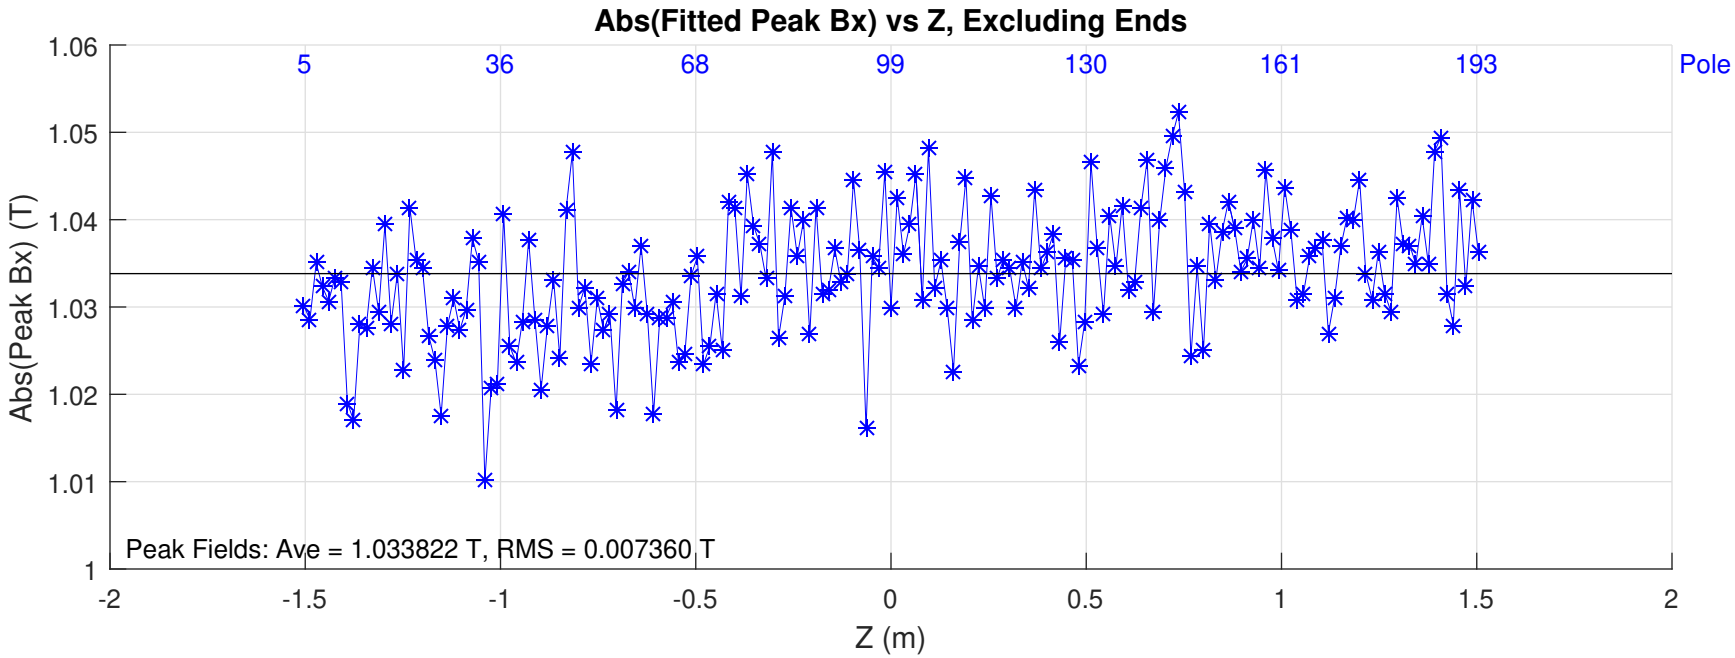
Abs(Fitted Peak Bx) vs Z, Excluding Ends
5
36
68
99
130
161
193
Pole
1.06
1.05
1.04
1.03
1.02
1.01
1
Abs(Peak Bx) (T)
Peak Fields: Ave = 1.033822 T, RMS = 0.007360 T
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

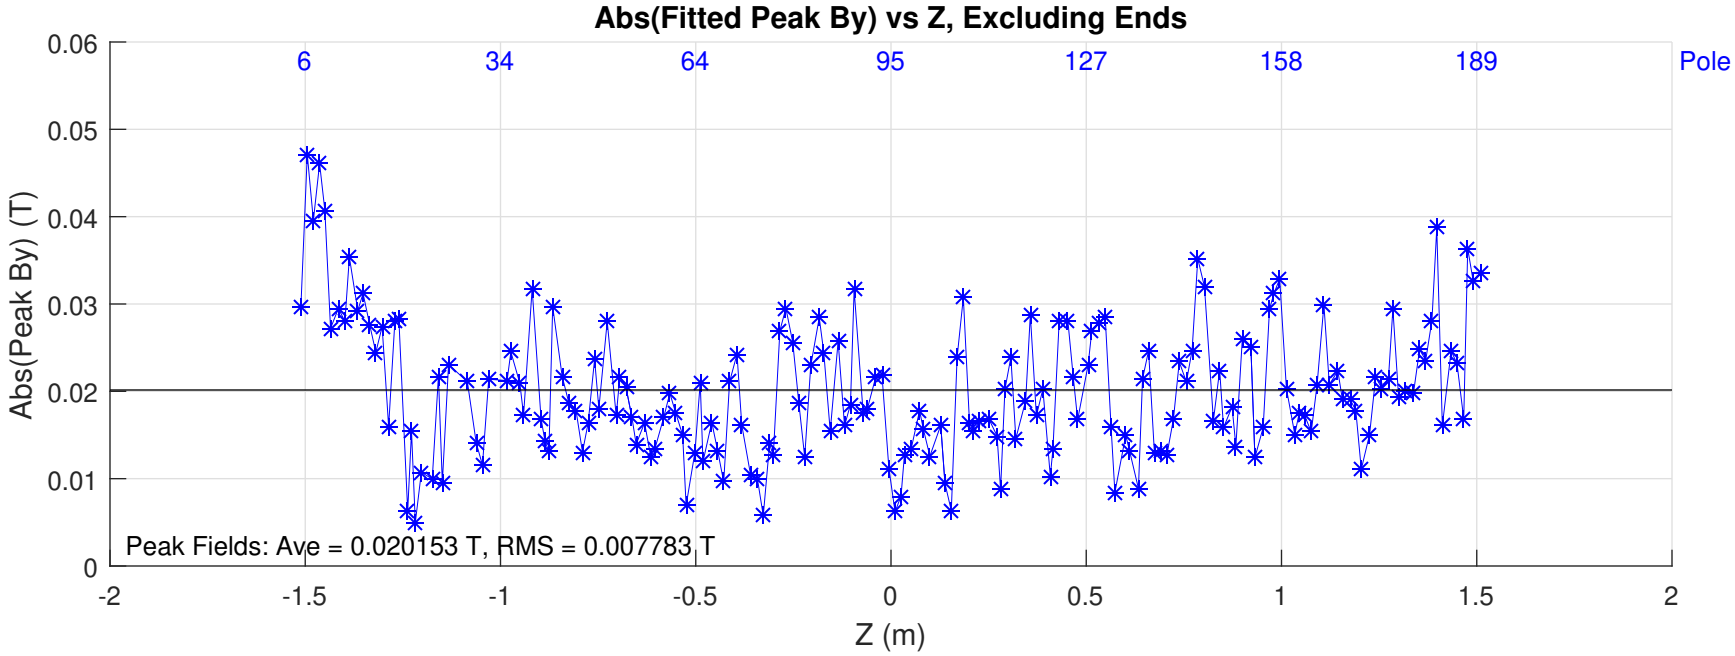
Abs(Fitted Peak By) vs Z, Excluding Ends
6
34
64
95
127
158
189
Pole
0.06
0.05
0.04
0.03
0.02
0.01
0
Abs(Peak By) (T)
Peak Fields: Ave = 0.020153 T, RMS = 0.007783 T
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

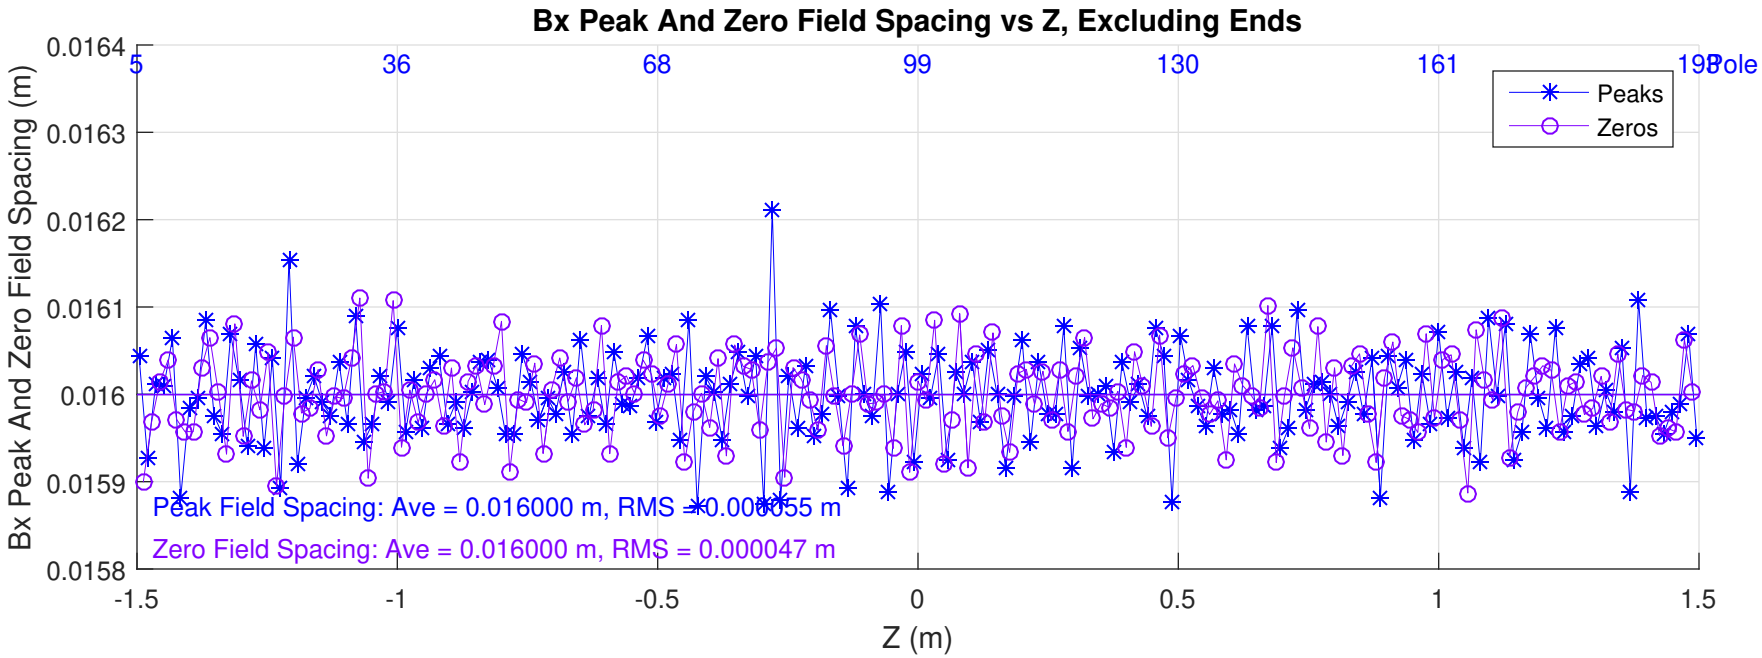
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016000 m, RMS = 0.000055 m
Zero Field Spacing: Ave = 0.016000 m, RMS = 0.000047 m

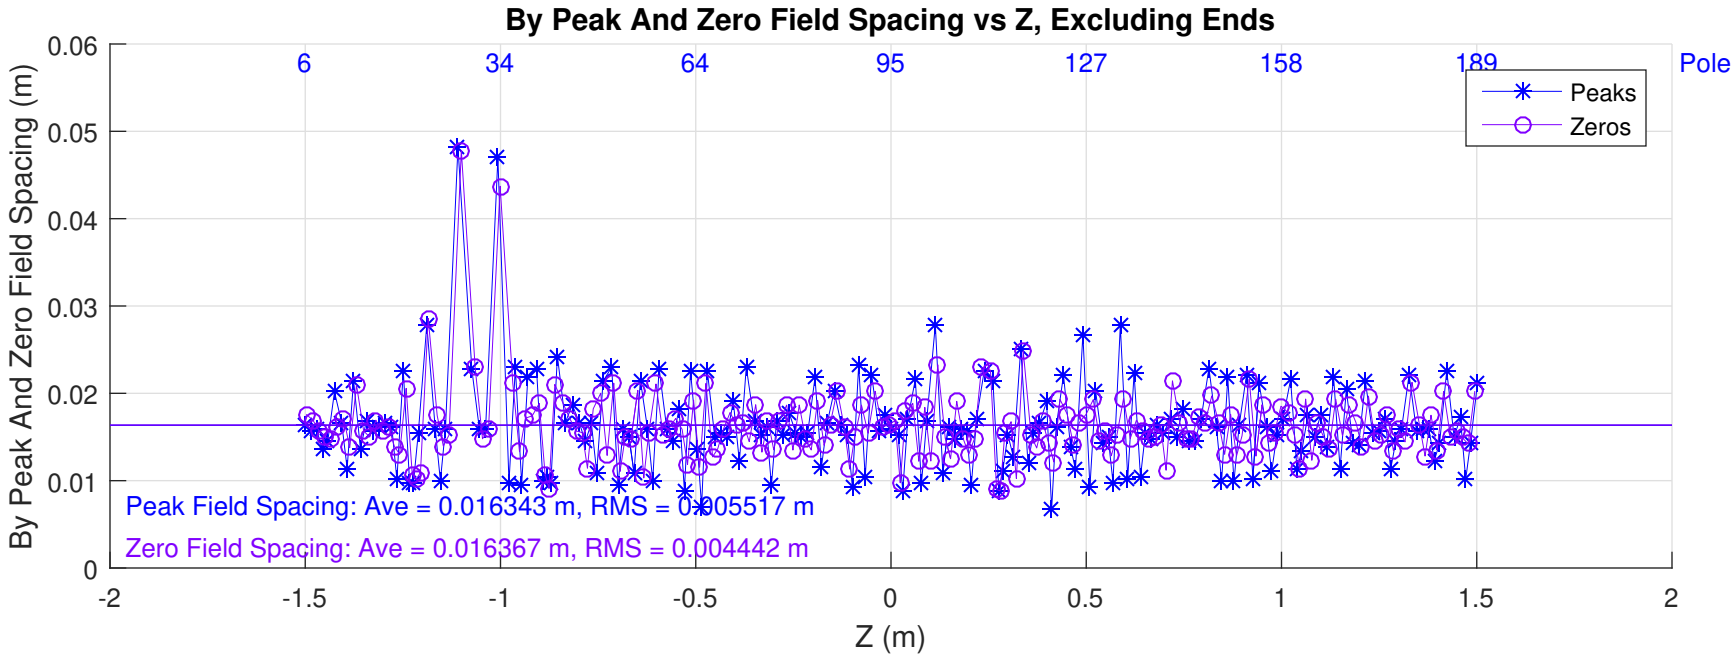
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016343 m, RMS = 0.005517 m
Zero Field Spacing: Ave = 0.016367 m, RMS = 0.004442 m

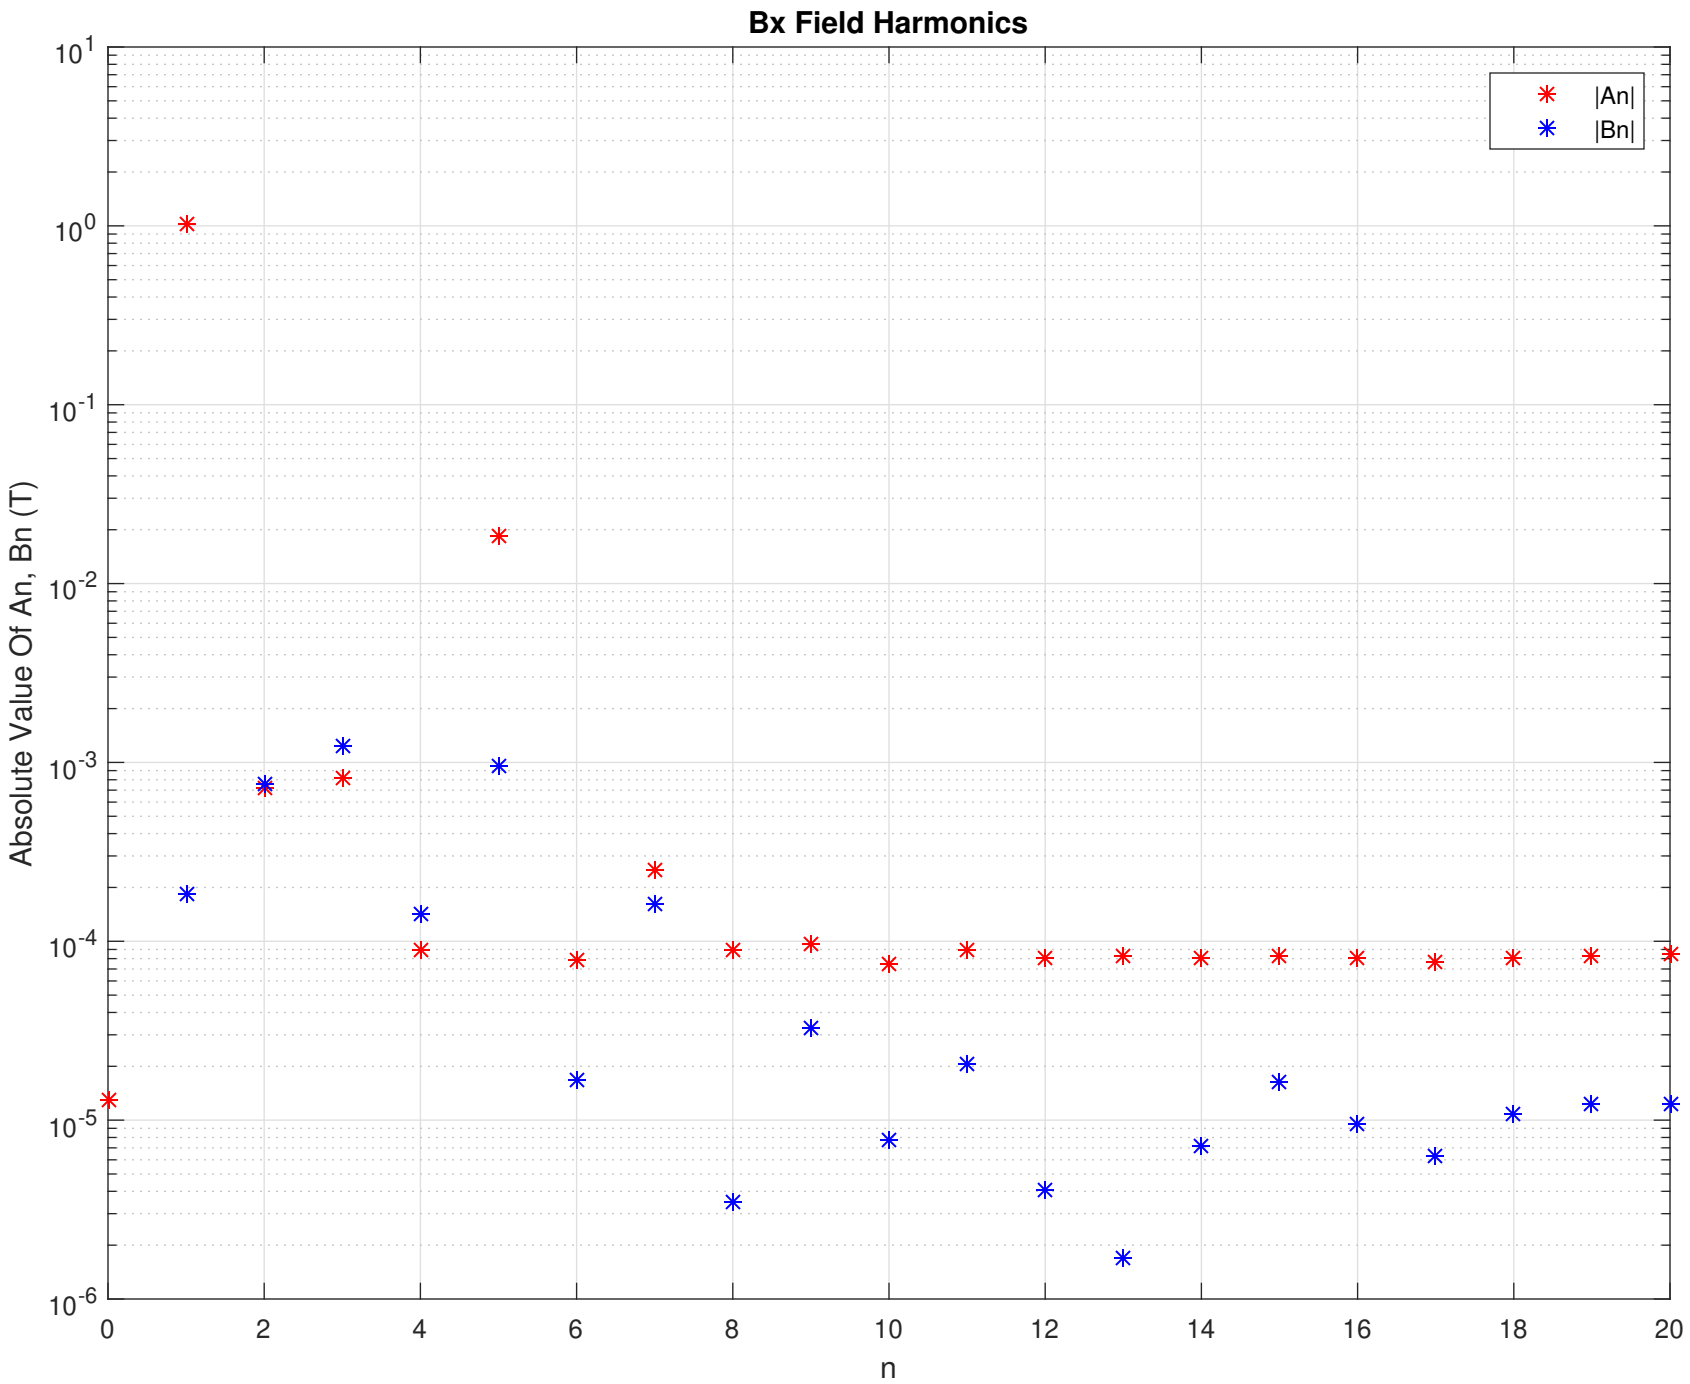
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
0
2
4
6
8
10
12
14
16
18
20

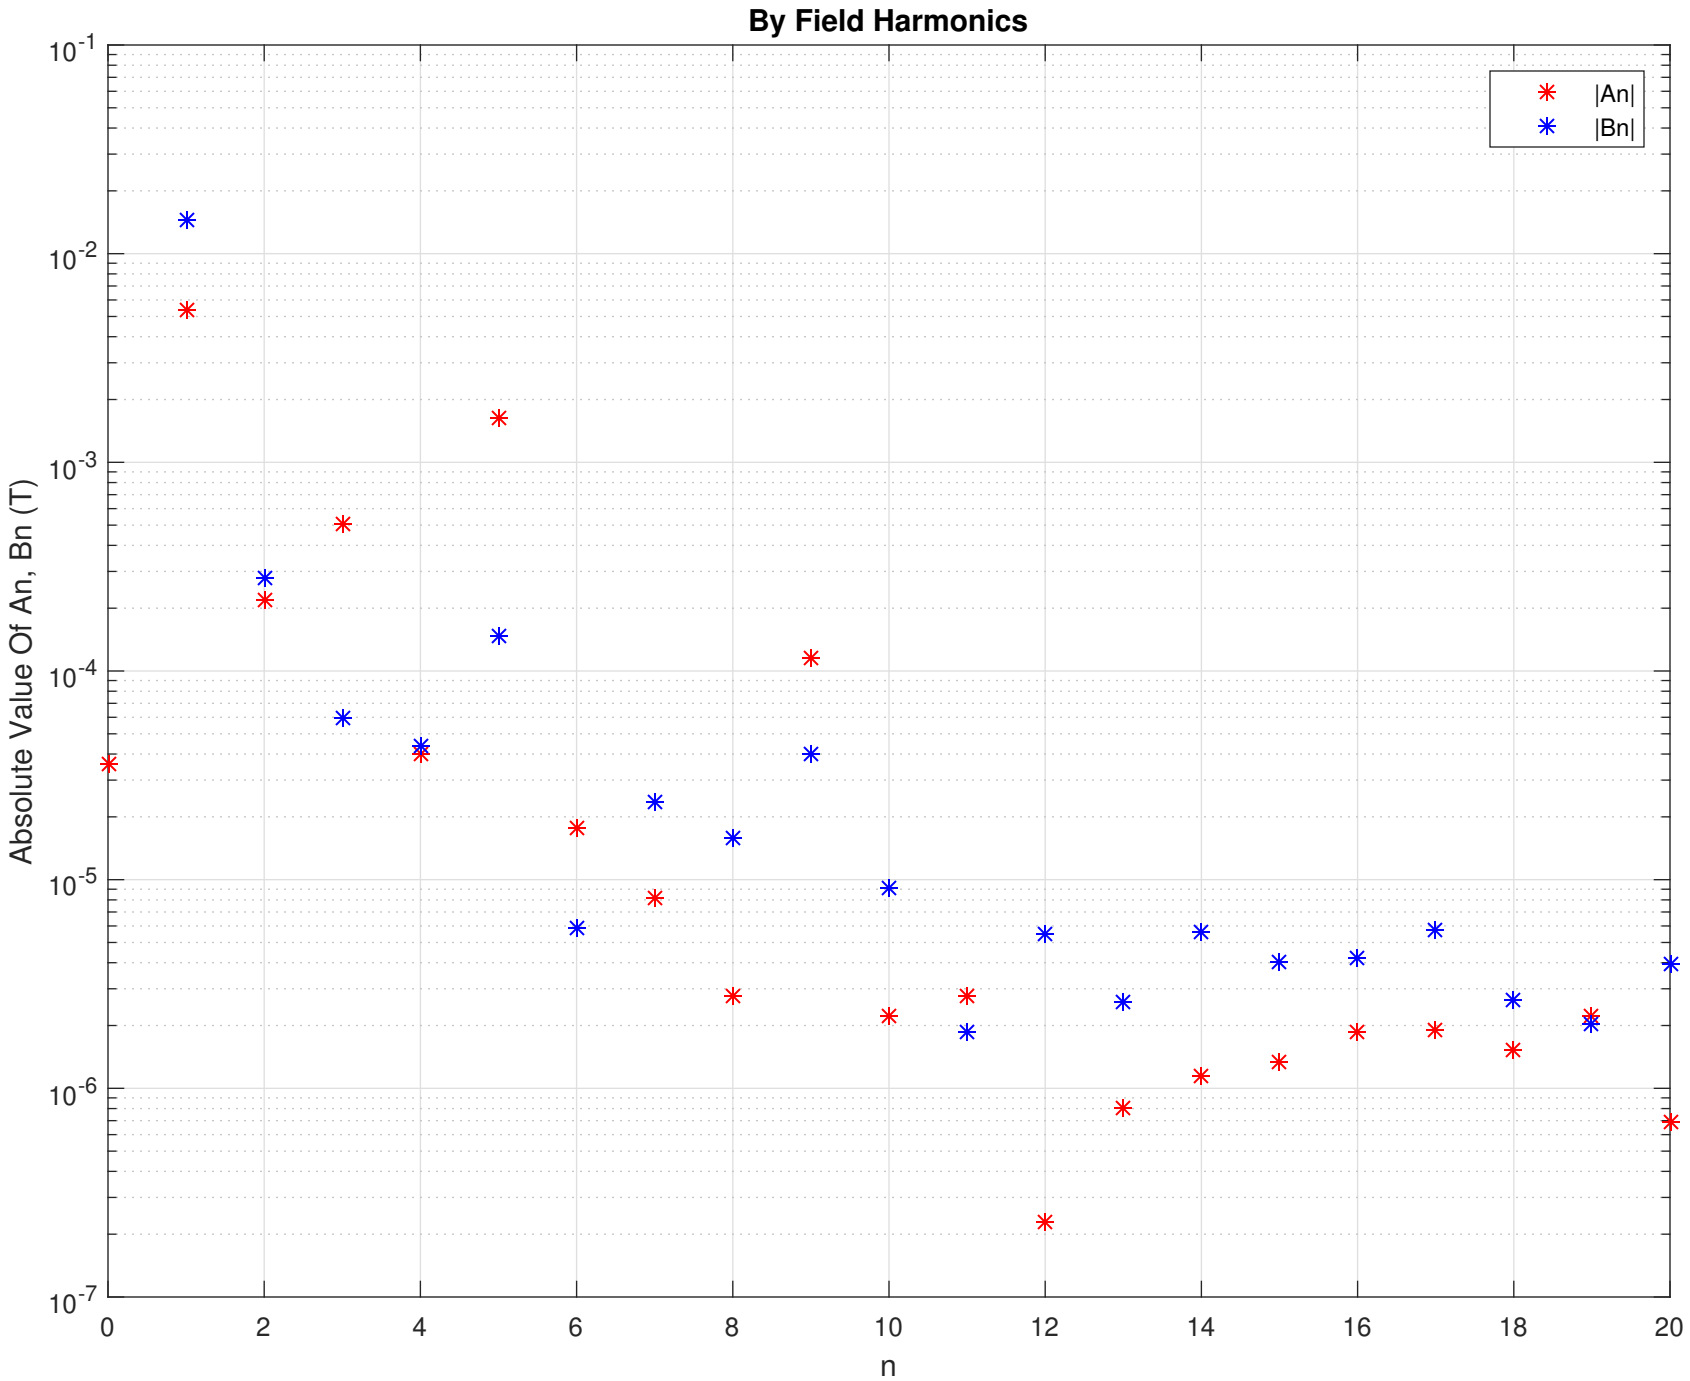
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^-1
10^-2
10^-3
10^-4
10^-5
10^-6
10^-7
0
2
4
6
8
10
12
14
16
18
20

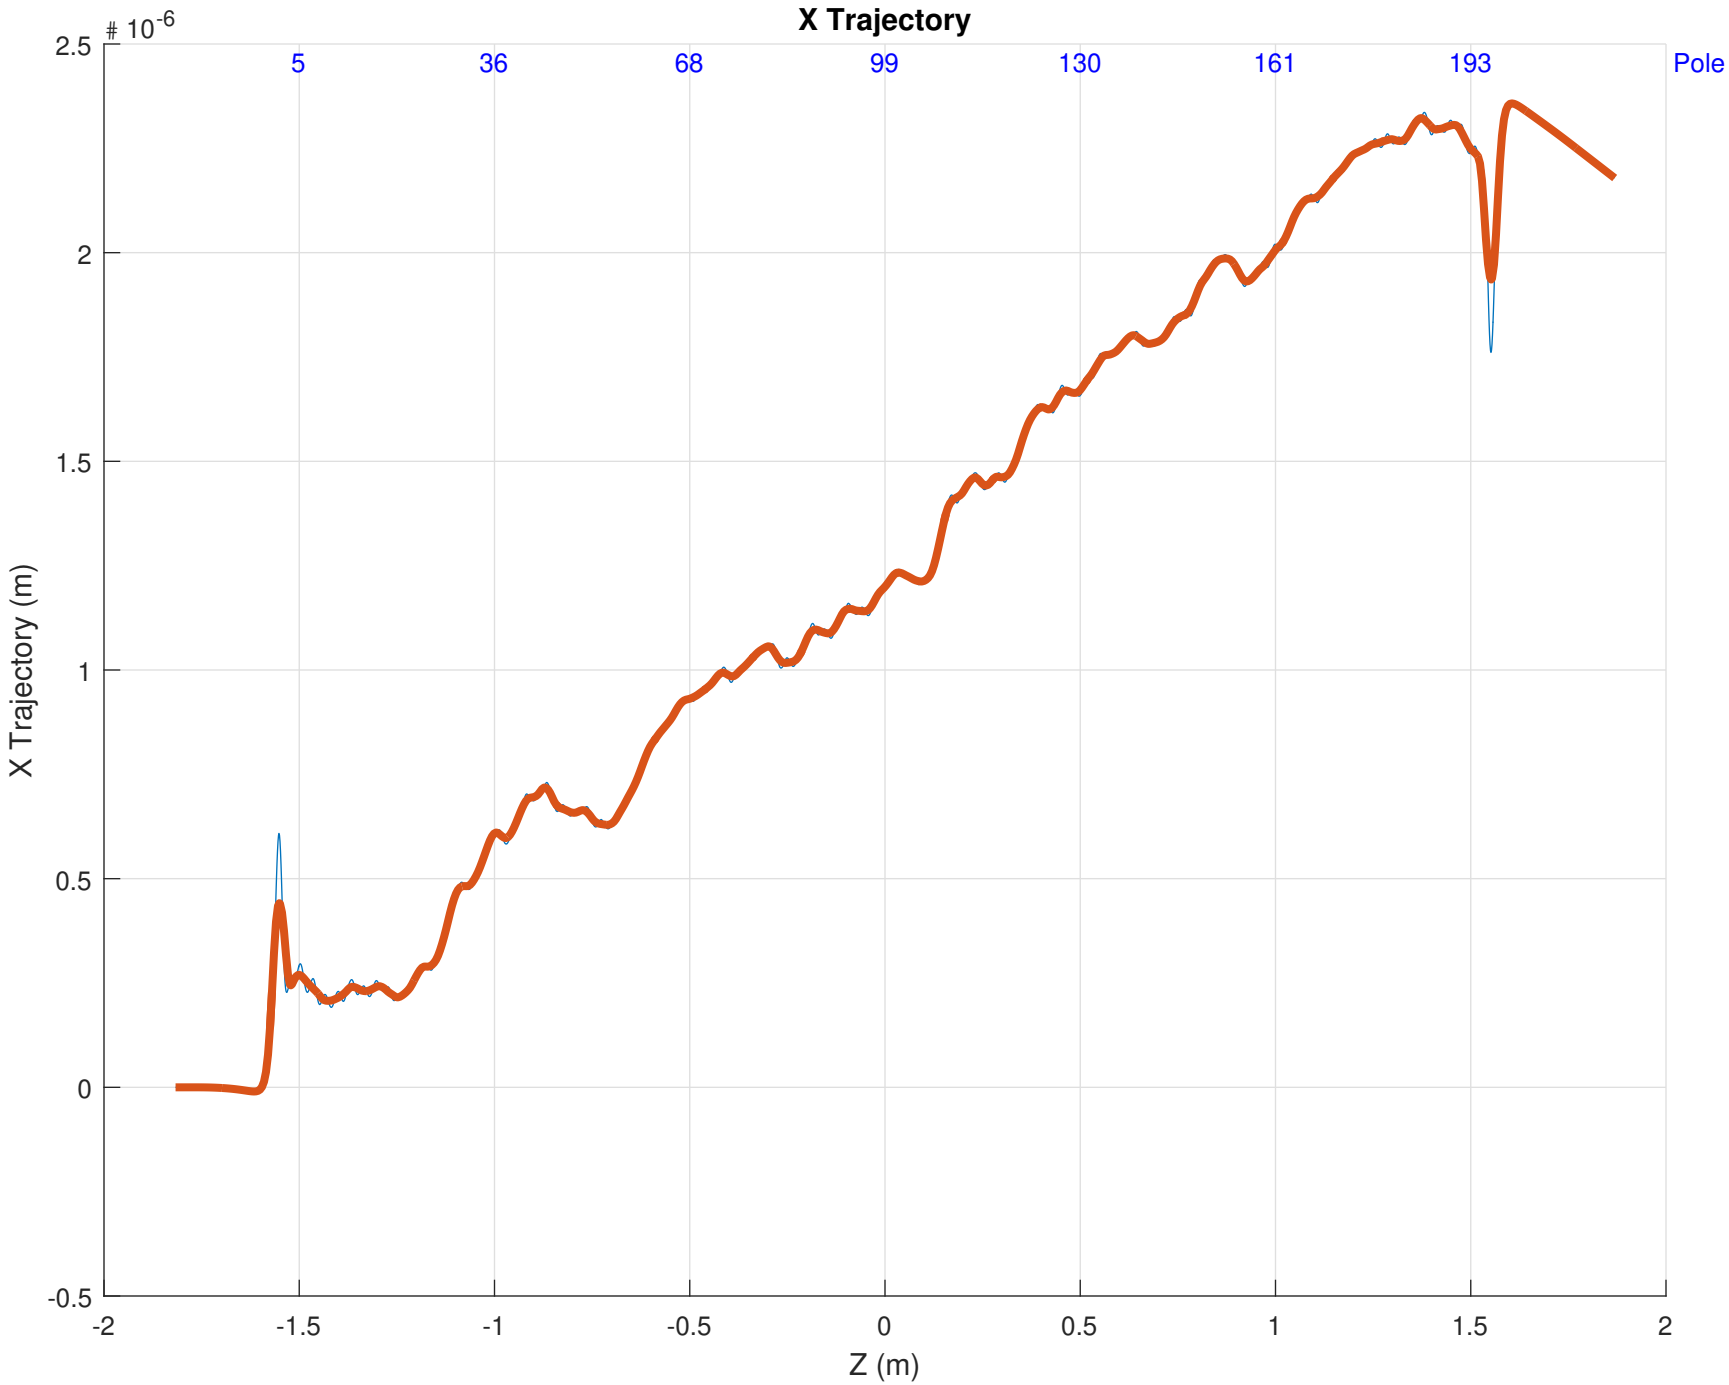
X Trajectory
10-6
5
36
68
99
130
161
193
Pole
2.5
2
1.5
1
0.5
0
-0.5
X Trajectory (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

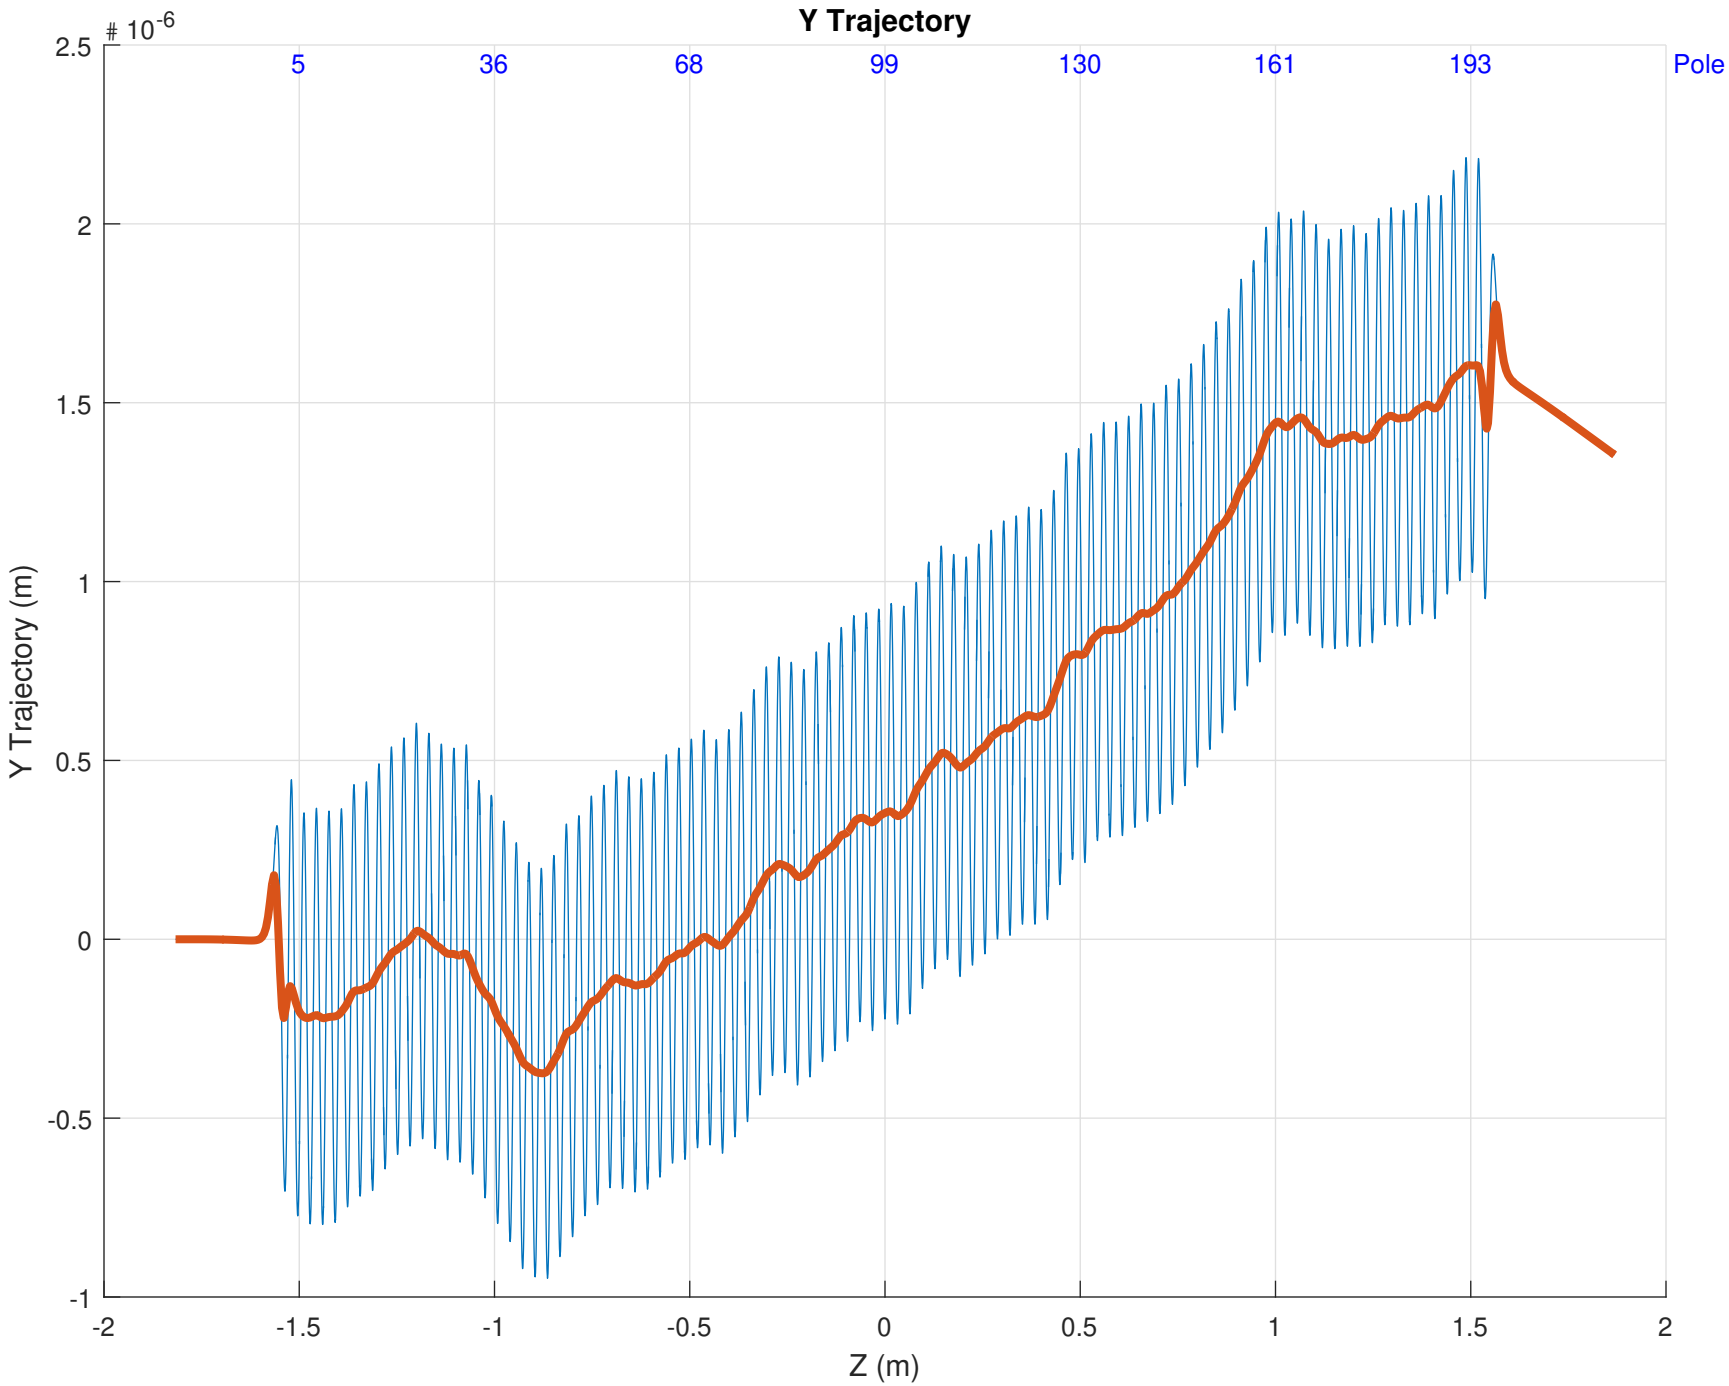
Y Trajectory
10^-6
5
36
68
99
130
161
193
Pole
2.5
2
1.5
1
0.5
0
-0.5
-1
Y Trajectory (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

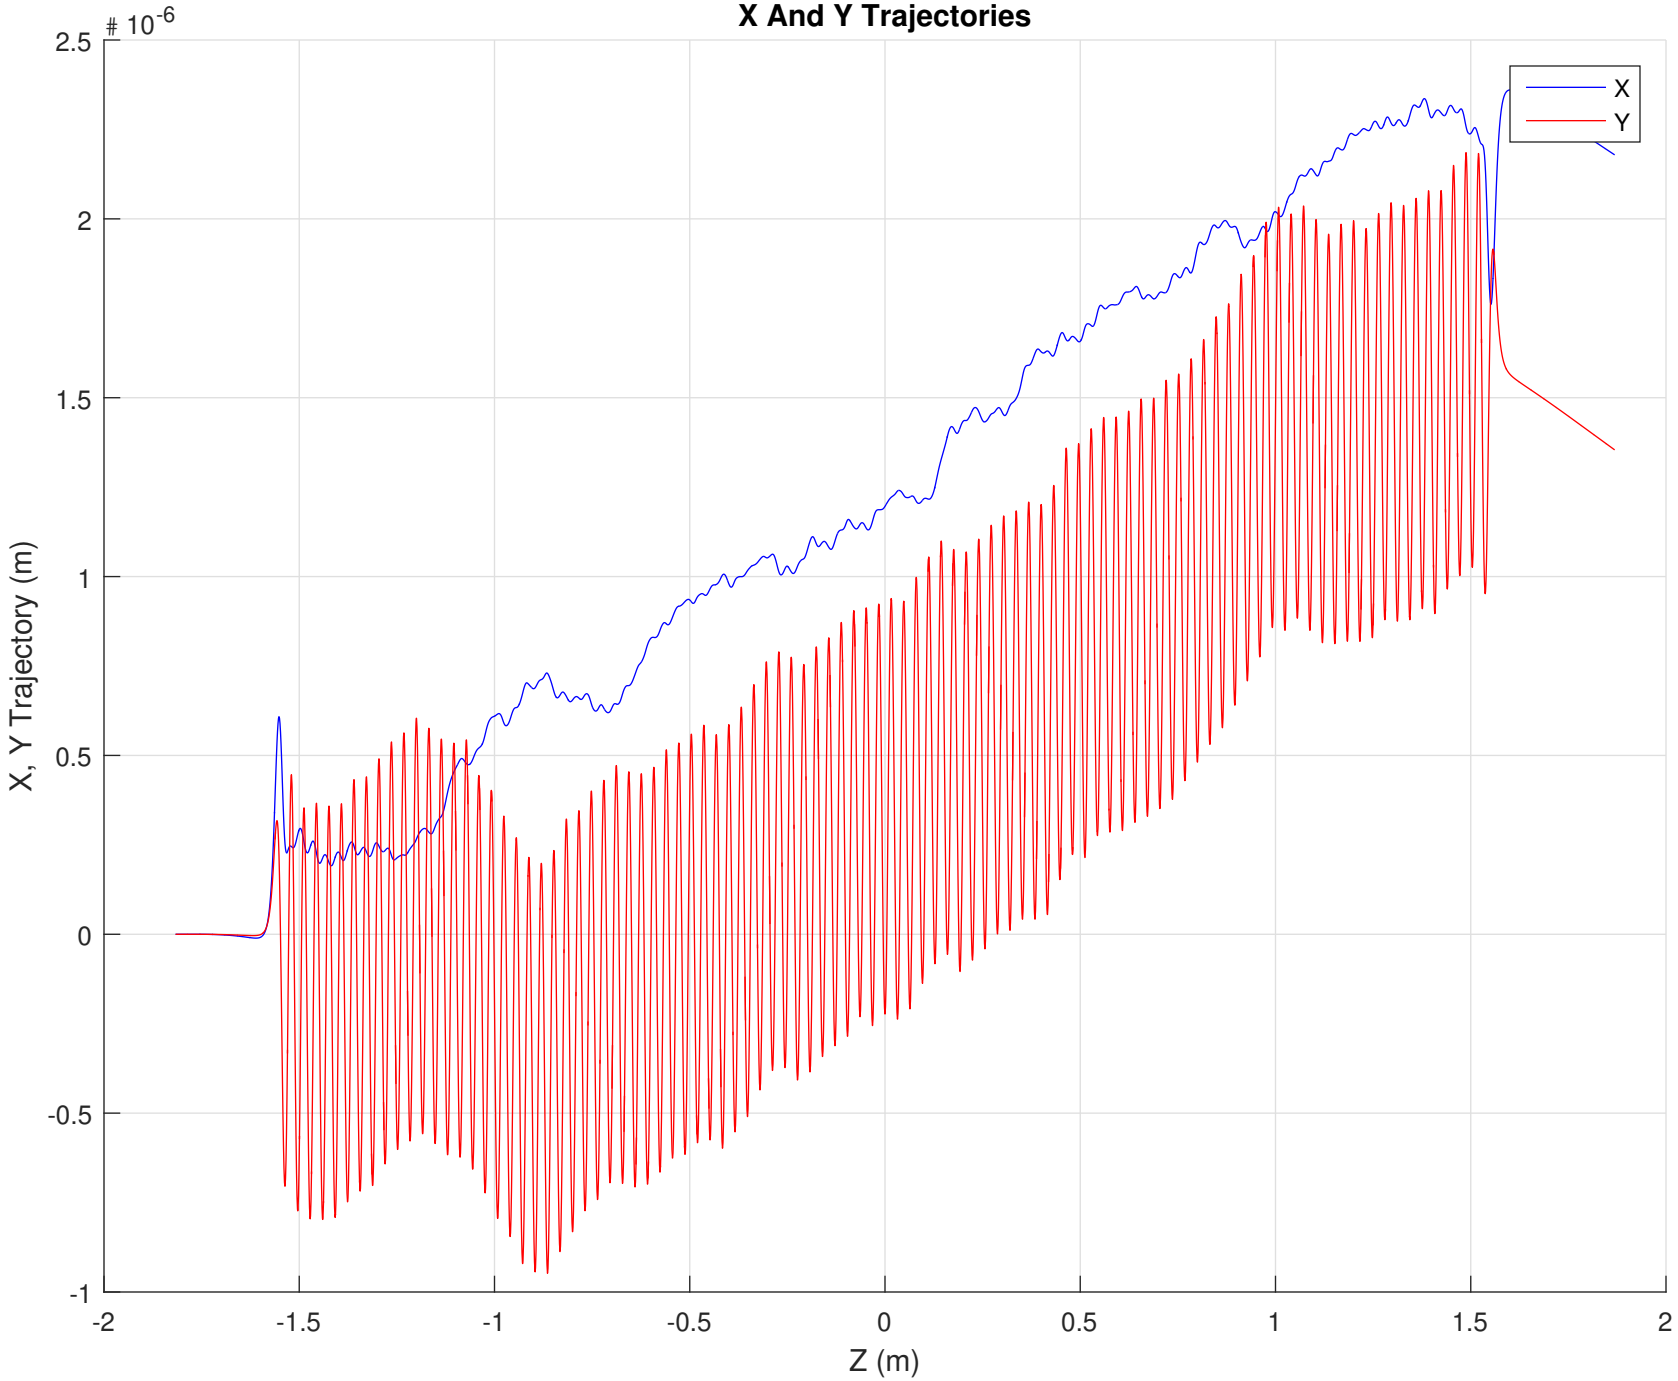
X And Y Trajectories
10^-6
2.5
2
1.5
1
0.5
0
-0.5
-1
X, Y Trajectory (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)
X
Y

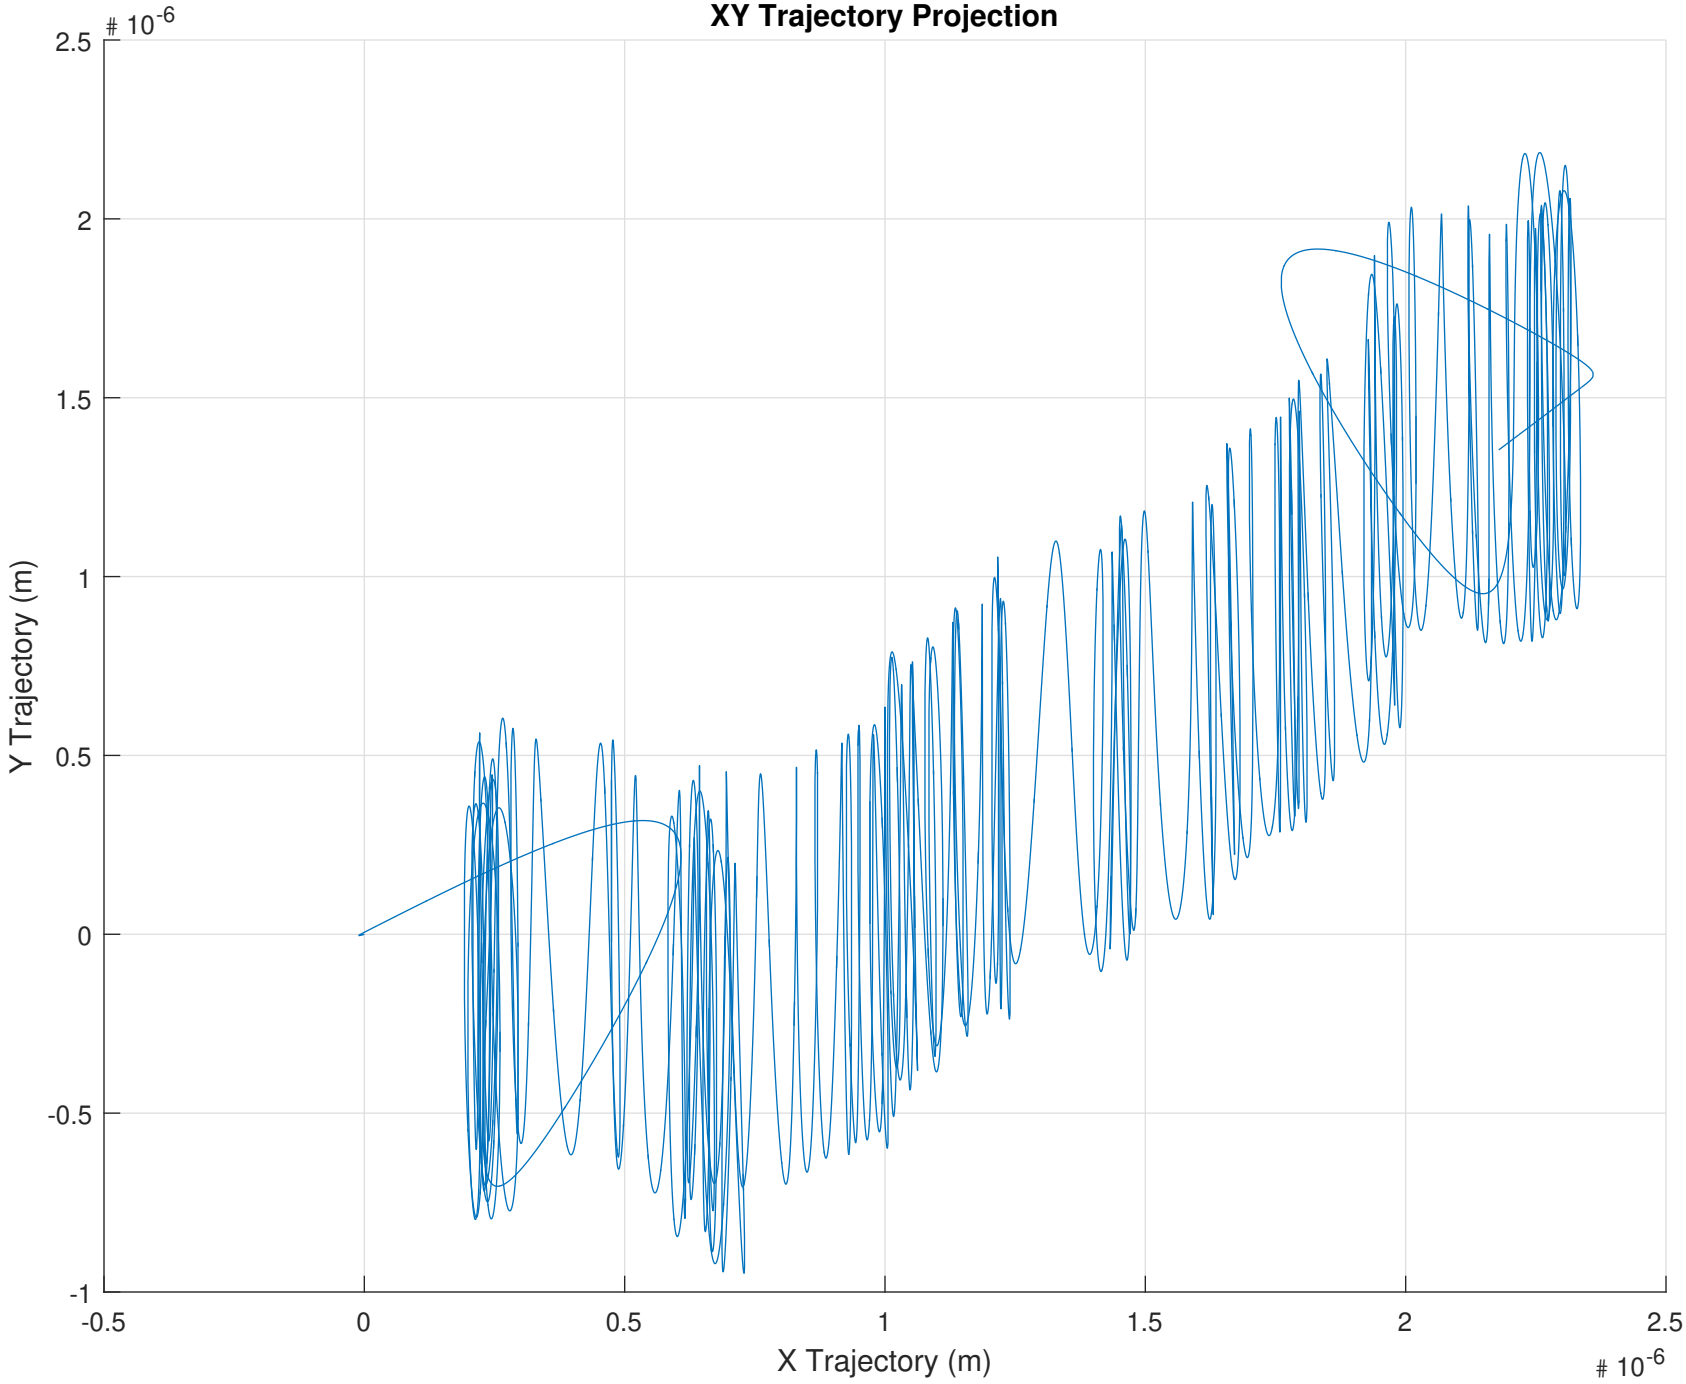
XY Trajectory Projection
10^-6
2.5
2
1.5
1
0.5
0
-0.5
-1
Y Trajectory (m)
-0.5
0
0.5
1
1.5
2
2.5
X Trajectory (m)
10^-6

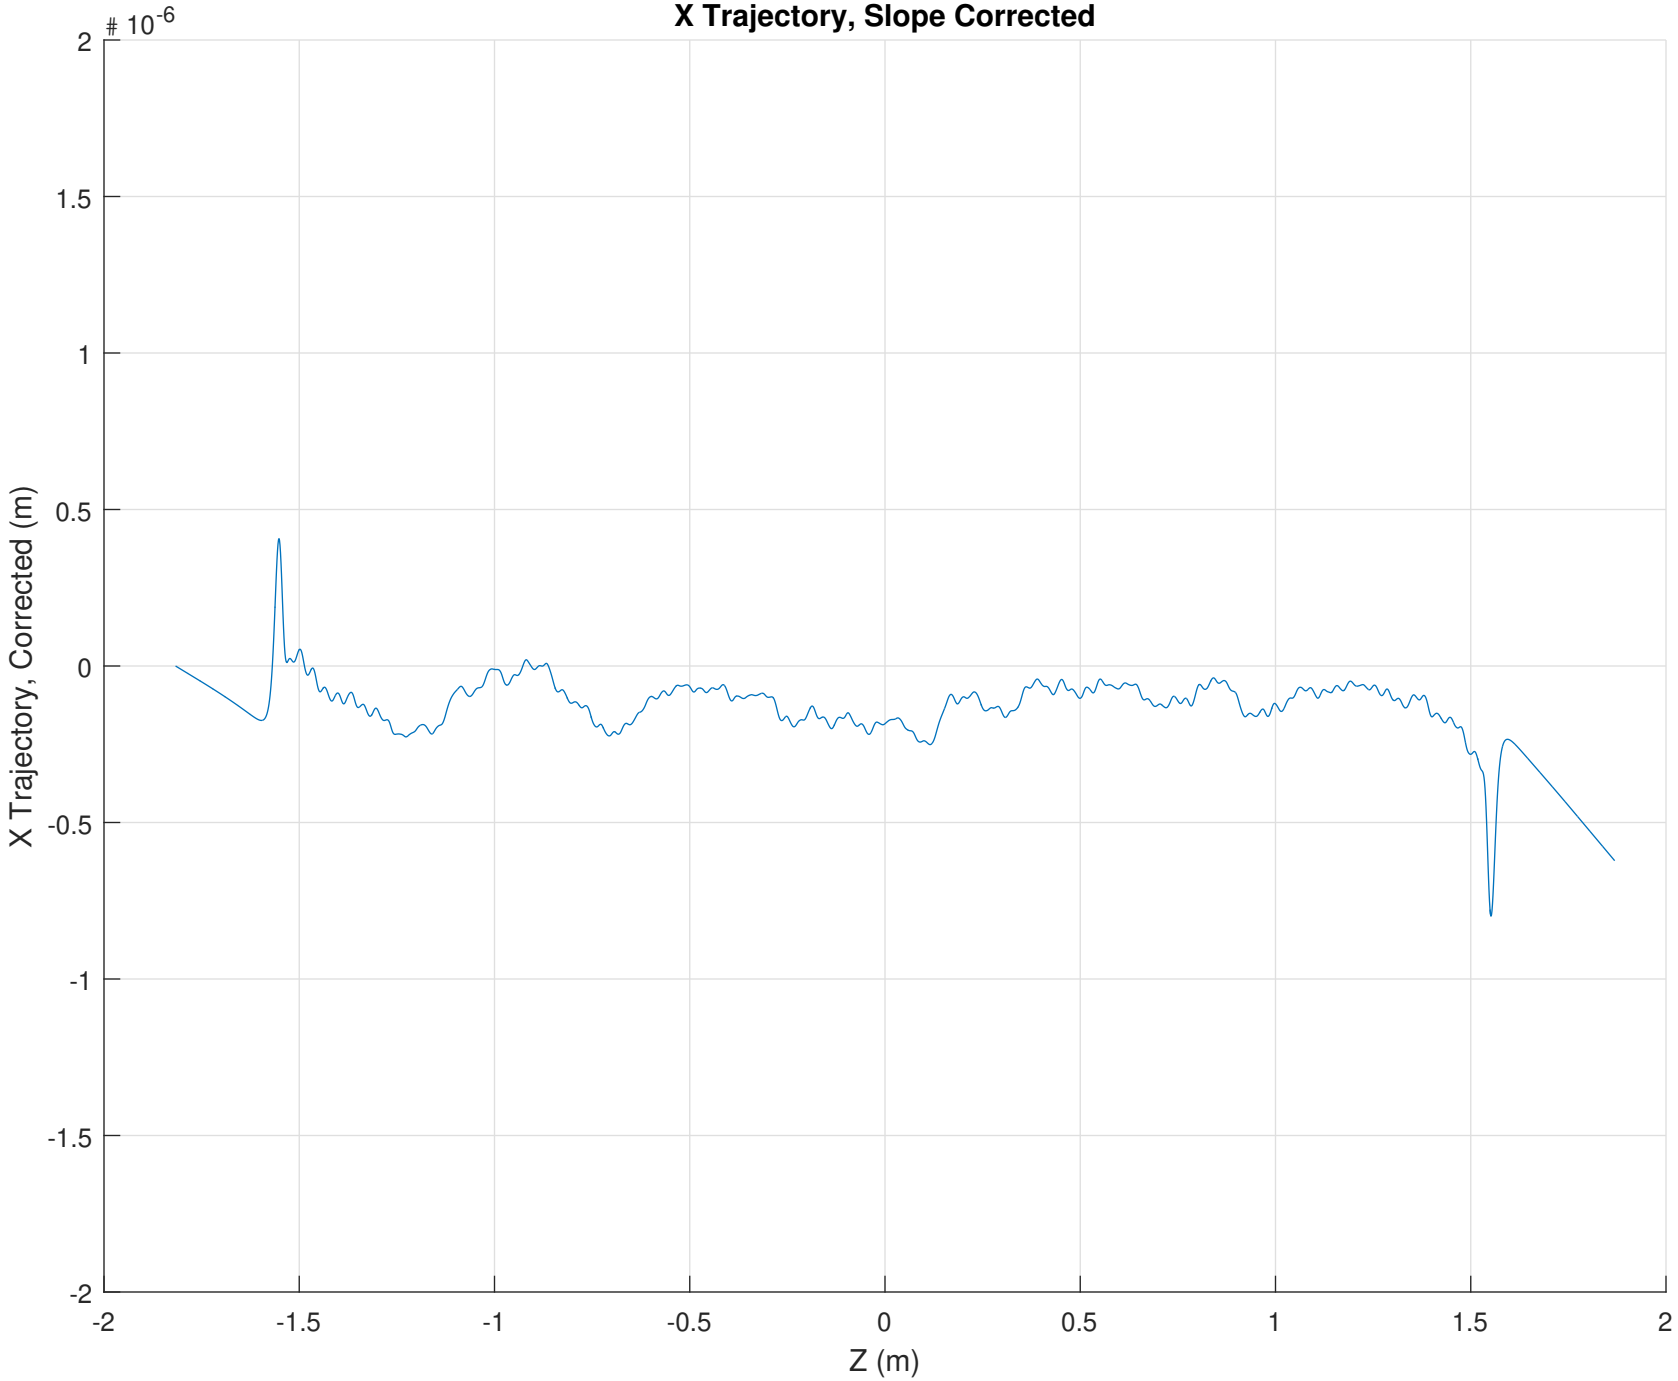
X Trajectory, Slope Corrected
10^-6
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
X Trajectory, Corrected (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

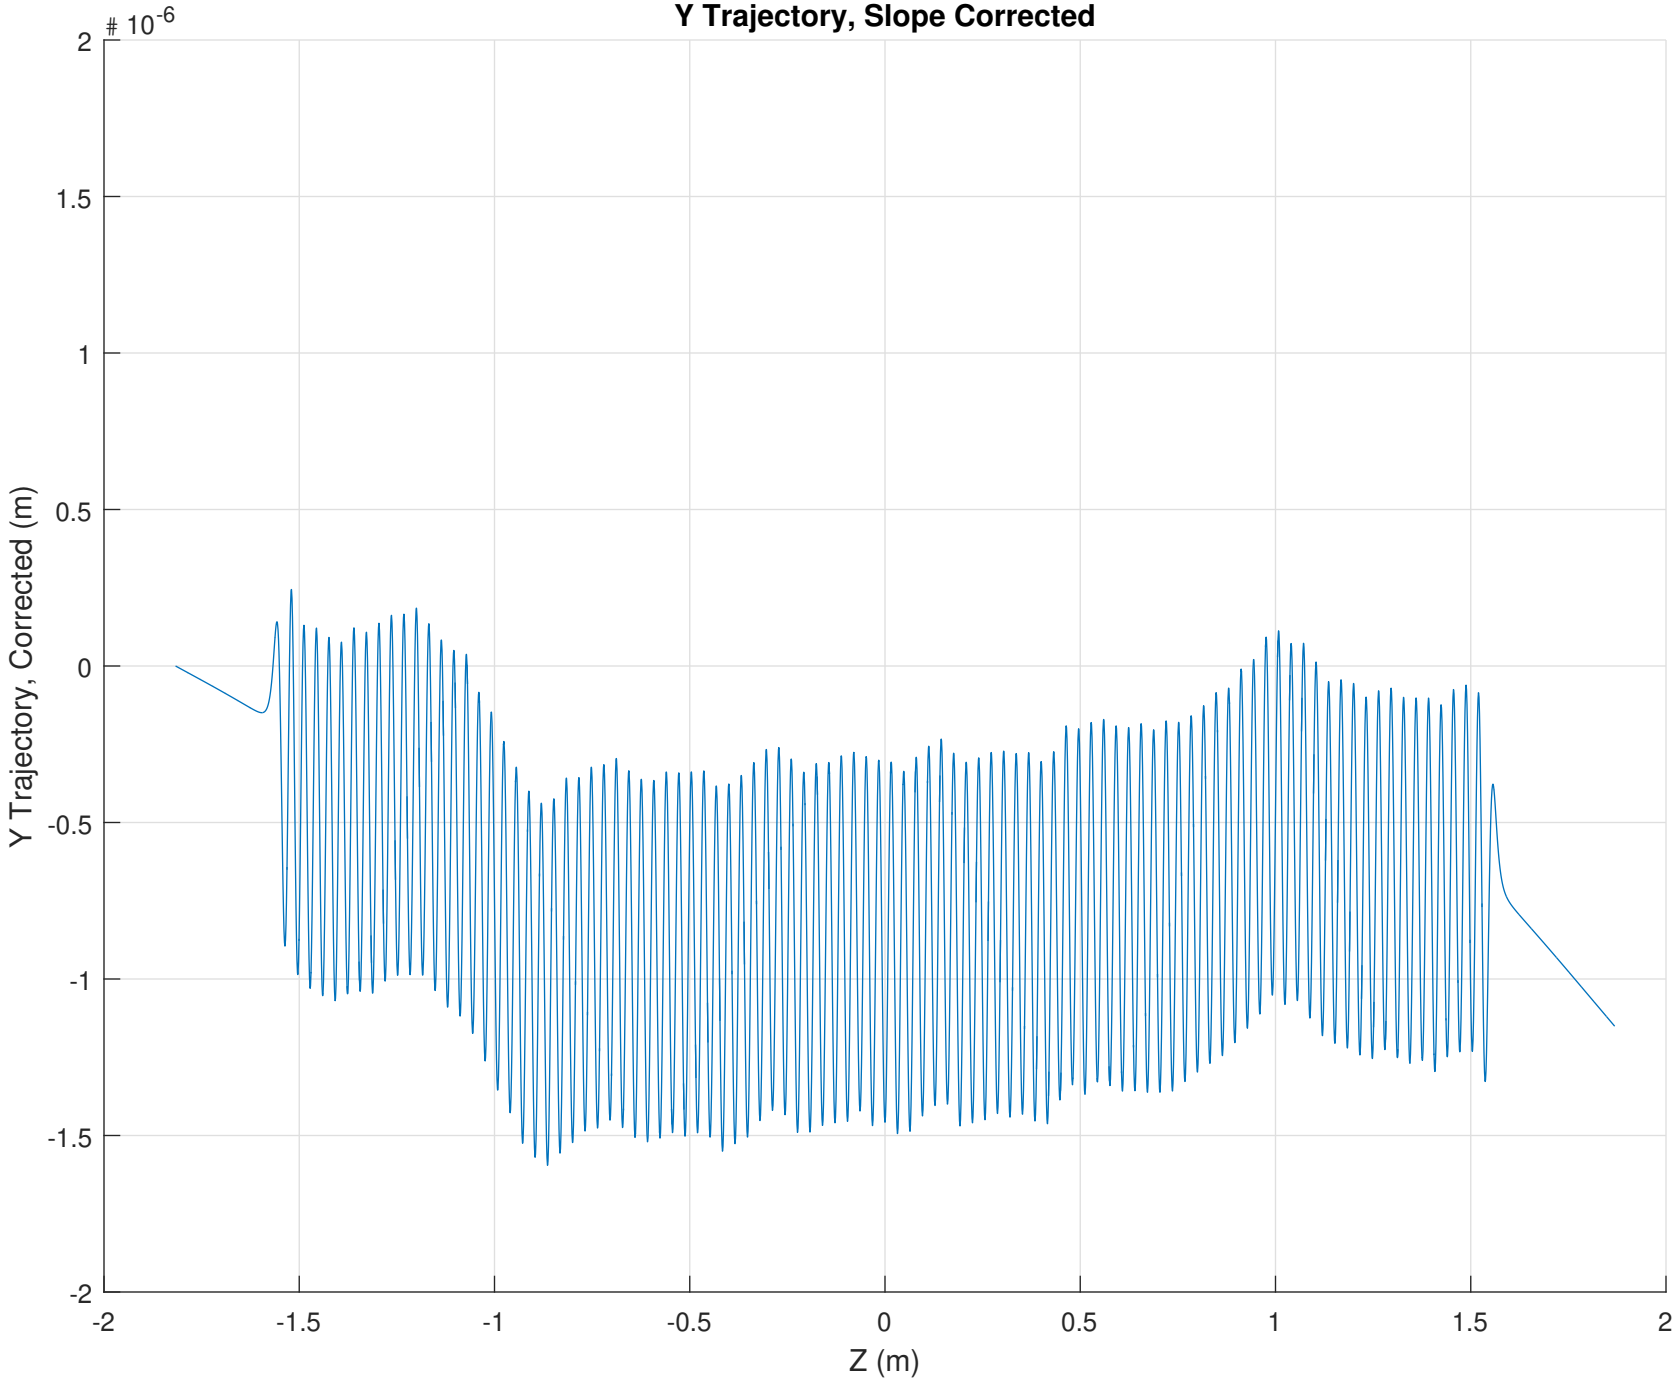
Y Trajectory, Slope Corrected
10^-6
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Y Trajectory, Corrected (m)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

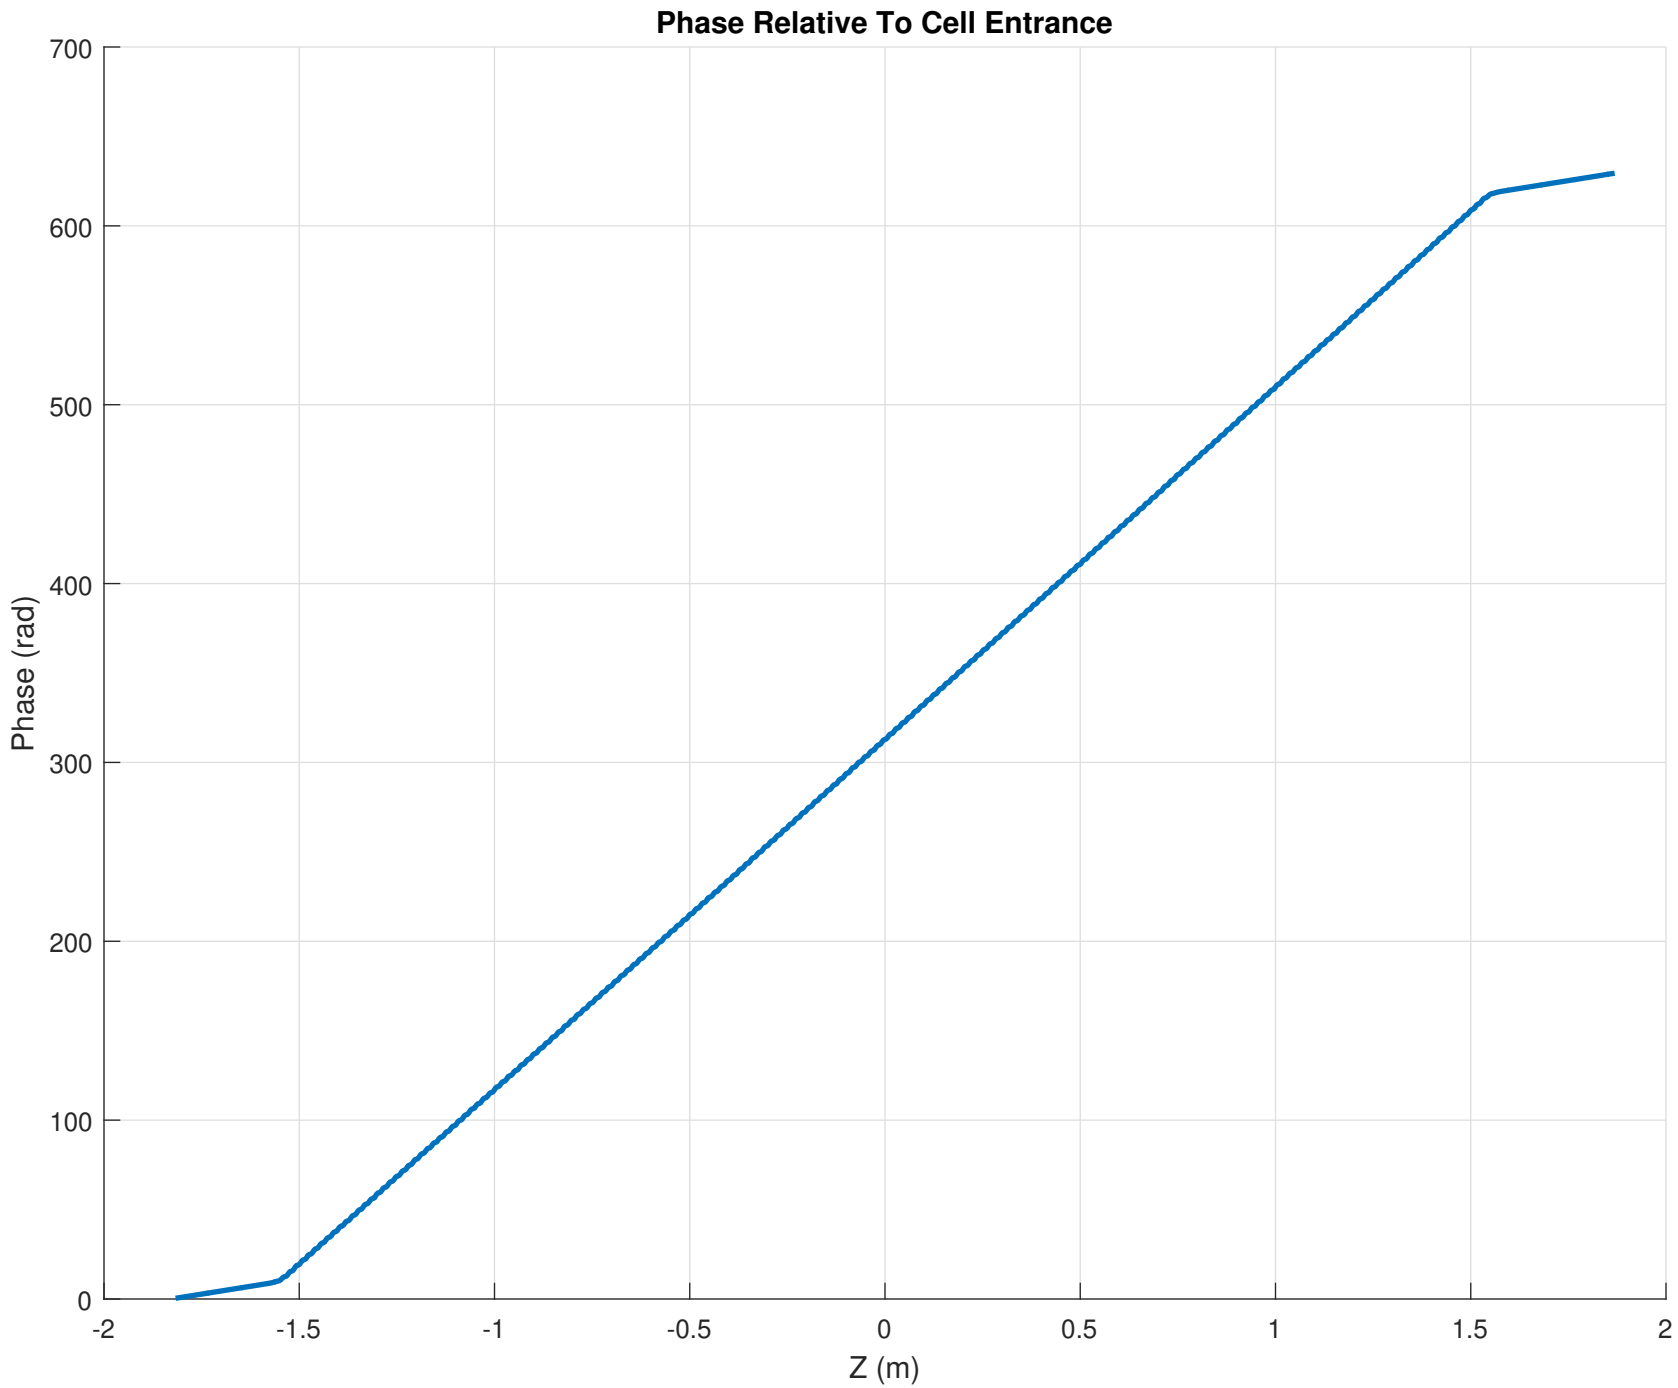
Phase Relative To Cell Entrance
700
600
500
400
300
200
100
0
Phase (rad)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

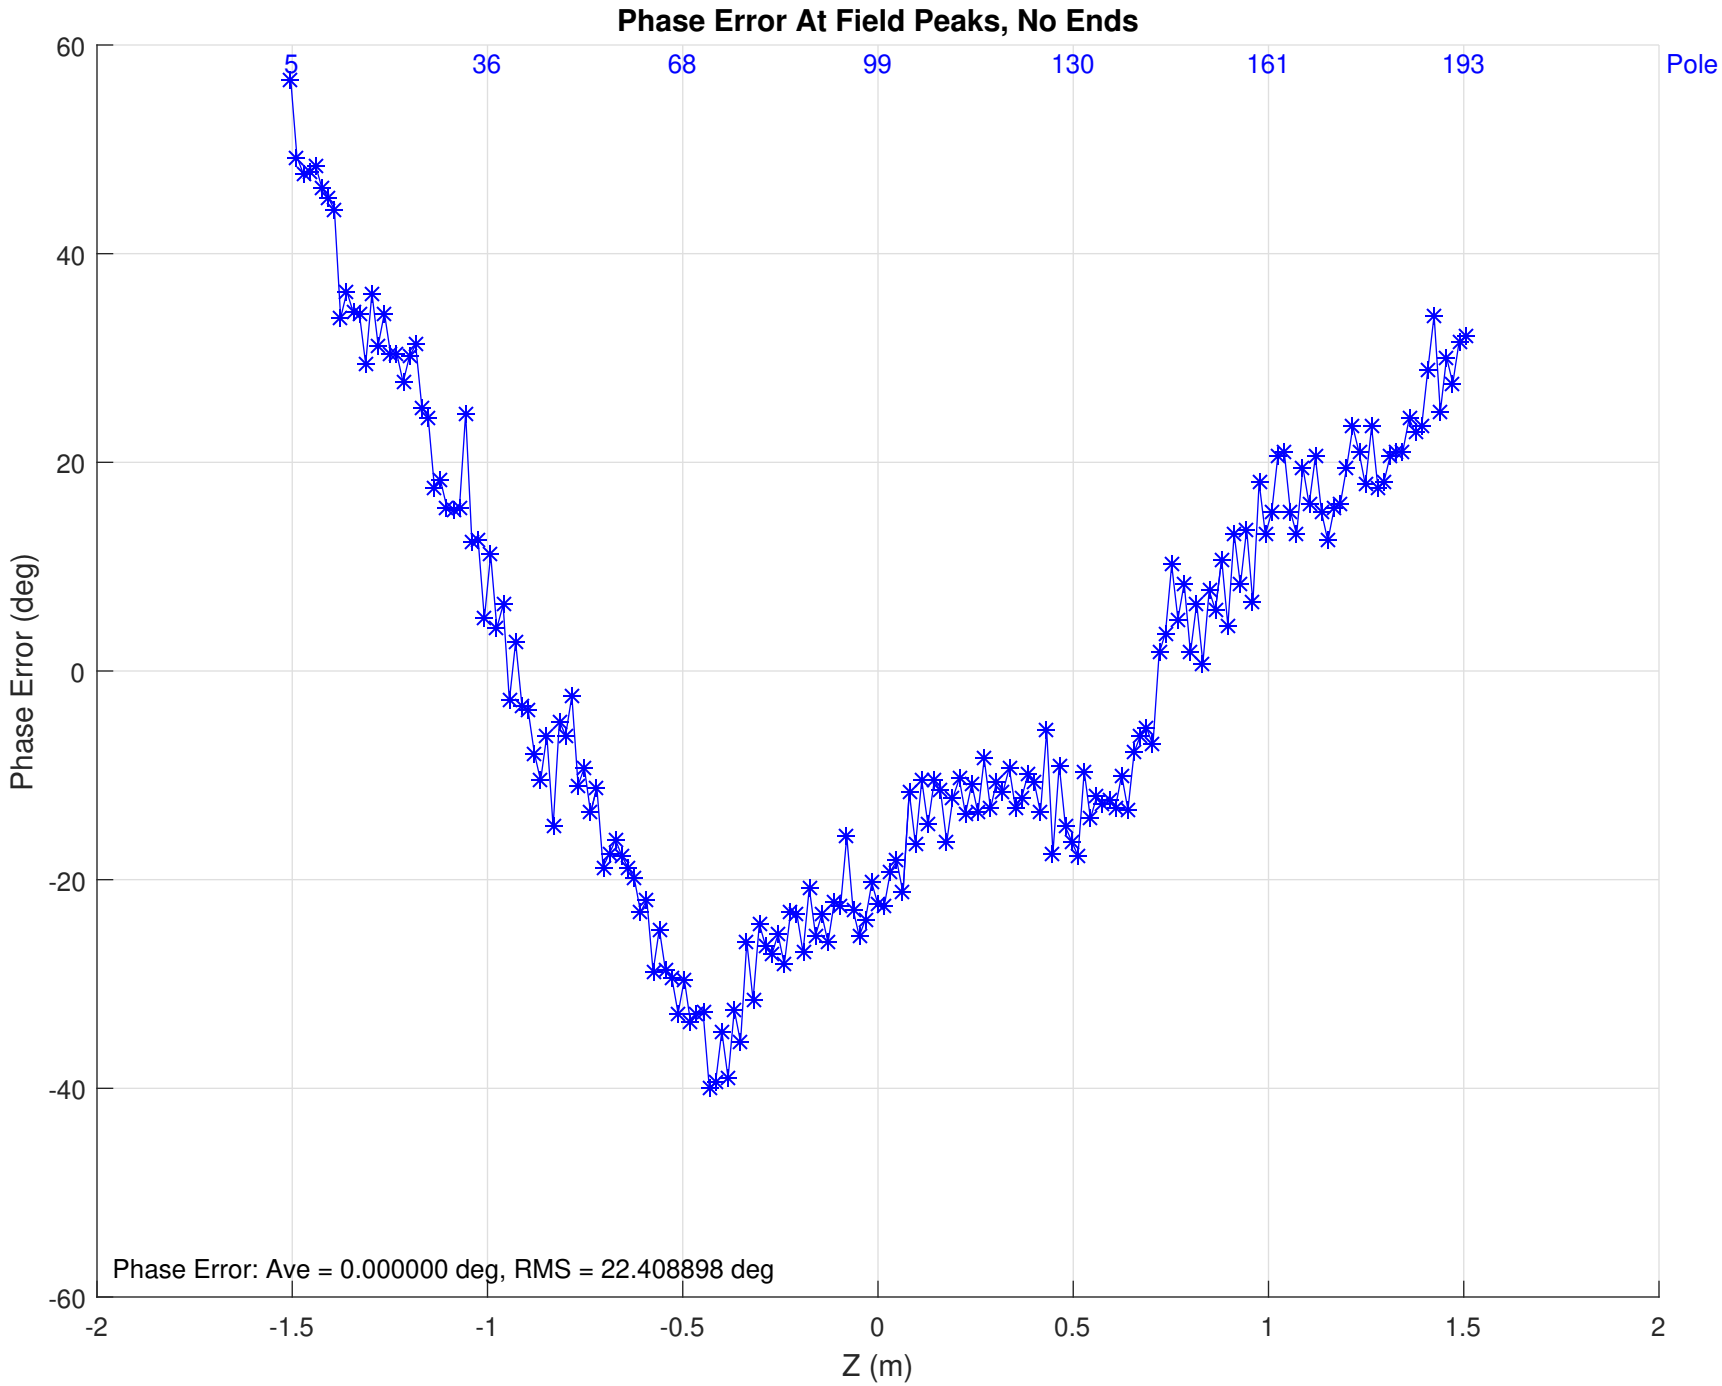
Phase Error At Field Peaks, No Ends
5
36
68
99
130
161
193
Pole
60
40
20
0
-20
-40
-60
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)
Phase Error: Ave = 0.000000 deg, RMS = 22.408898 deg

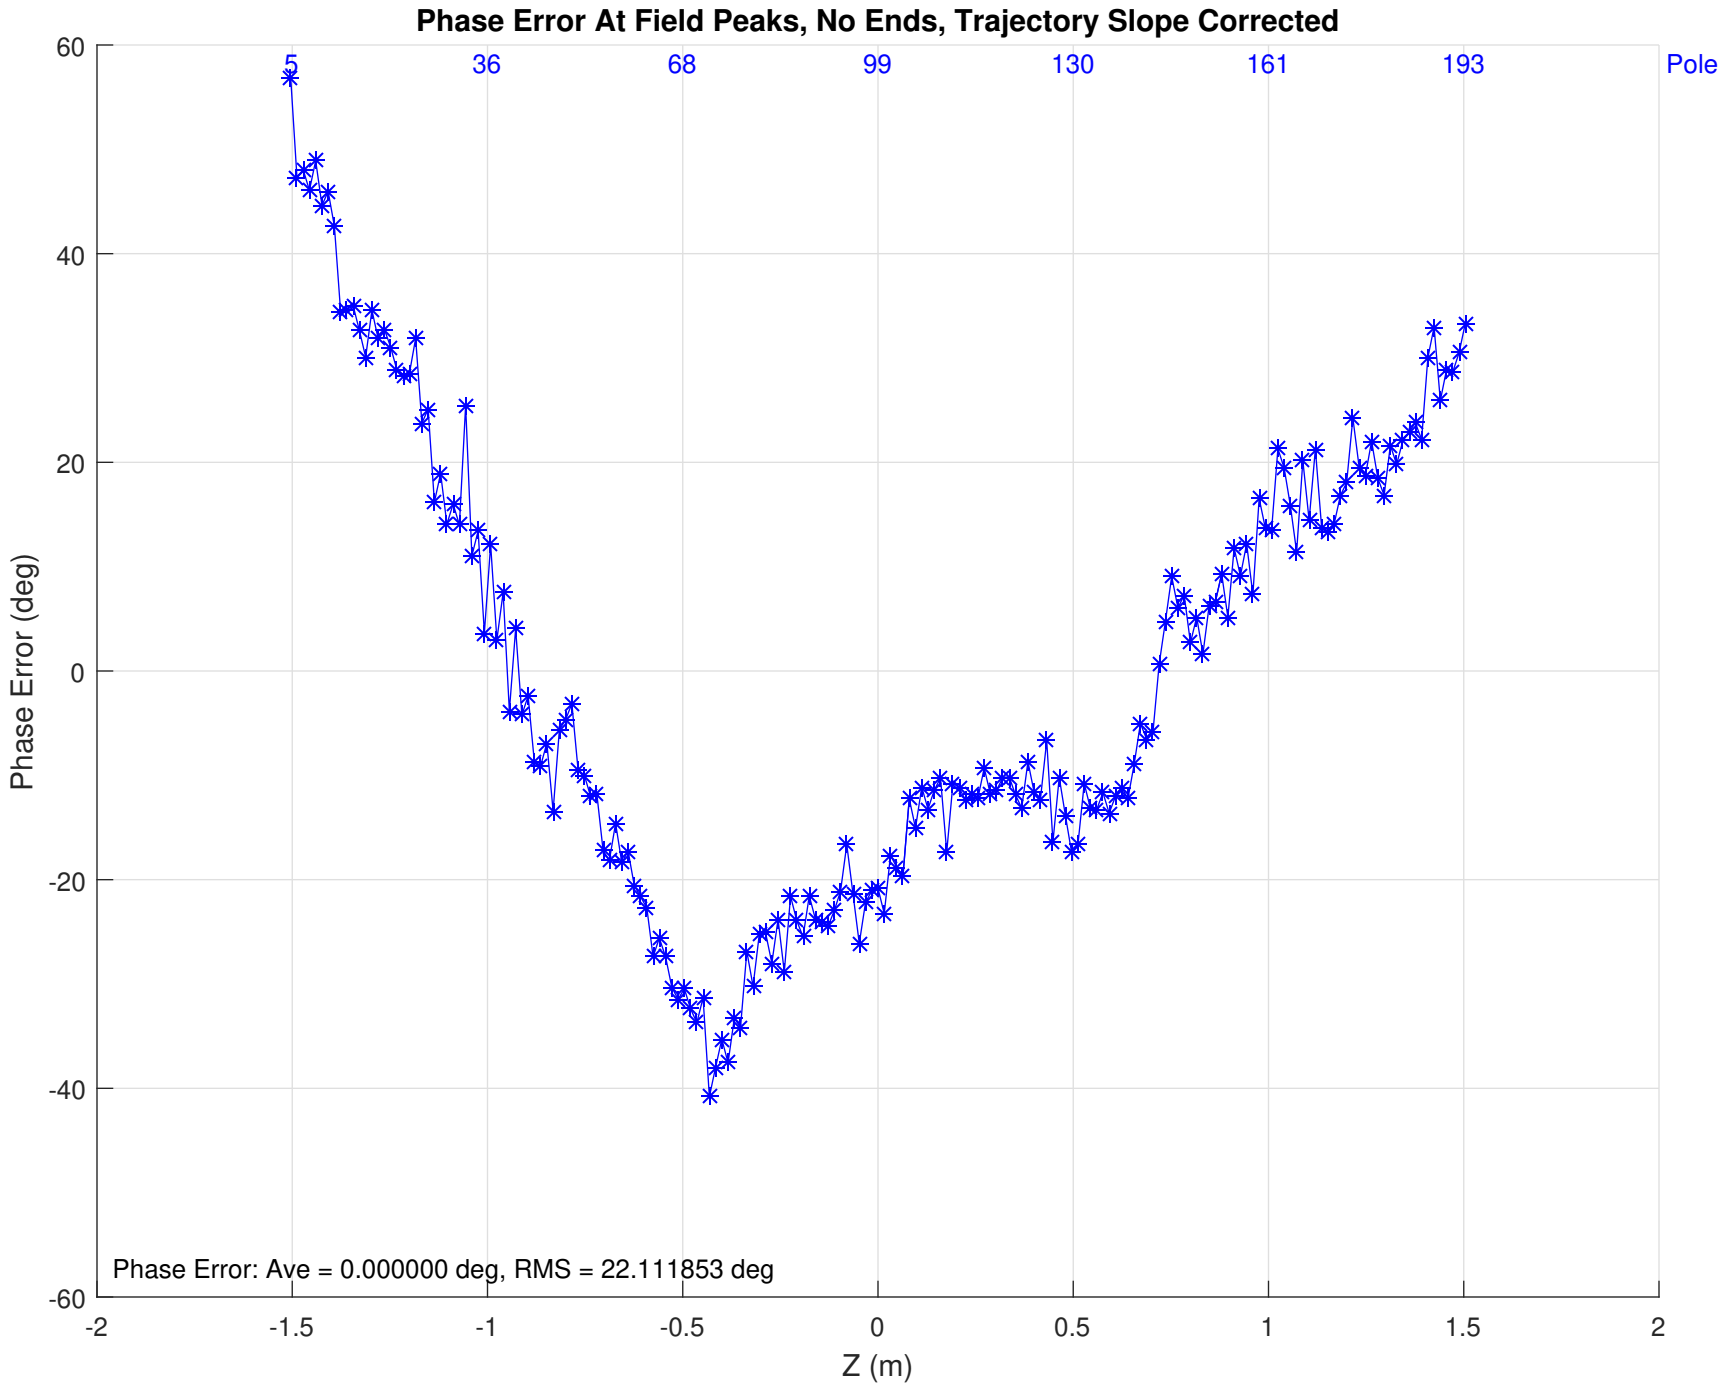
Phase Error At Field Peaks, No Ends, Trajectory Slope Corrected
5
36
68
99
130
161
193
Pole
60
40
20
0
-20
-40
-60
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)
Phase Error: Ave = 0.000000 deg, RMS = 22.111853 deg

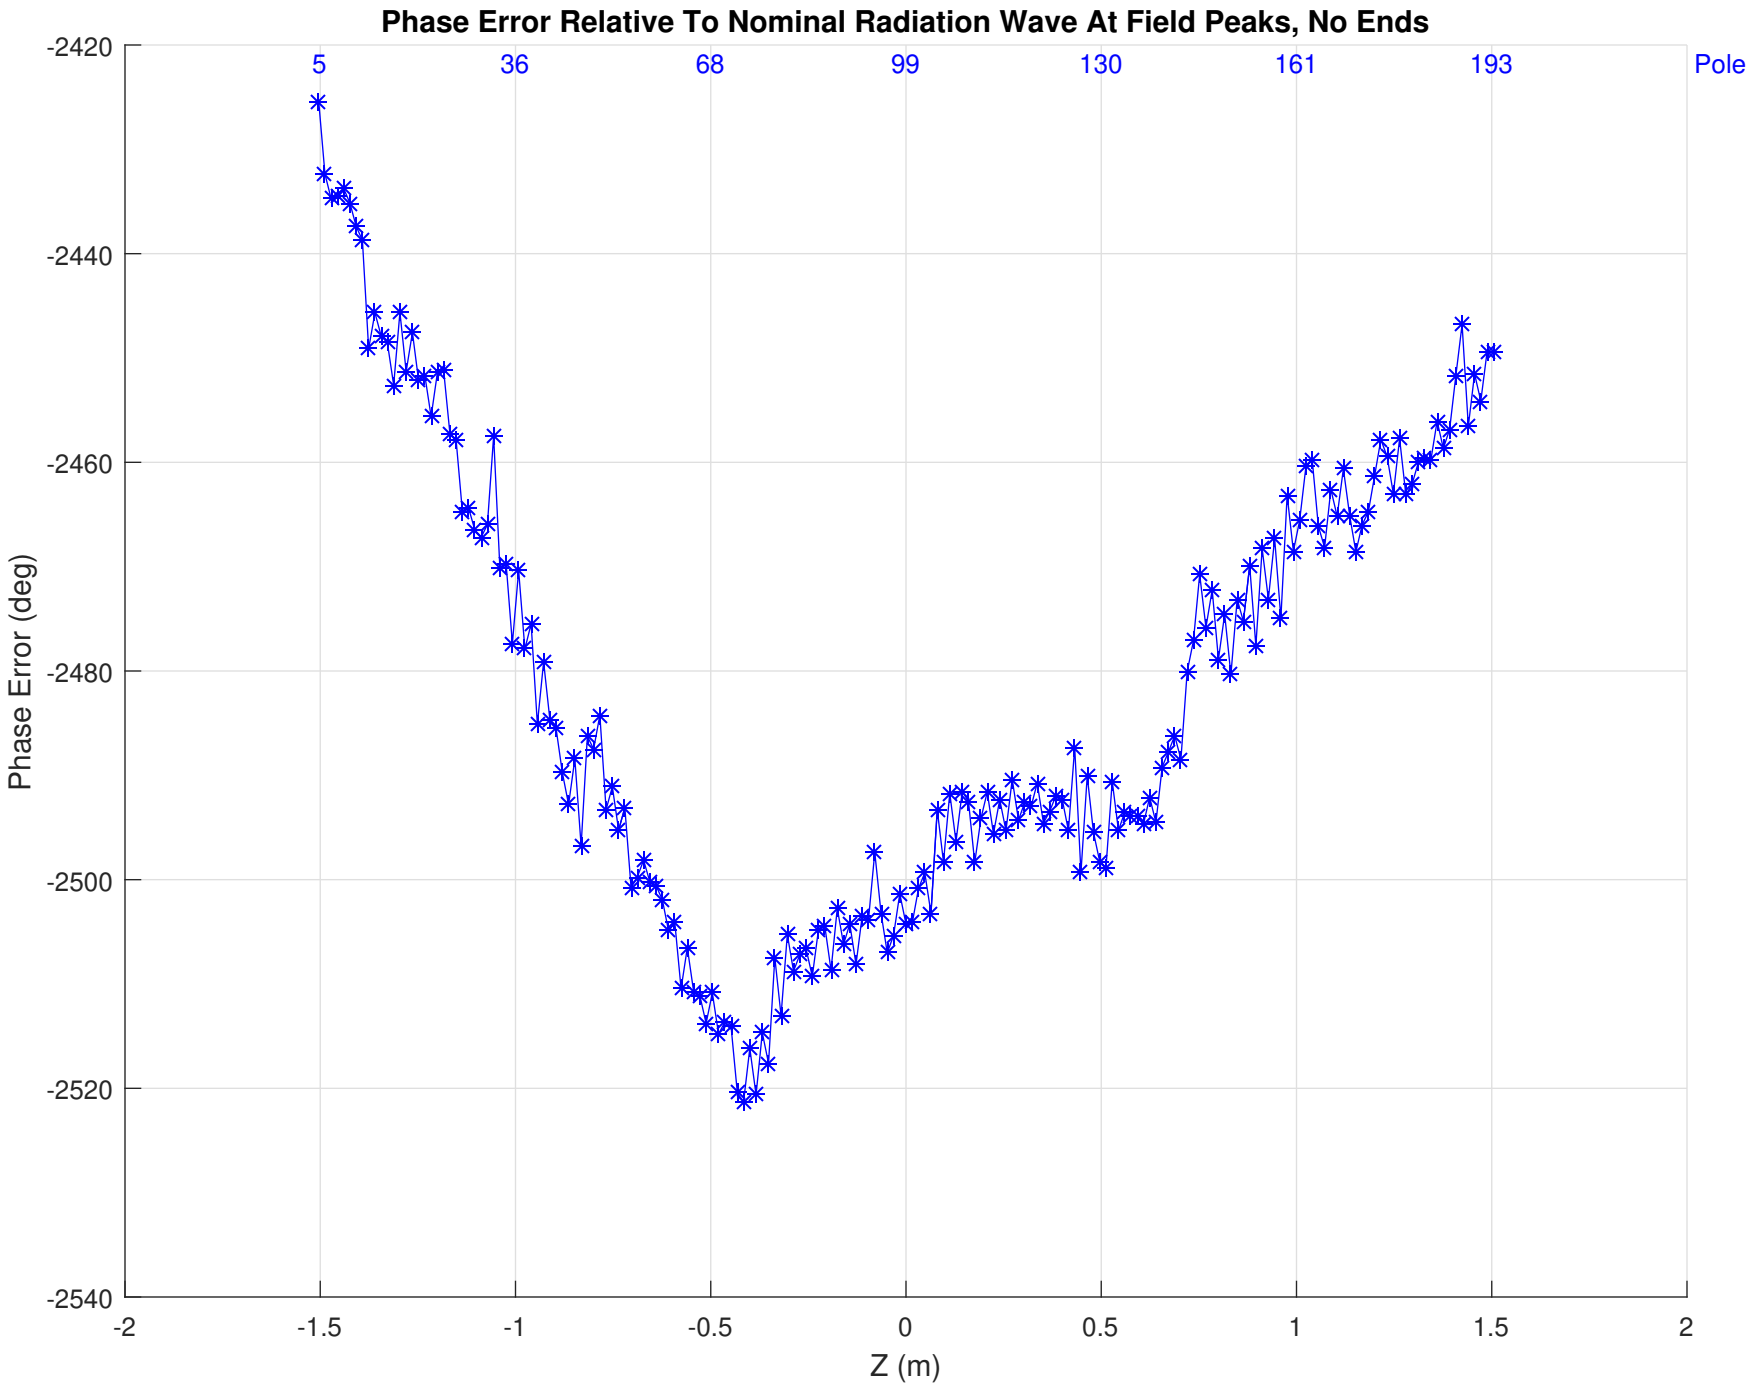
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
5
36
68
99
130
161
193
Pole
-2420
-2440
-2460
-2480
-2500
-2520
-2540
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z (m)

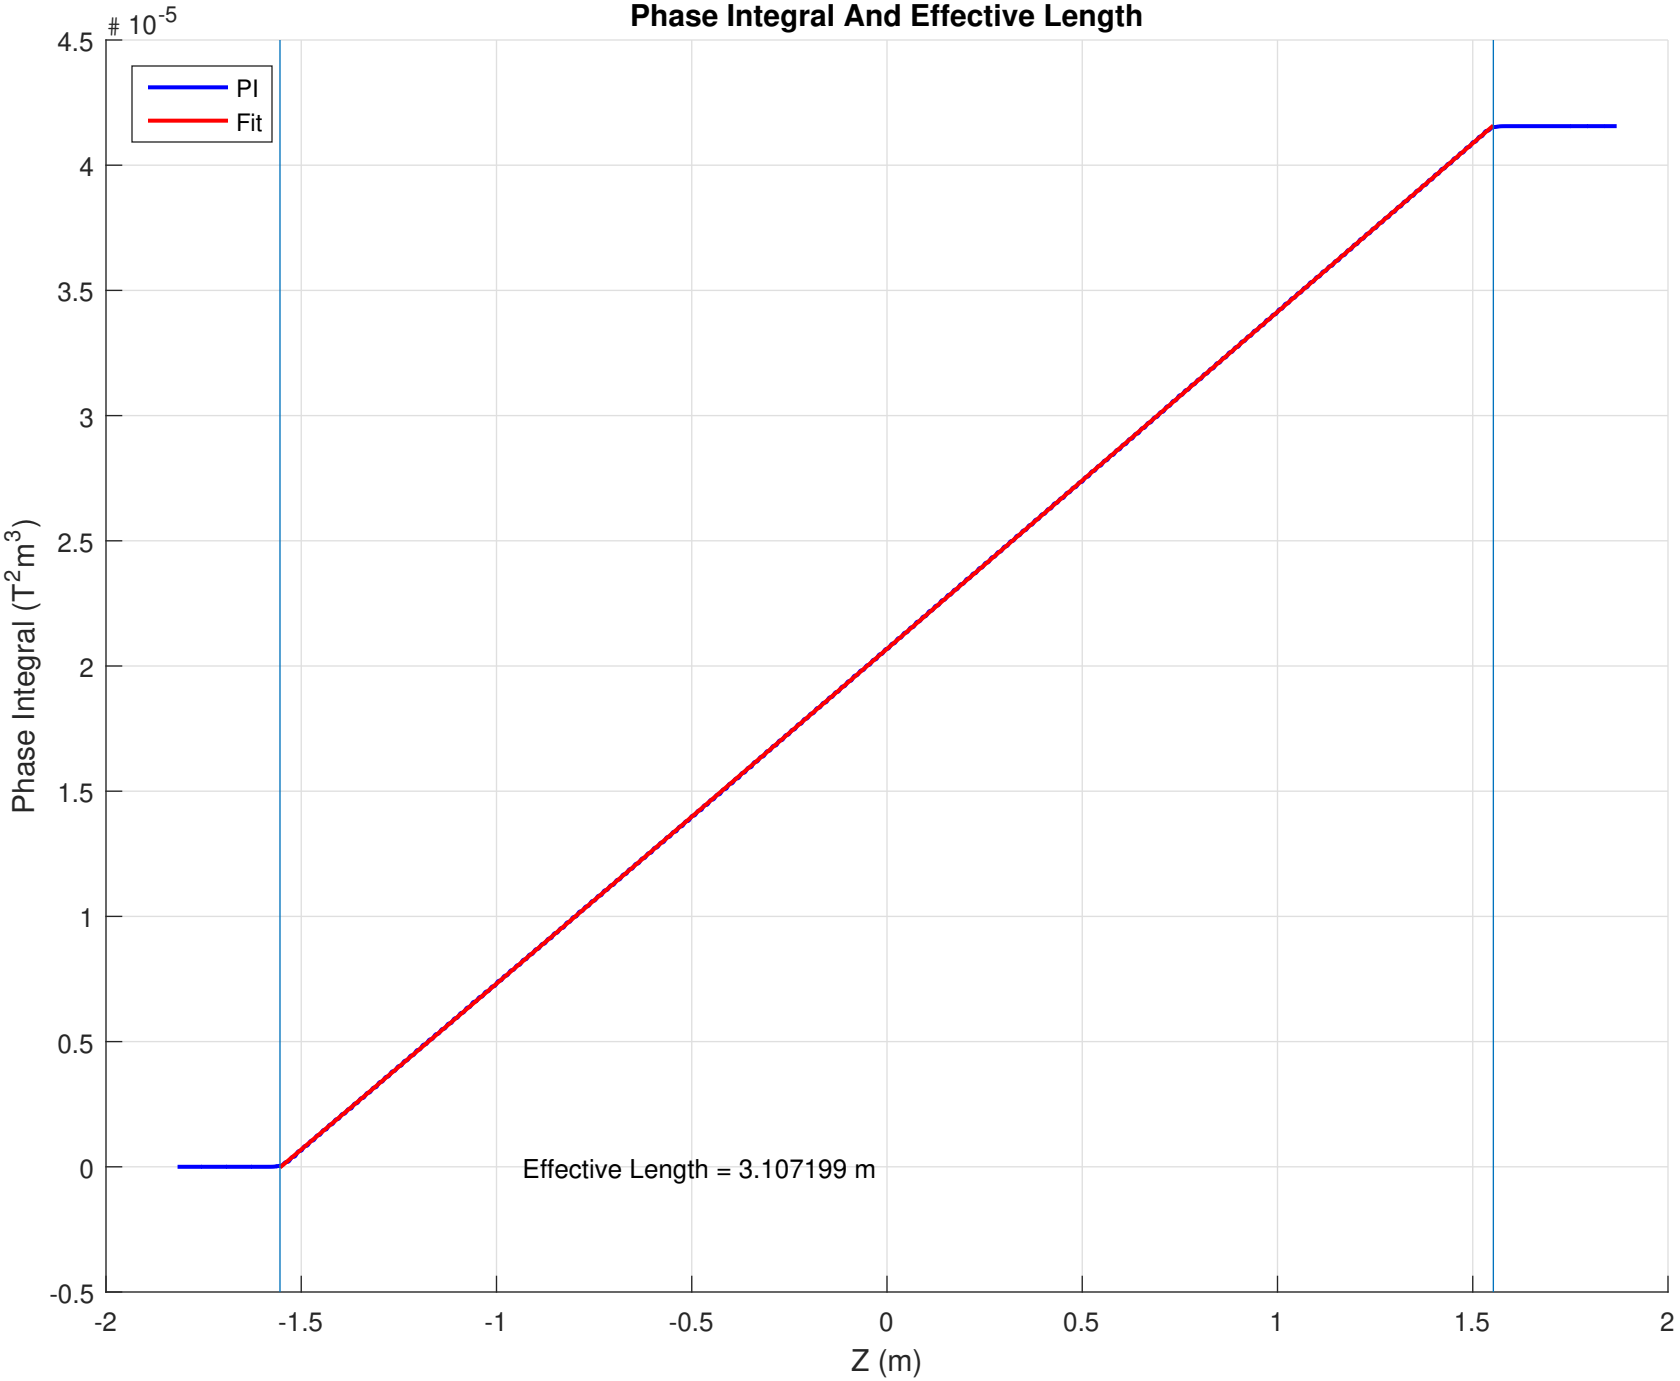
Phase Integral And Effective Length
10^-5
PI
Fit
Effective Length = 3.107199 m
Phase Integral (T^2m^3)
Z (m)
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
-0.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

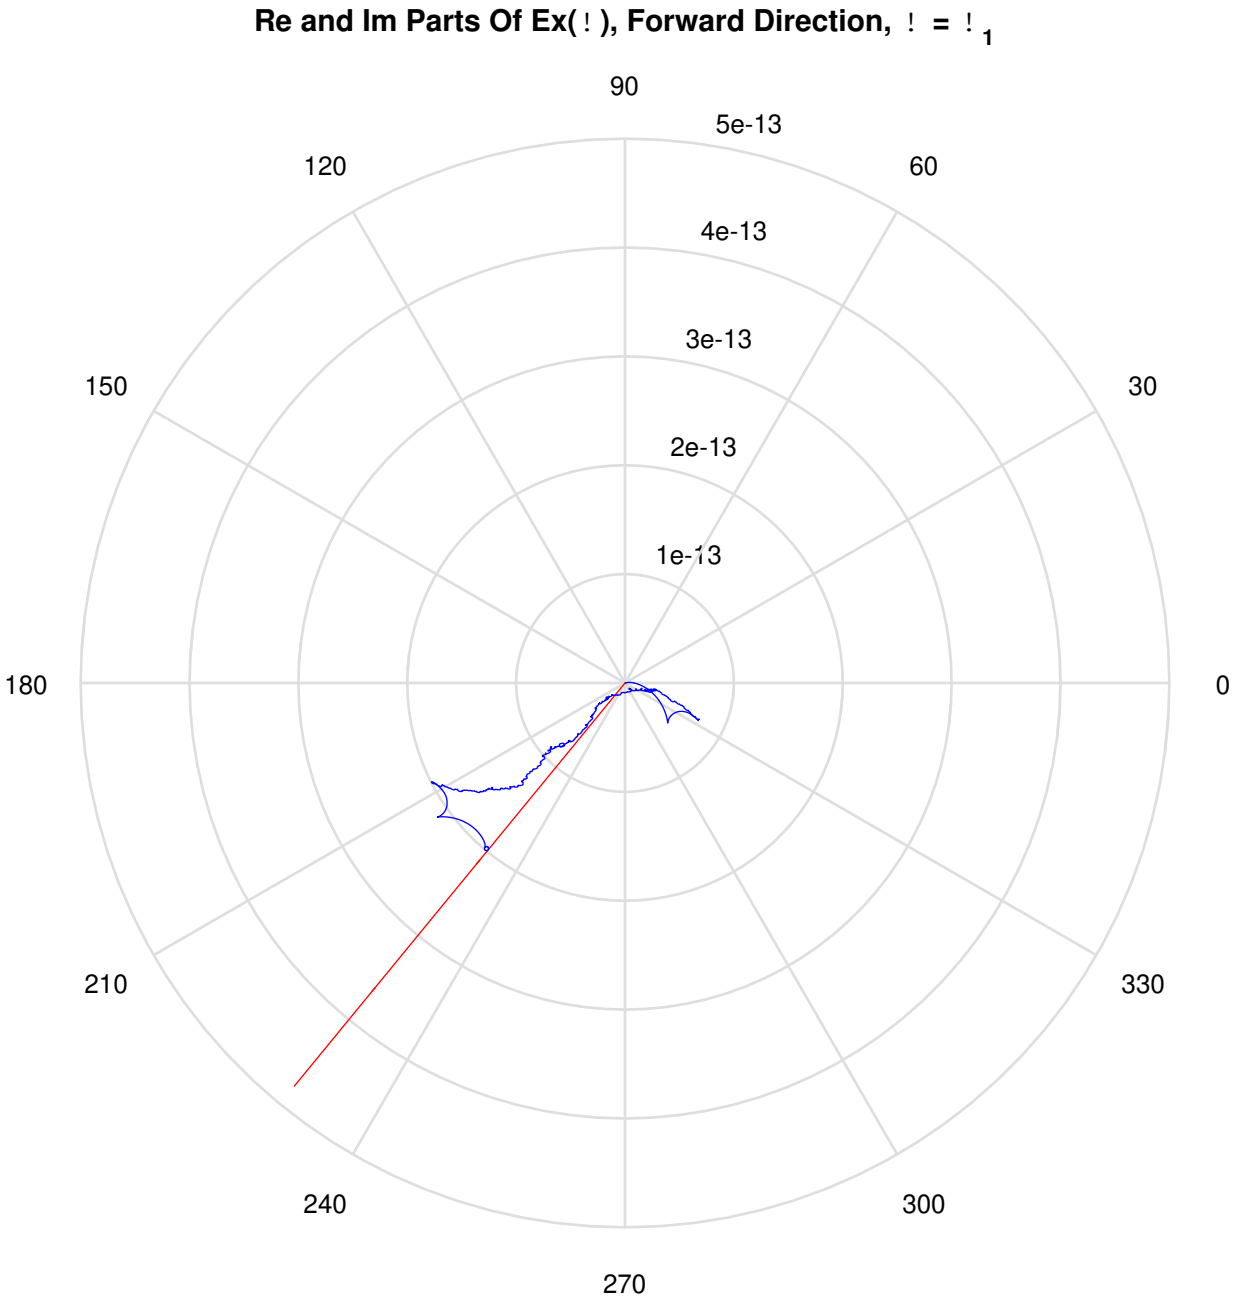
Re and Im Parts Of Ex(!), Forward Direction, ! = !1
90
5e-13
120
60
4e-13
3e-13
150
30
2e-13
1e-13
180
0
210
330
240
300
270

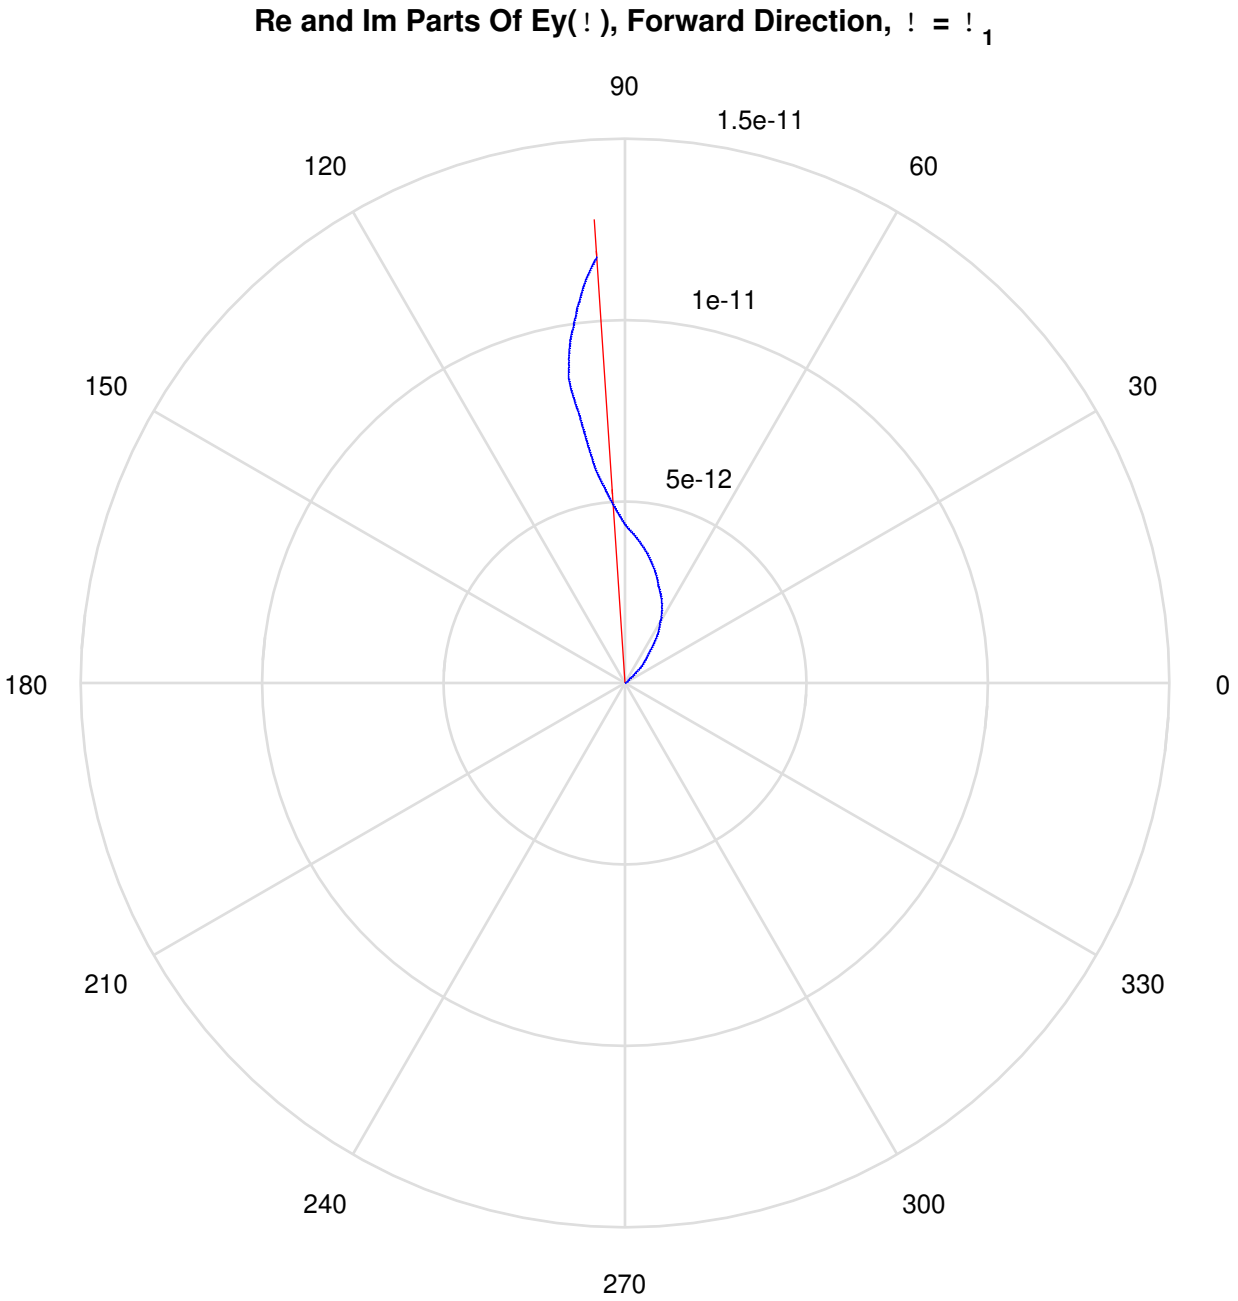
Re and Im Parts Of Ey(!), Forward Direction, ! = !1
90
1.5e-11
120
60
1e-11
150
30
5e-12
180
0
210
330
240
300
270

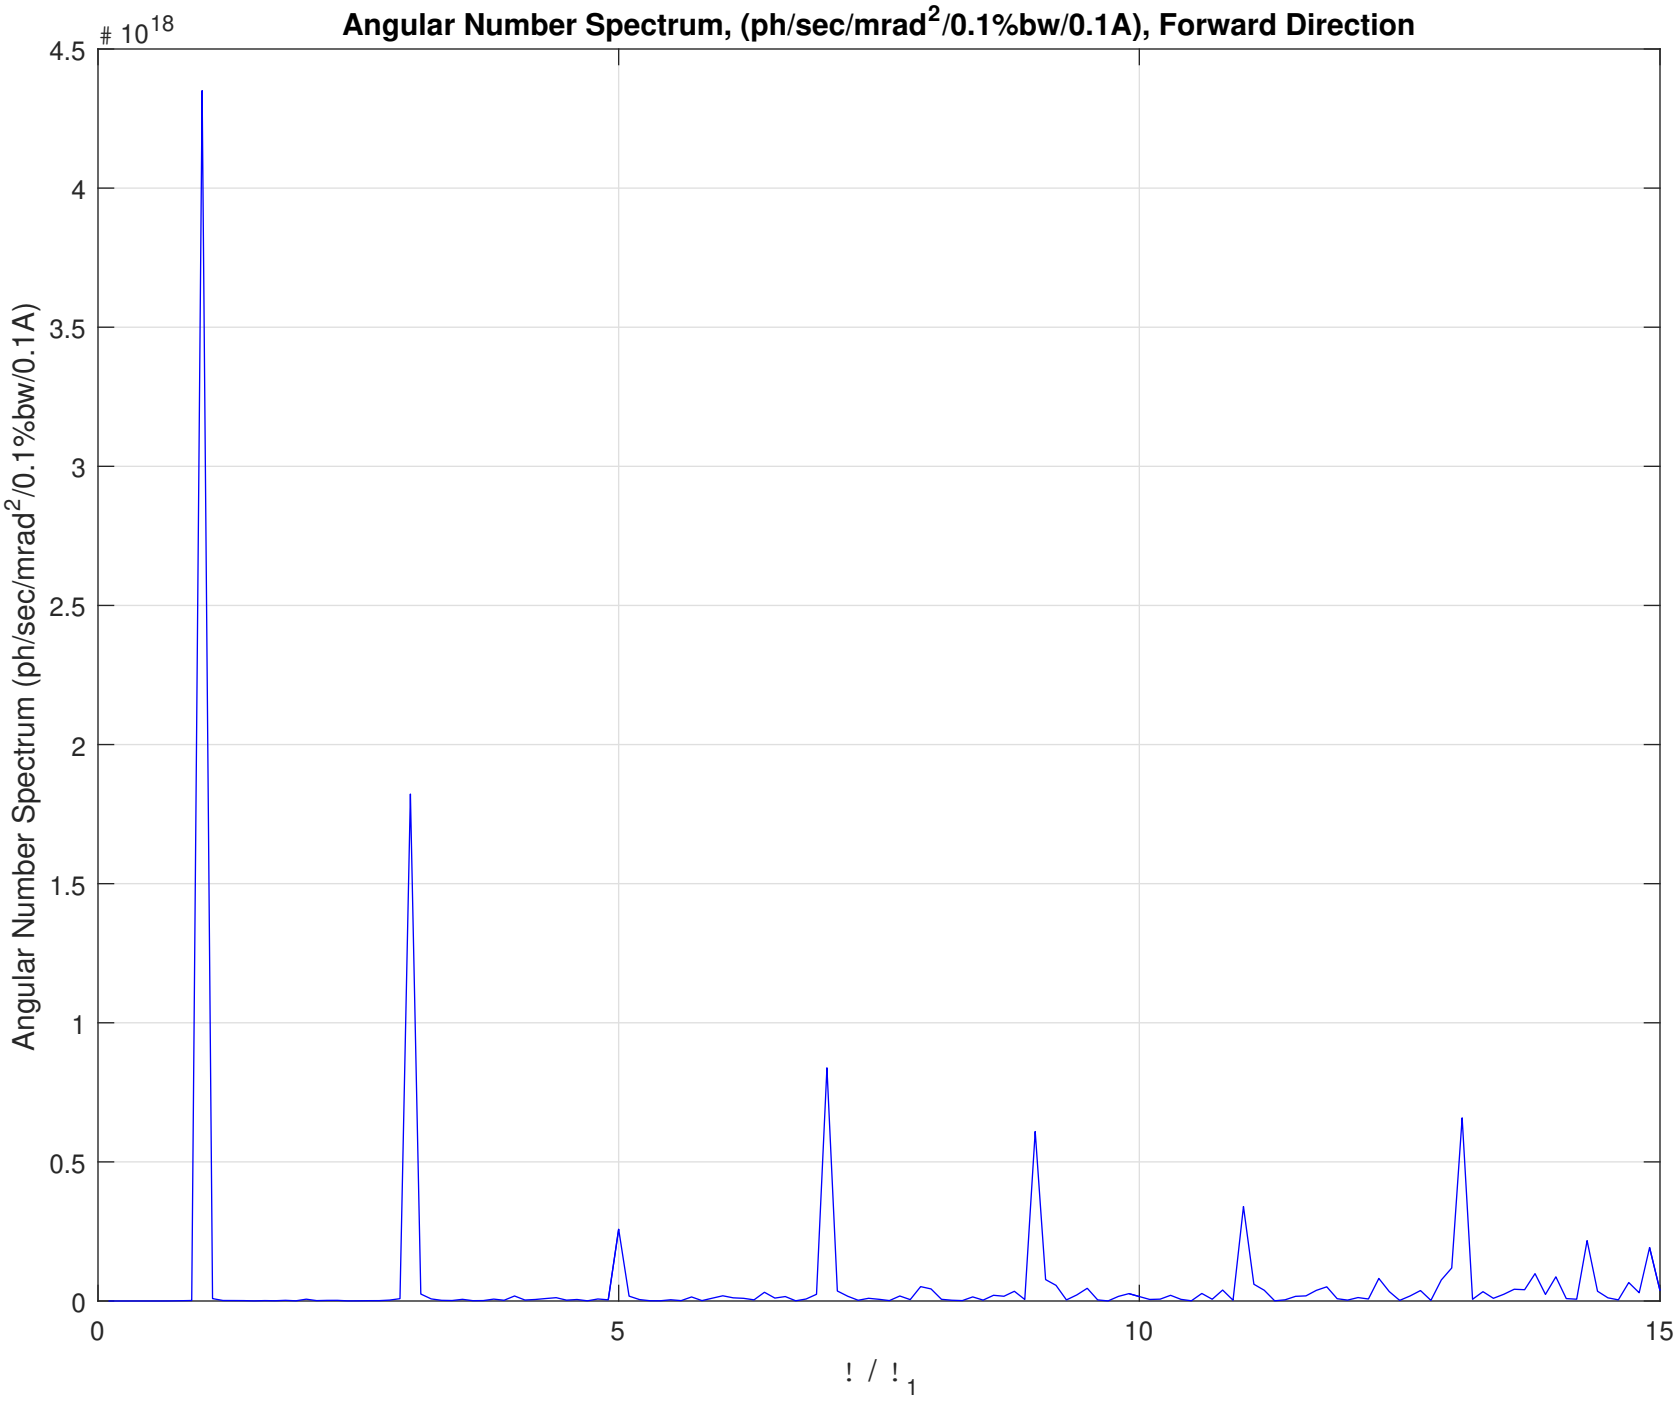
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
0
5
10
15
! / !$_1$

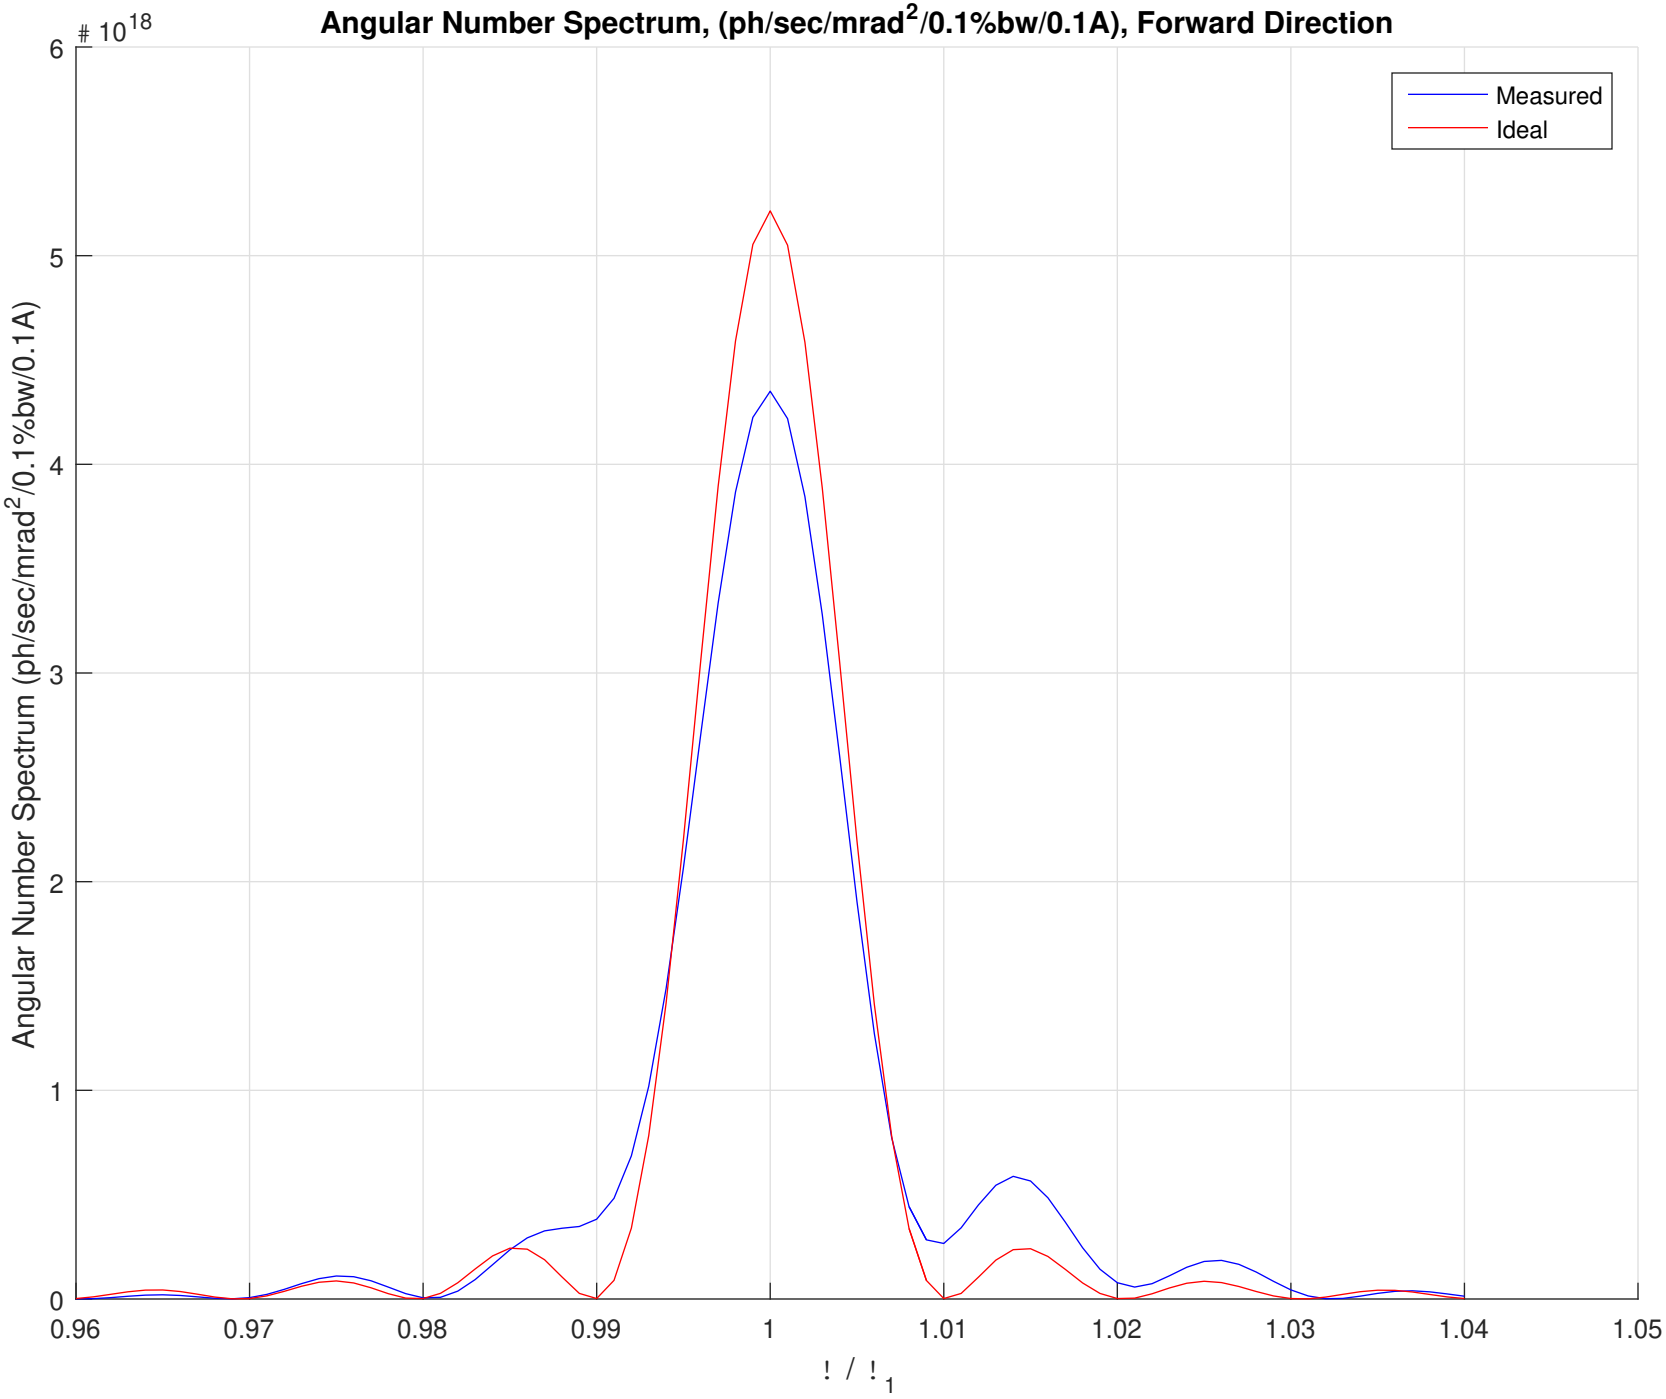
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
0
1
2
3
4
5
6
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05
! / !$_1$

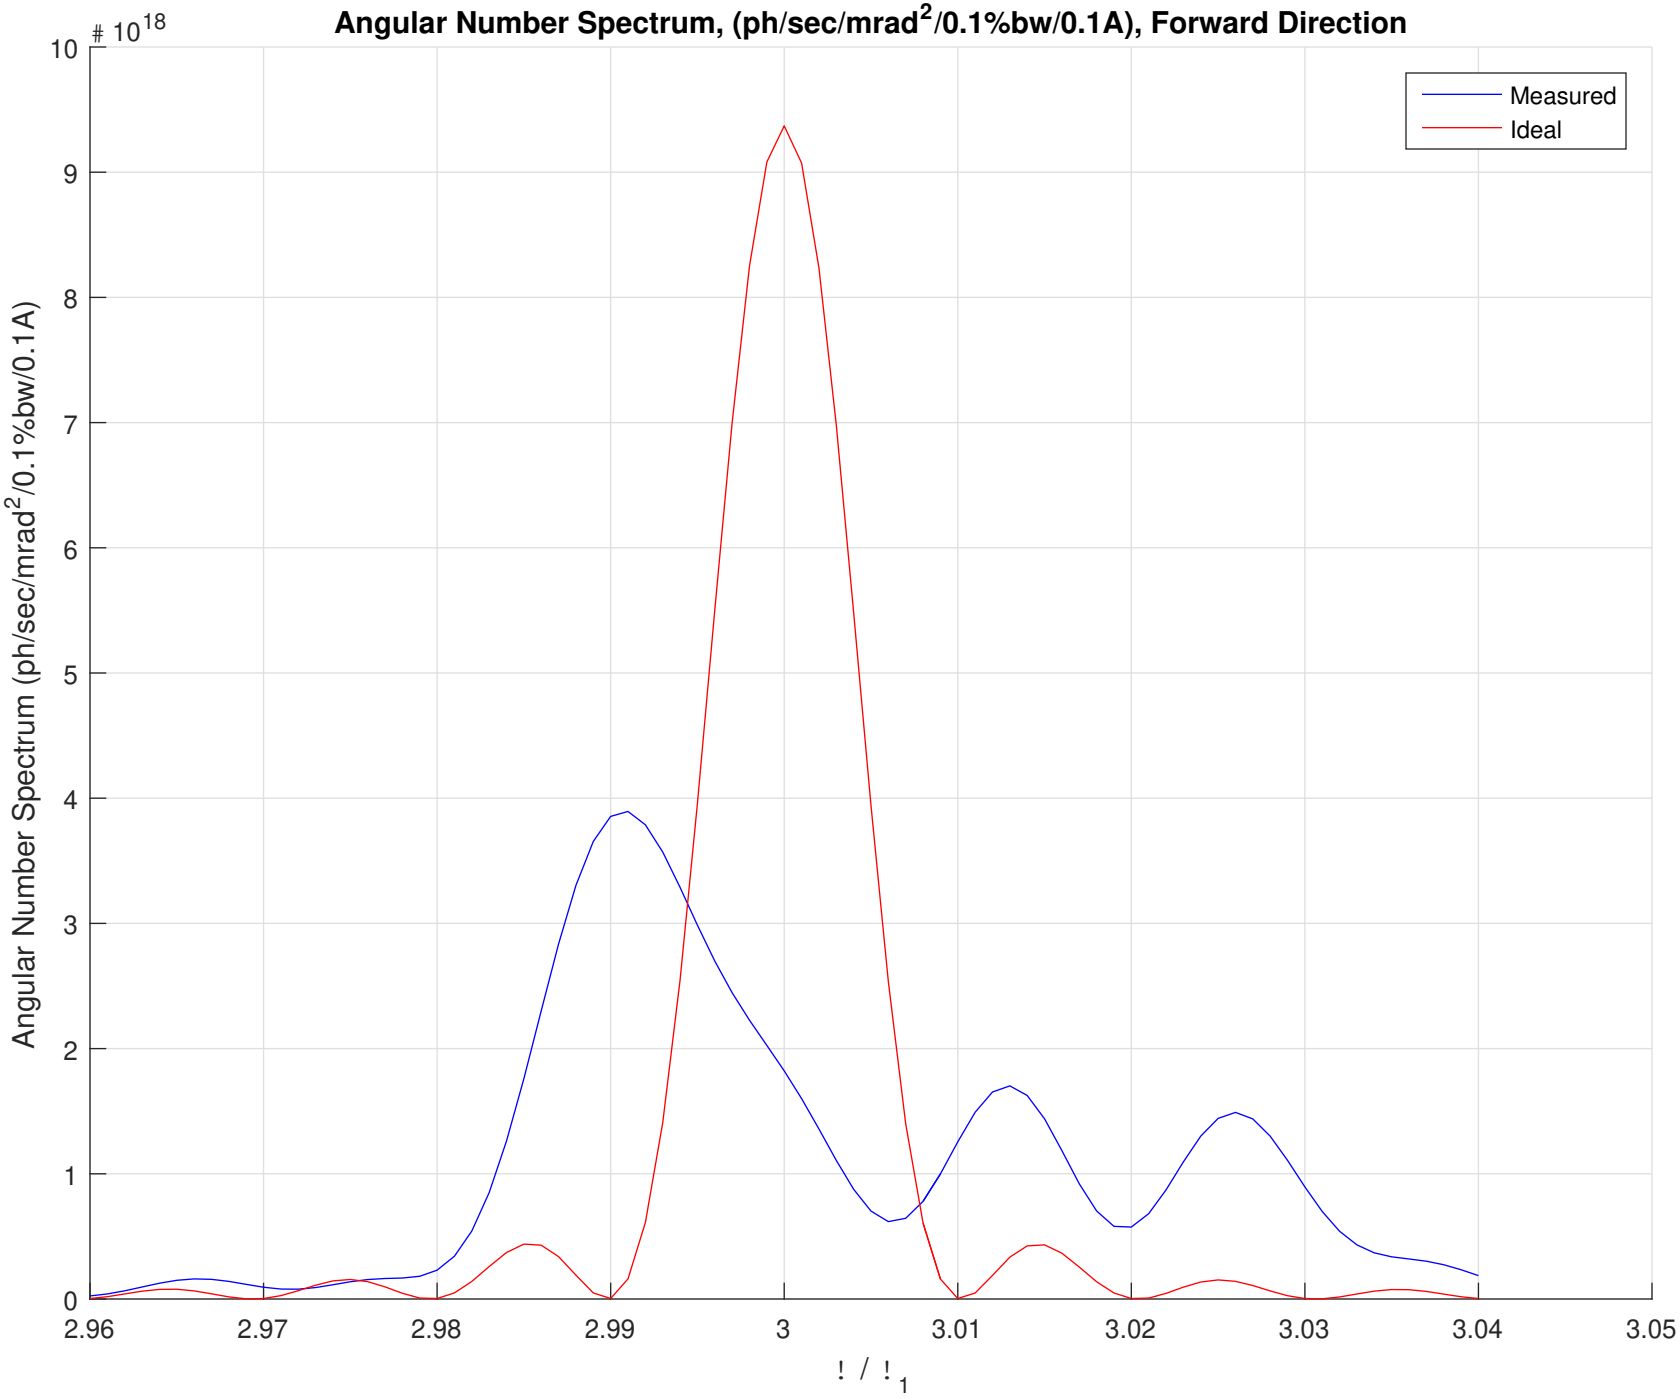
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
10
9
8
7
6
5
4
3
2
1
0
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05
! / !$_1$

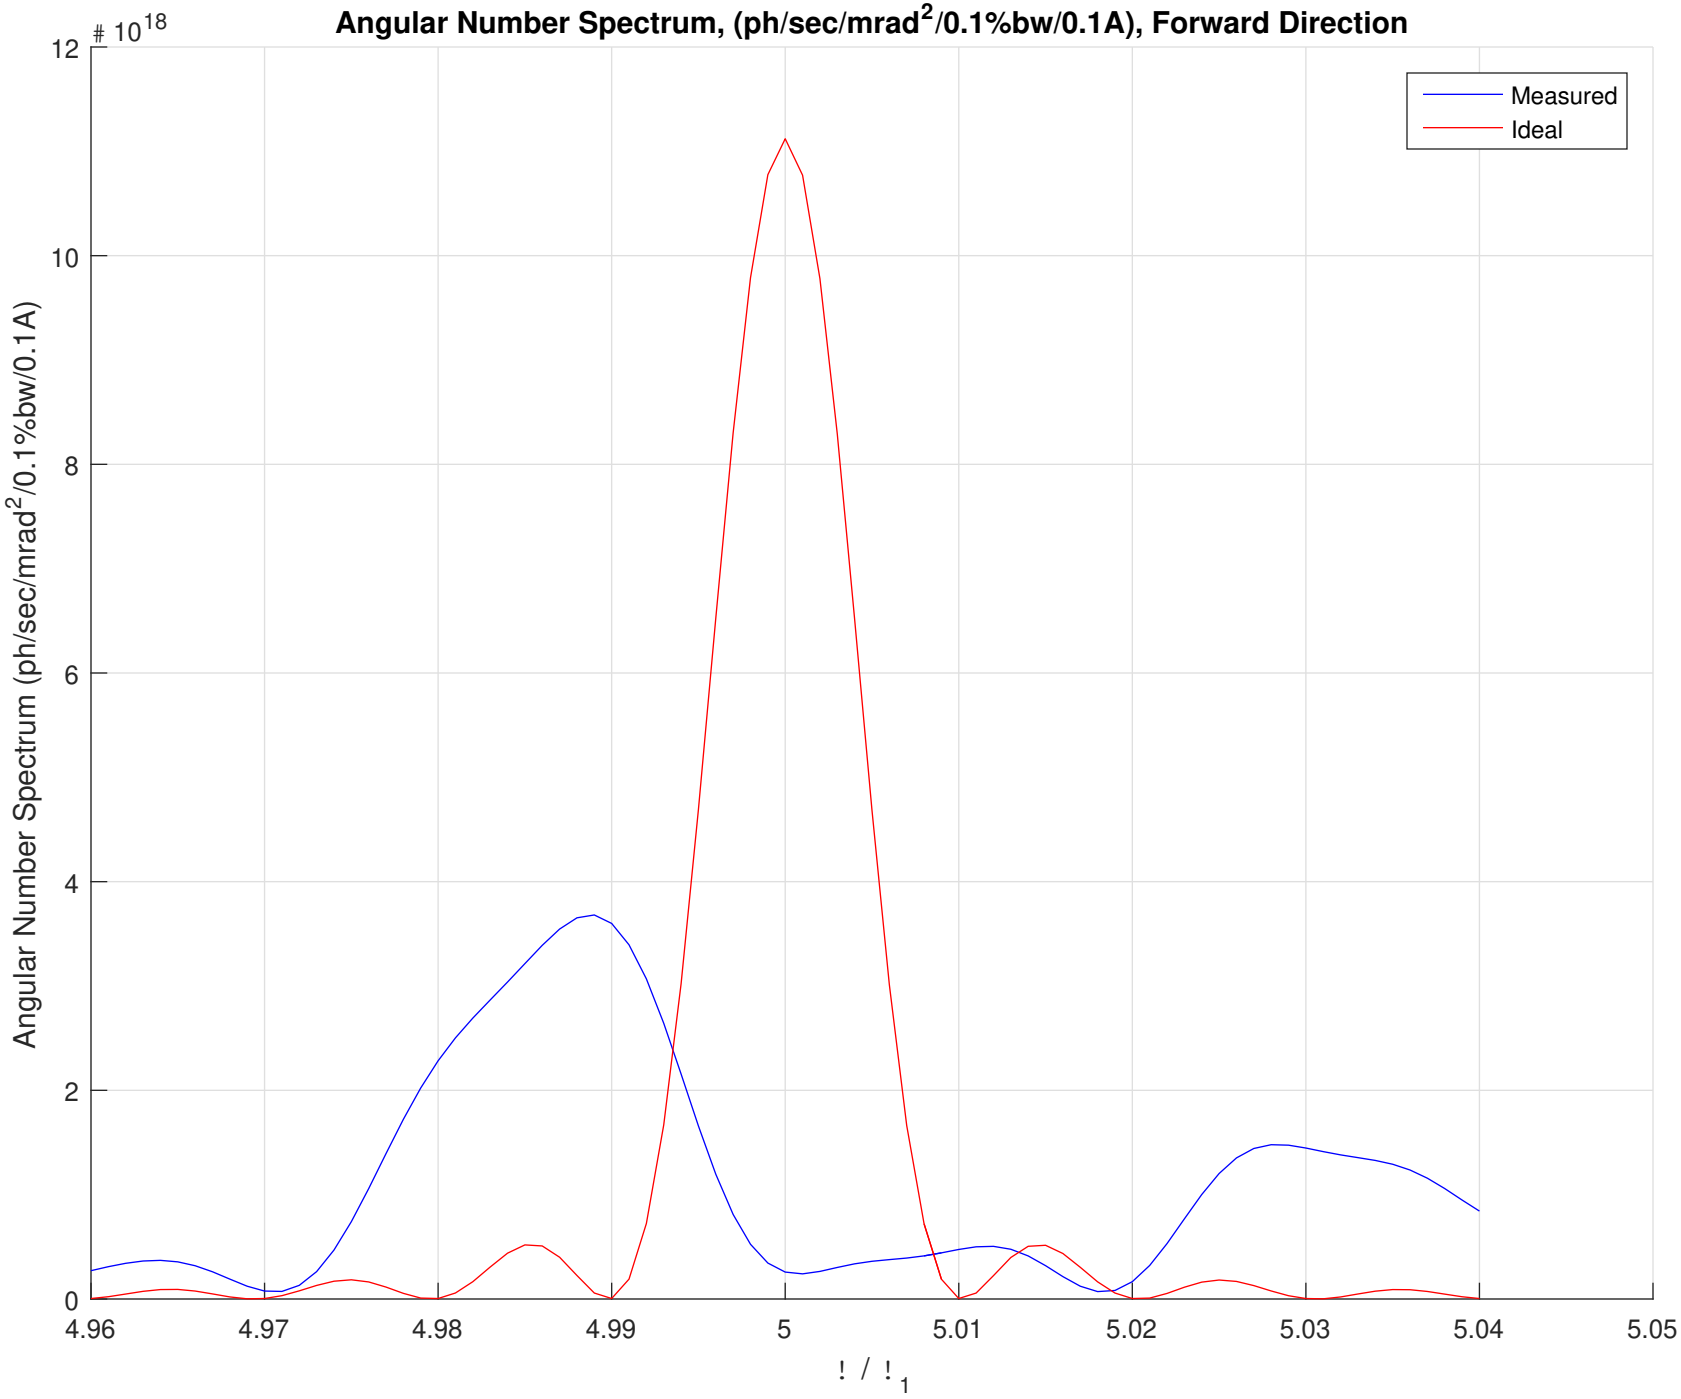
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
12
10
8
6
4
2
0
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05
! / !$_1$