SLAC Magnetic Measurements

EPU Analysis
––––––––––––

Parameters:
INPUT–FILE–DIR =V:\MET\MagServe\MagData\DELTA\Superpose Quadrants Q1 300microns\LPVMF\KR070
INPUT–FILE–NAME =superpose–quadrants.dat
INPUT–FILE–TYPE =ZBXYZH
CORR–REQUIRED =0
GAMMA =26671.59
NOM–LAMBDA–U =0
NOM–K–VALUE =0
NOM–LAMBDA–R =0
NUM–POLES =196
NUM–END–POLES =4
CELL–LENGTH =3.656

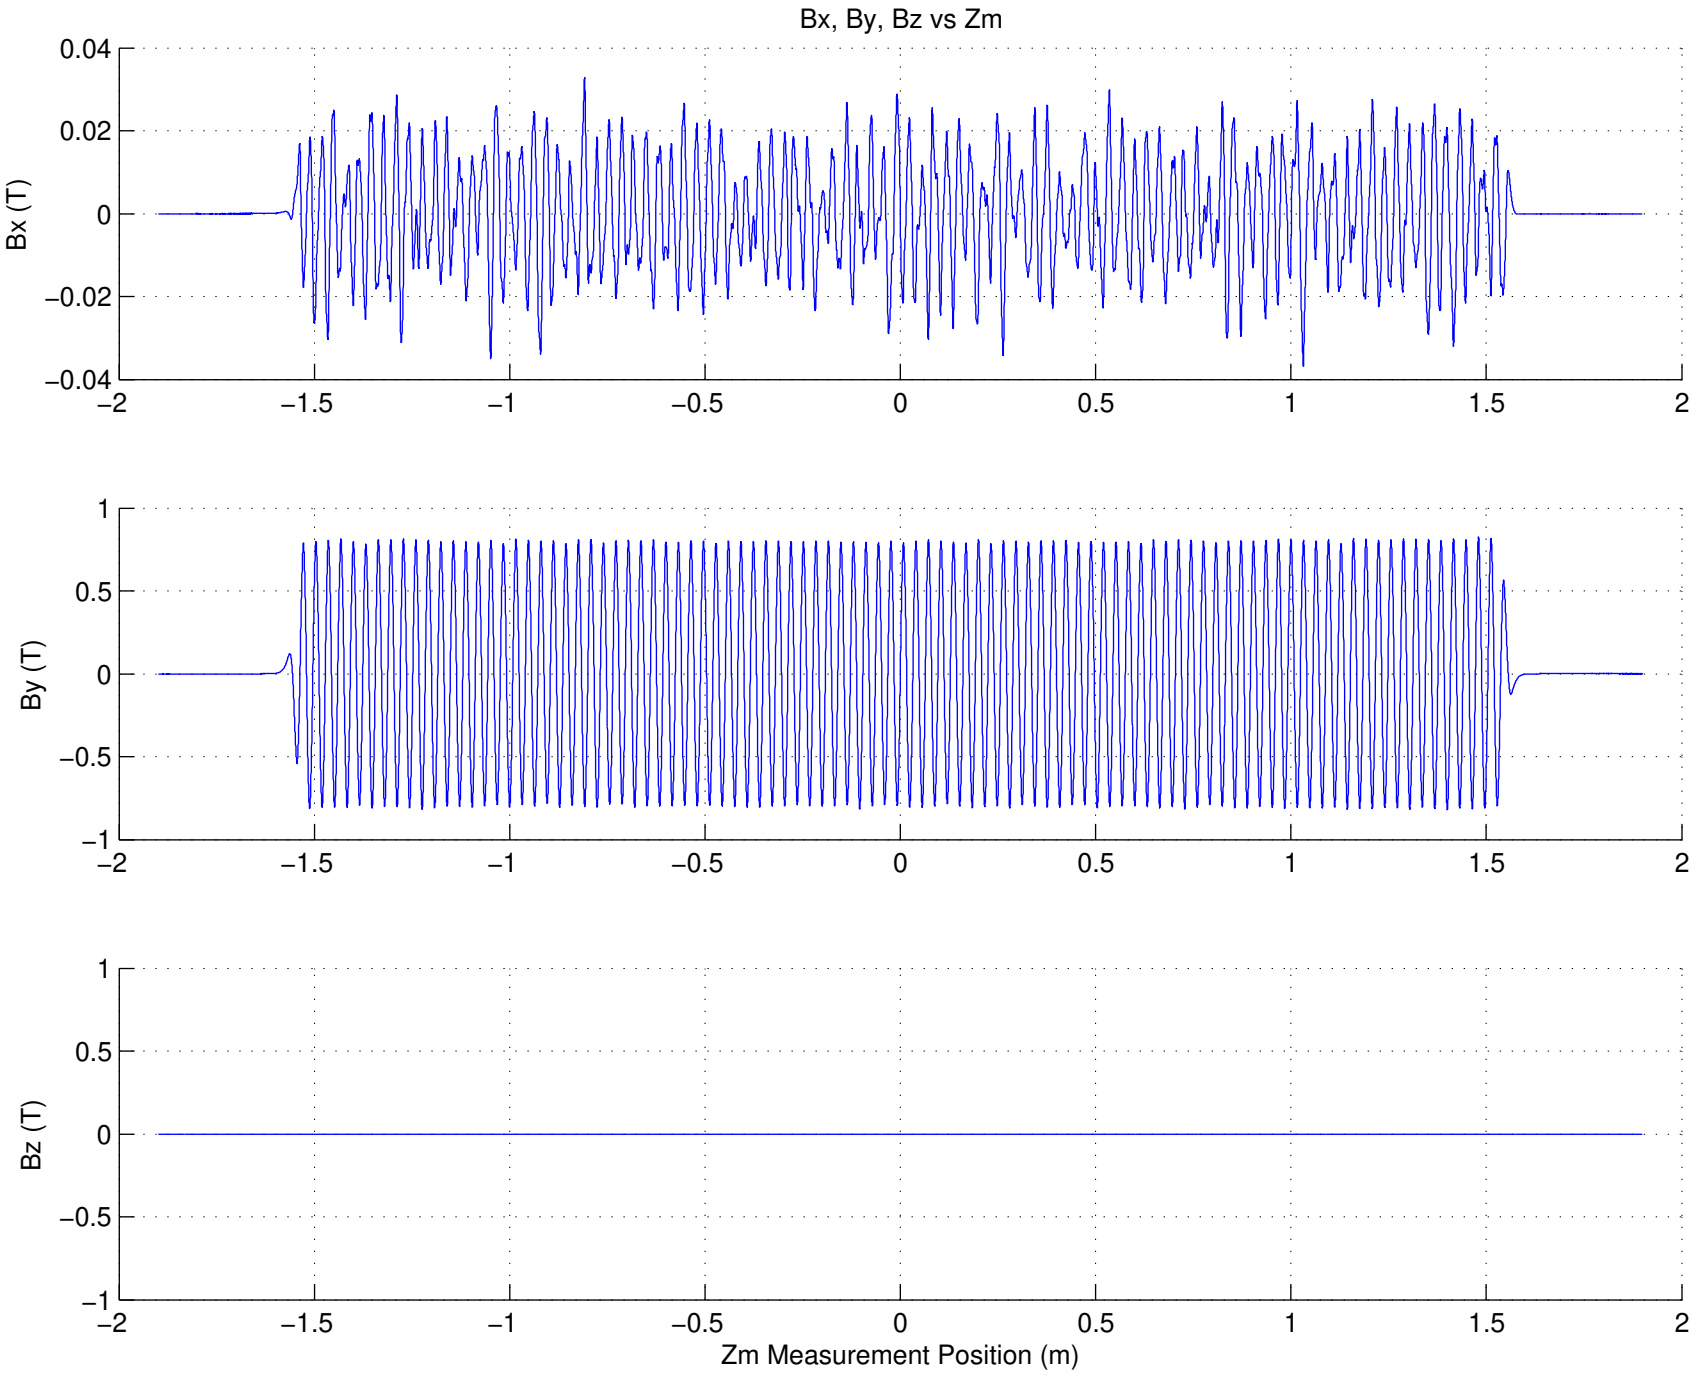
Bx, By, Bz vs Zm
Bx (T)
0.04
0.02
0
−0.02
−0.04
By (T)
1
0.5
0
−0.5
−1
Bz (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Zm Measurement Position (m)

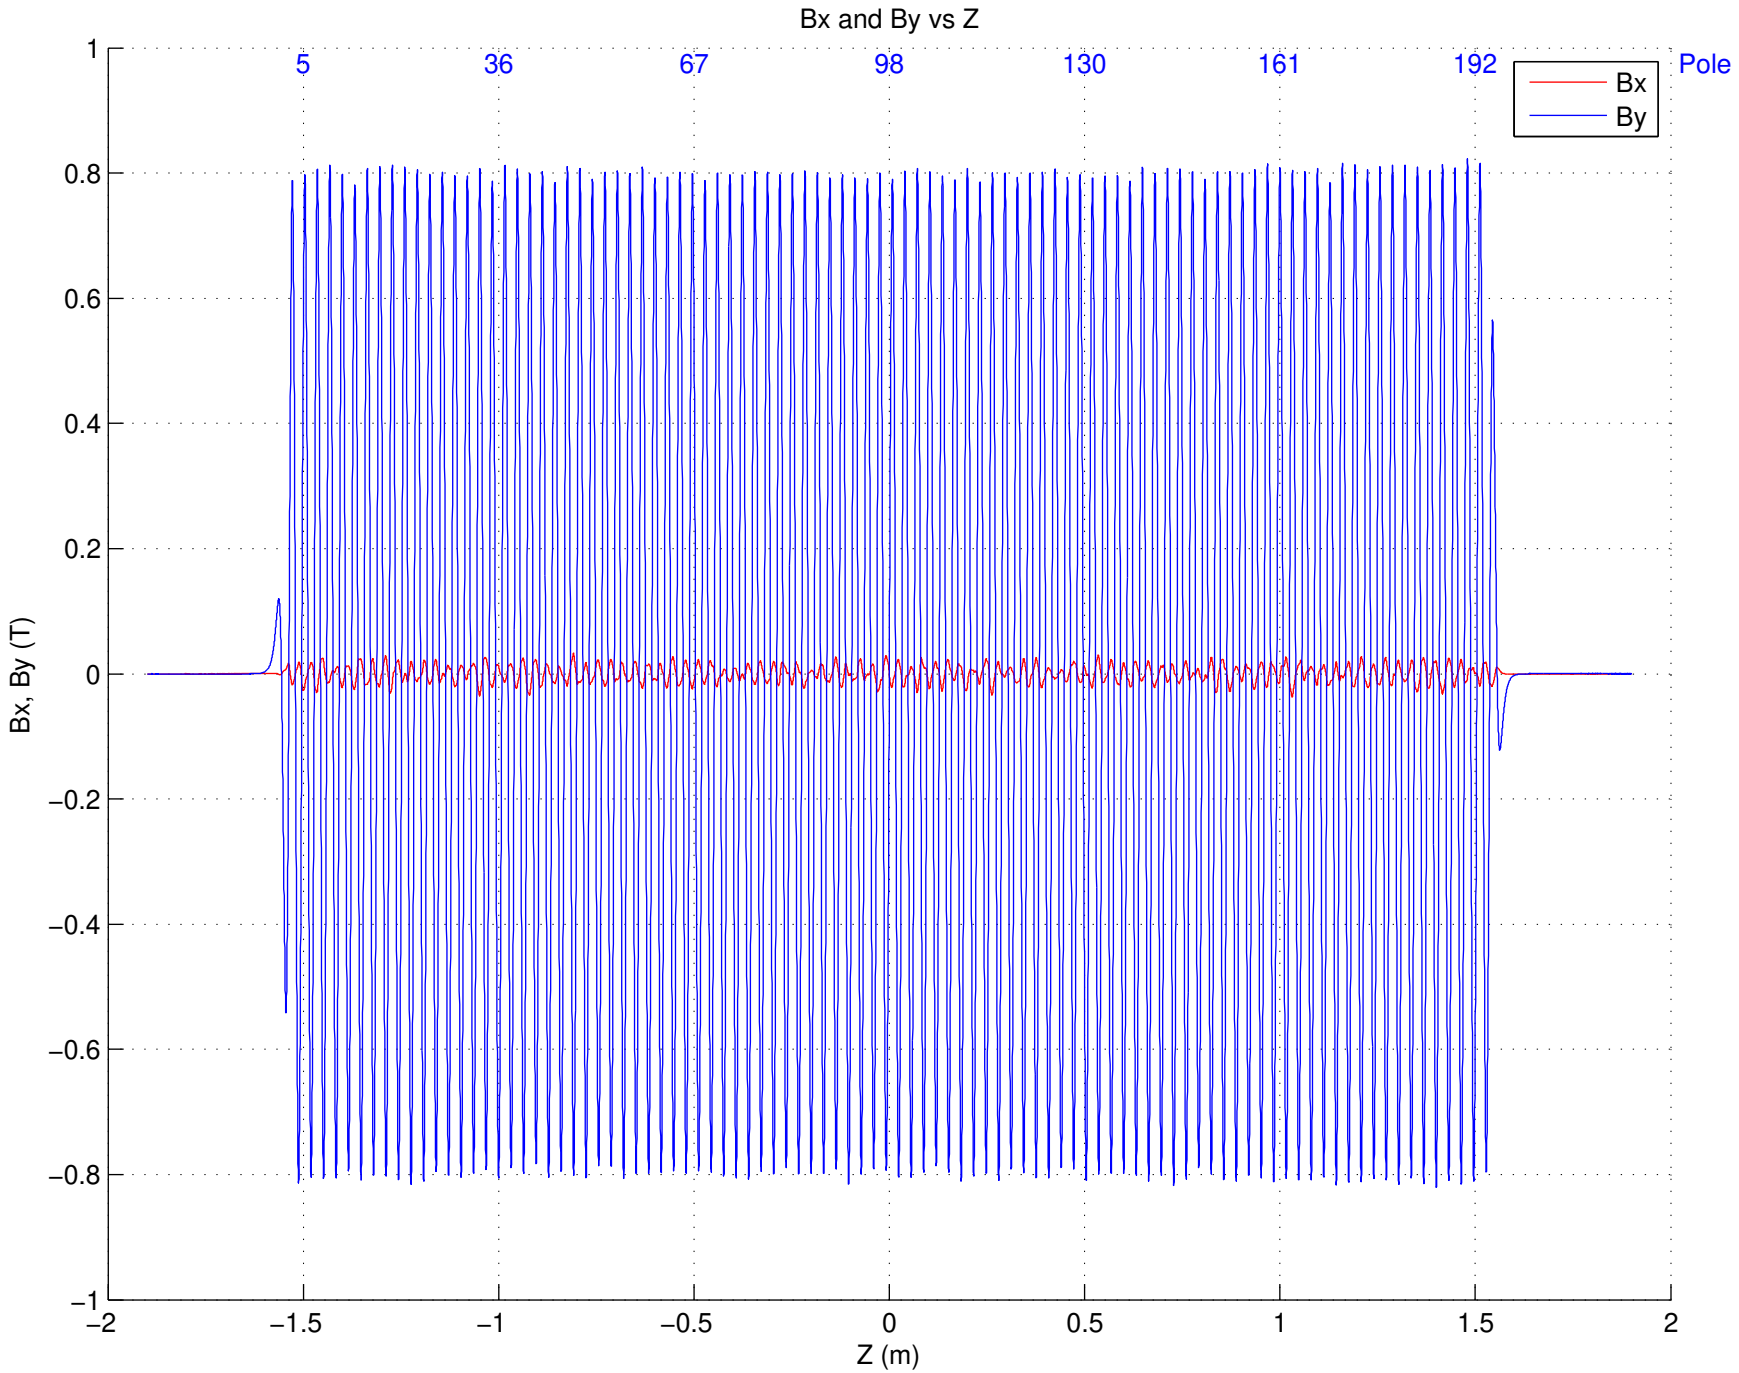
Bx and By vs Z
5
36
67
98
130
161
192
Pole
Bx
By
1
0.8
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
−1
Bx, By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

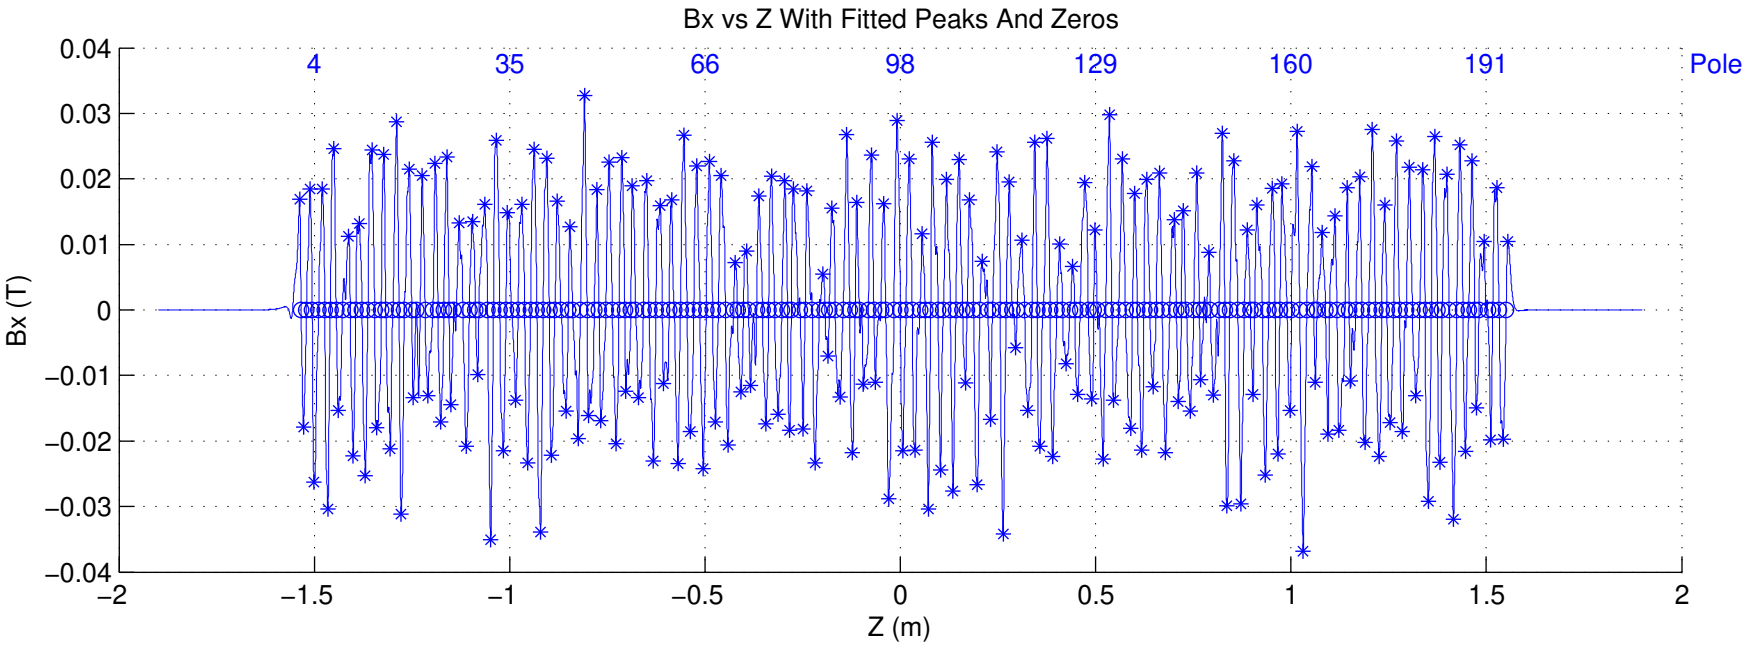
Bx vs Z With Fitted Peaks And Zeros
4
35
66
98
129
160
191
Pole
0.04
0.03
0.02
0.01
0
−0.01
−0.02
−0.03
−0.04
Bx (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

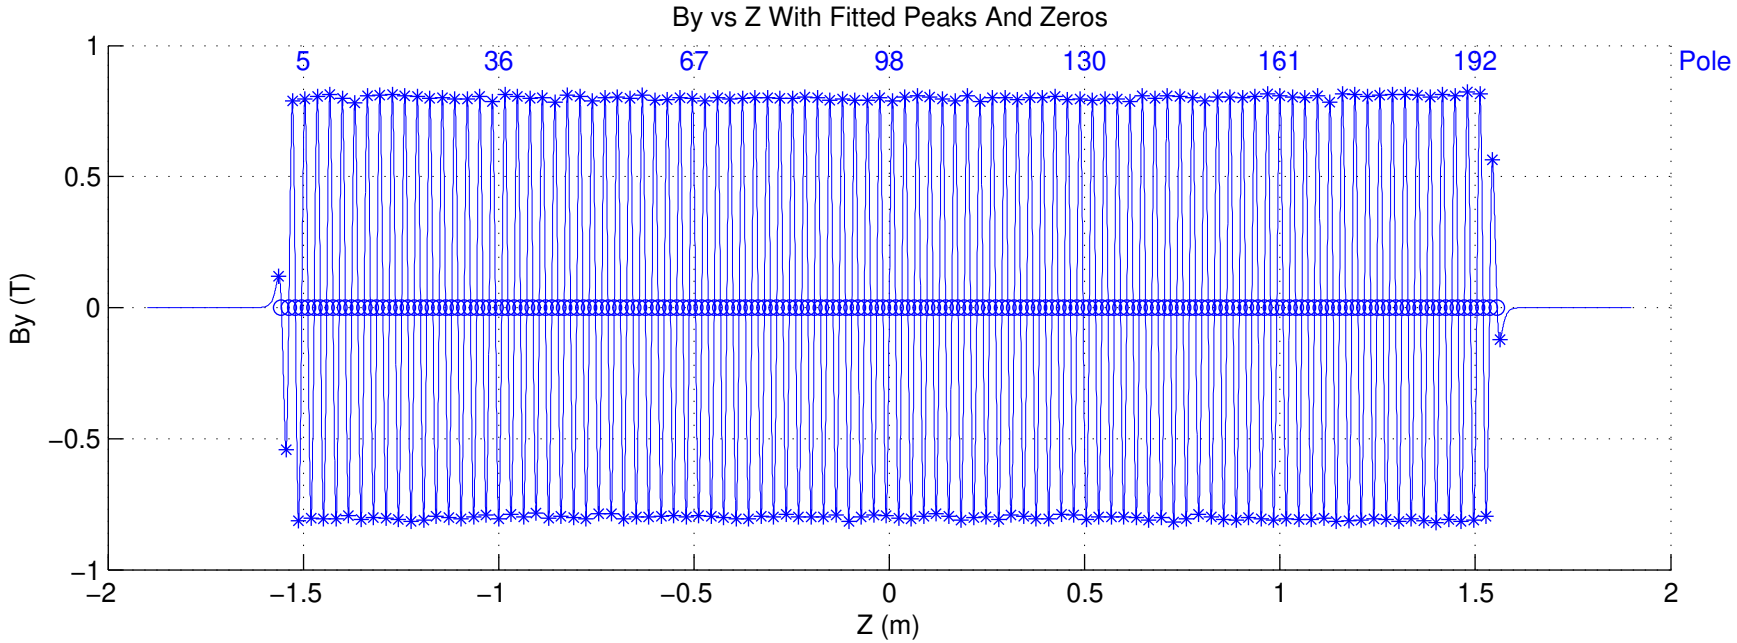
By vs Z With Fitted Peaks And Zeros
5
36
67
98
130
161
192
Pole
1
0.5
0
−0.5
−1
By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

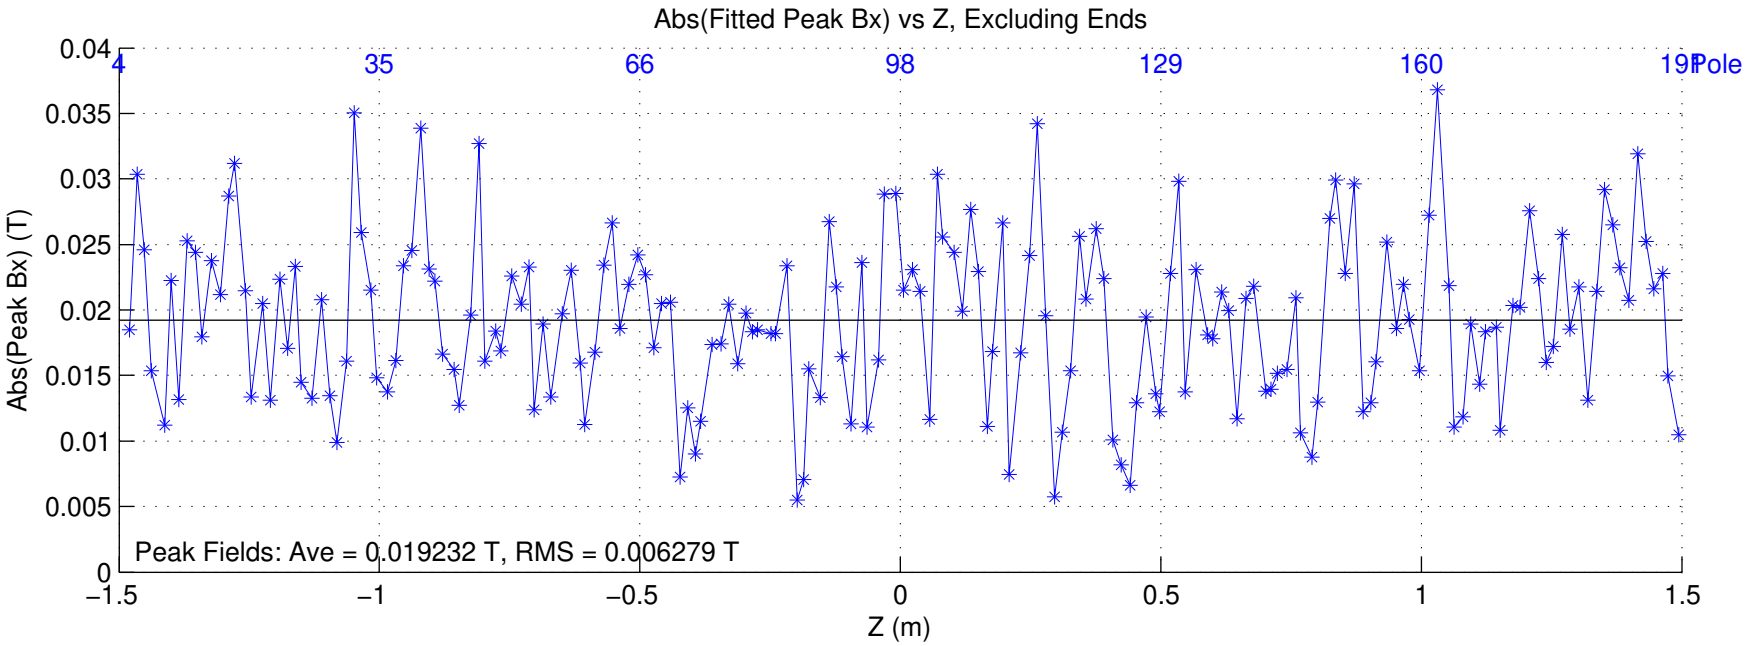
Abs(Fitted Peak Bx) vs Z, Excluding Ends
4
35
66
98
129
160
191
Pole
0.04
0.035
0.03
0.025
0.02
0.015
0.01
0.005
0
Abs(Peak Bx) (T)
Peak Fields: Ave = 0.019232 T, RMS = 0.006279 T
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

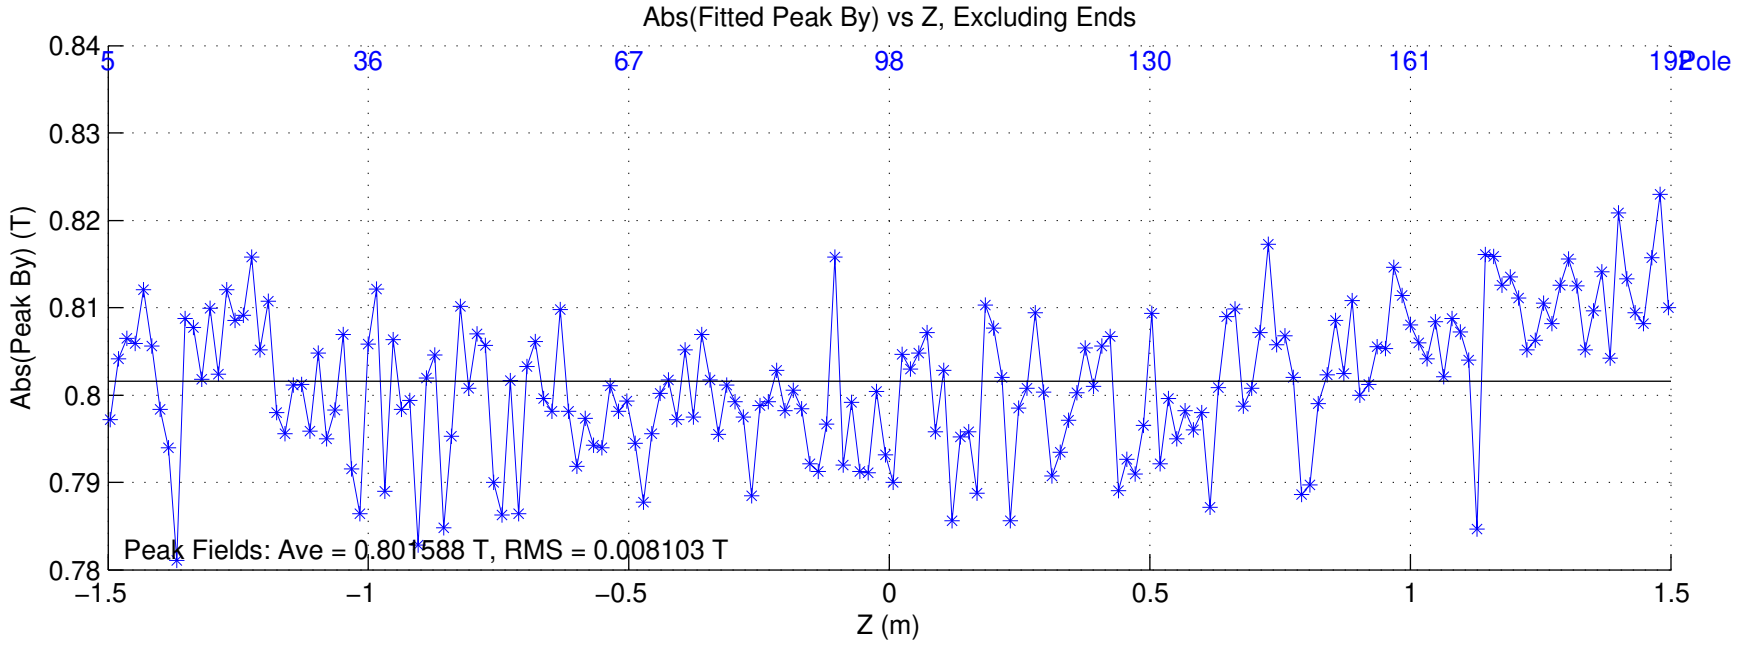
Abs(Fitted Peak By) vs Z, Excluding Ends
5
36
67
98
130
161
192
Pole
0.84
0.83
0.82
0.81
0.8
0.79
0.78
Abs(Peak By) (T)
Peak Fields: Ave = 0.801588 T, RMS = 0.008103 T
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

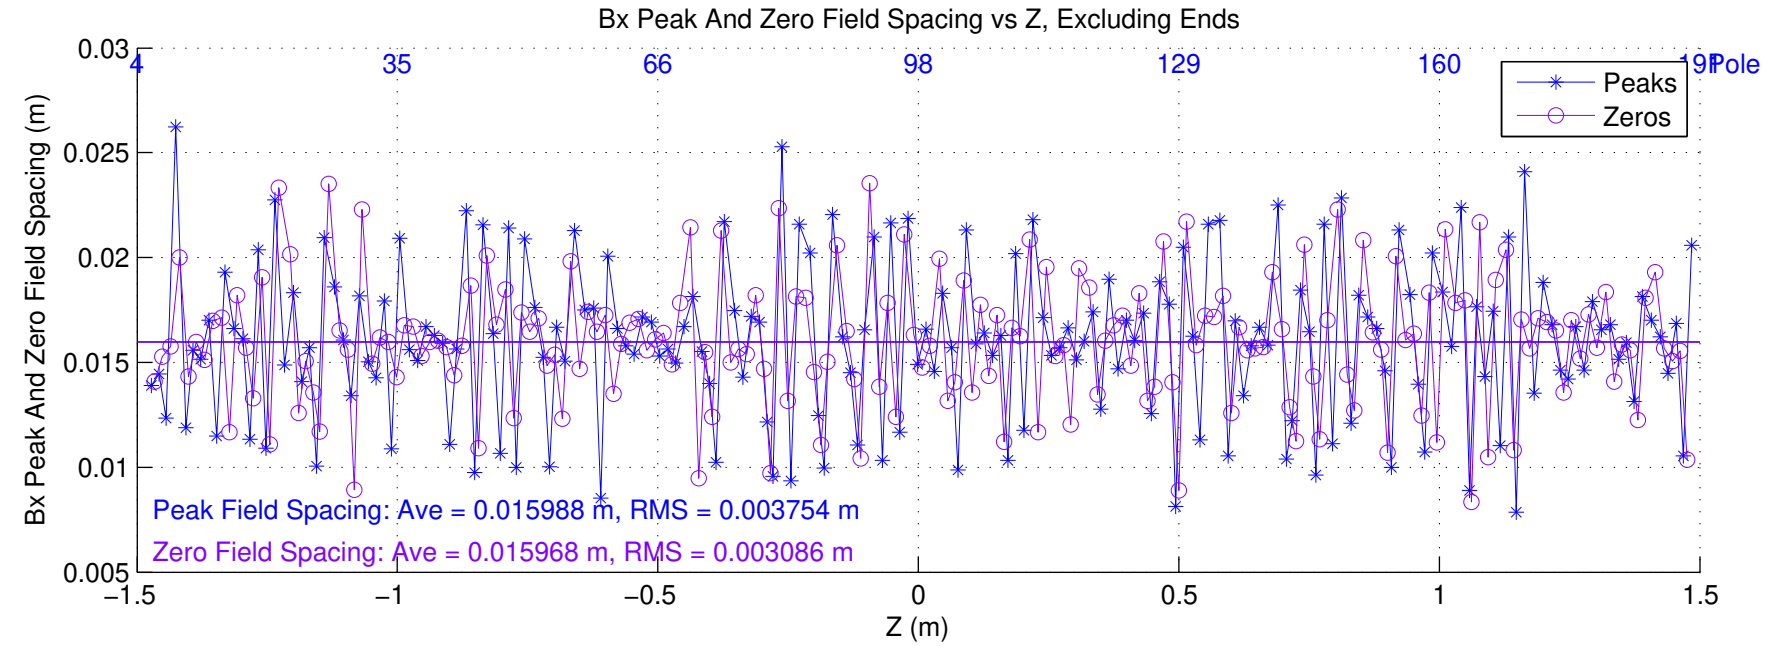
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.015988 m, RMS = 0.003754 m
Zero Field Spacing: Ave = 0.015968 m, RMS = 0.003086 m

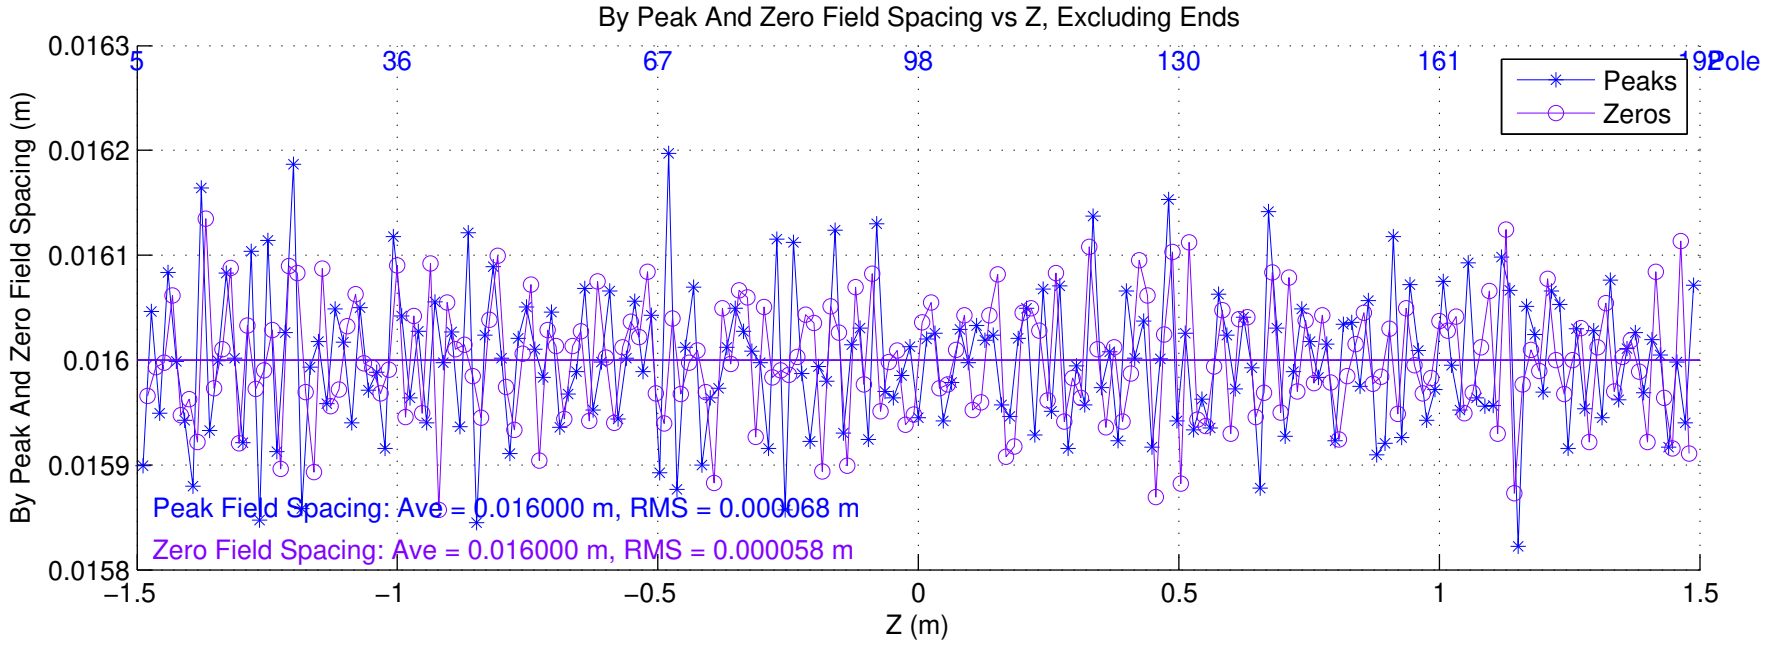
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016000 m, RMS = 0.000068 m
Zero Field Spacing: Ave = 0.016000 m, RMS = 0.000058 m

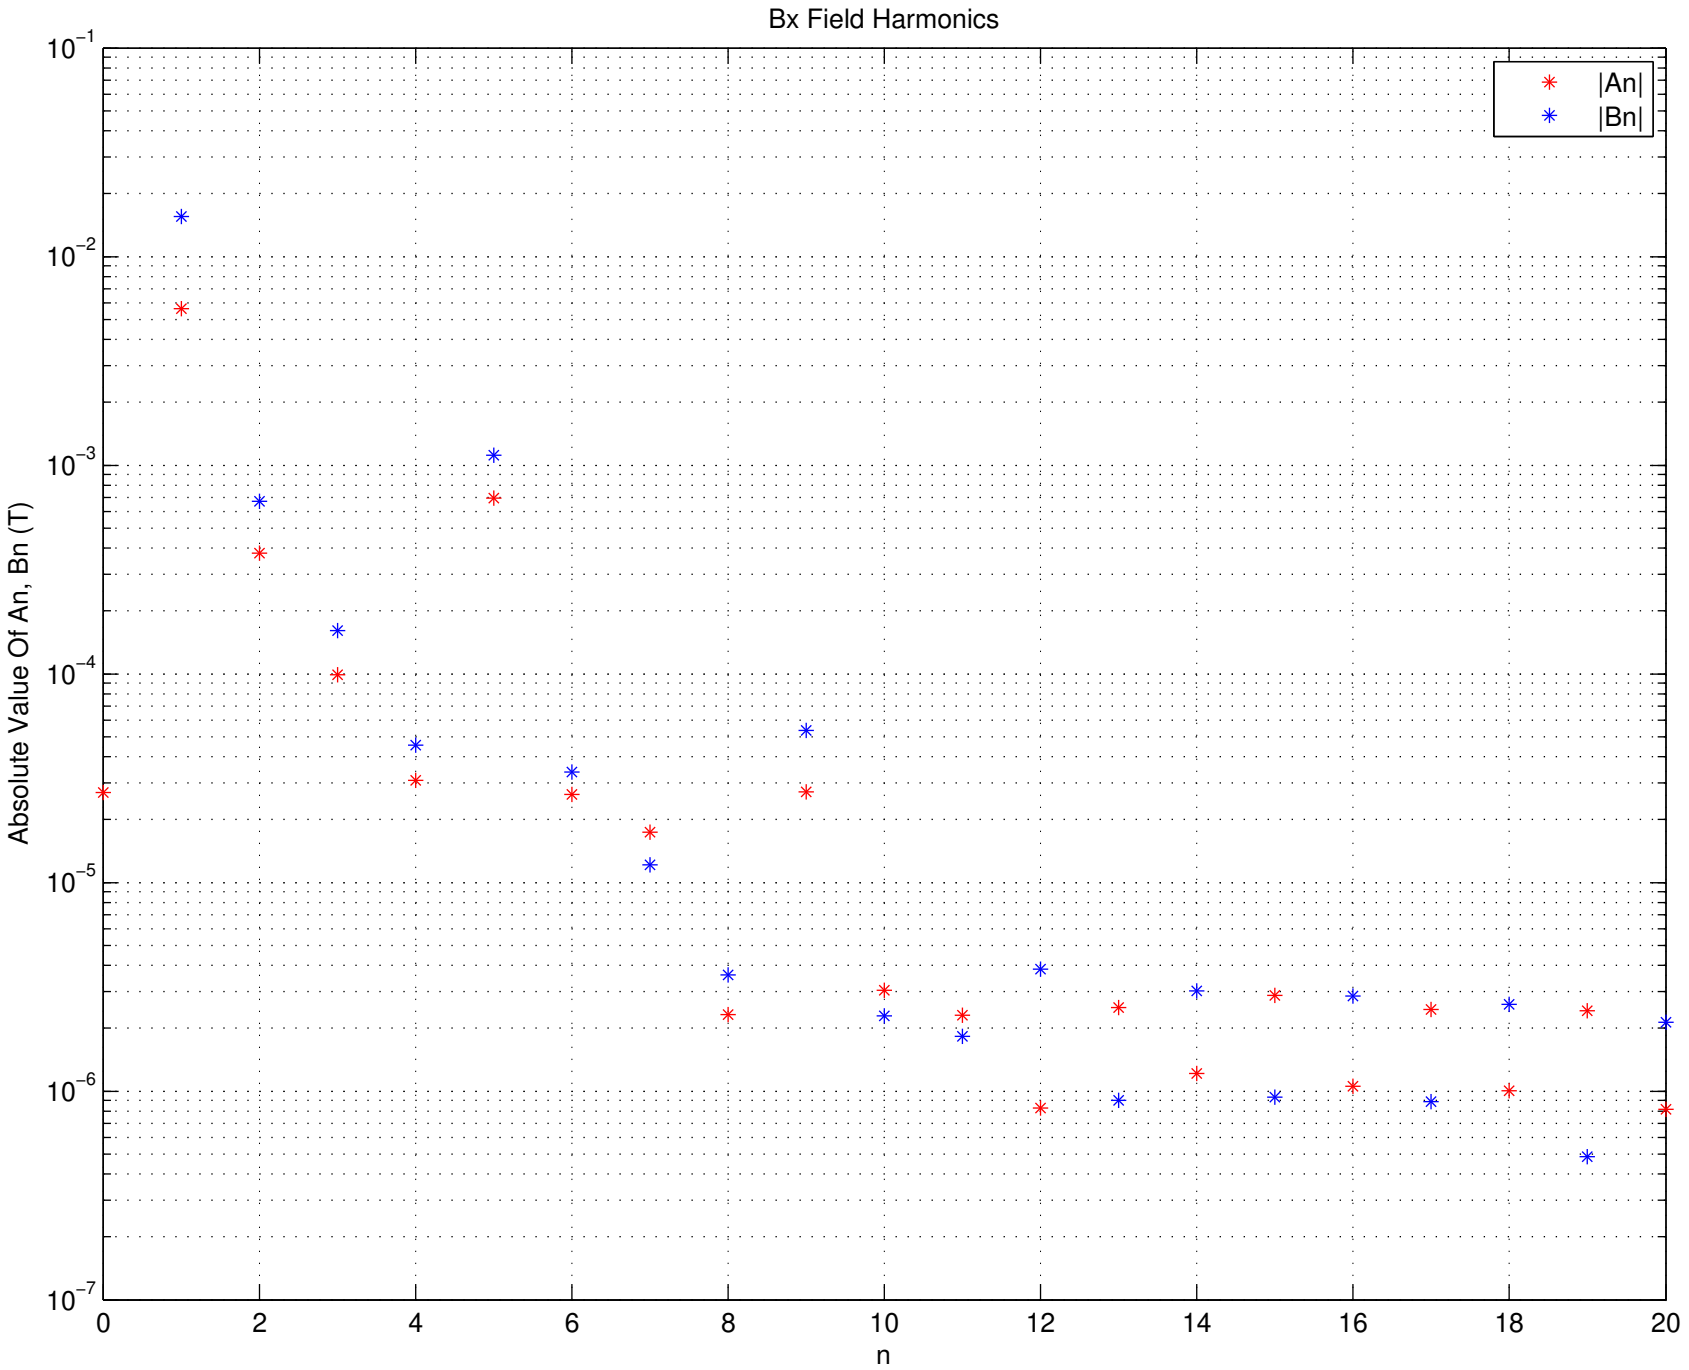
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
$10^{-5}$
$10^{-6}$
$10^{-7}$
0
2
4
6
8
10
12
14
16
18
20

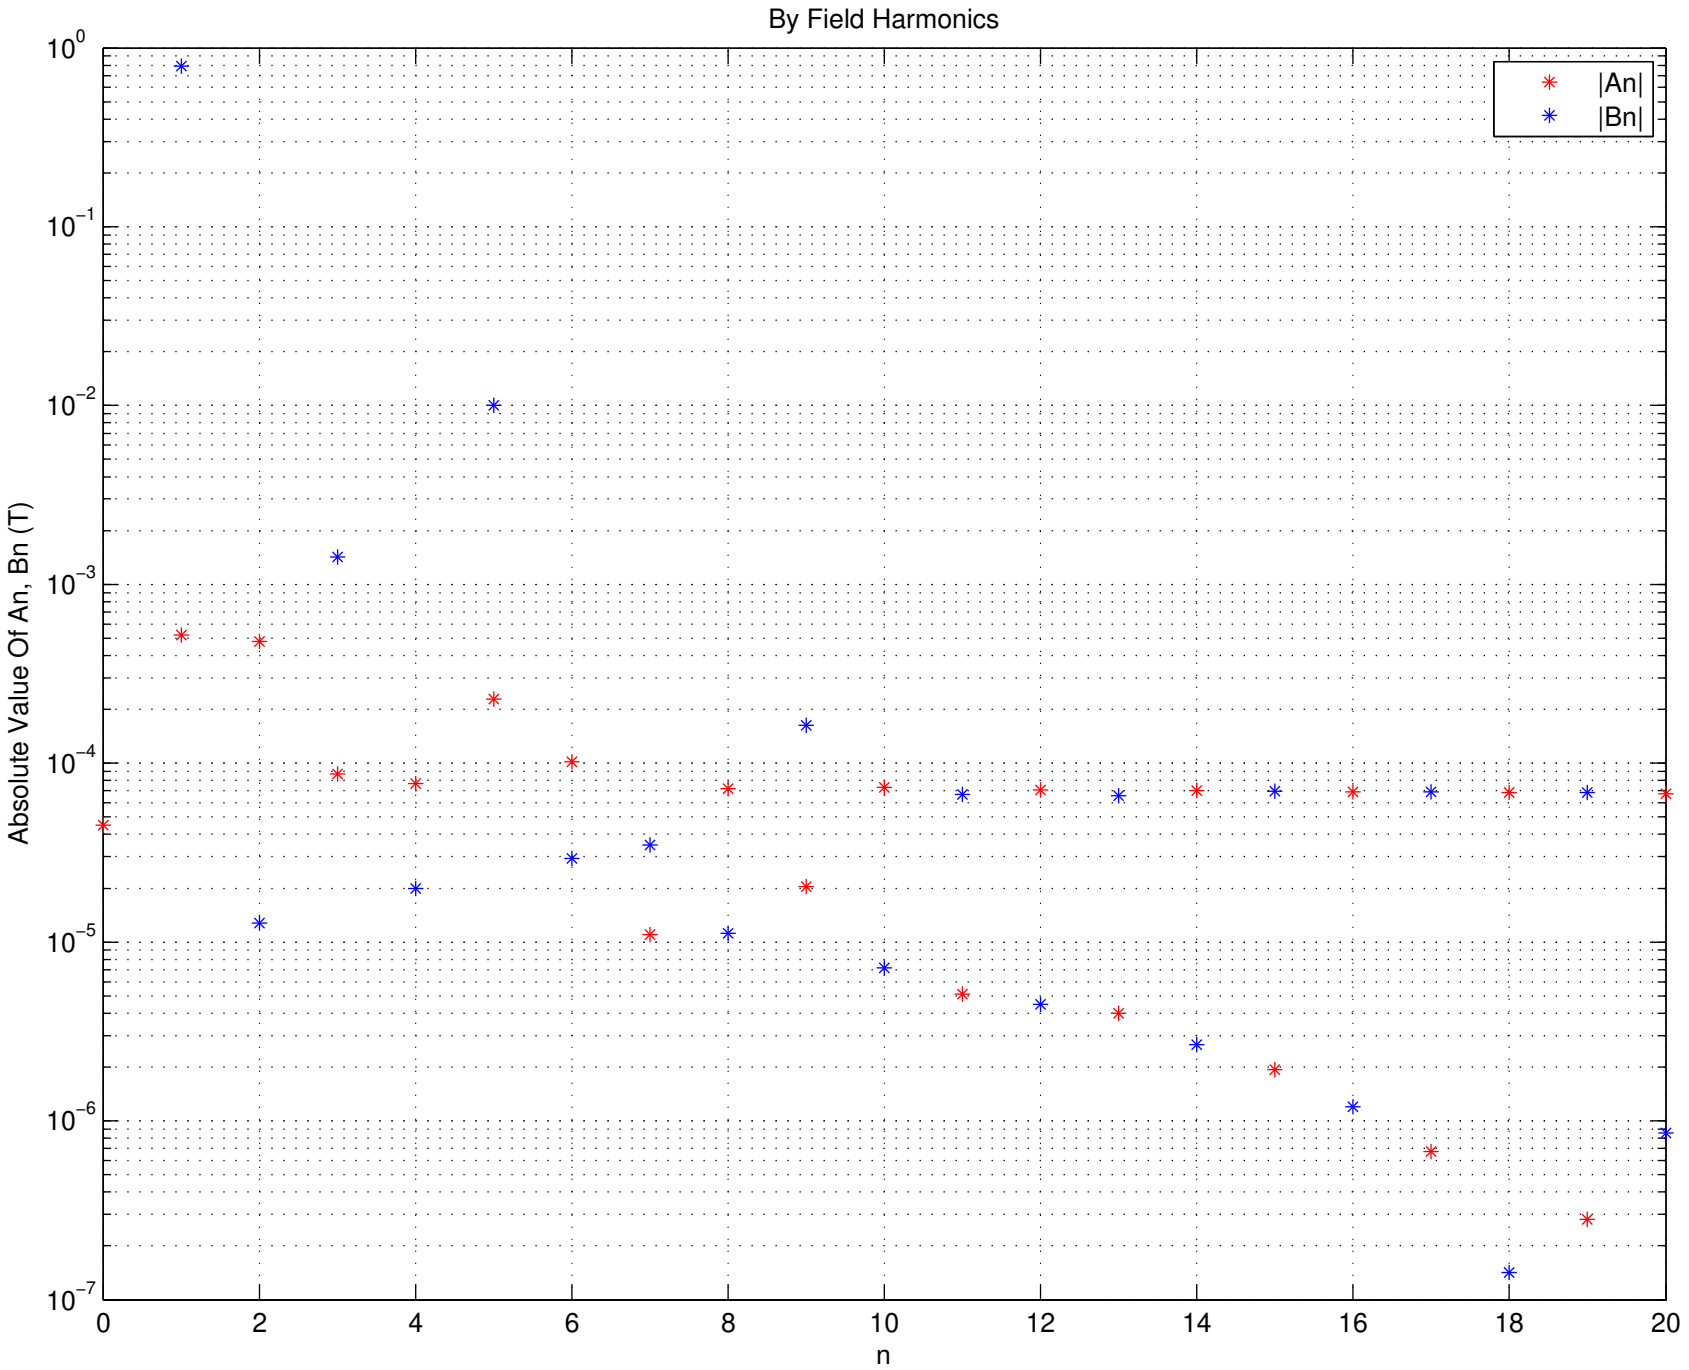
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
$10^{0}$
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
$10^{-5}$
$10^{-6}$
$10^{-7}$
0
2
4
6
8
10
12
14
16
18
20

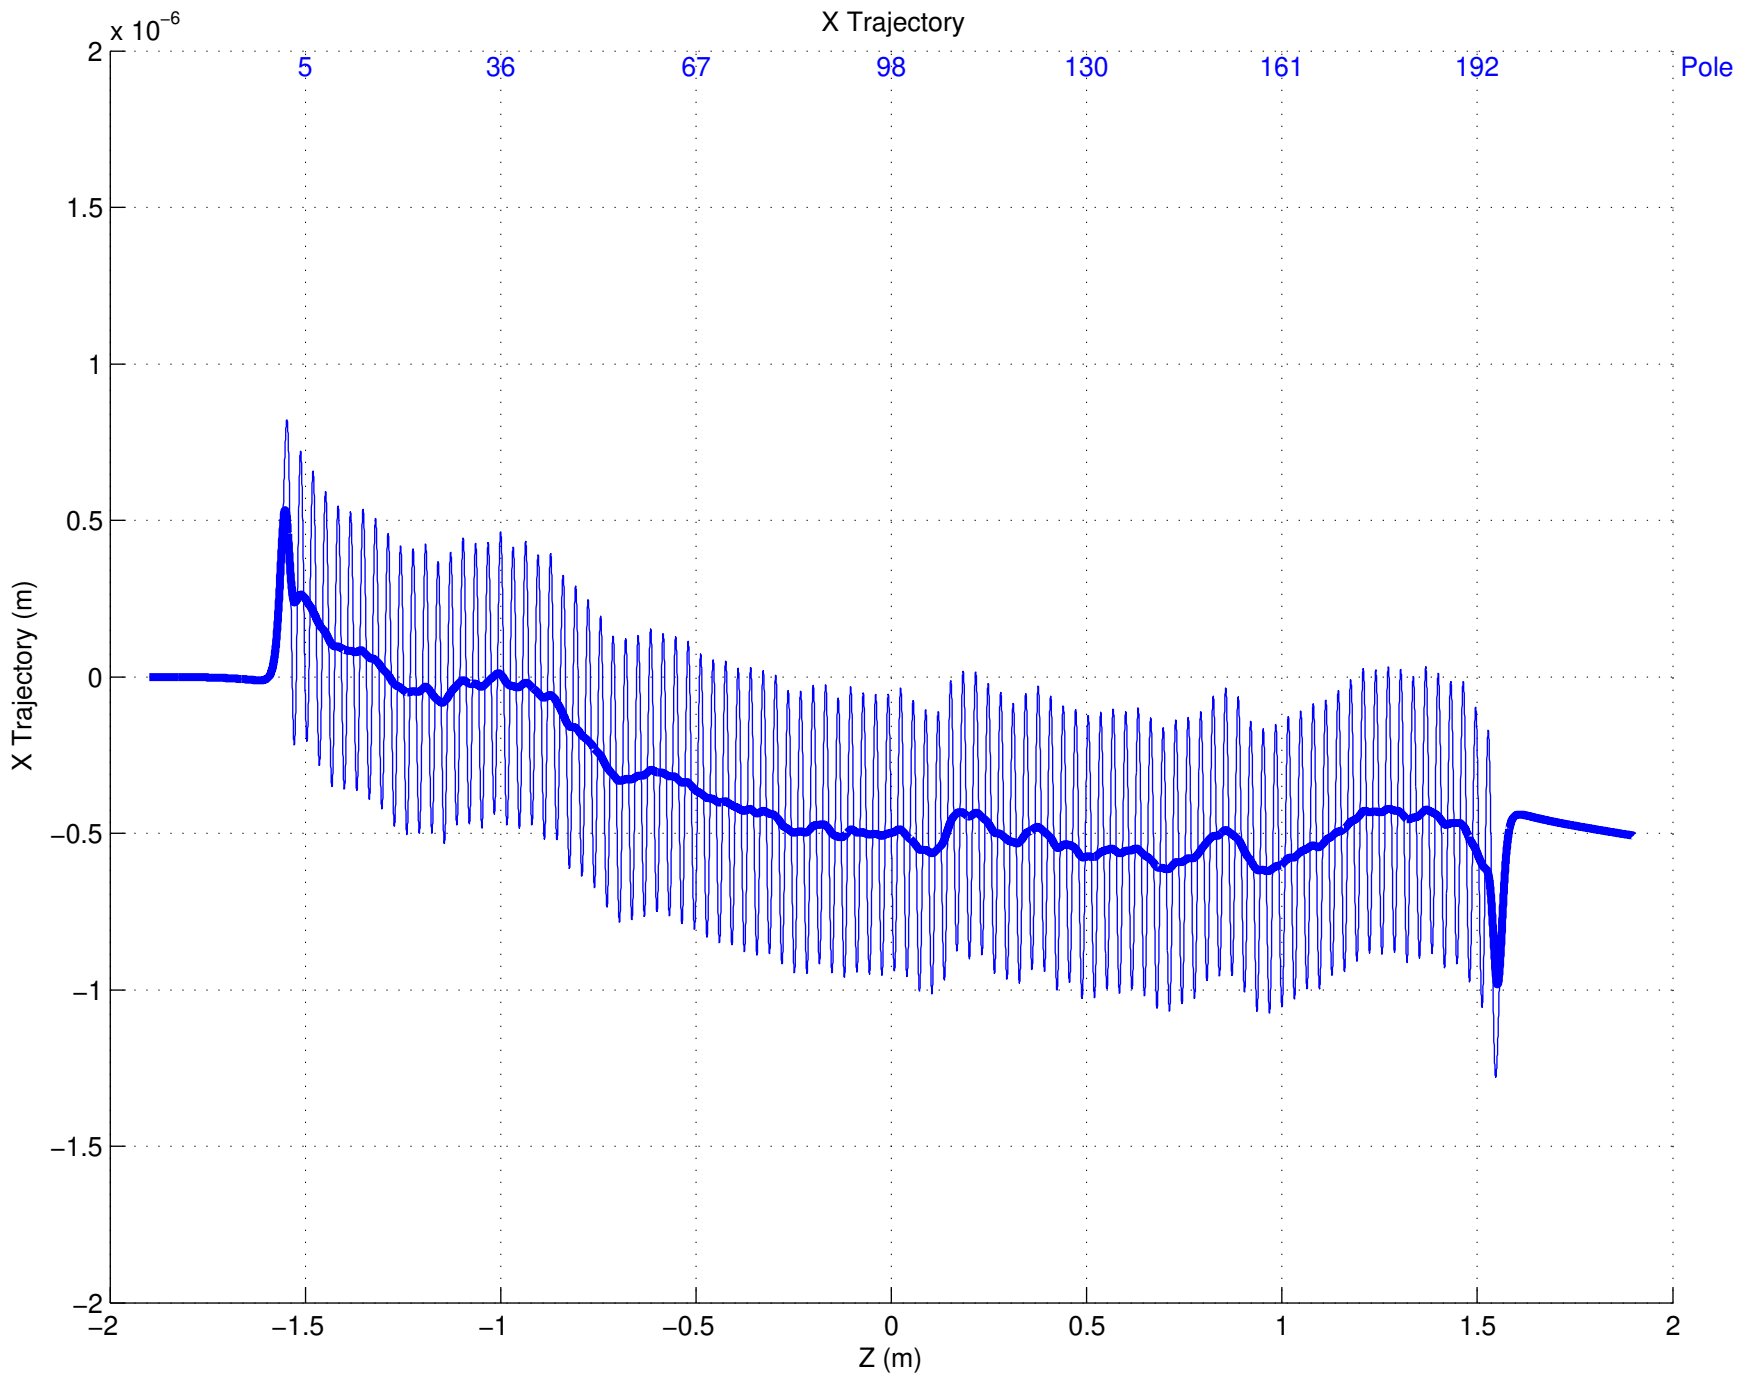
X Trajectory
x 10^-6
5
36
67
98
130
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

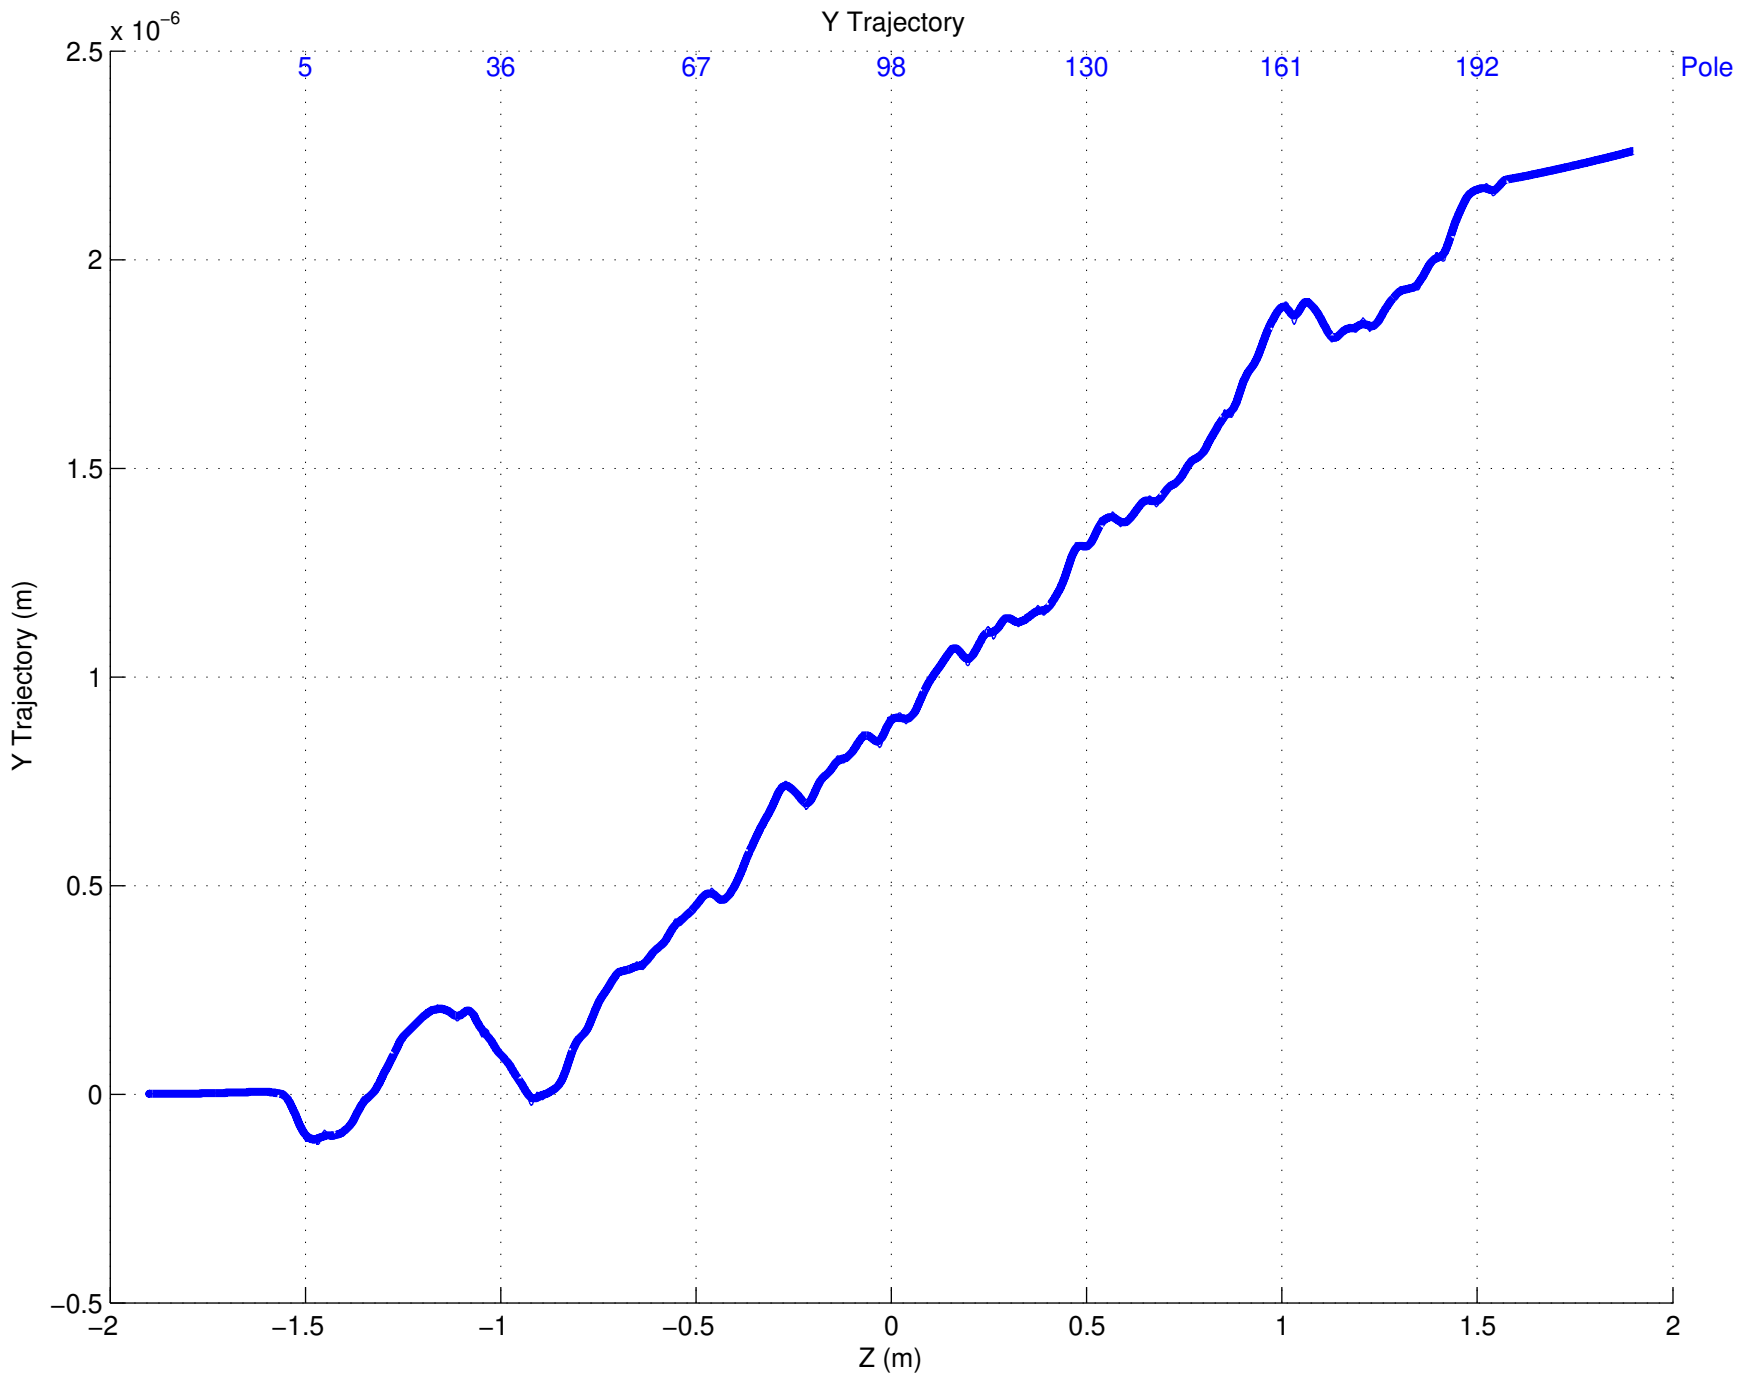
Y Trajectory
x 10^-6
2.5
2
1.5
1
0.5
0
−0.5
5
36
67
98
130
161
192
Pole
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

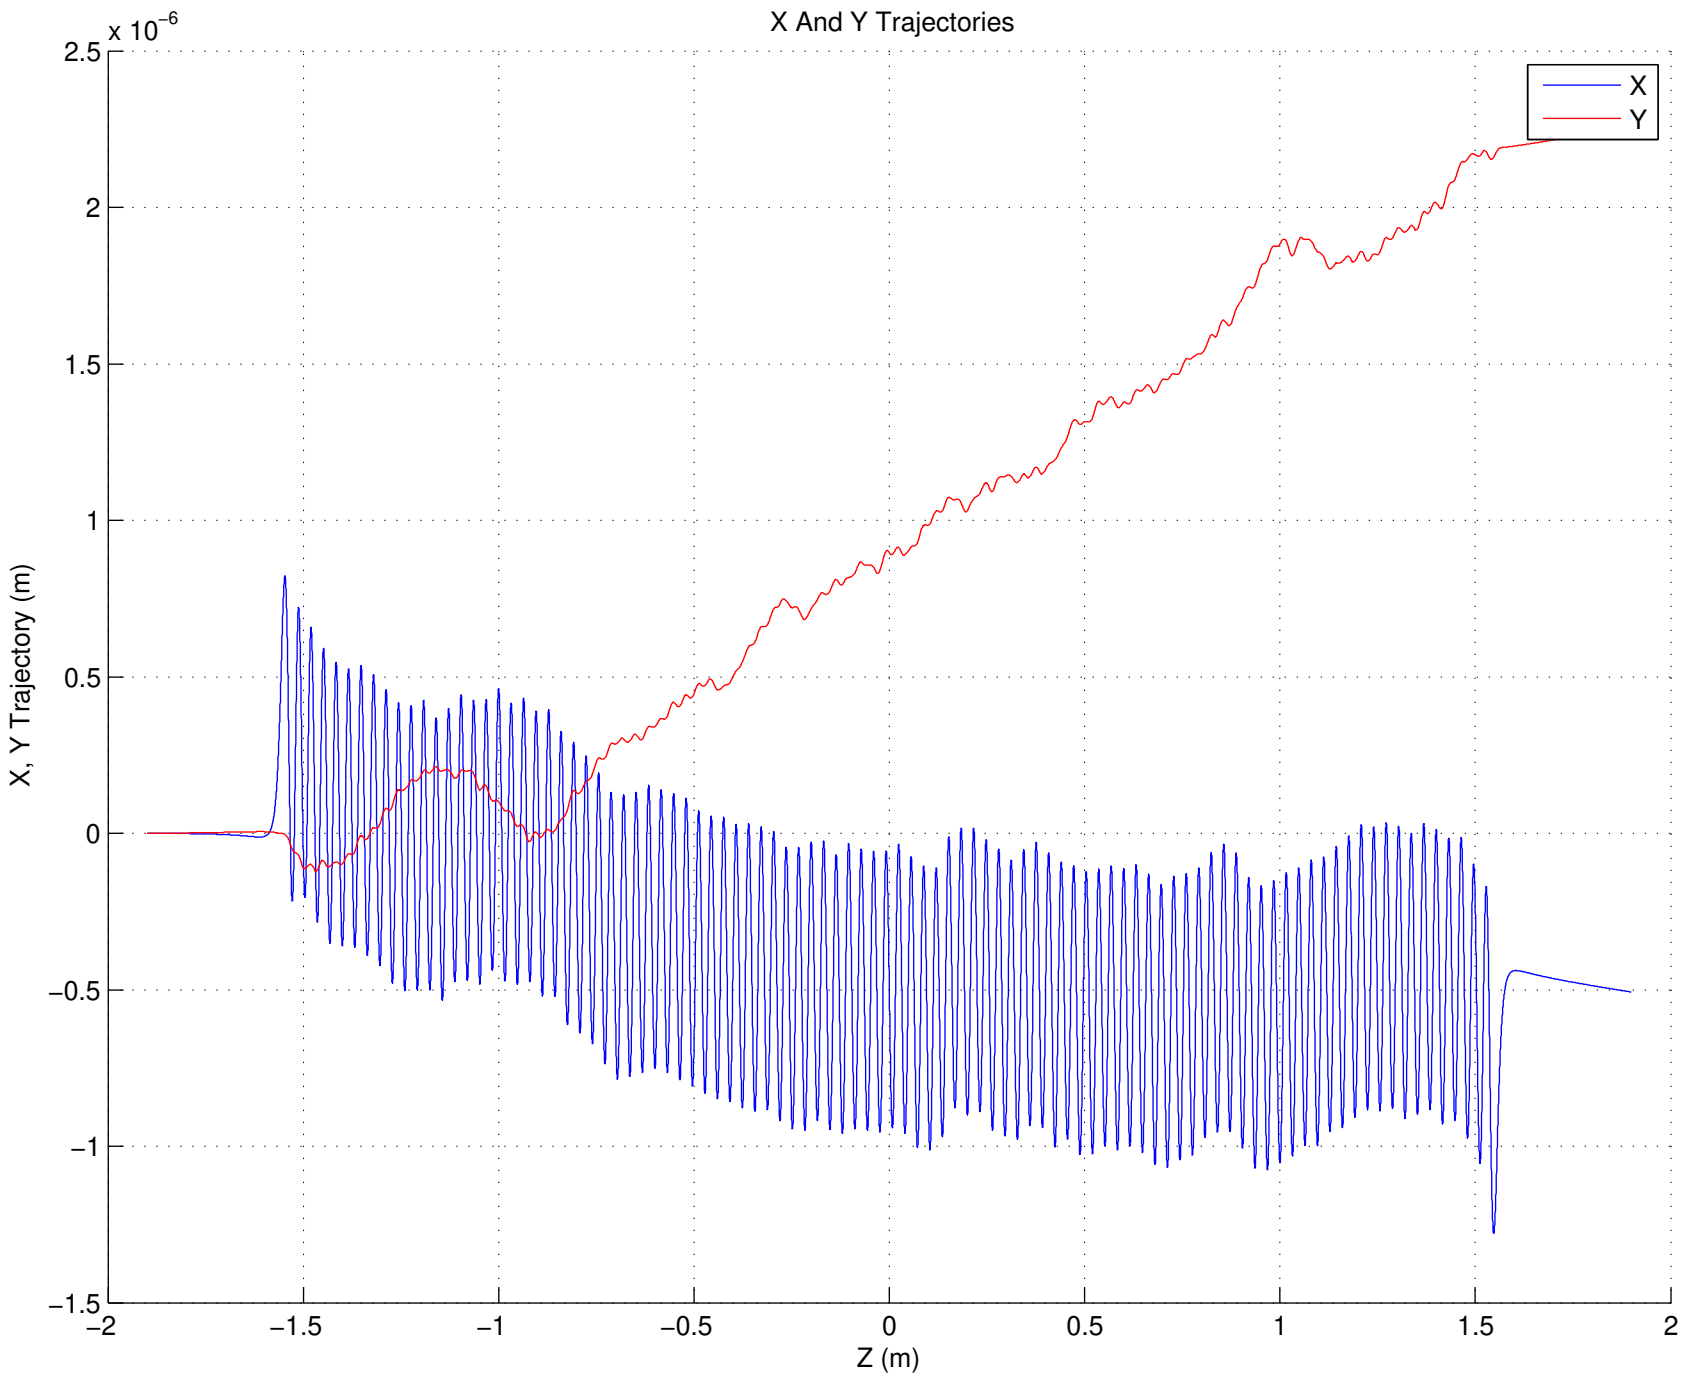
X And Y Trajectories
x 10^-6
2.5
2
1.5
1
0.5
0
−0.5
−1
−1.5
X, Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)
X
Y

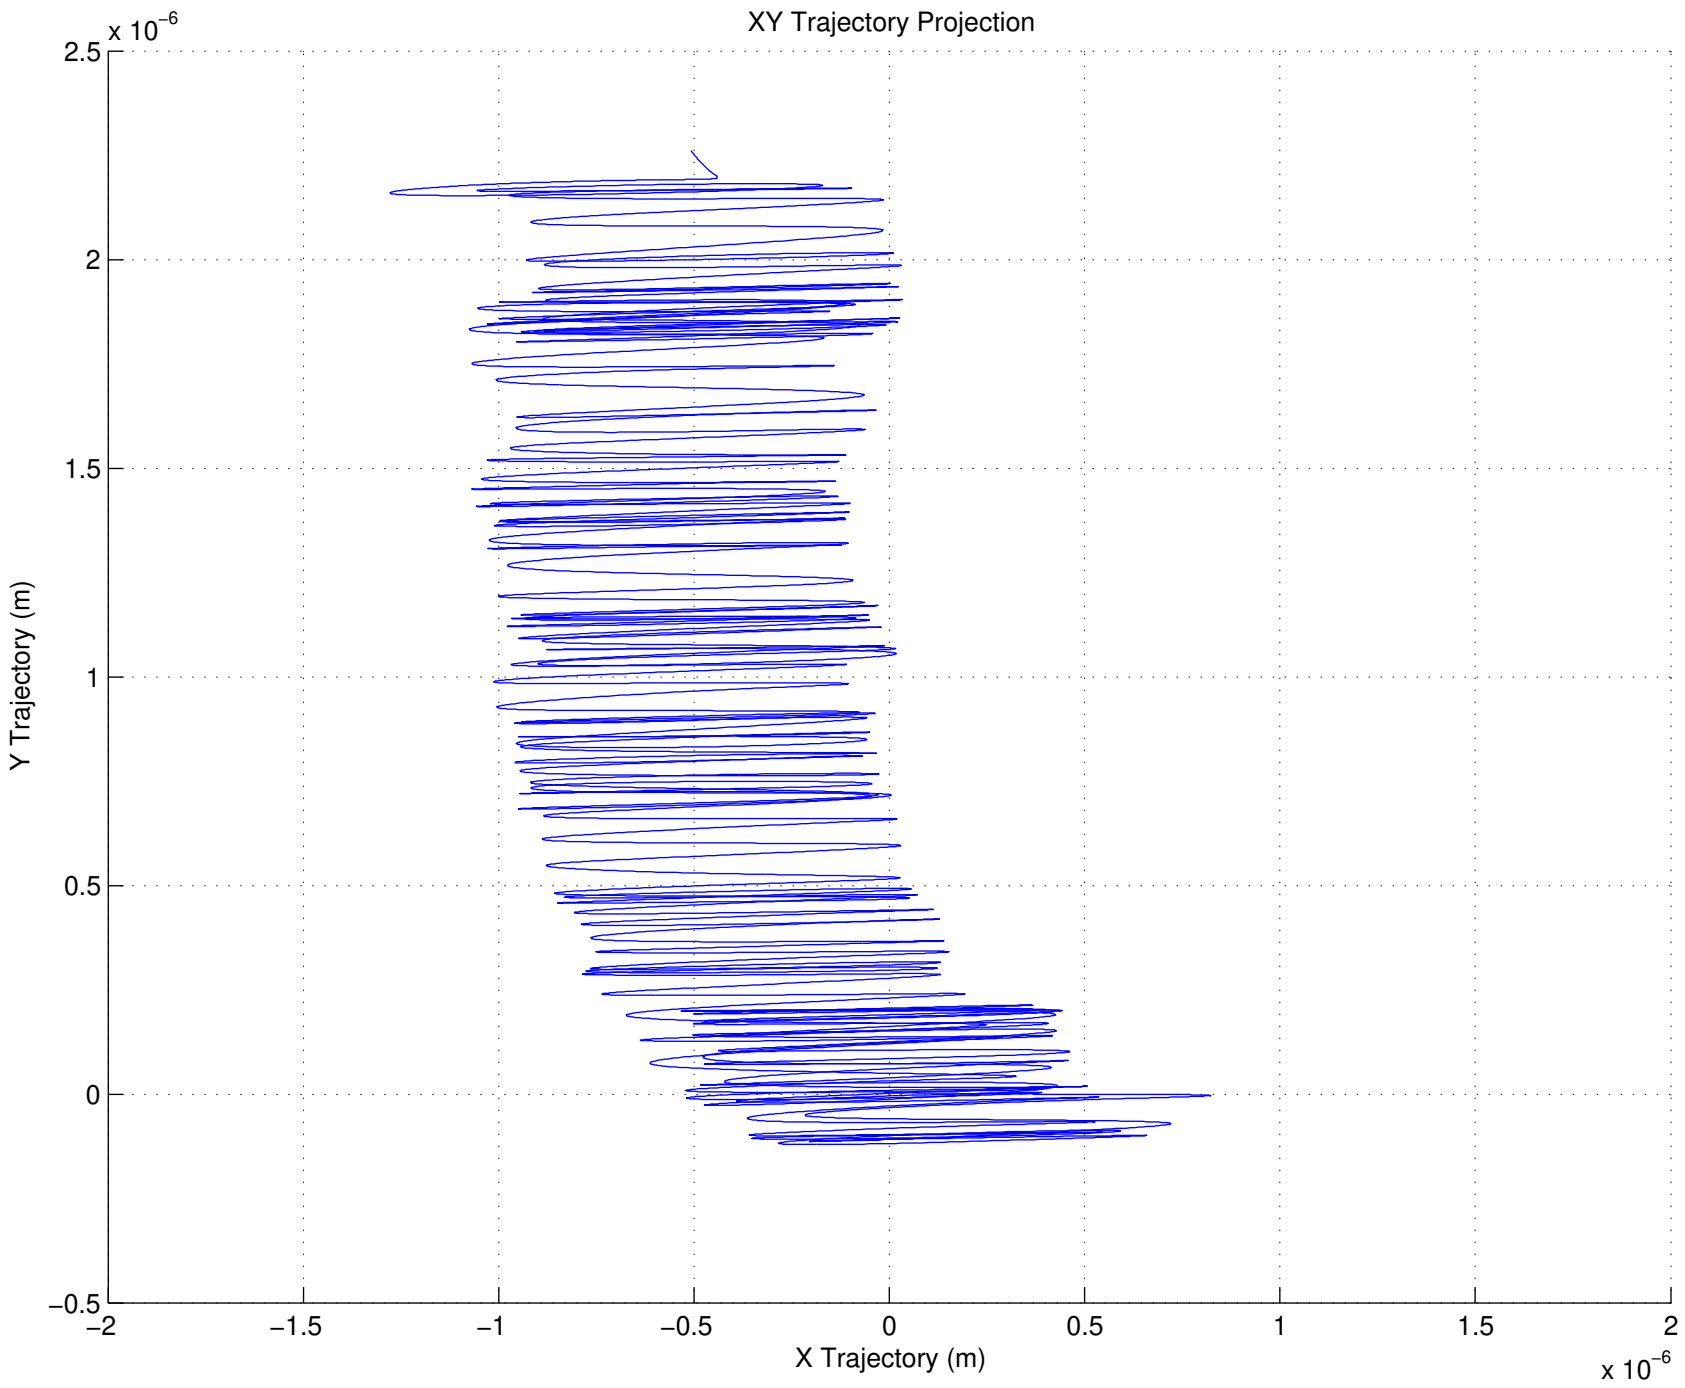
XY Trajectory Projection
x 10^-6
2.5
2
1.5
1
0.5
0
−0.5
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
X Trajectory (m)
x 10^-6

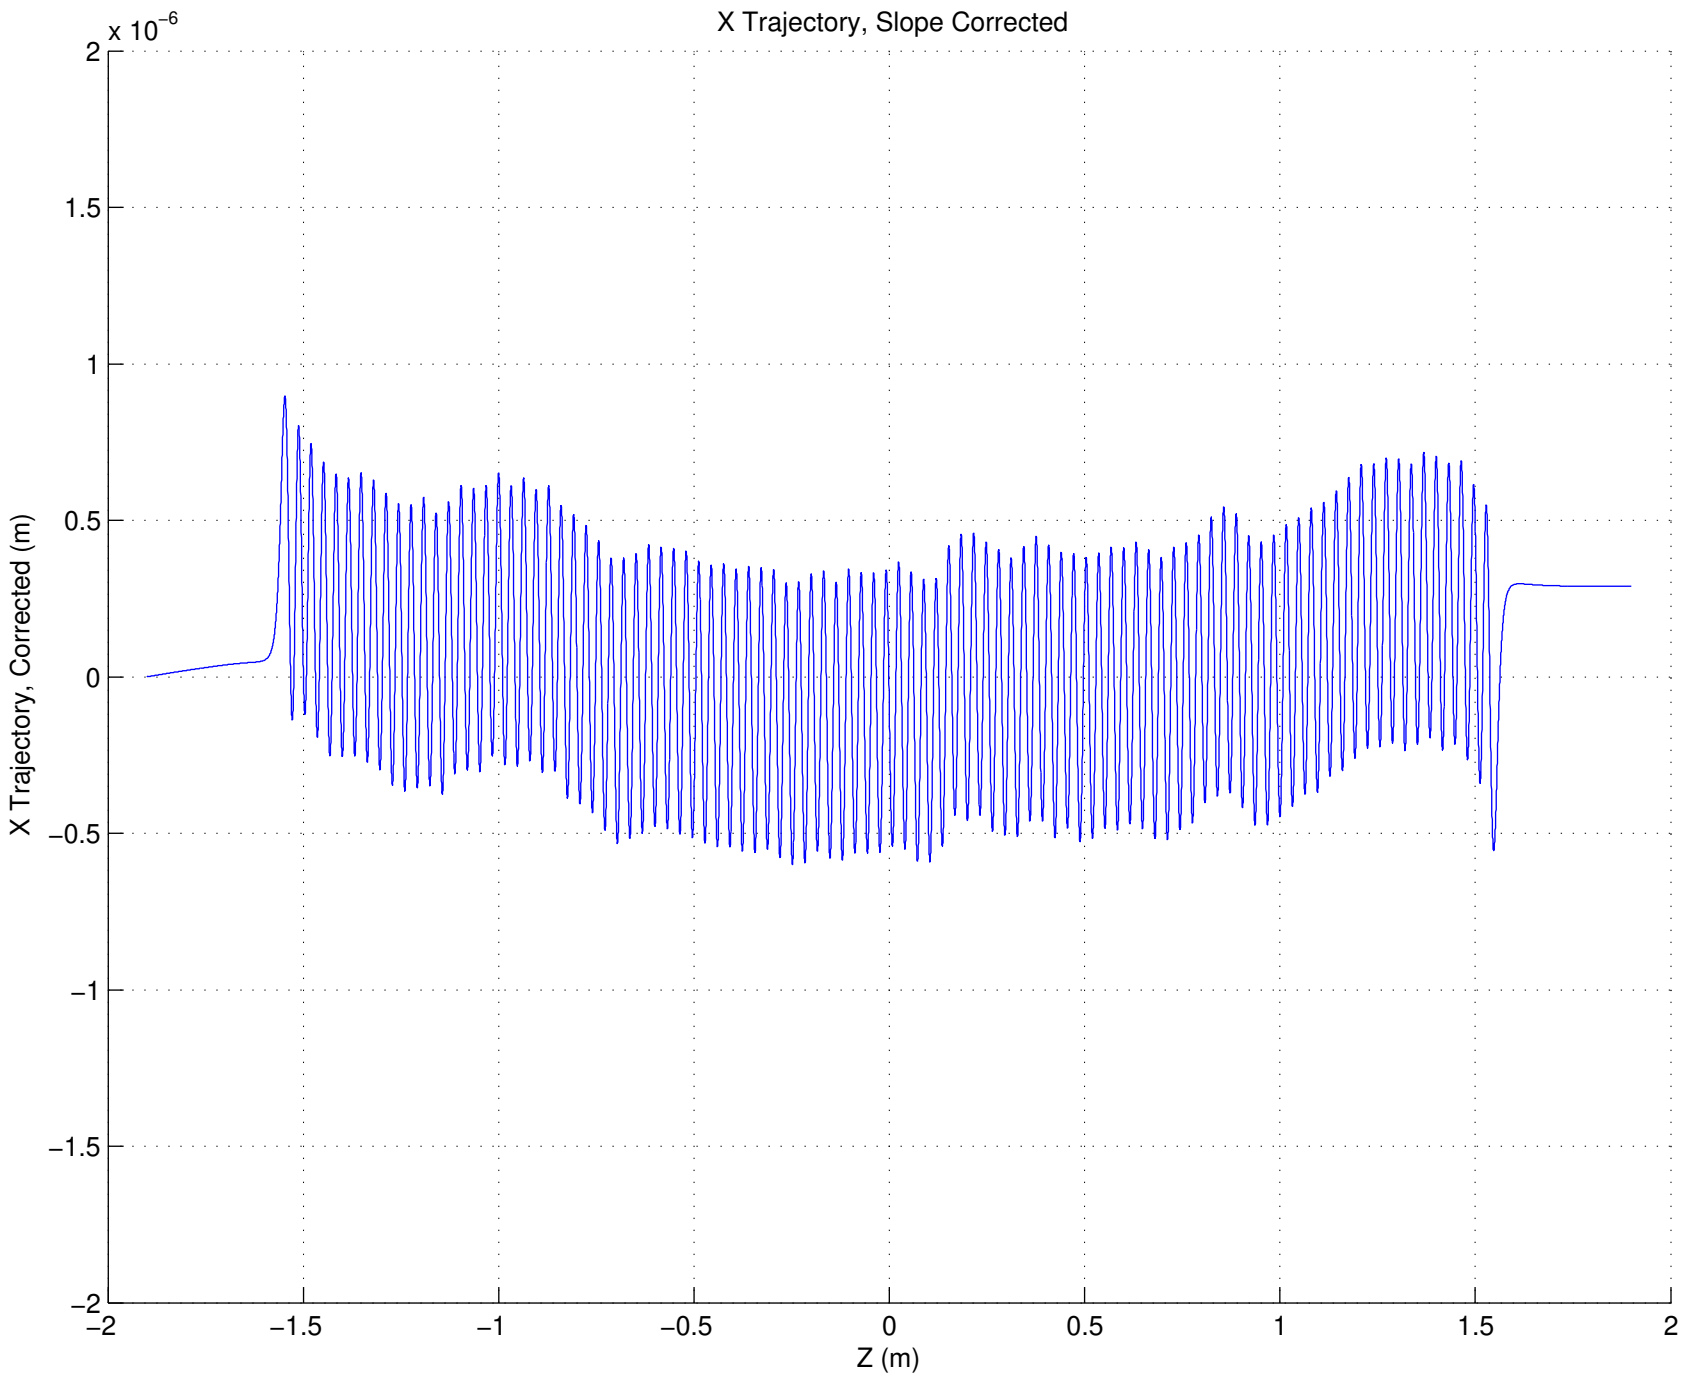
X Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

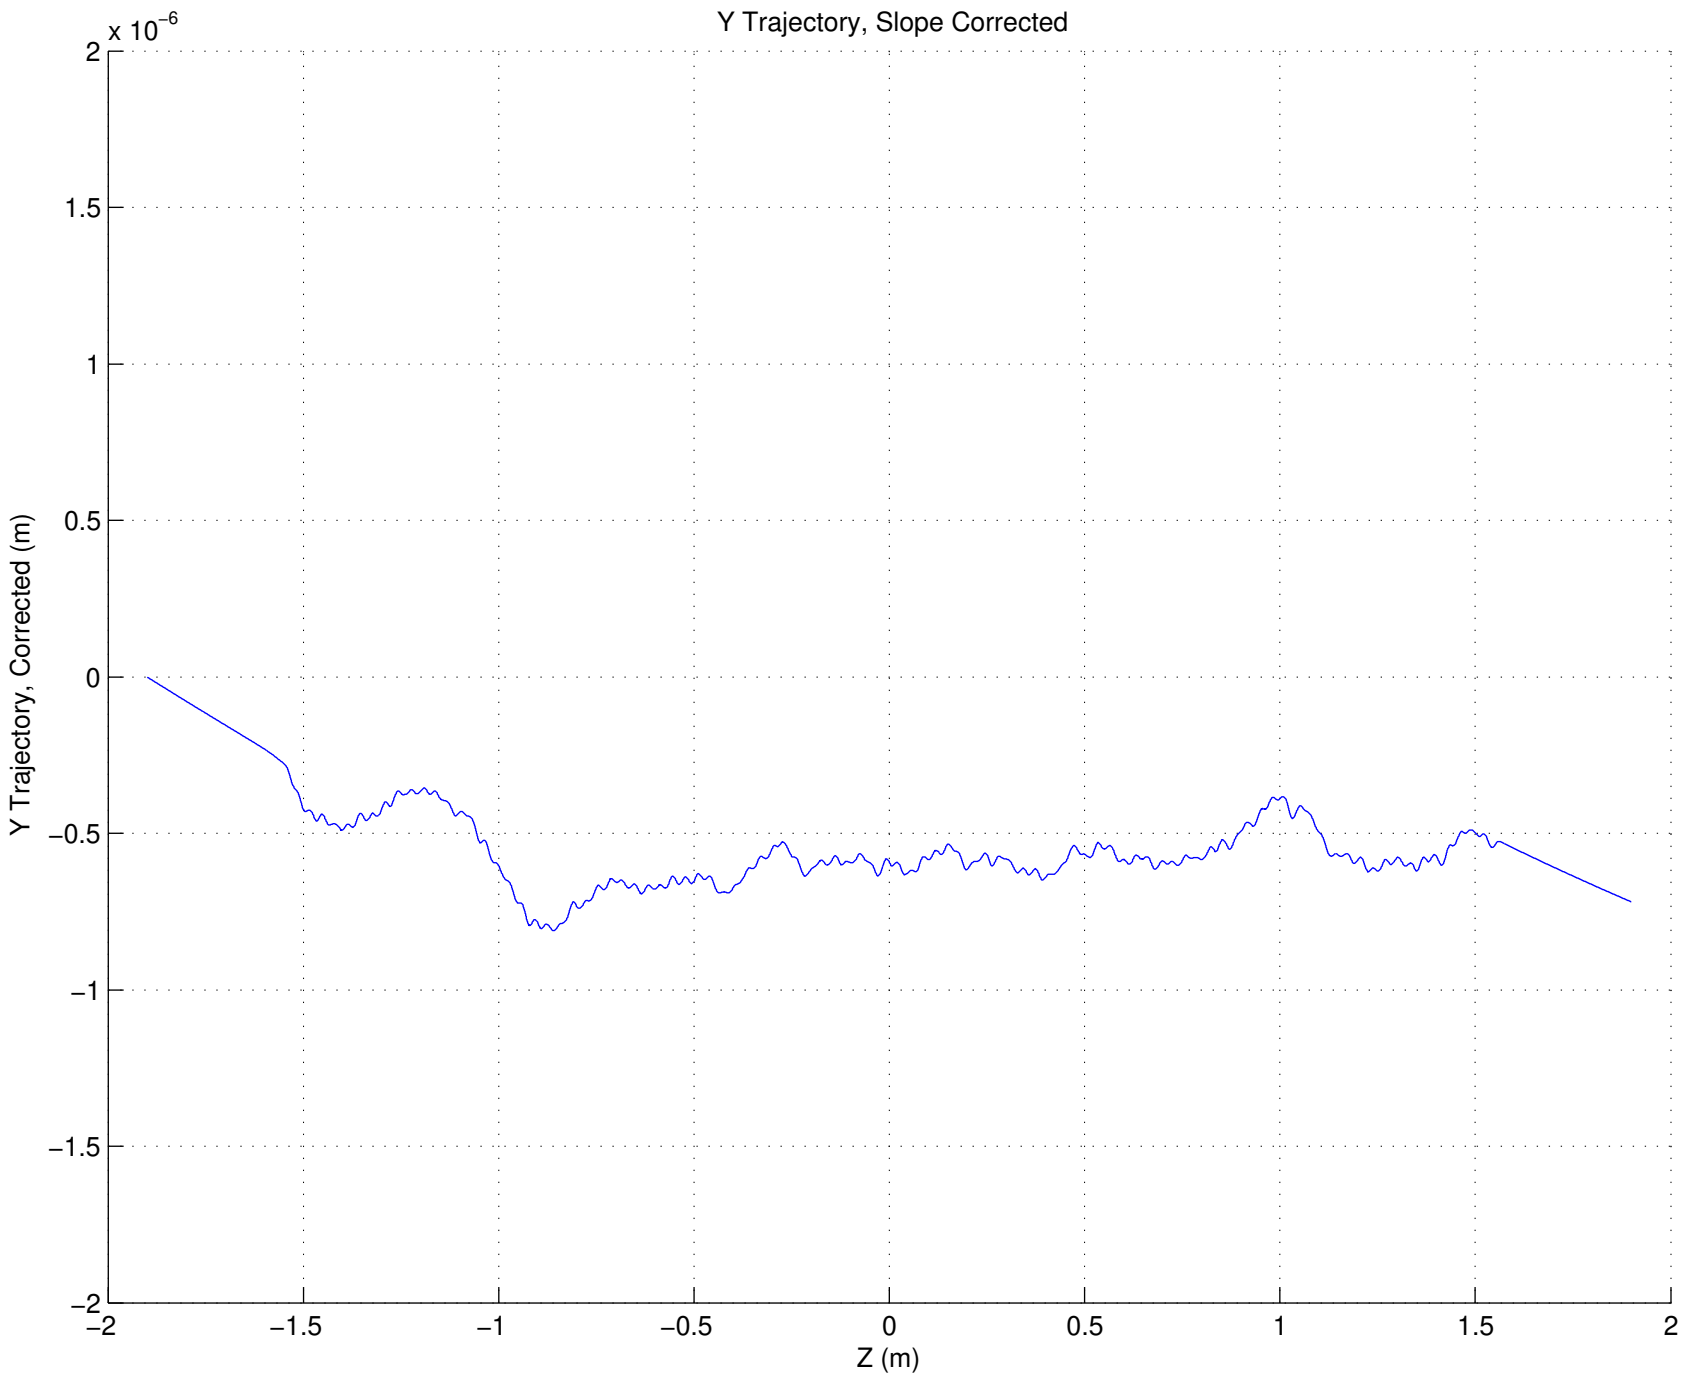
Y Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

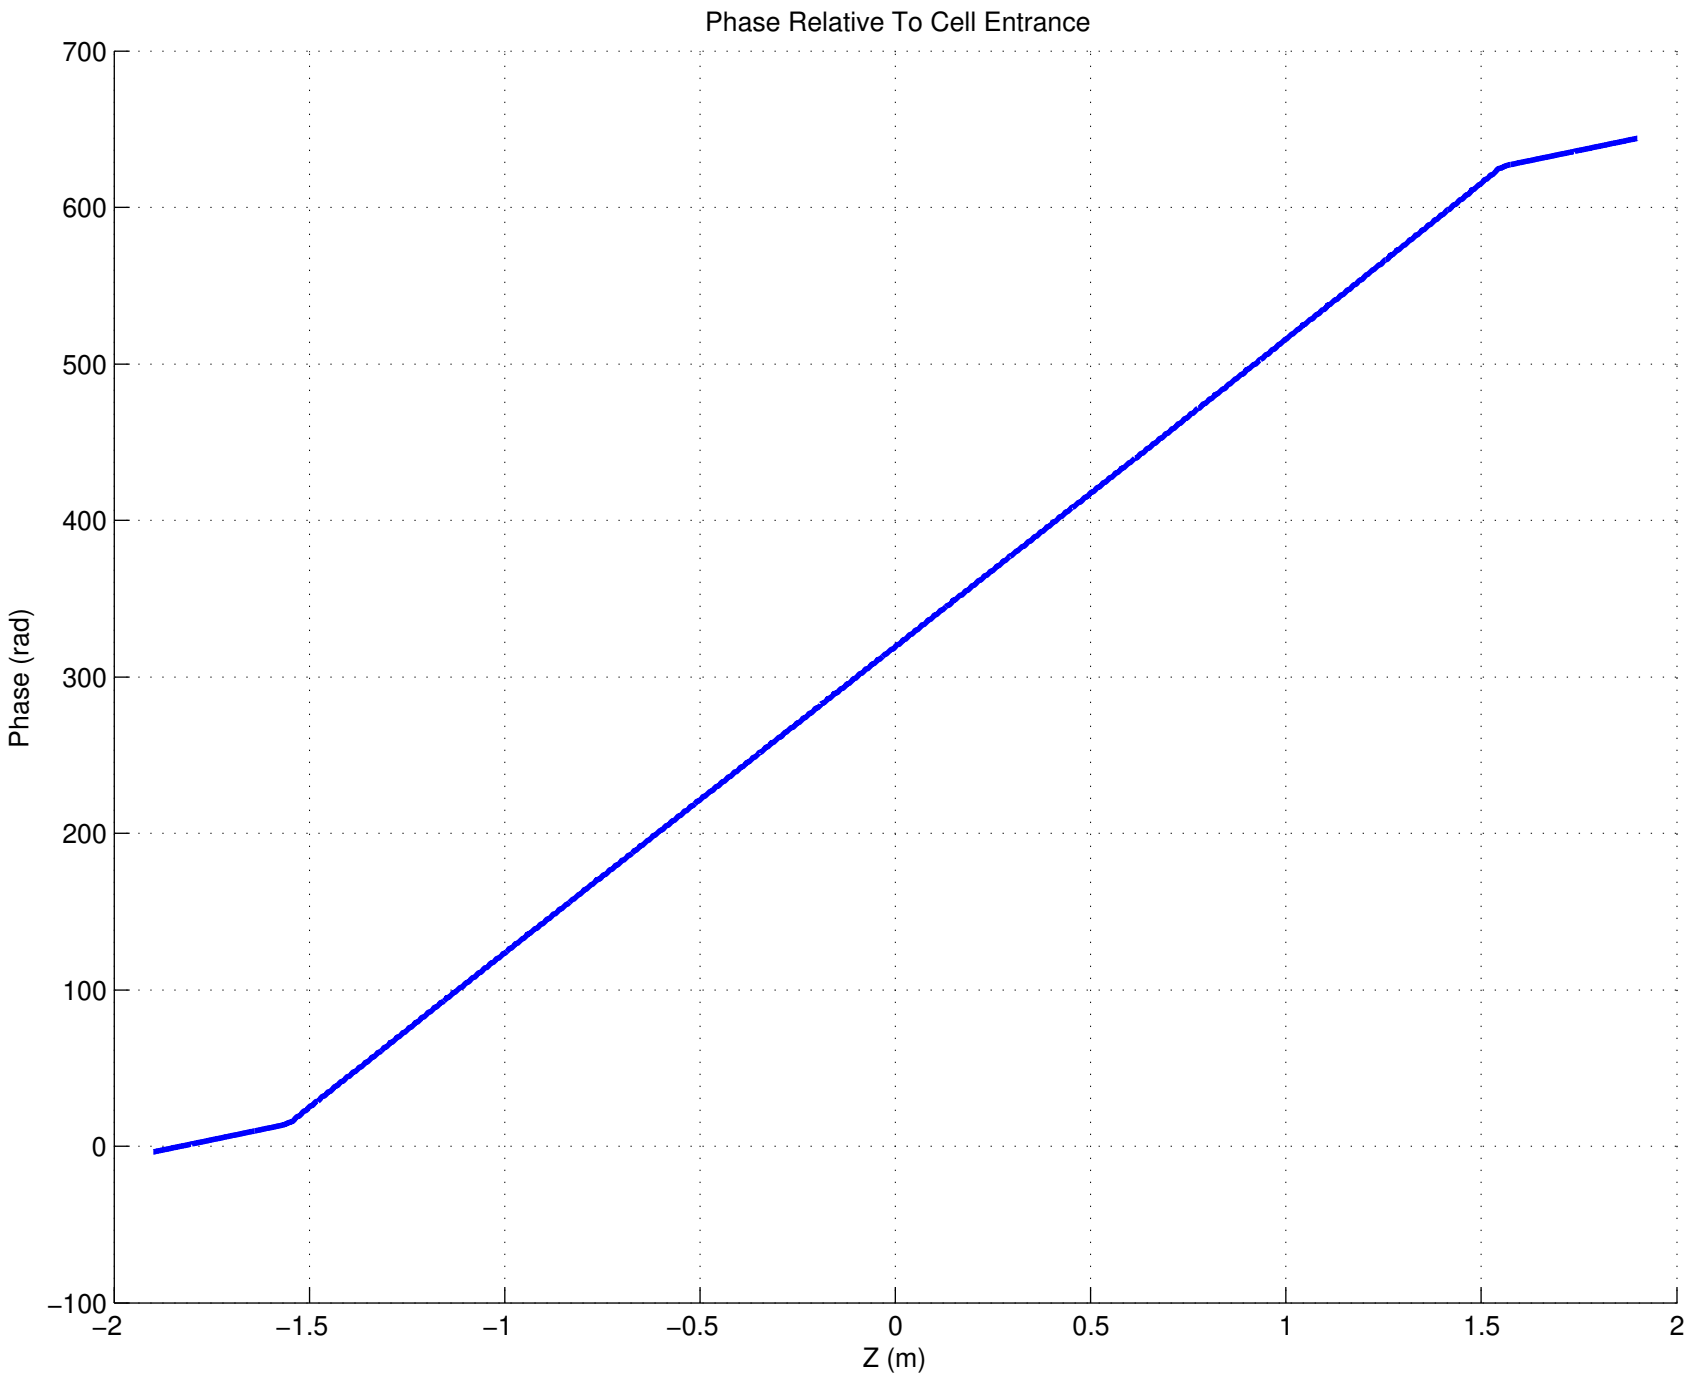
Phase Relative To Cell Entrance
Phase (rad)
700
600
500
400
300
200
100
0
−100
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

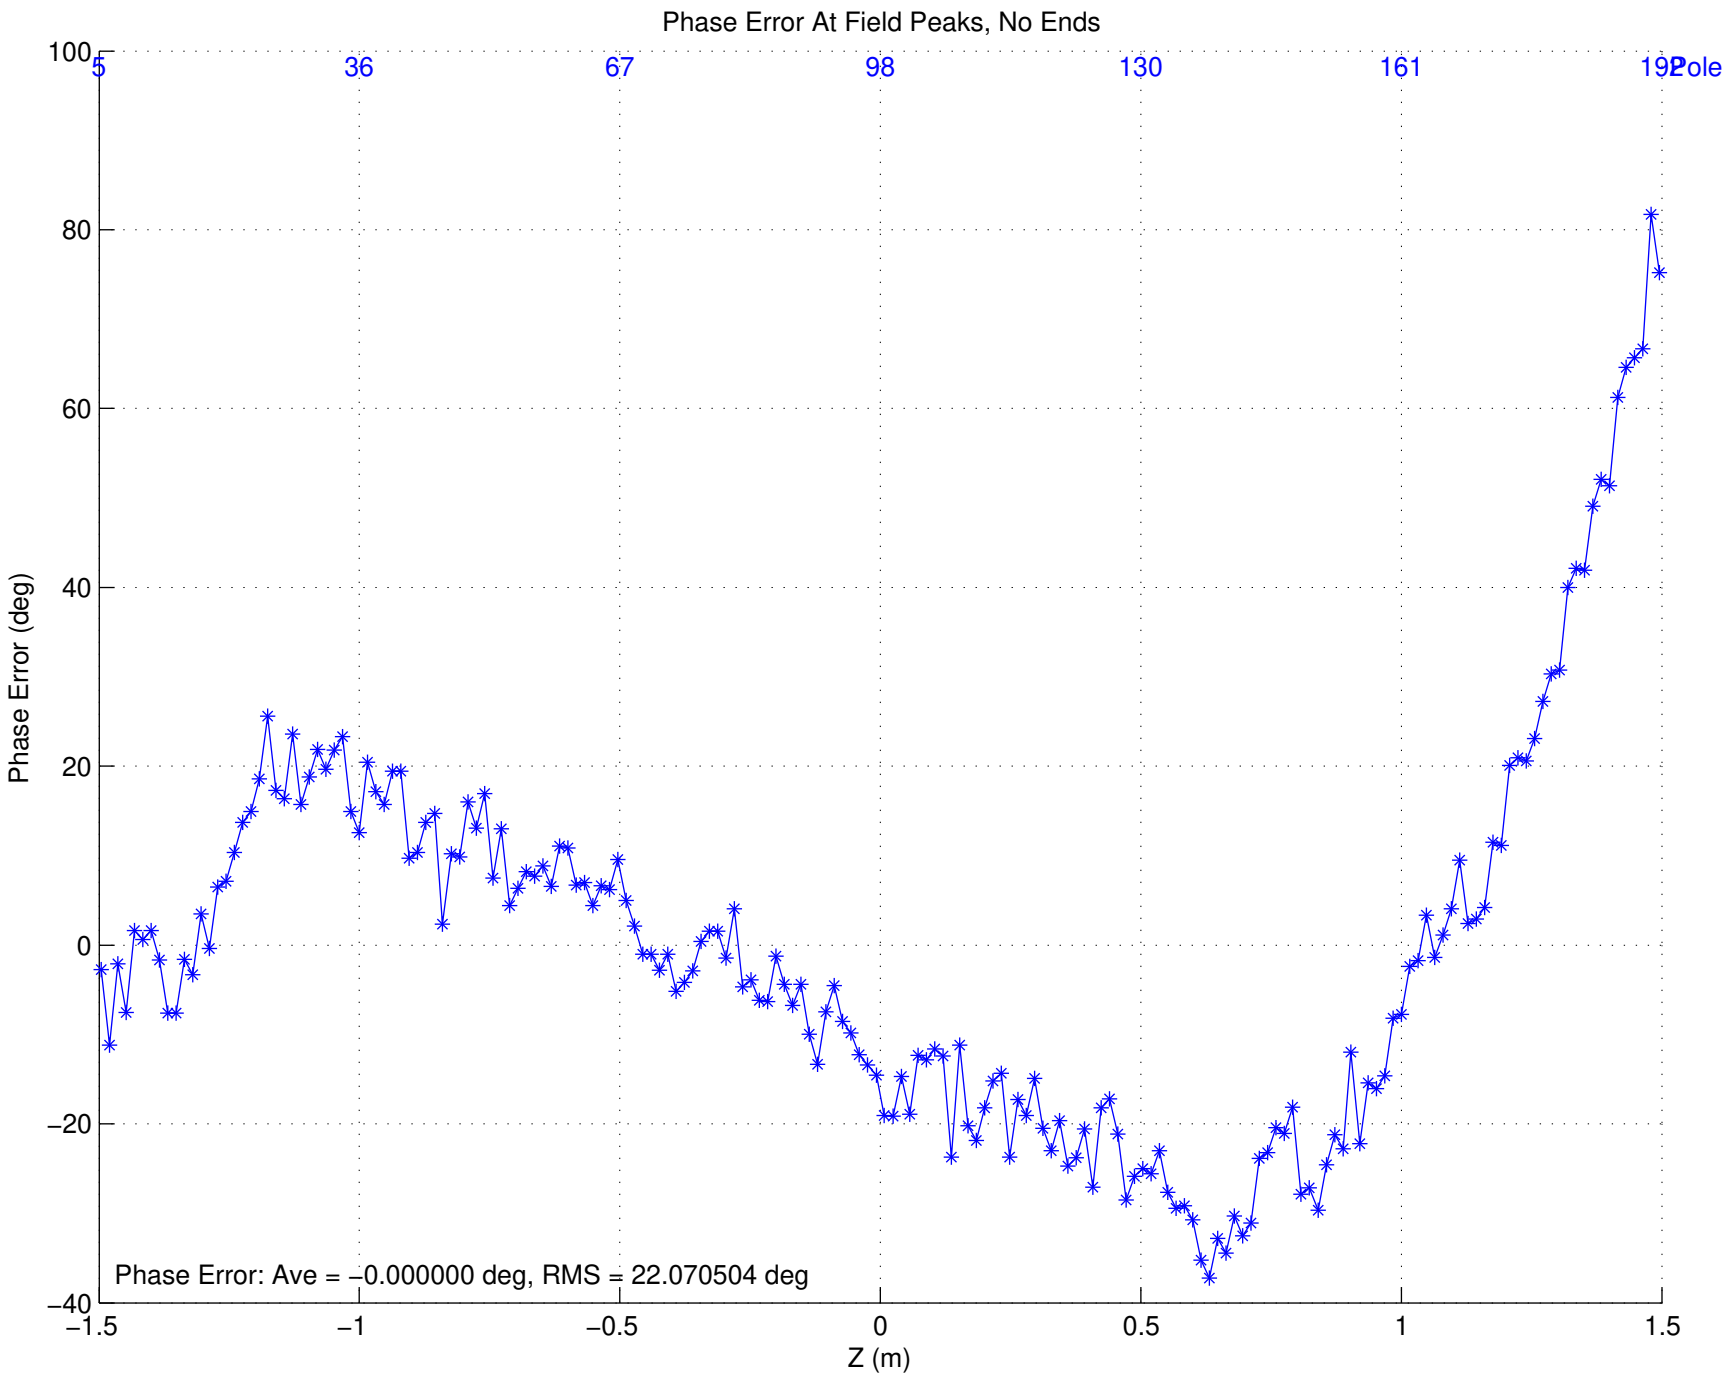
Phase Error At Field Peaks, No Ends
5
36
67
98
130
161
192
Pole
100
80
60
40
20
0
−20
−40
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)
Phase Error: Ave = −0.000000 deg, RMS = 22.070504 deg

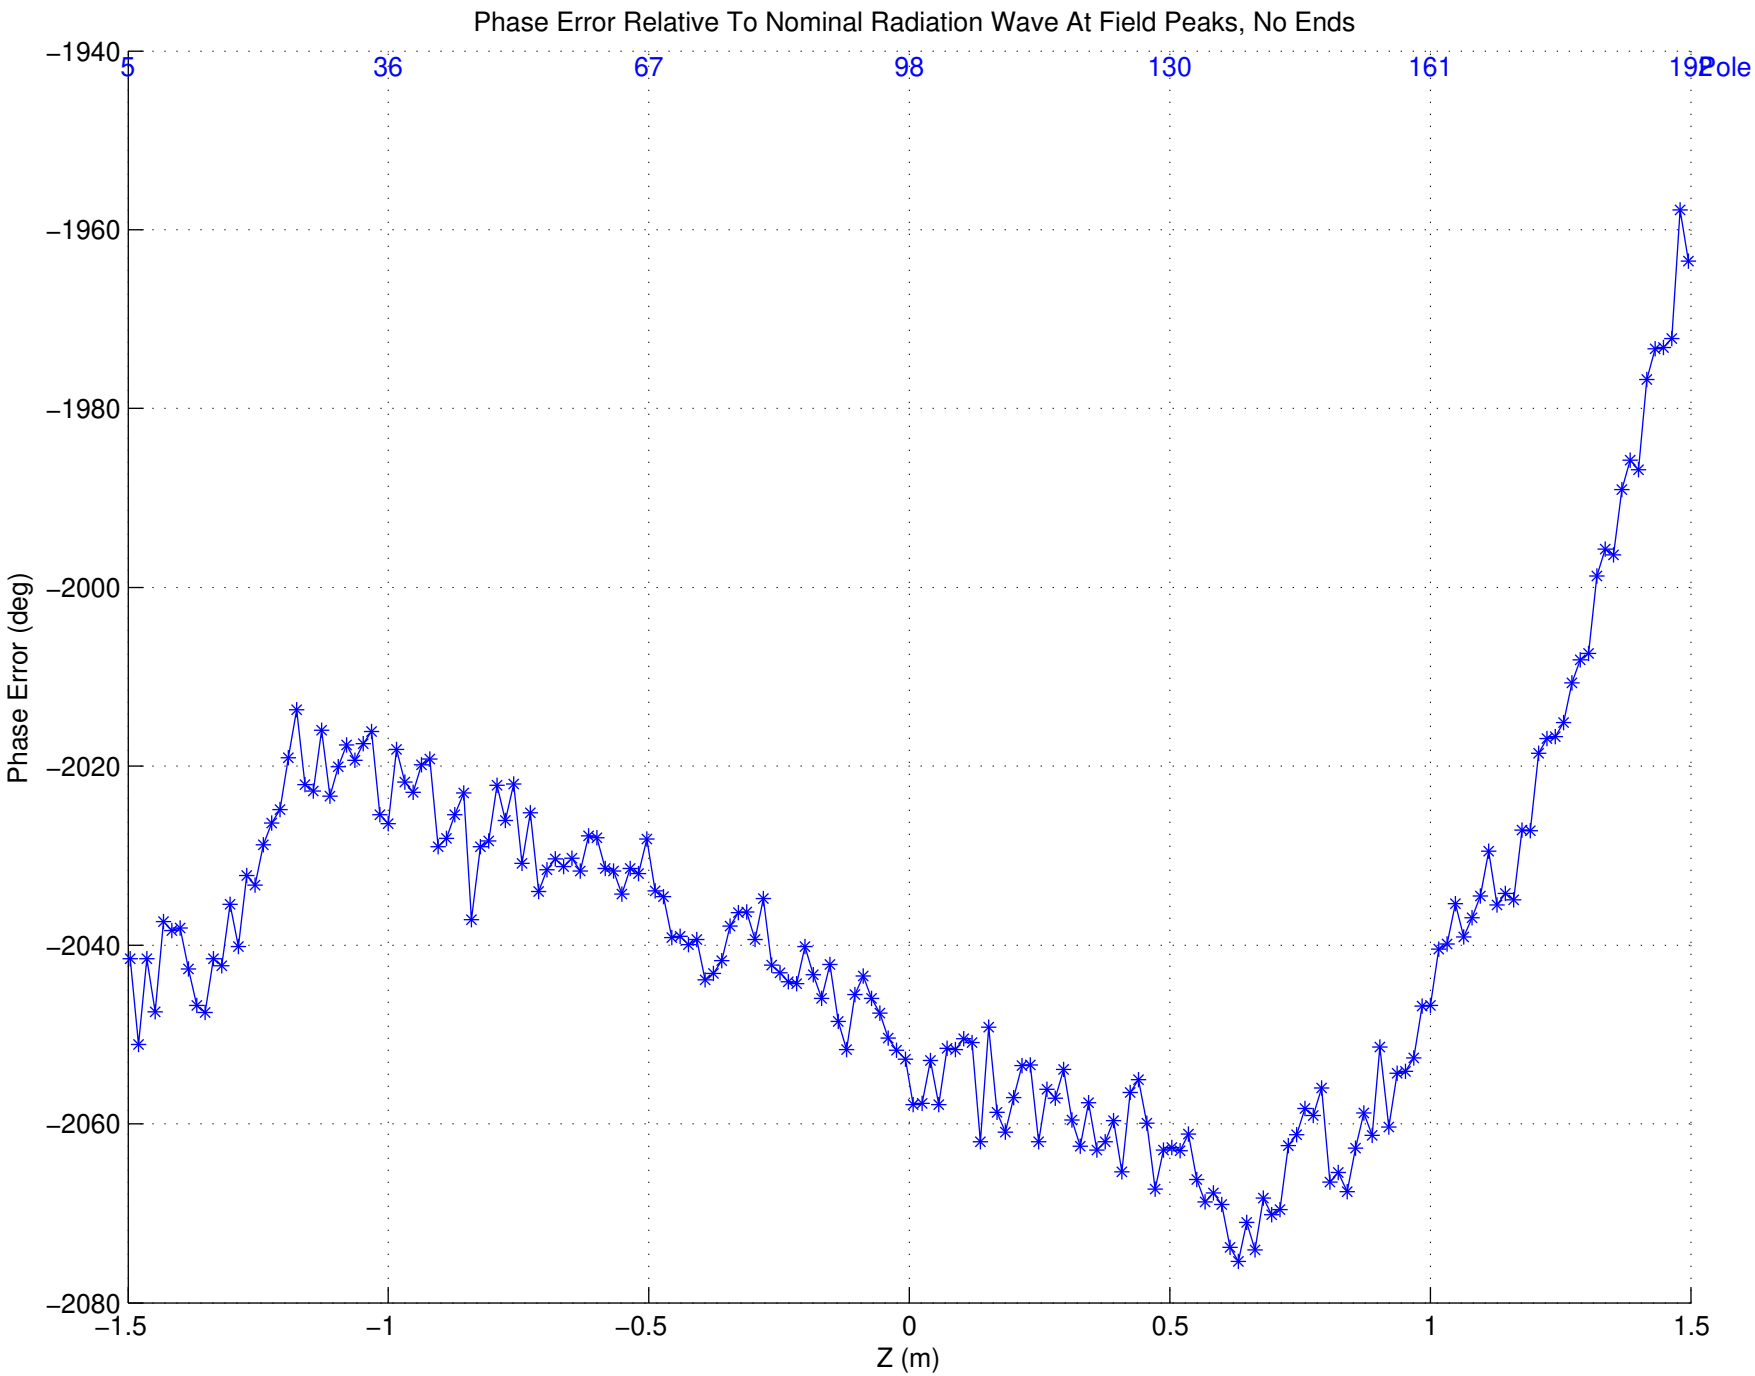
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
5
36
67
98
130
161
192
Pole
−1940
−1960
−1980
−2000
−2020
−2040
−2060
−2080
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

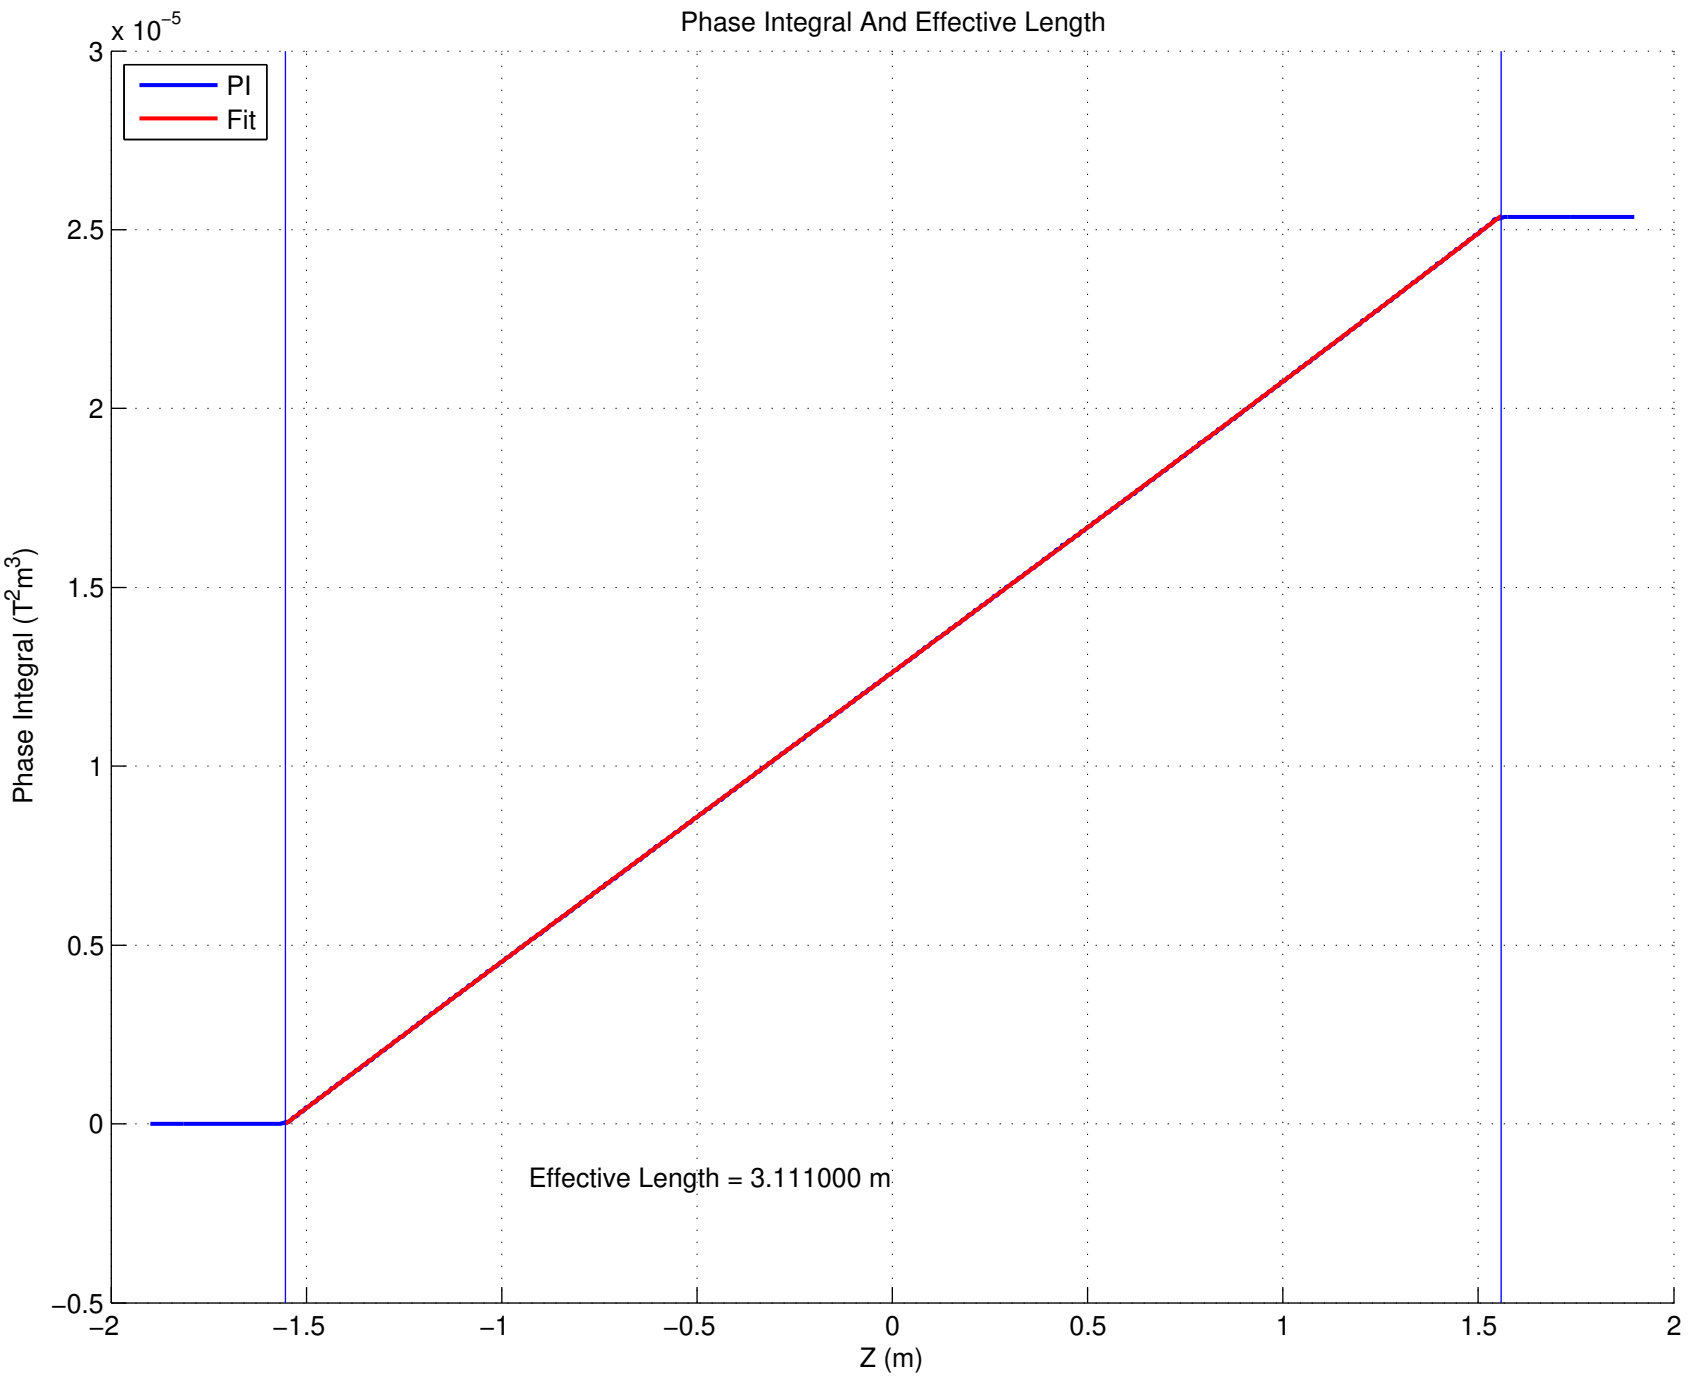
Phase Integral And Effective Length
x 10^-5
PI
Fit
Phase Integral (T^2m^3)
Z (m)
Effective Length = 3.111000 m
3
2.5
2
1.5
1
0.5
0
−0.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

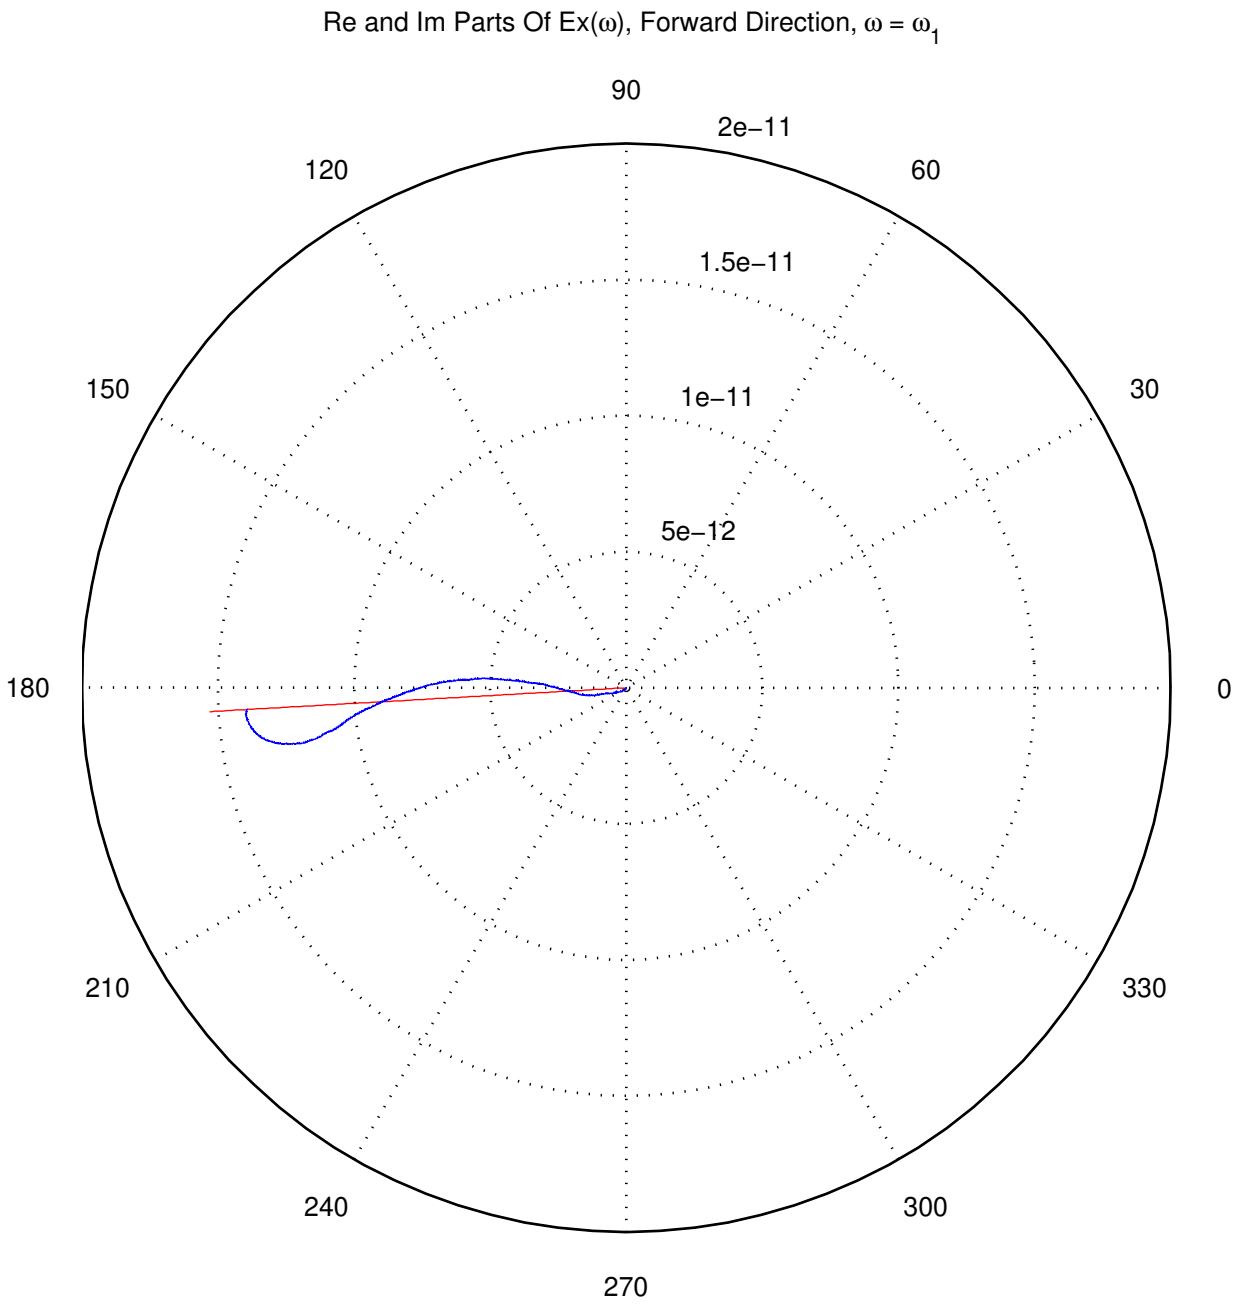
Re and Im Parts Of Ex(ω), Forward Direction, ω = ω1
90
2e−11
120
60
1.5e−11
150
30
1e−11
5e−12
180
0
210
330
240
300
270

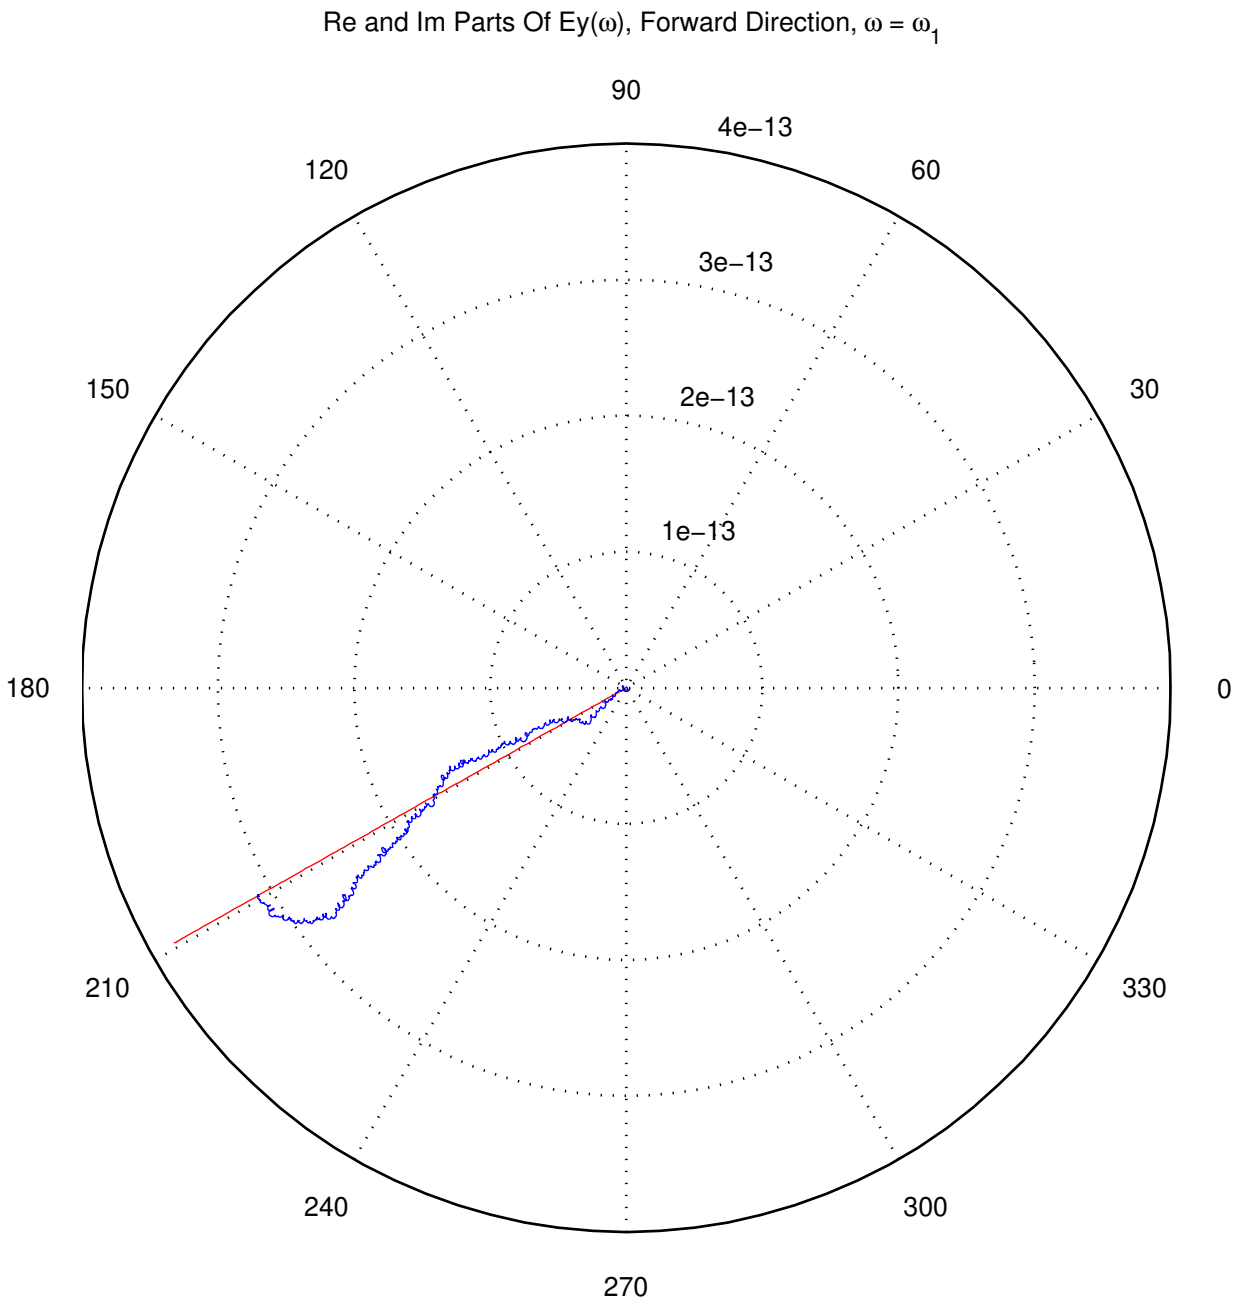
Re and Im Parts Of Ey(ω), Forward Direction, ω = ω1
90
4e−13
120
60
3e−13
150
30
2e−13
1e−13
180
0
210
330
240
300
270

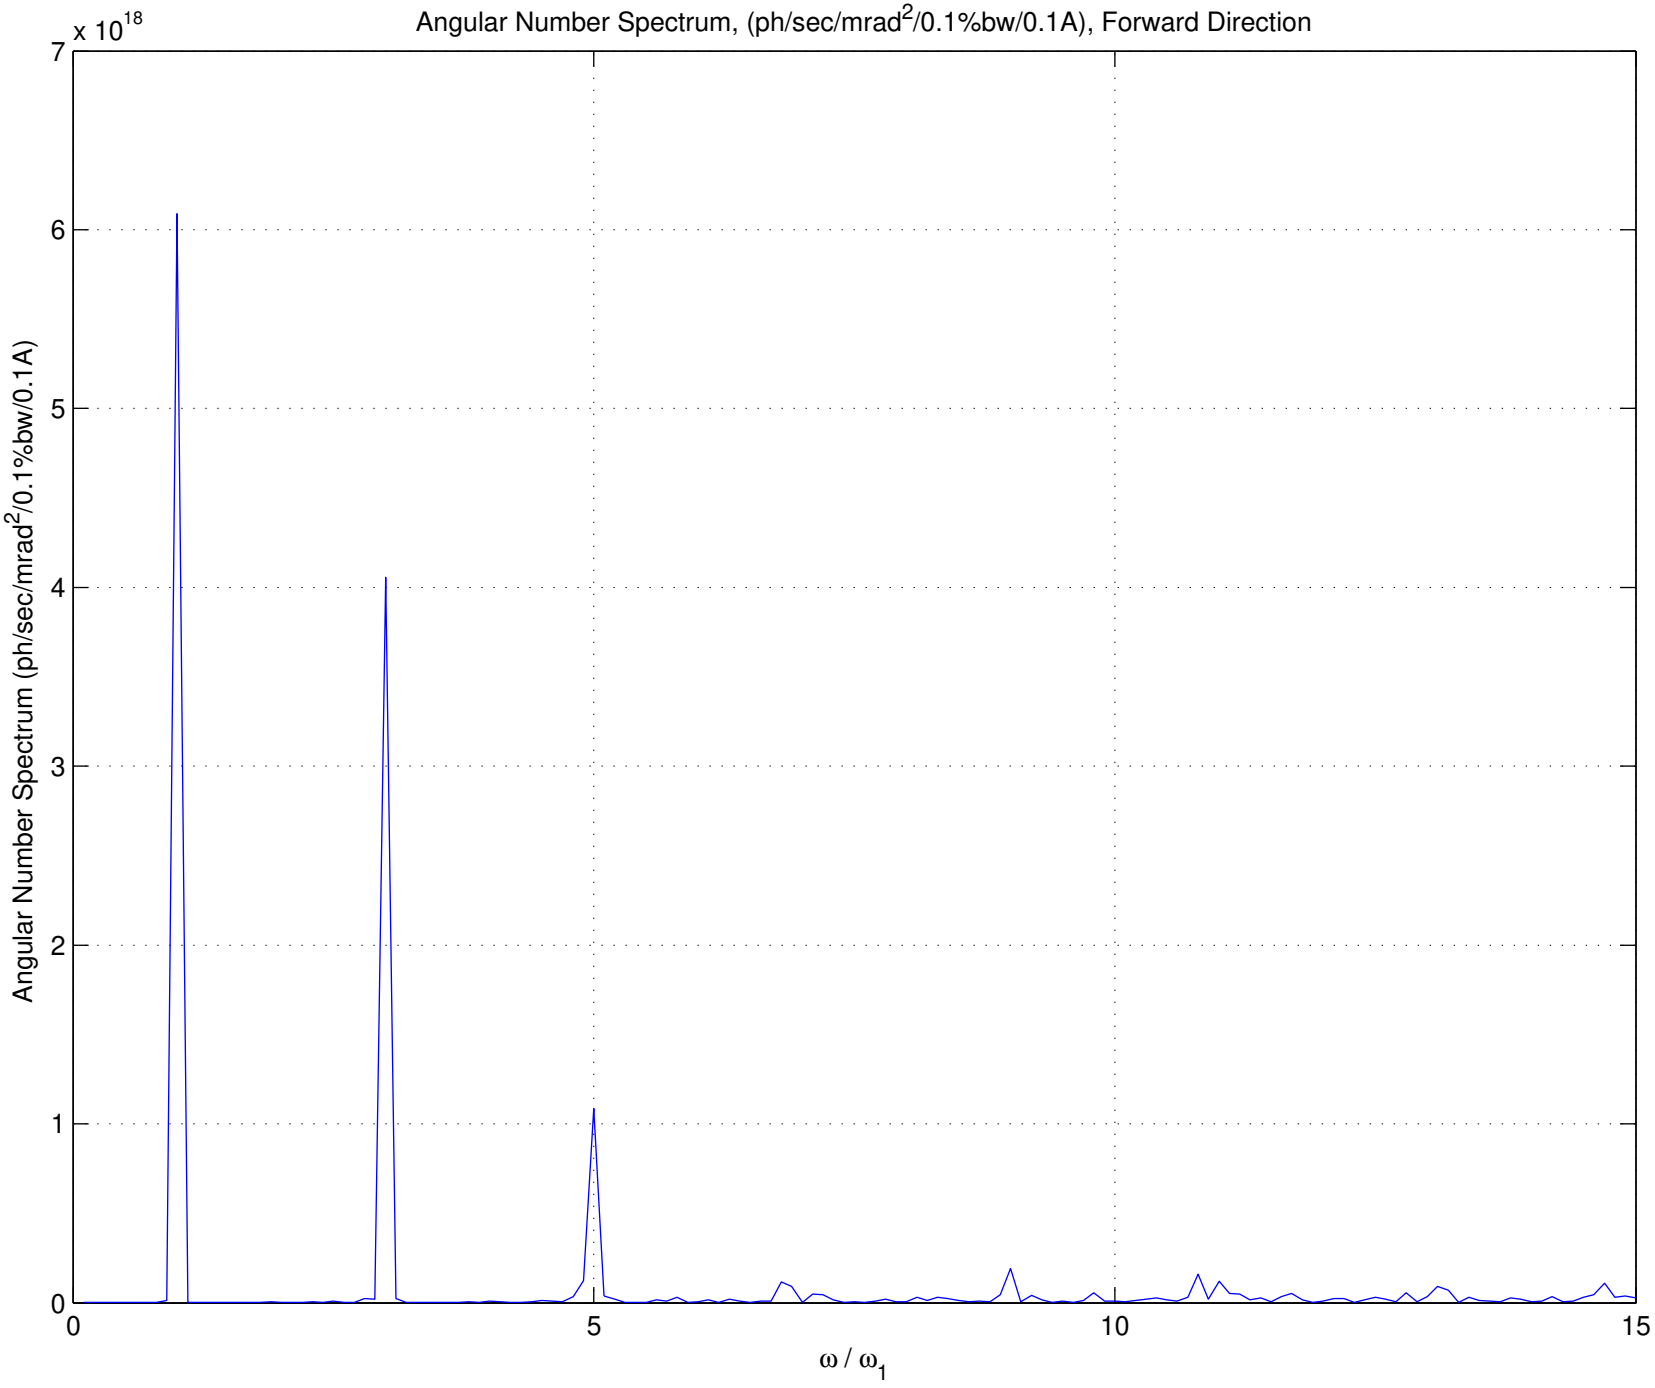
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
7
6
5
4
3
2
1
0
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
0
5
10
15
ω / ω1

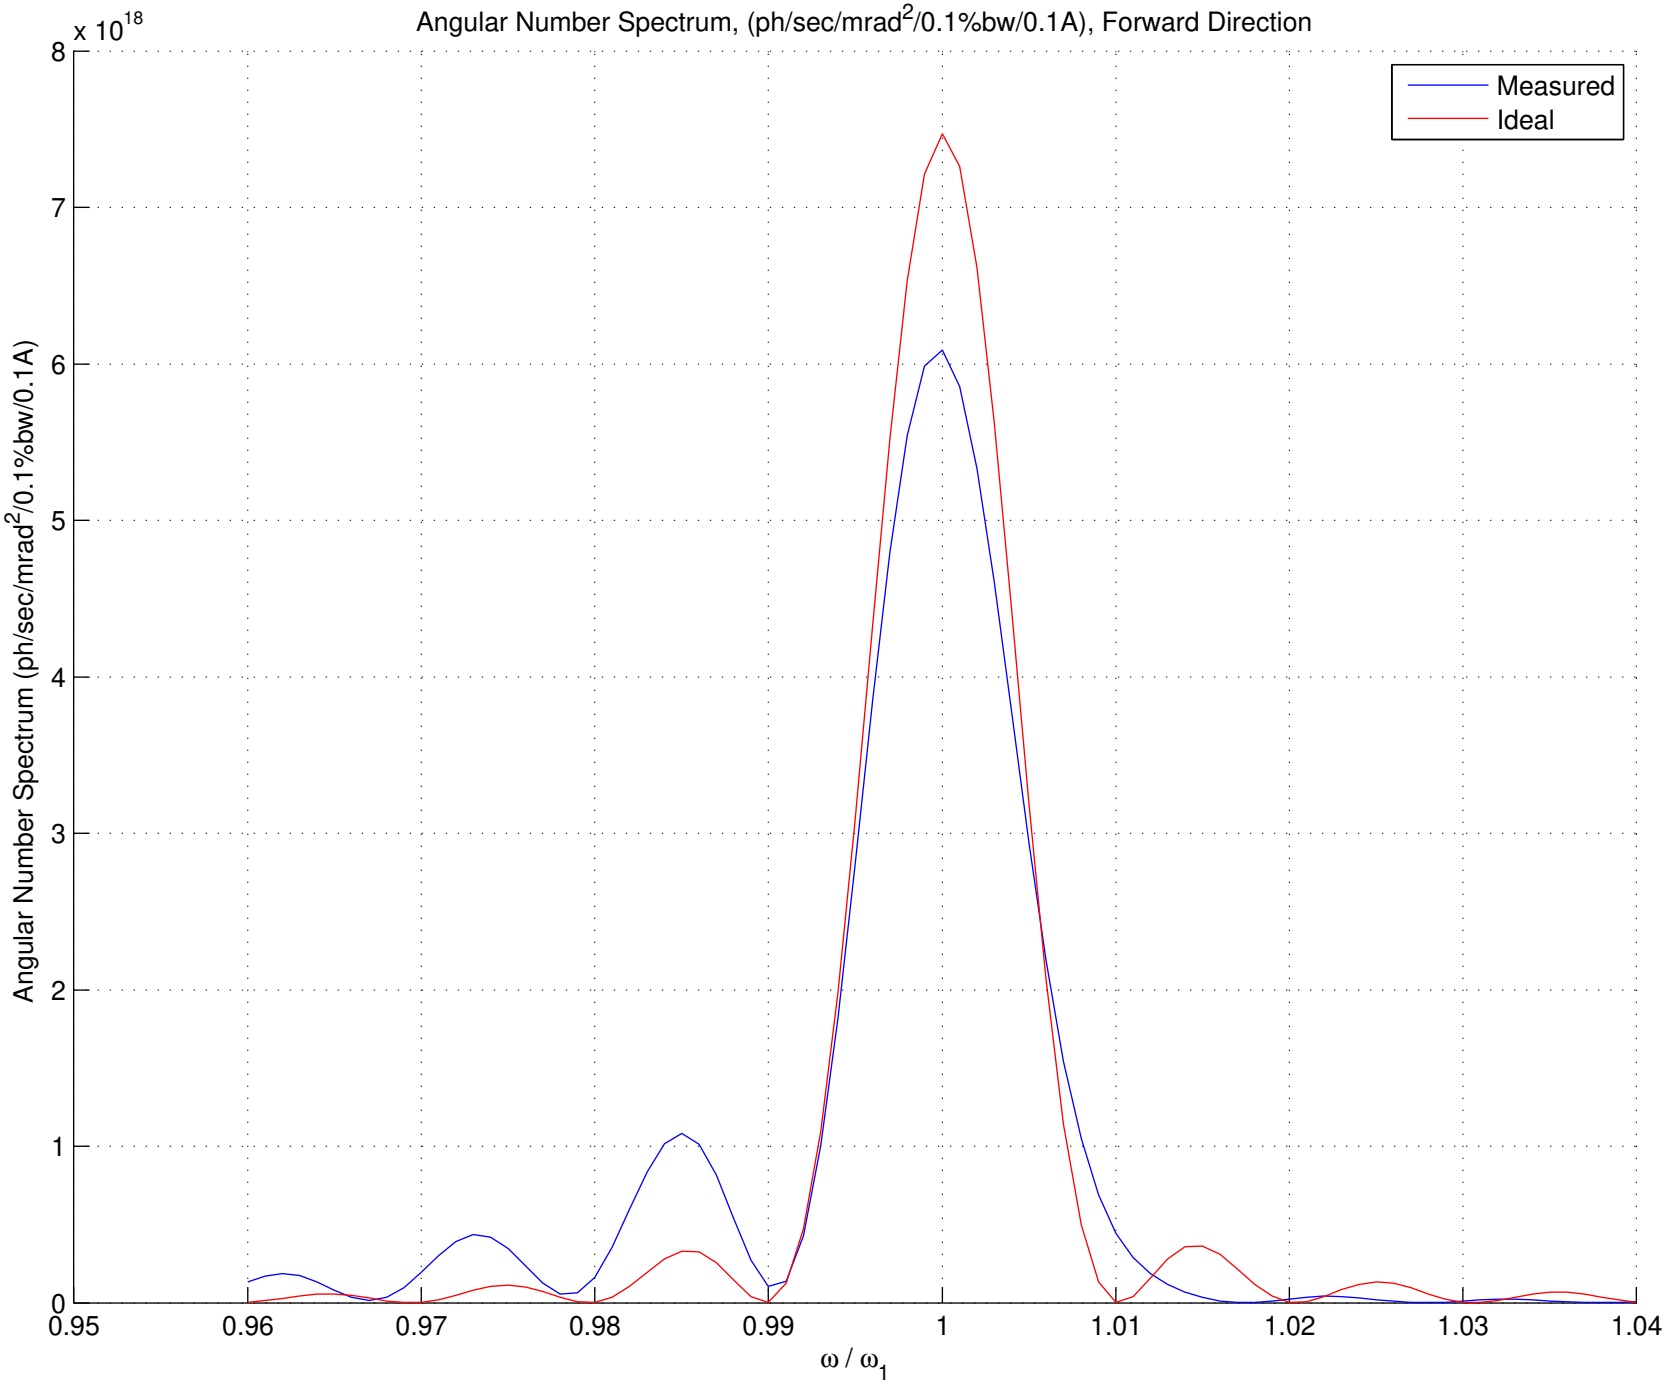
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
1
2
3
4
5
6
7
8
0.95
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04

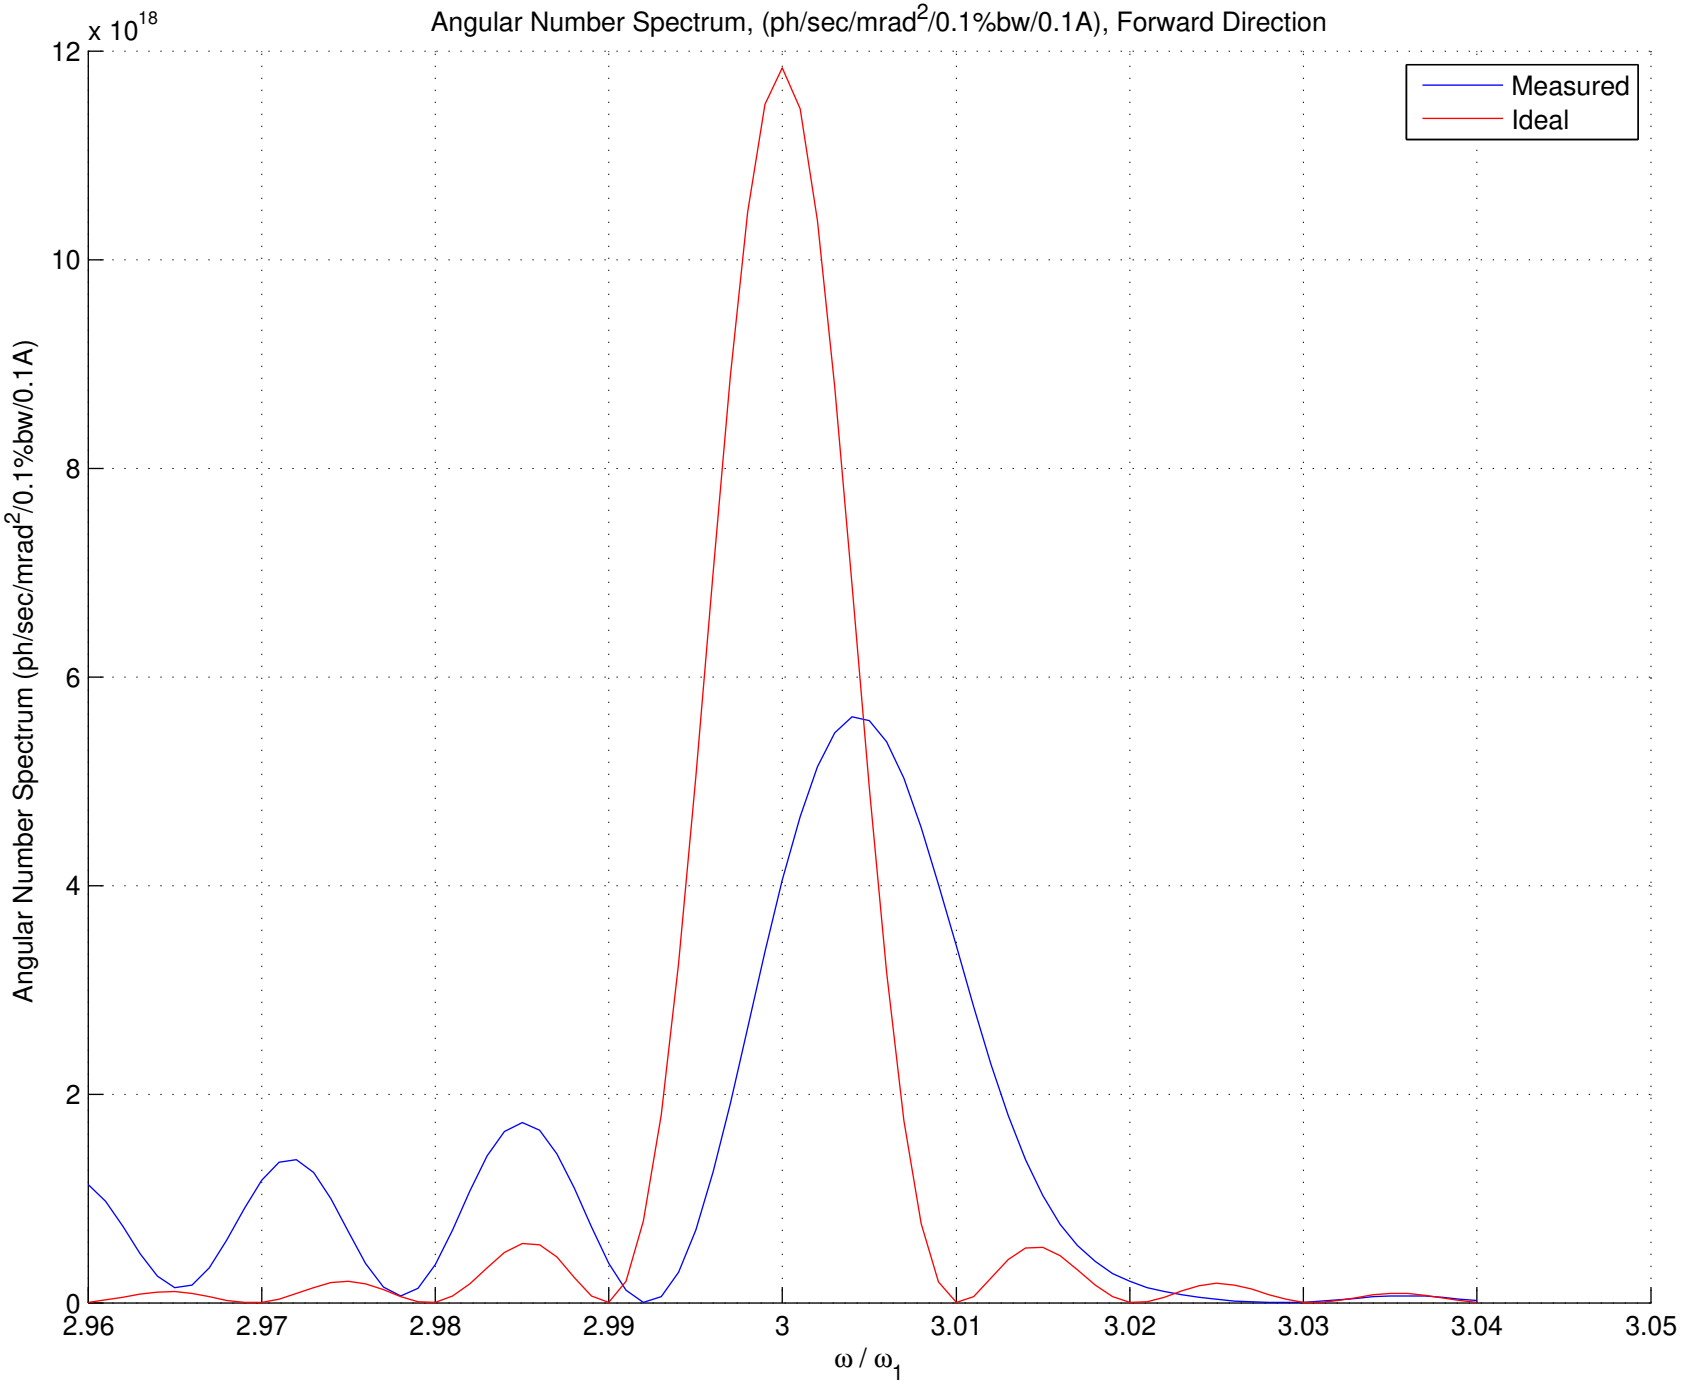
Angular Number Spectrum, (ph/sec/mrad$^2$/0.1%bw/0.1A), Forward Direction
x $10^{18}$
Angular Number Spectrum (ph/sec/mrad$^2$/0.1%bw/0.1A)
ω / $ω_1$
Measured
Ideal
0
2
4
6
8
10
12
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05

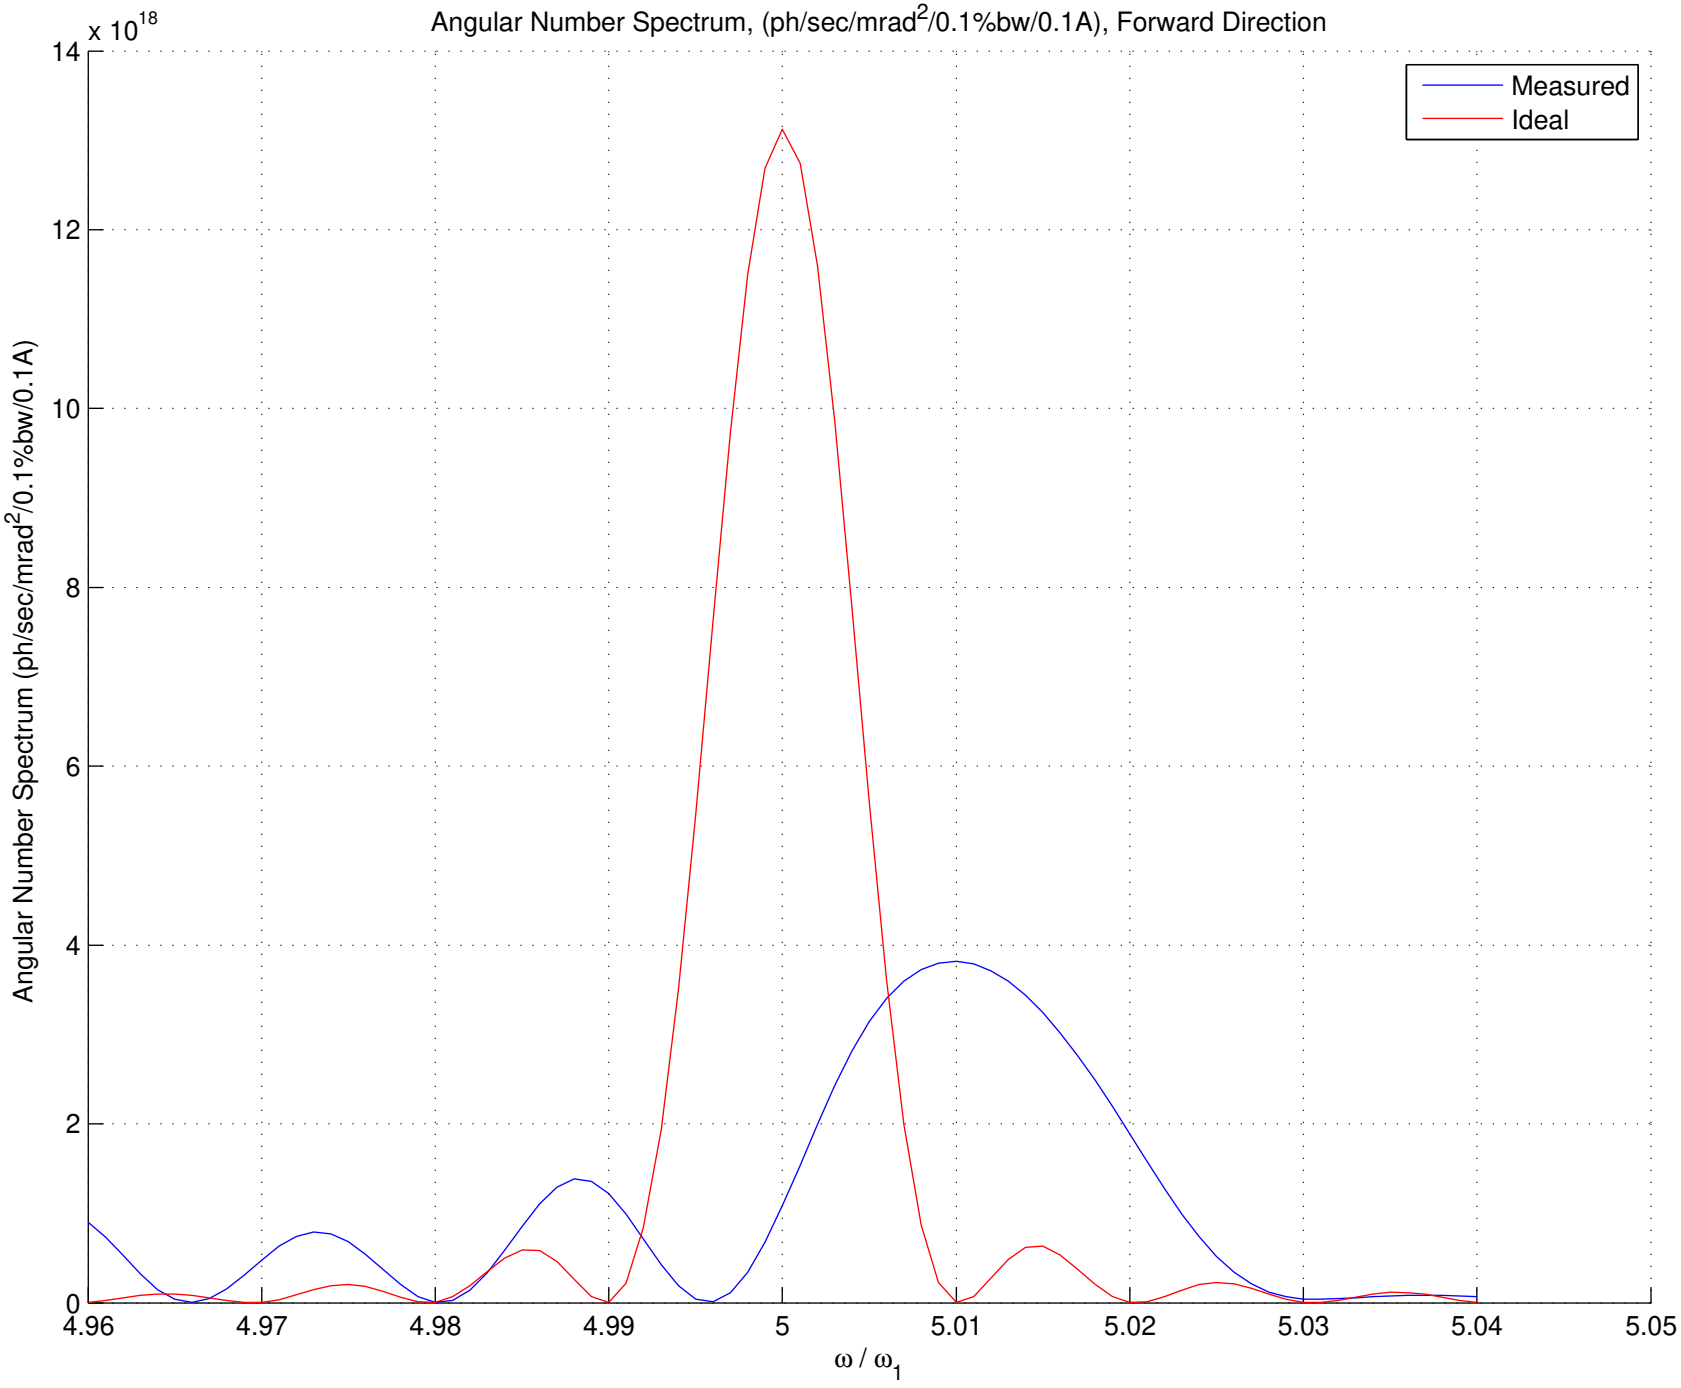
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
2
4
6
8
10
12
14
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05