SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 08−25−2014
Time: 16:16:12

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 4
Tuning Stage: Fine Tuning
Run Number: 27
Measurement Type: Z Scans
Operator: YL
Comment: spacers removed from #87
Session first run: 20
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0004\Fine Tuning\Z Scans\Run 027\bscanz.dat

Temperature (C)
DELTA:−−> T1 20.17 −−> T2 20.13 −−> T5 20.04 −−> T3 20.17 −−> Air 20.08 −−> T4 20.11

Axes position (m) X:0.021643 Y:0.000194
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001161 V
Vy_0i = −0.002790 V

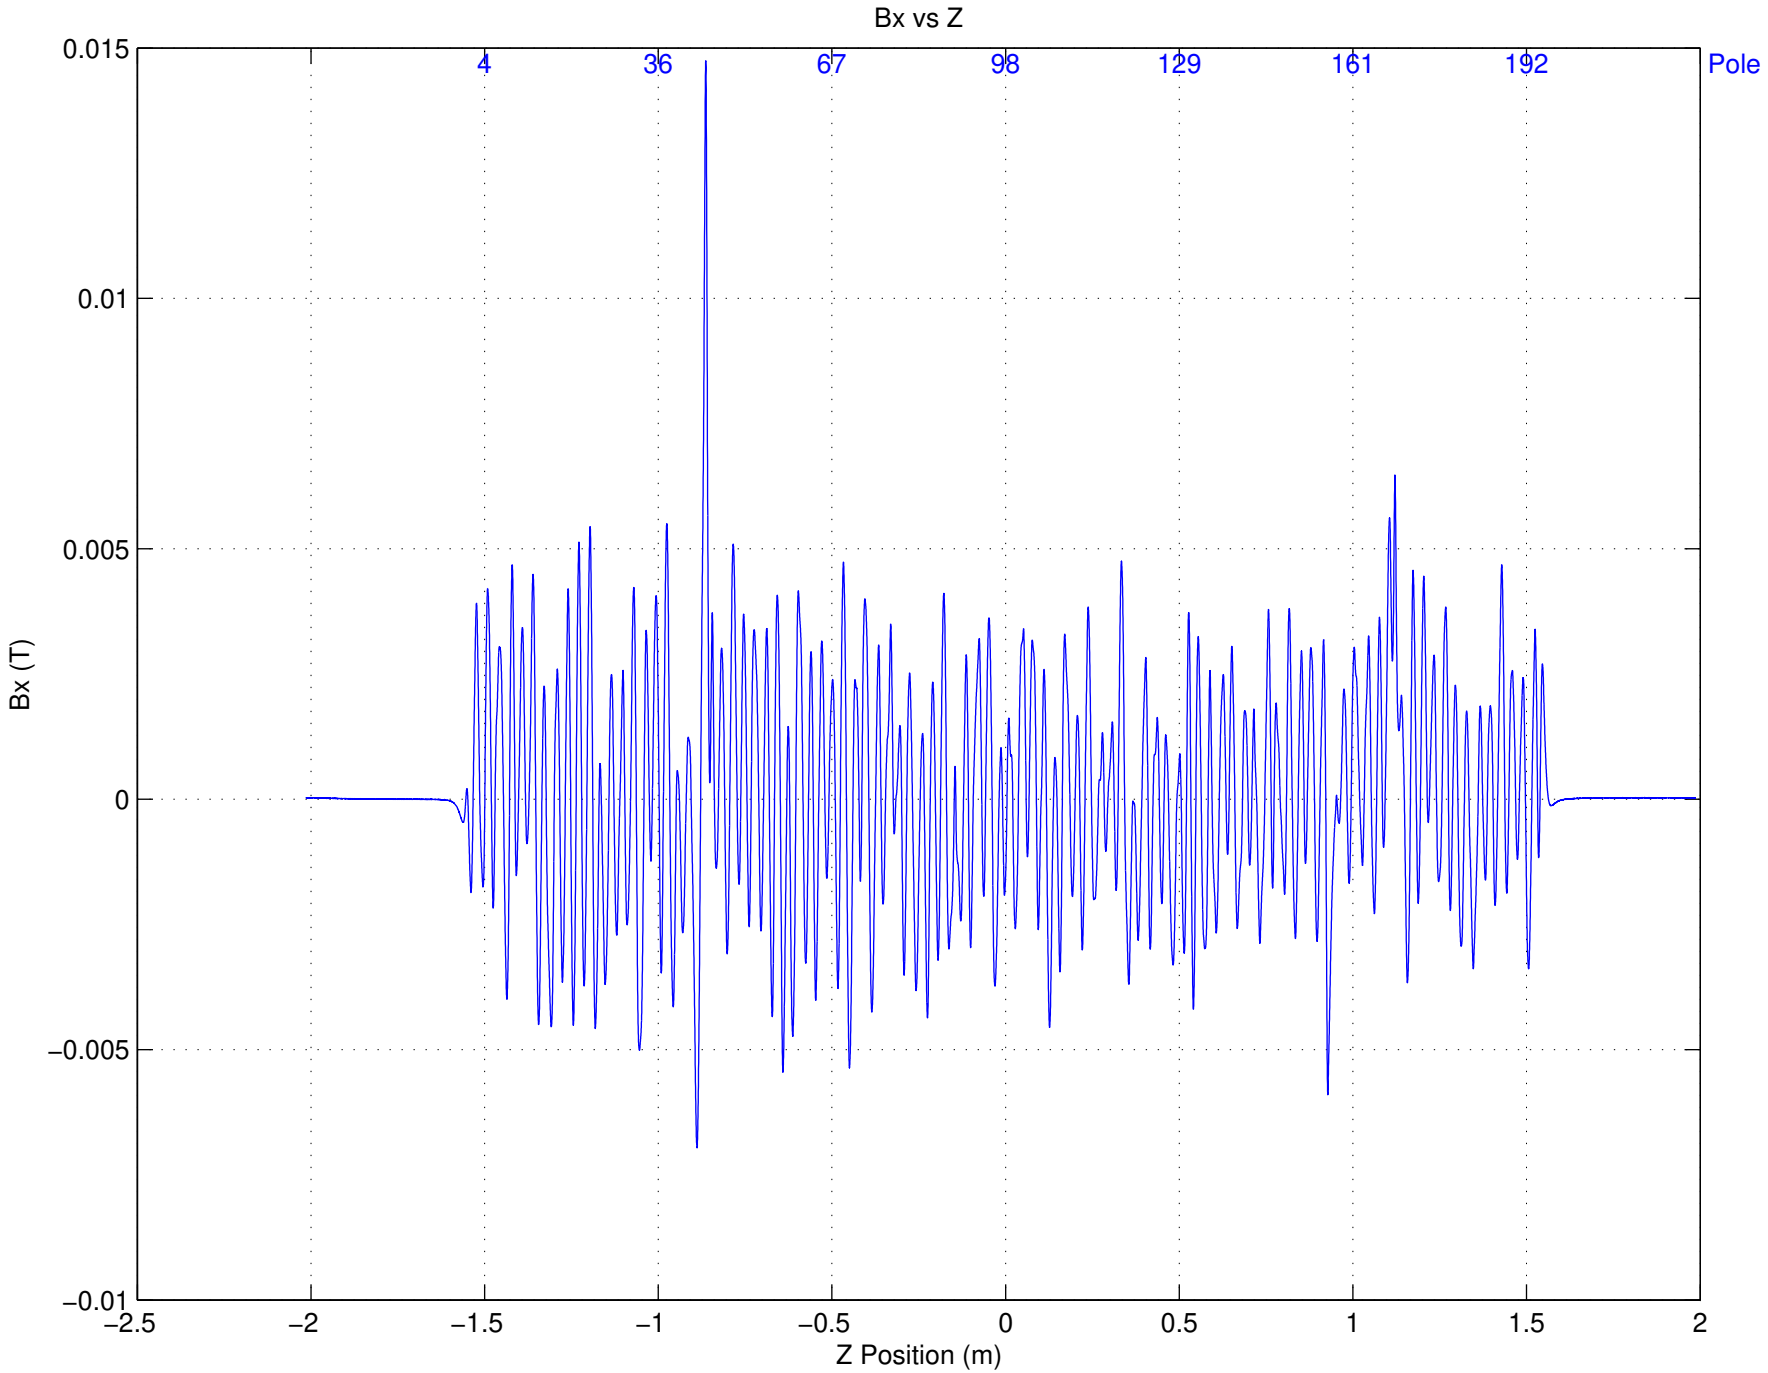
Bx vs Z
4
36
67
98
129
161
192
Pole
0.015
0.01
0.005
0
−0.005
−0.01
Bx (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

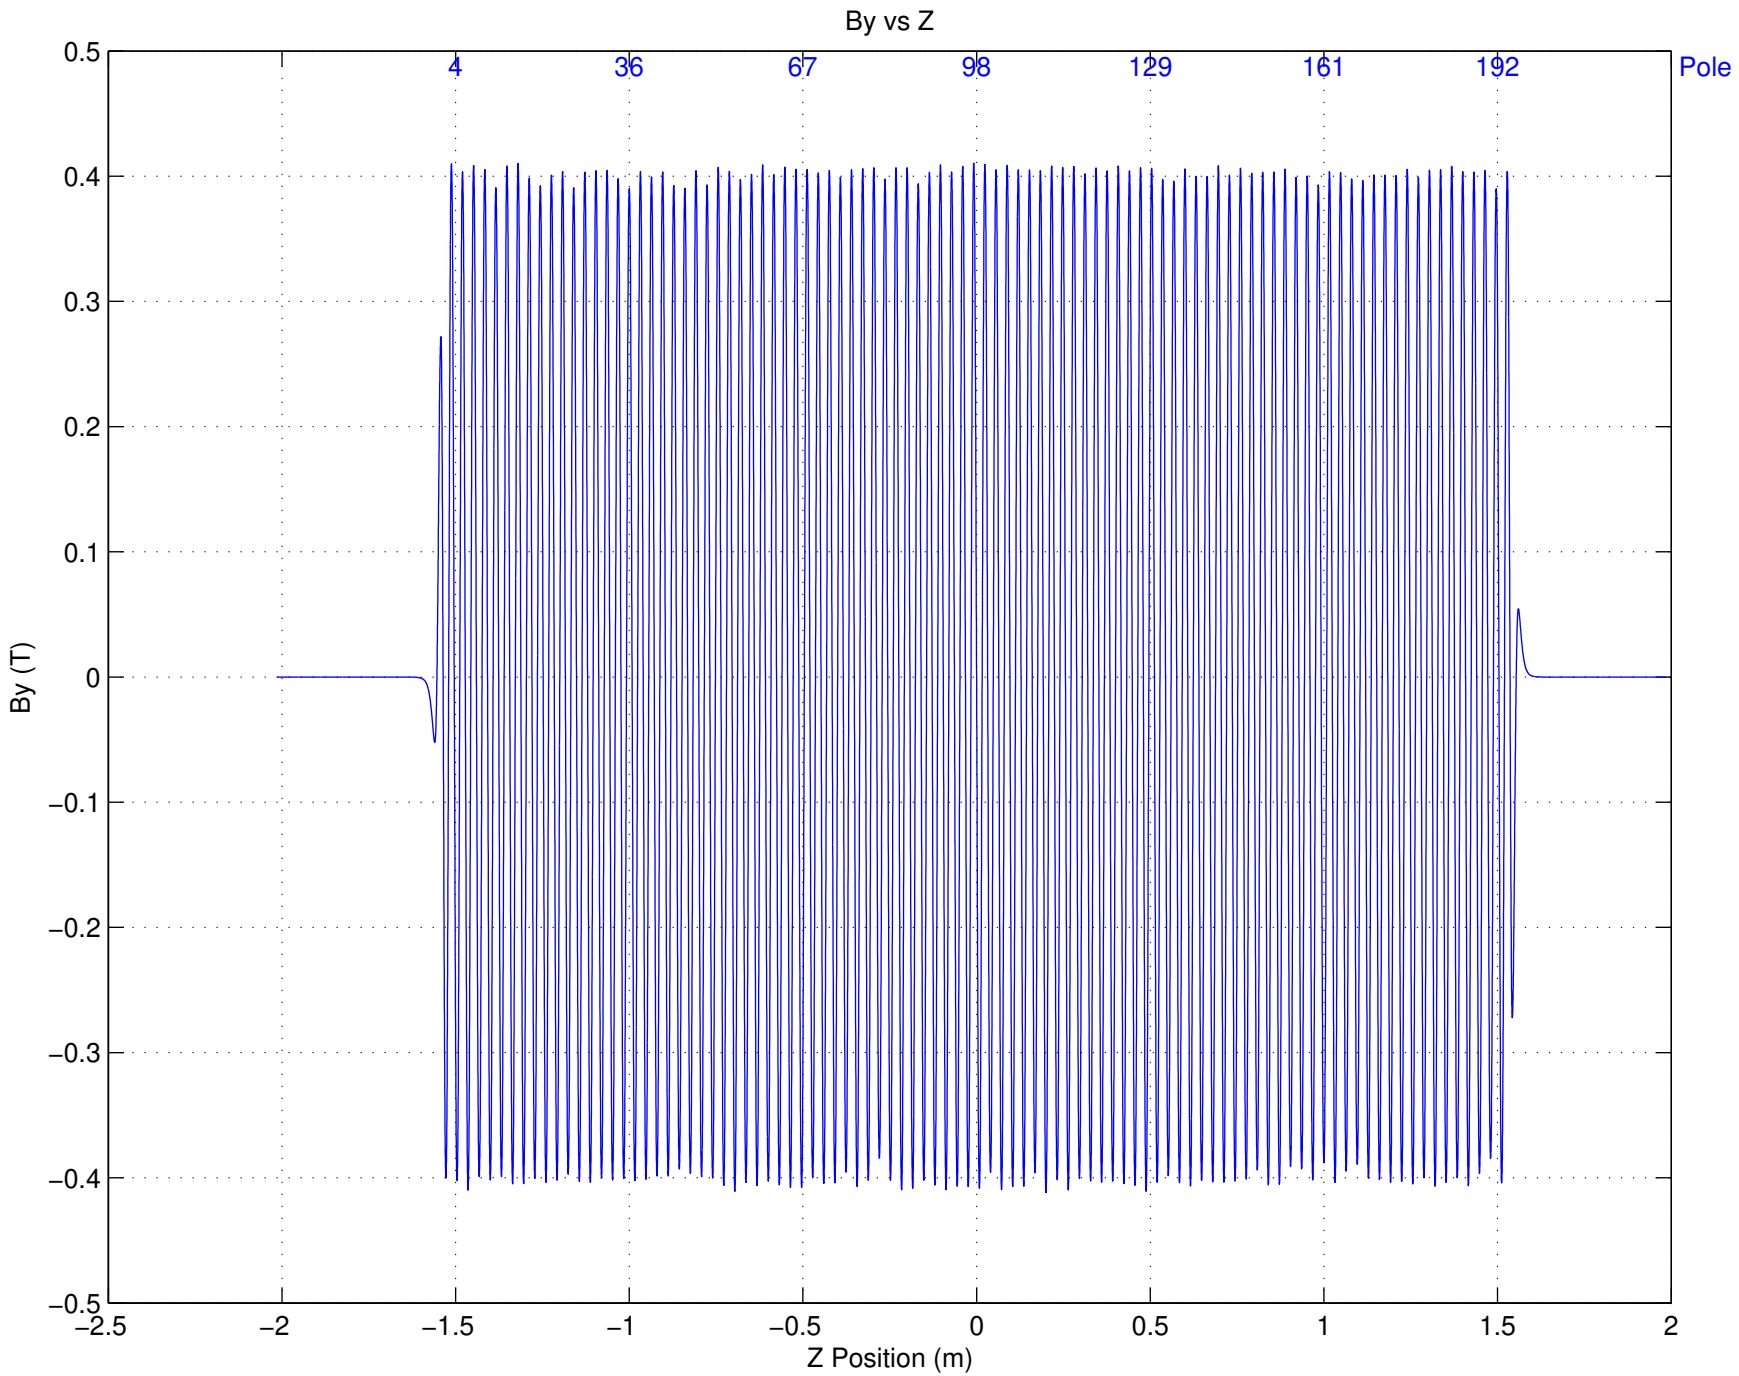
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

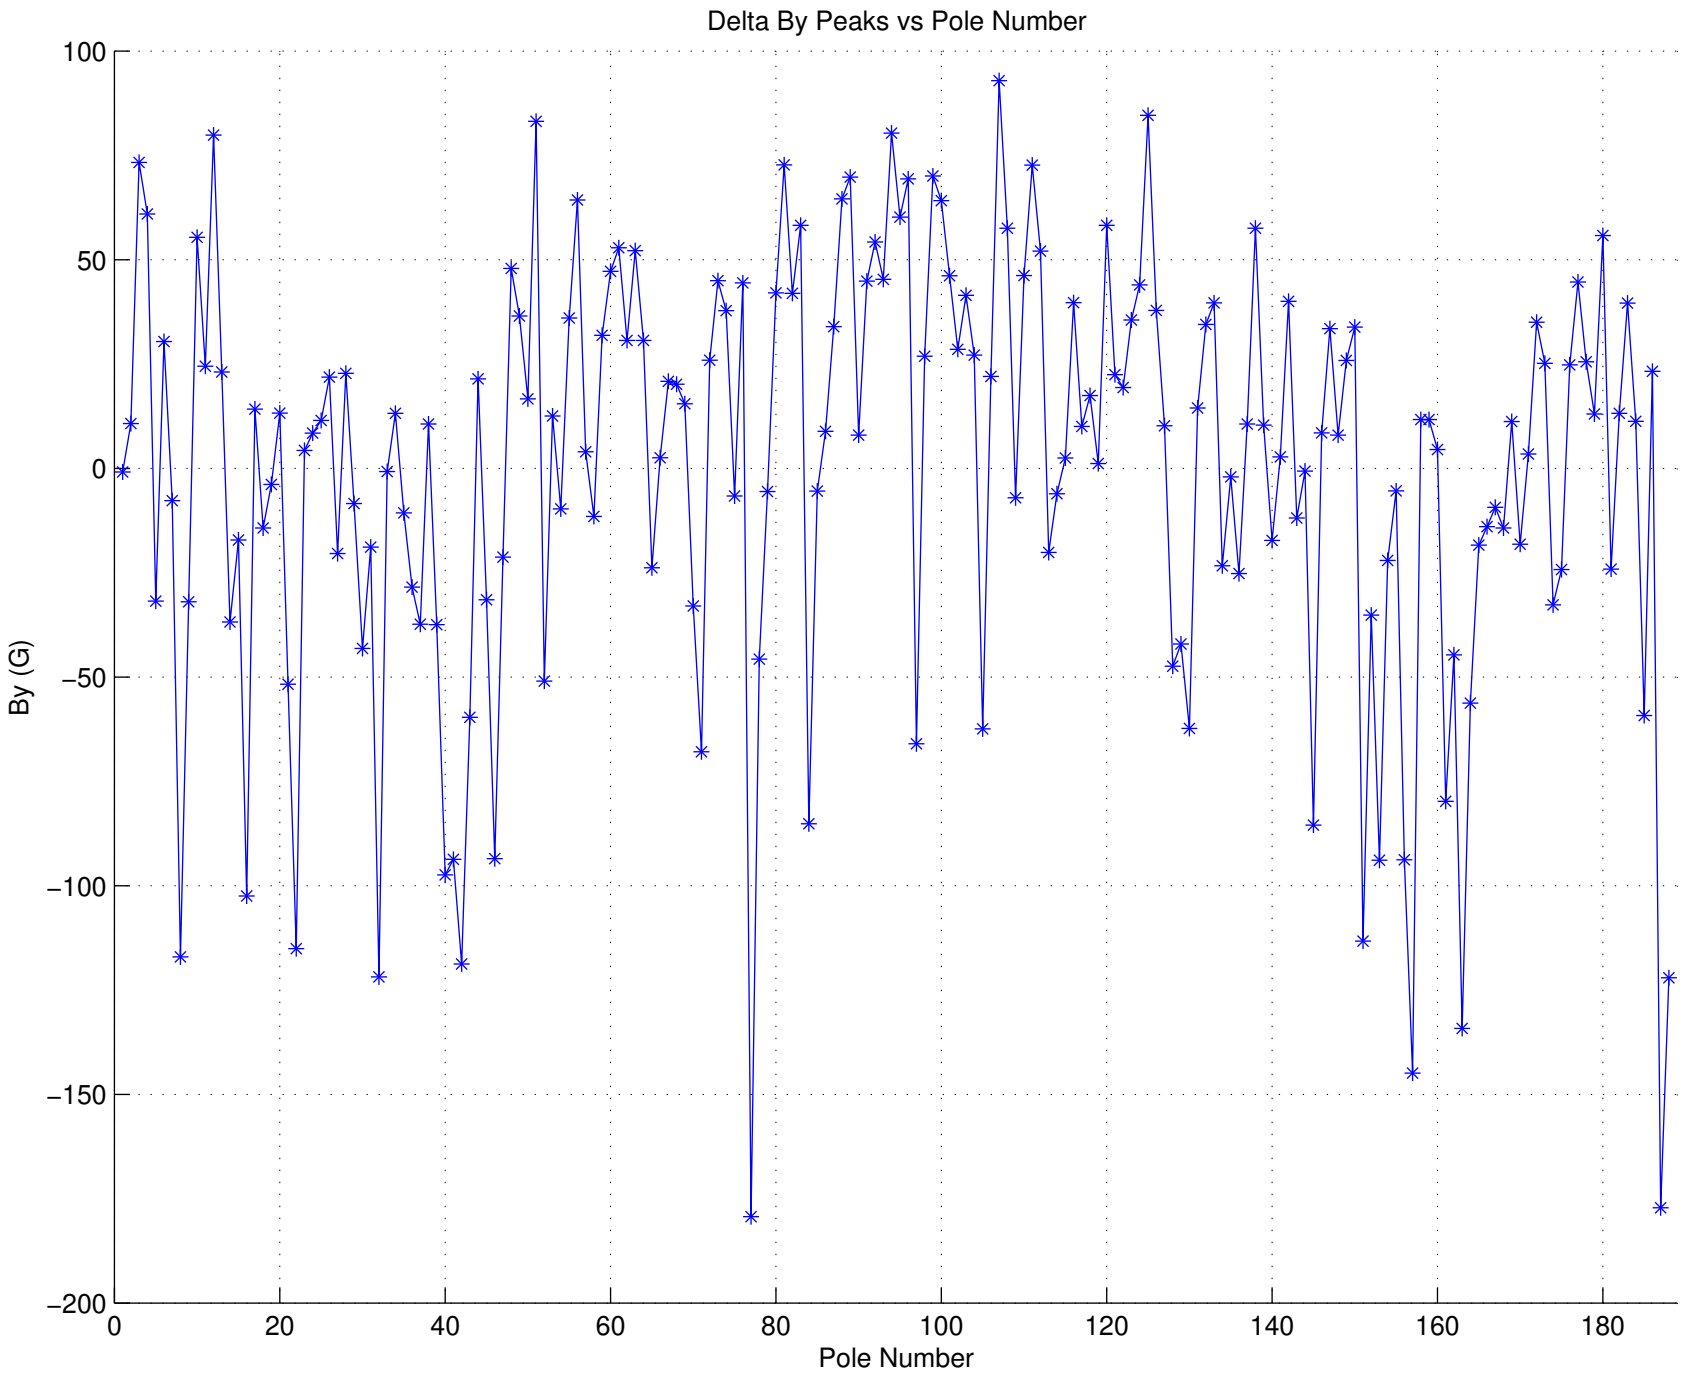
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
50
0
−50
−100
−150
−200
0
20
40
60
80
100
120
140
160
180

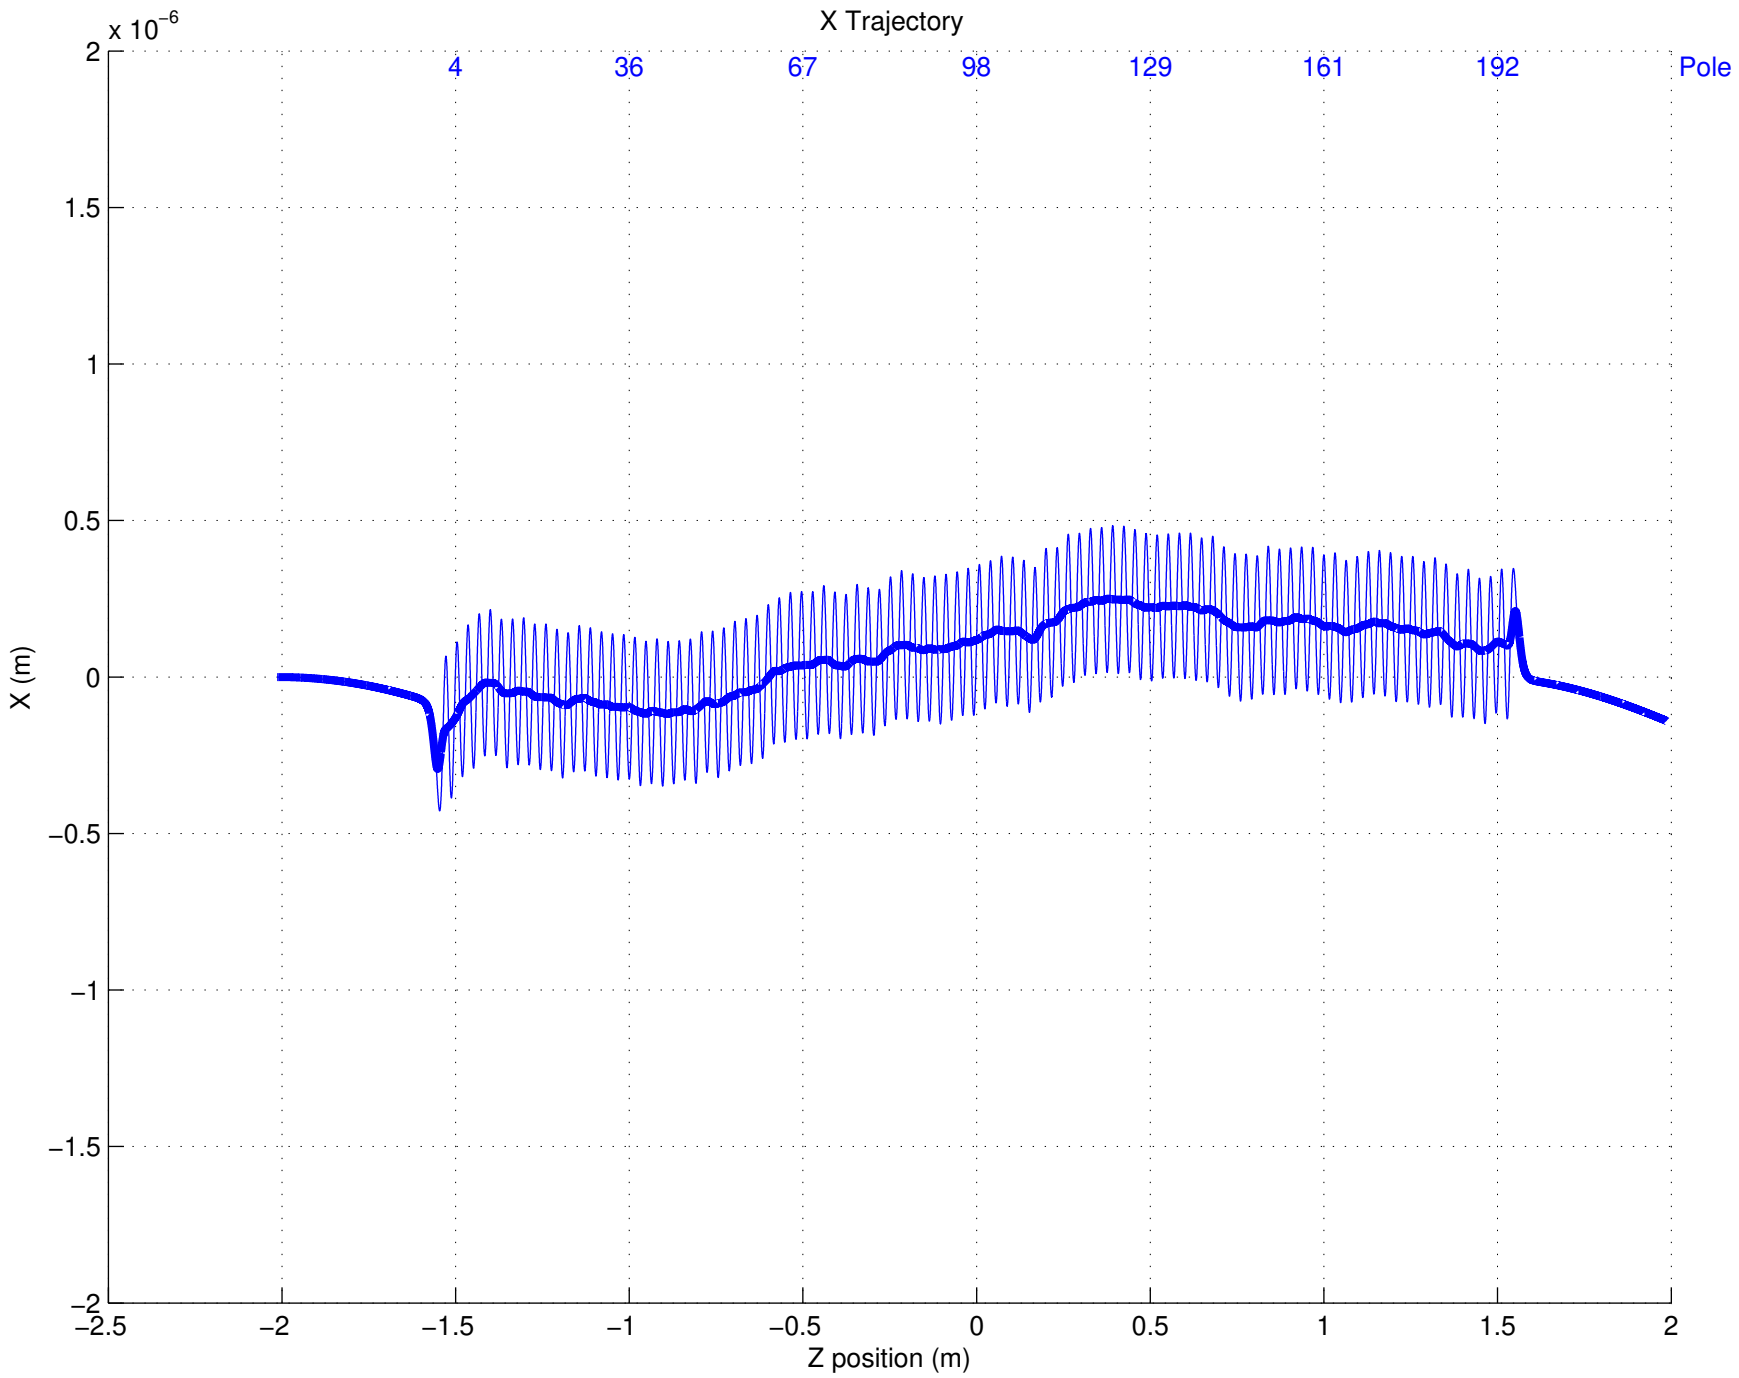
X Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

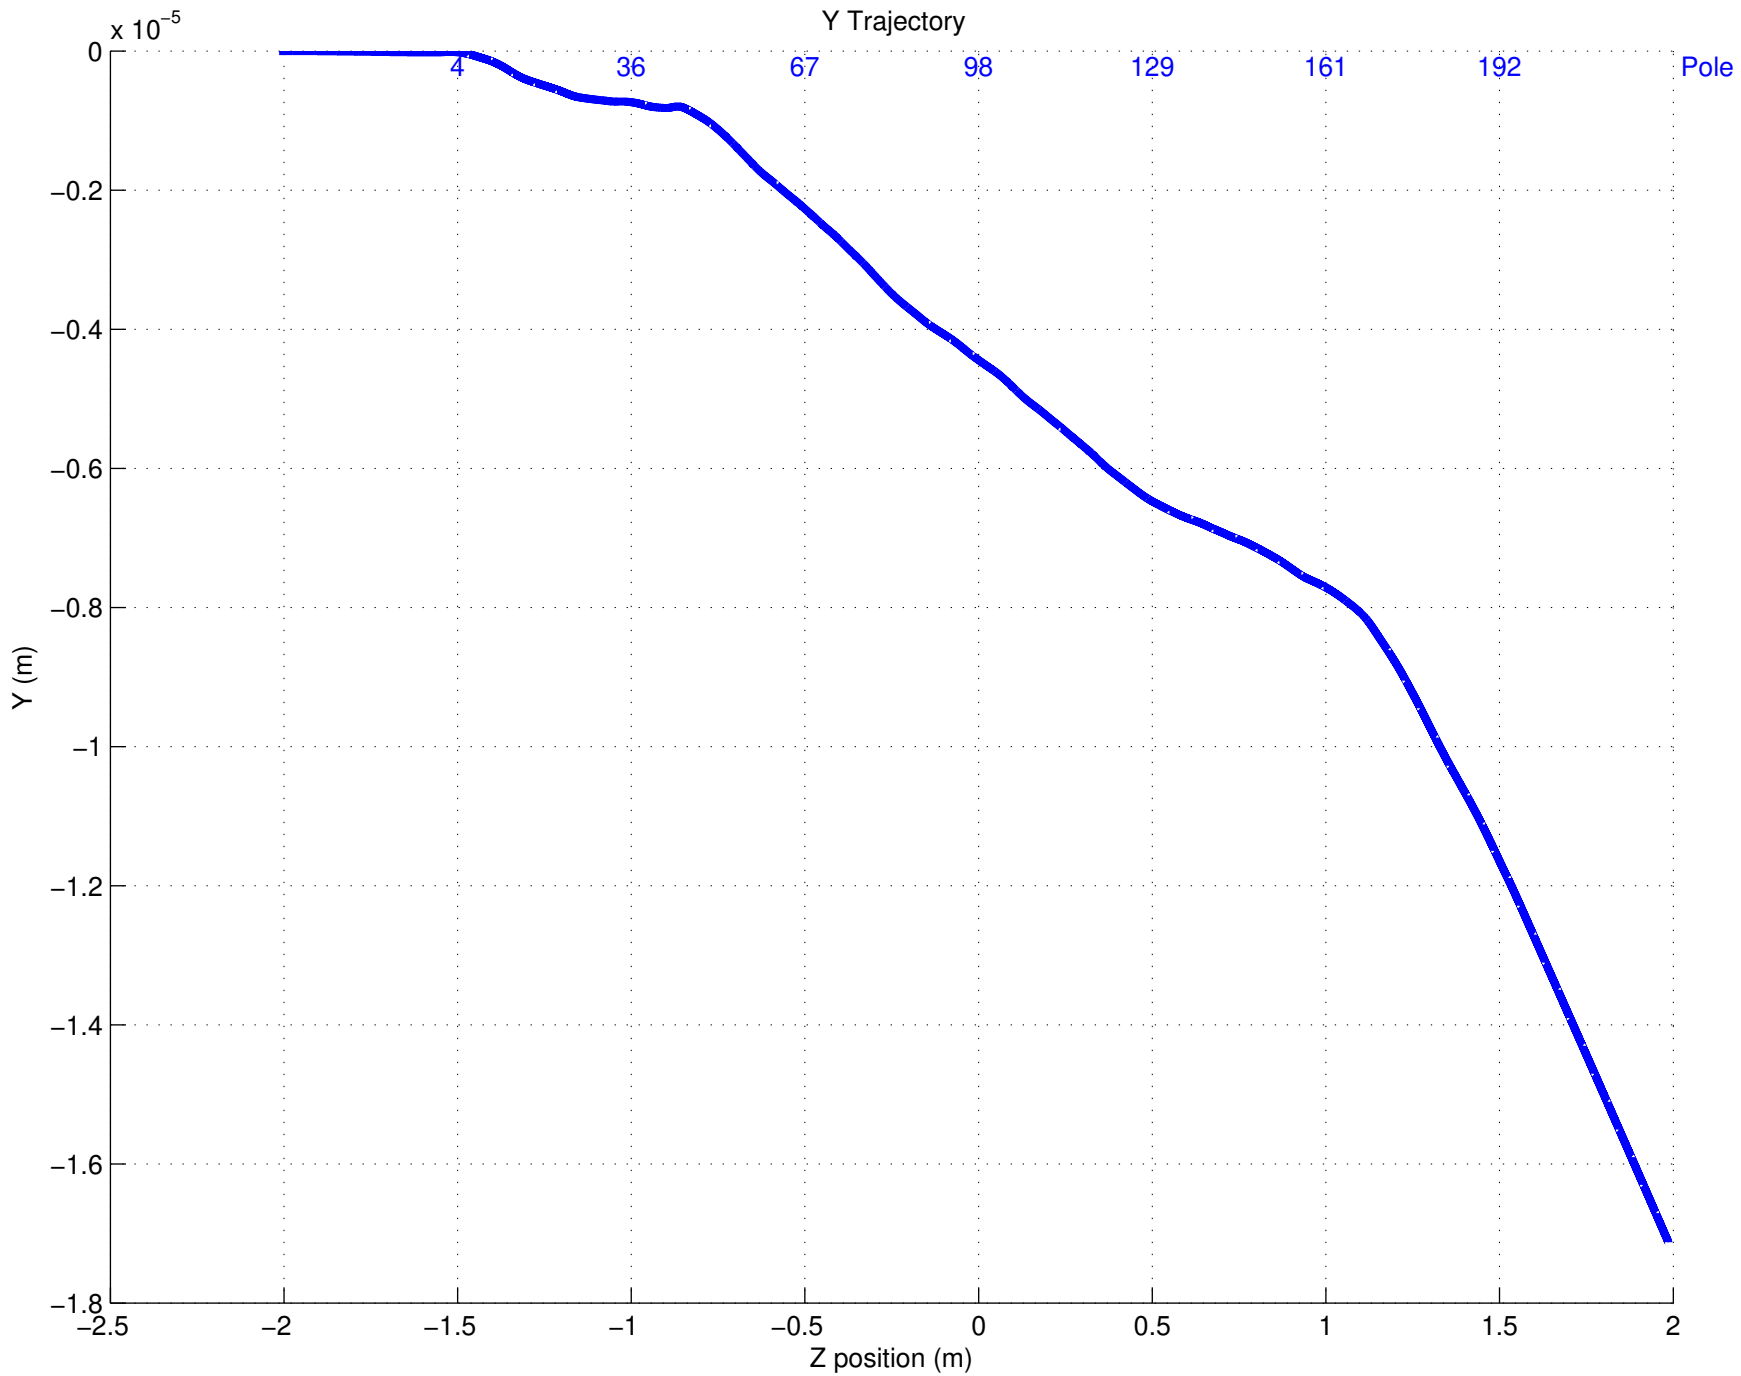
Y Trajectory
x 10^-5
0
−0.2
−0.4
−0.6
−0.8
−1
−1.2
−1.4
−1.6
−1.8
Y (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

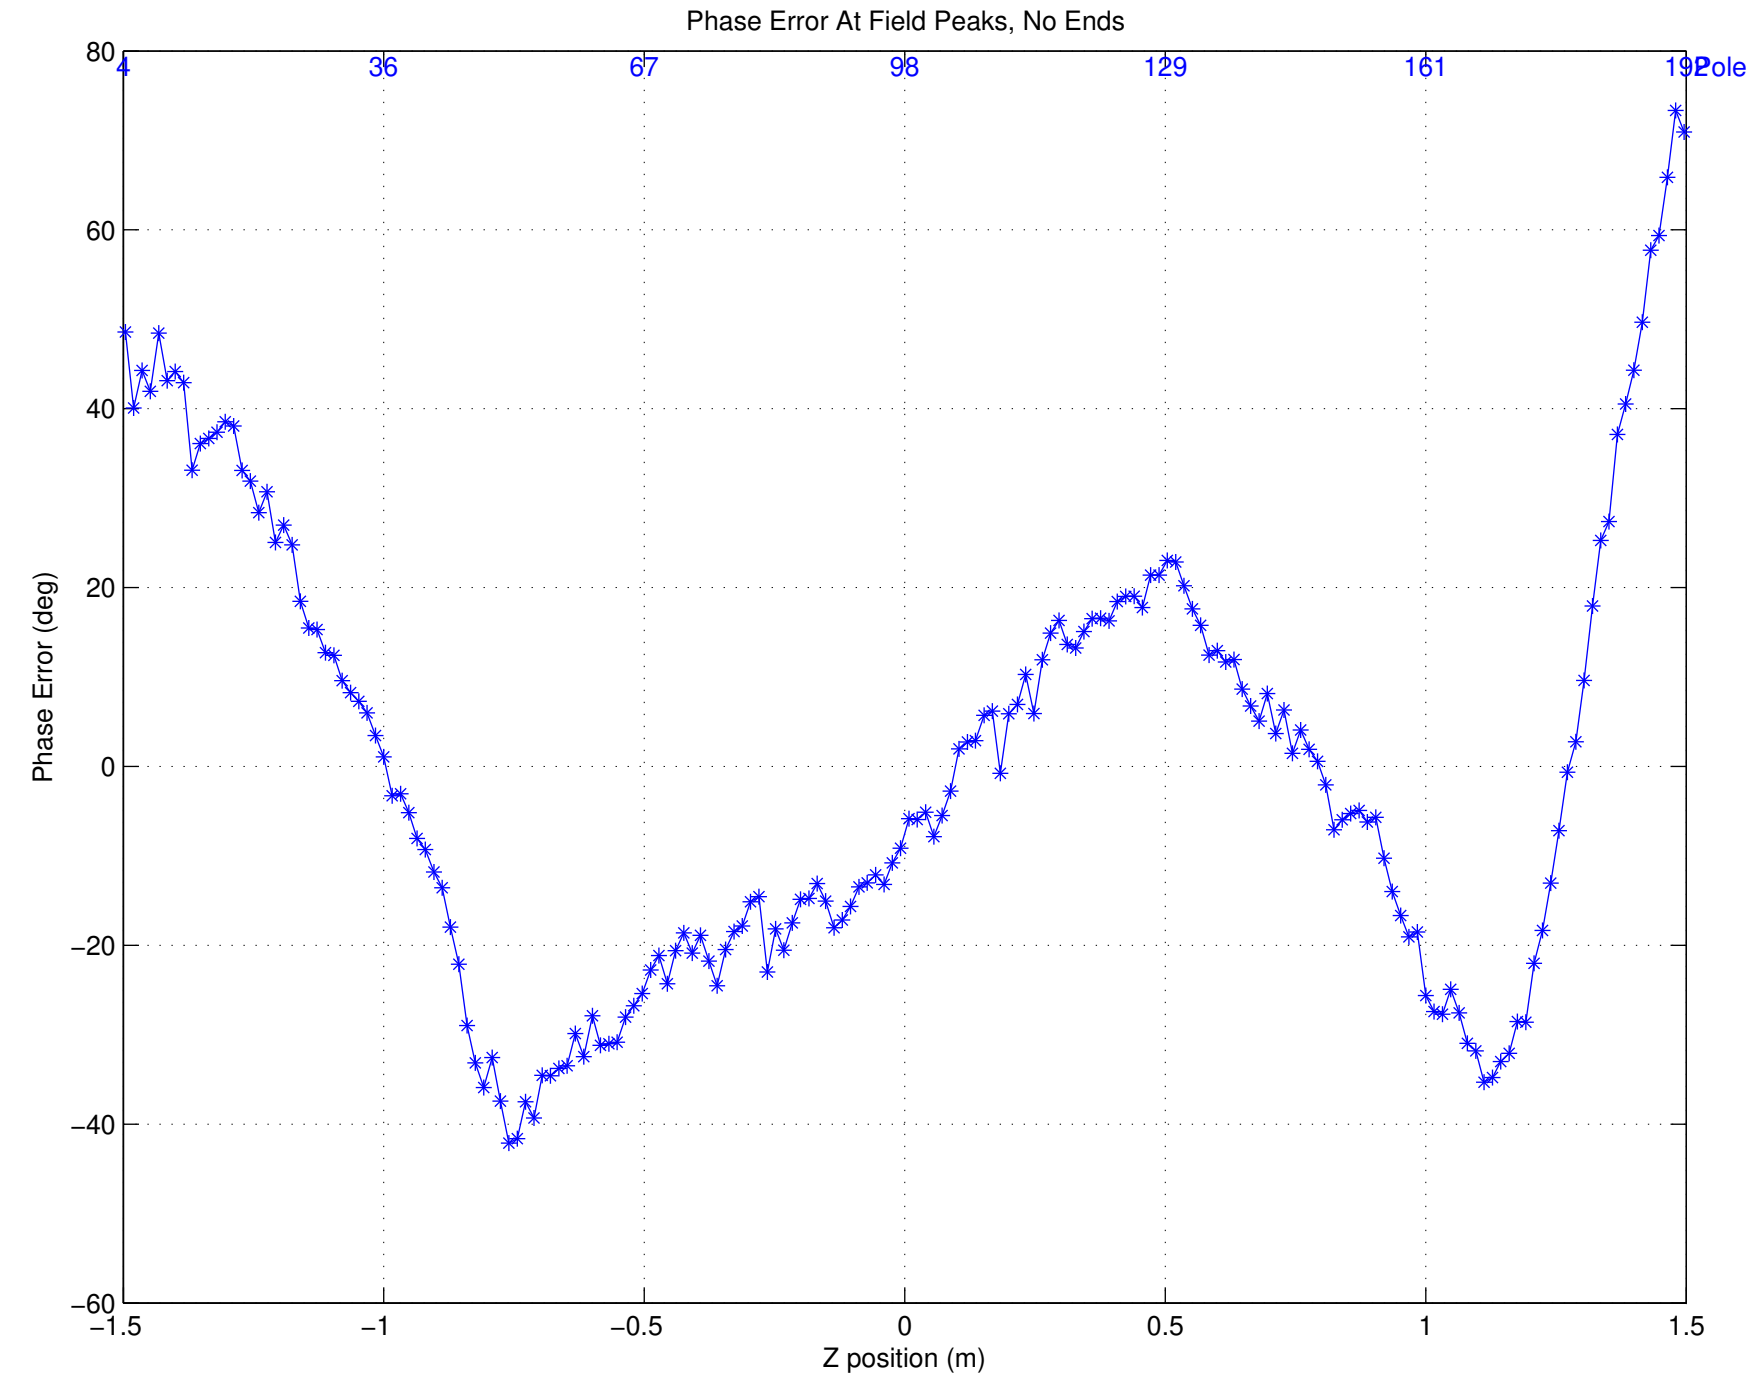

Phase Error: Ave = −0.000000 deg, RMS = 25.294590 deg

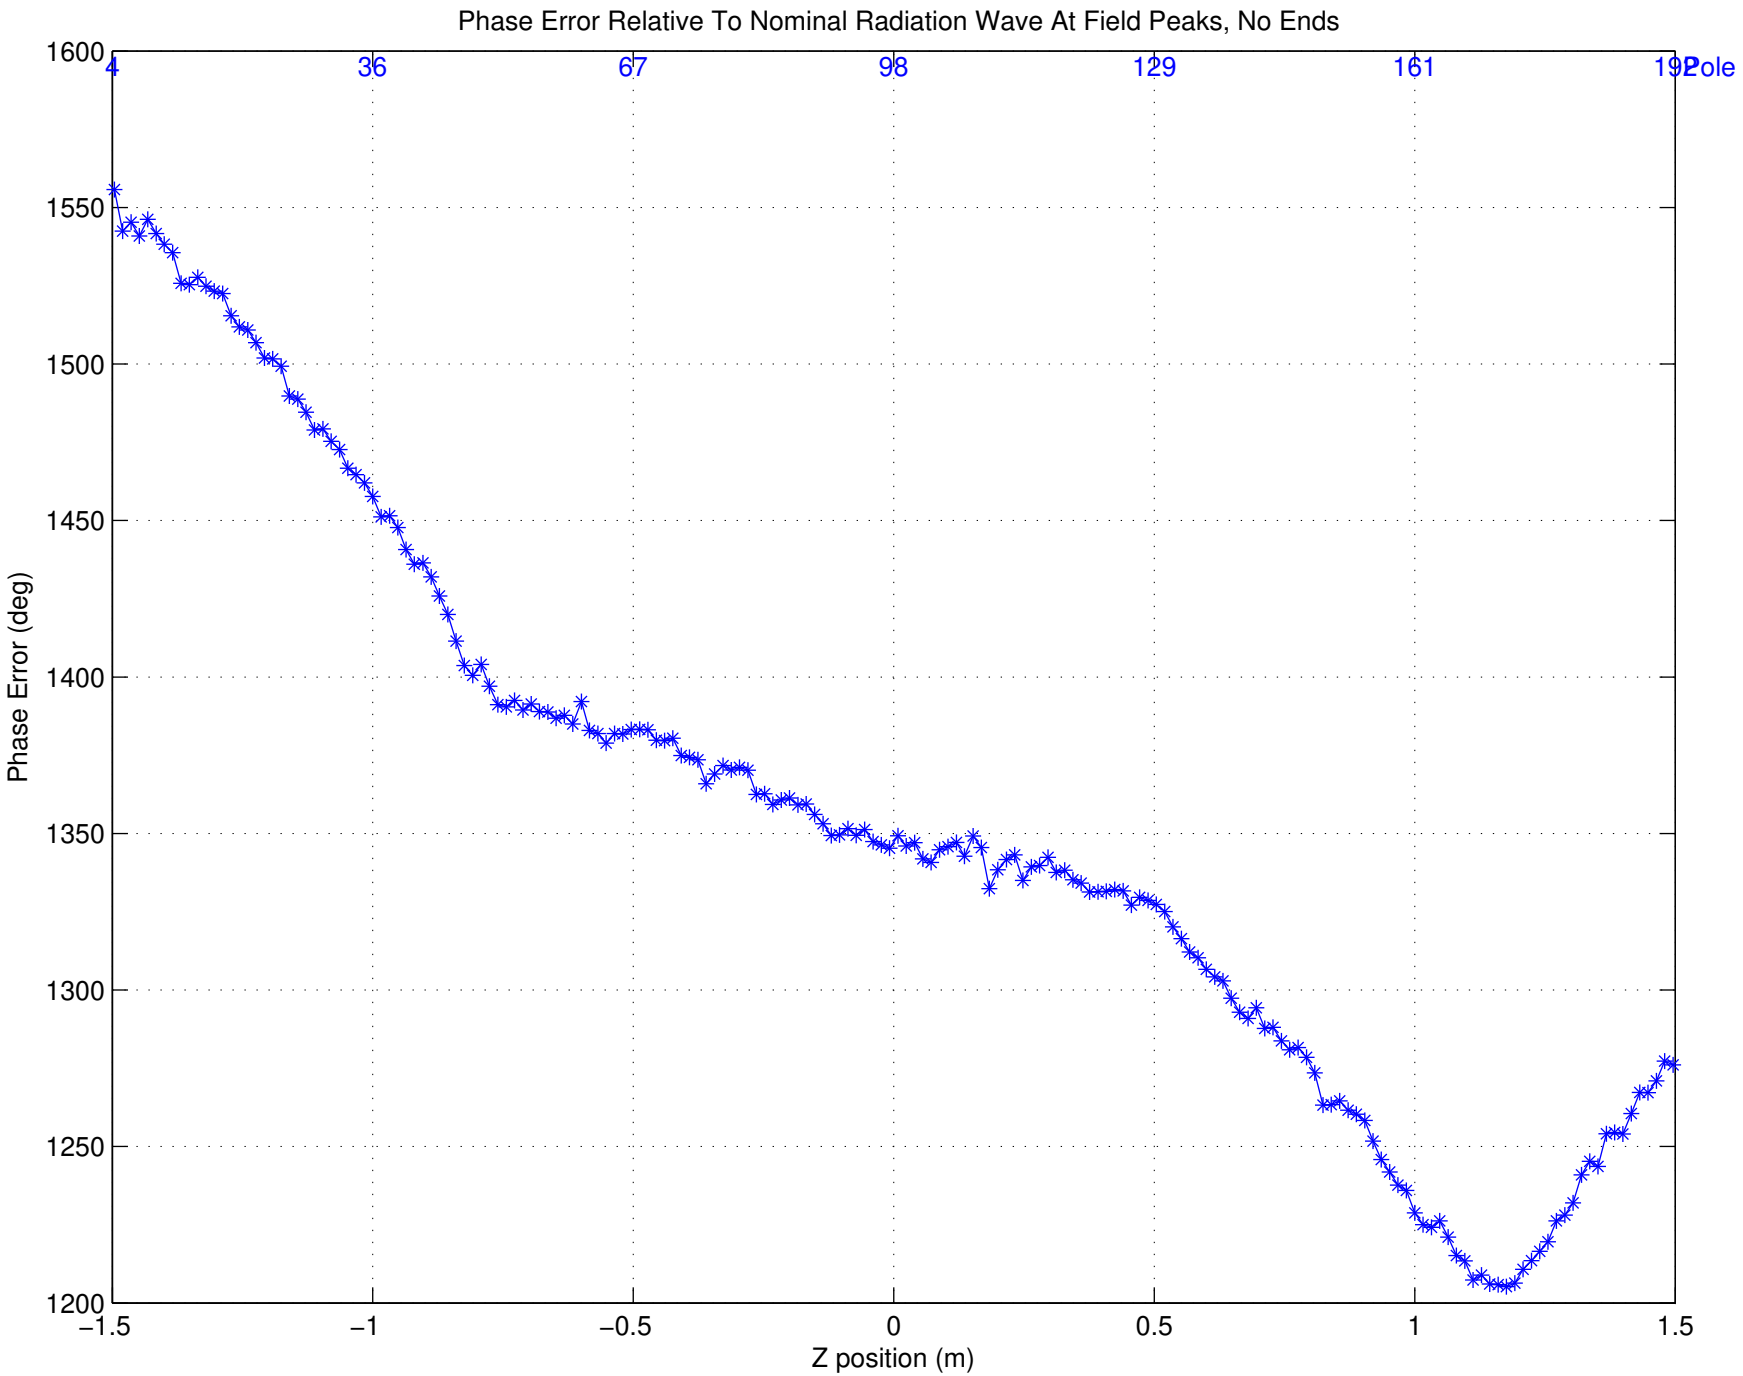
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
Phase Error (deg)
Z position (m)
Pole
4
36
67
98
129
161
192
1600
1550
1500
1450
1400
1350
1300
1250
1200
−1.5
−1
−0.5
0
0.5
1
1.5