SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 10−10−2011
Time: 10:01:10

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−11
DATASET Number: 3
Tuning Stage: Fine Tuning
Run Number: 30
Measurement Type: Z Scans
Operator: YL
Comment: find Y at min K;check after power outage
Session first run: 30
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−11\DATASET0003\Fine Tuning\Z Scans\Run 030\bscanz.dat

Temperature (C)
L143−112000−11:−−> T1 19.98 −−> T2 19.97 −−> T5 19.96 −−> T3 19.97 −−> Air 20.11 −−> T4 19.96

Axes position (m) X:0.027741 Y:0.000261
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001158 V
Vy_0i = −0.002757 V

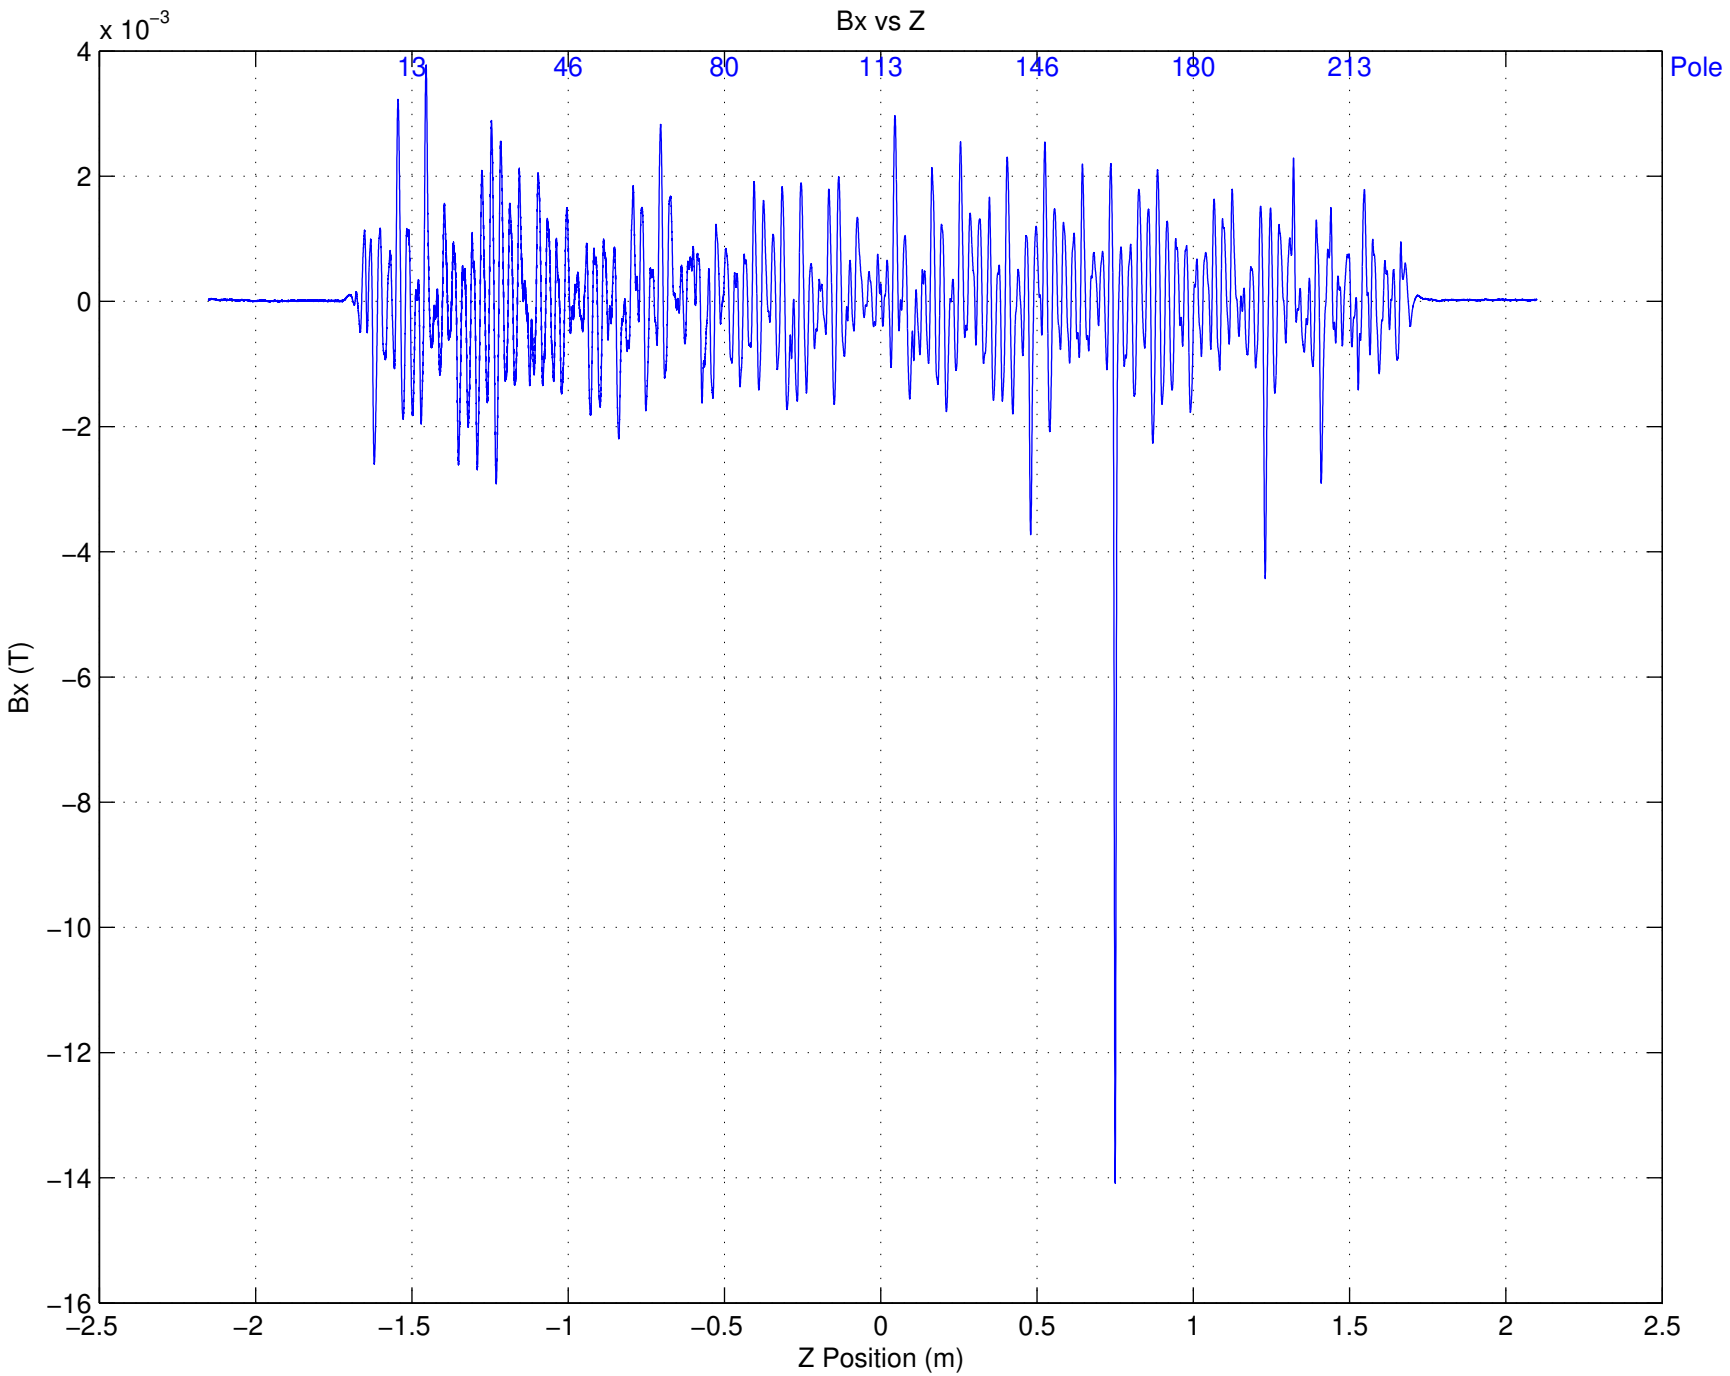
Bx vs Z
x 10^-3
4
2
0
−2
−4
−6
−8
−10
−12
−14
−16
Bx (T)
13
46
80
113
146
180
213
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

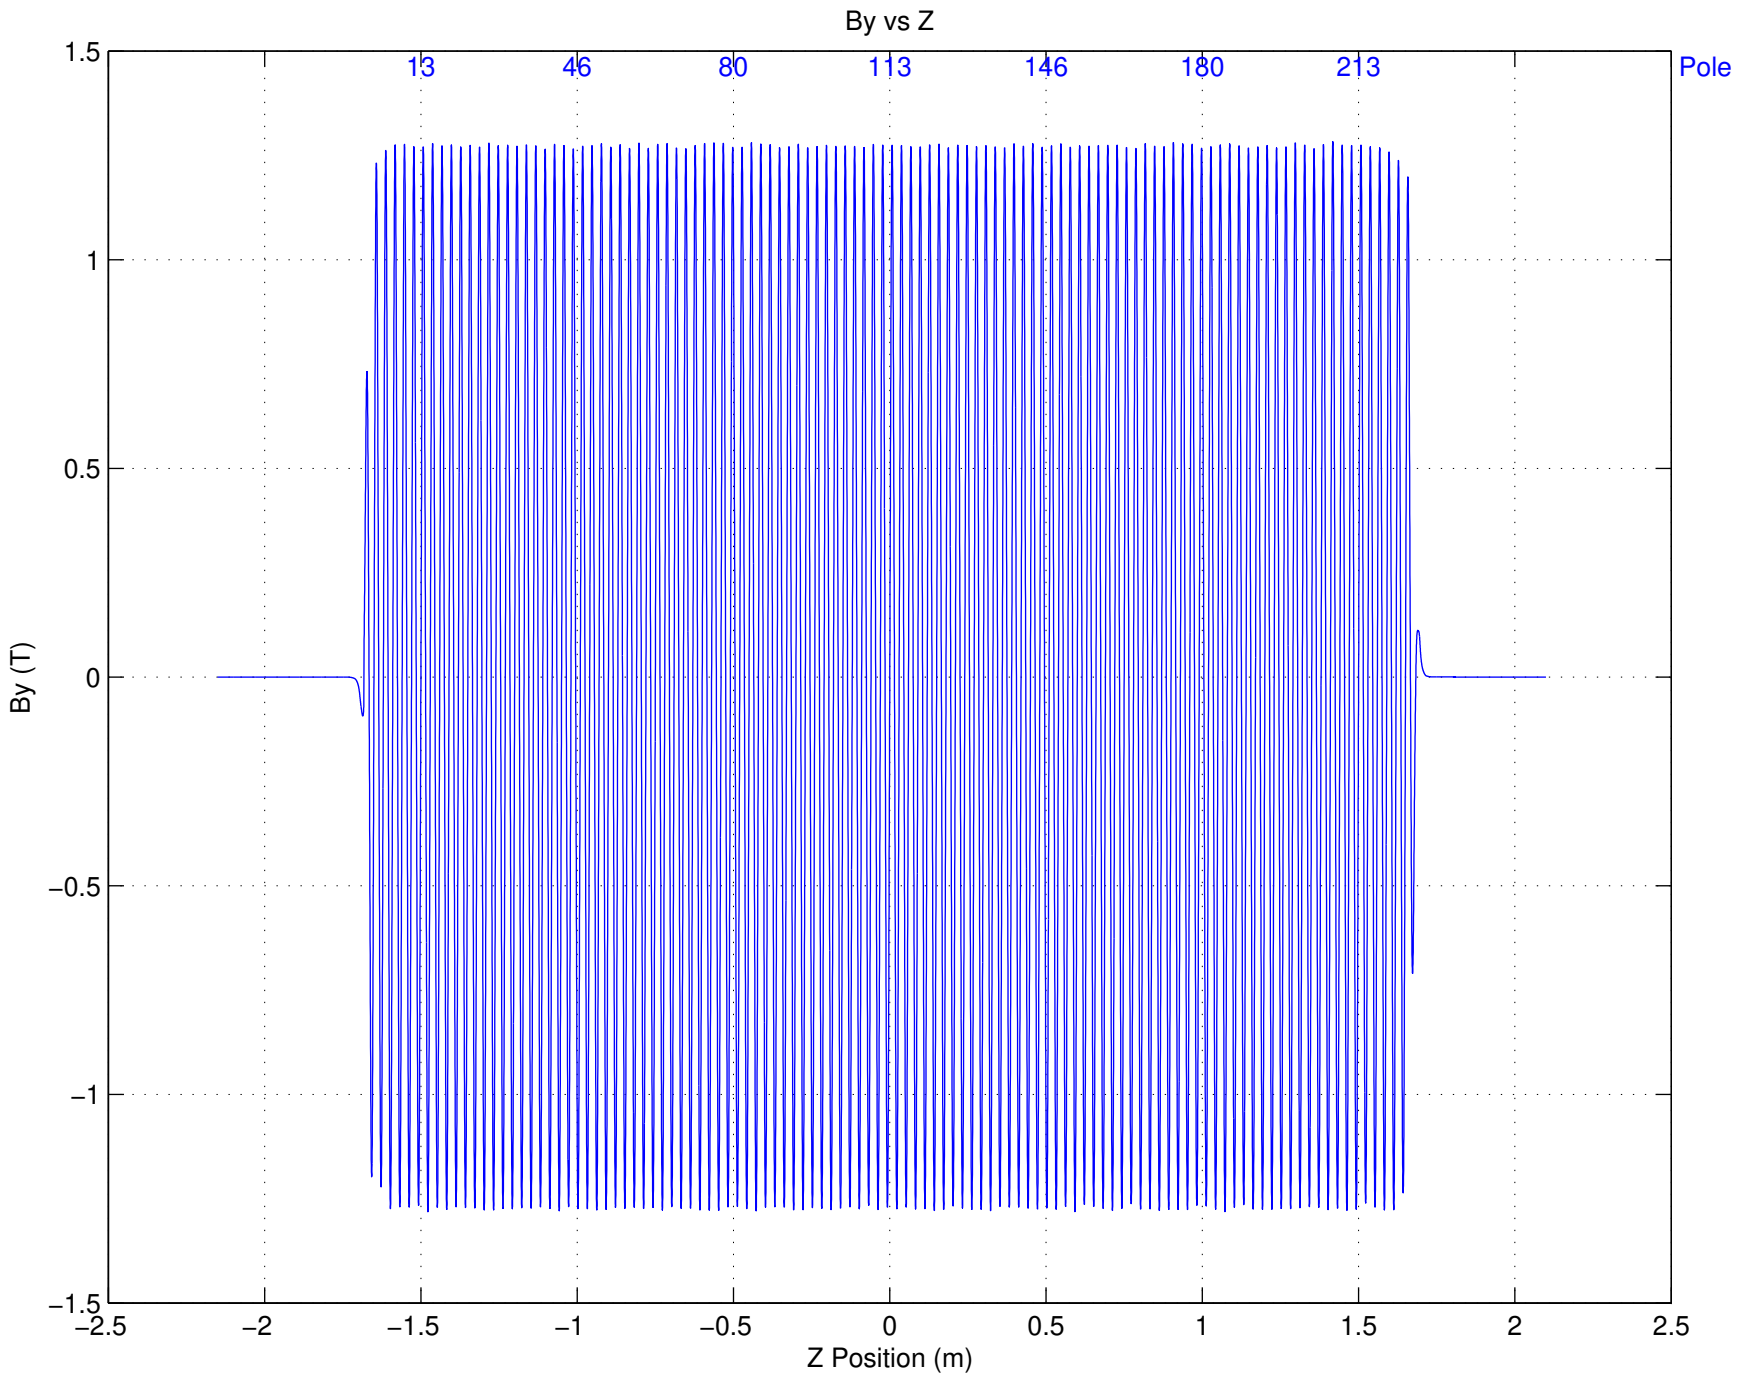
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

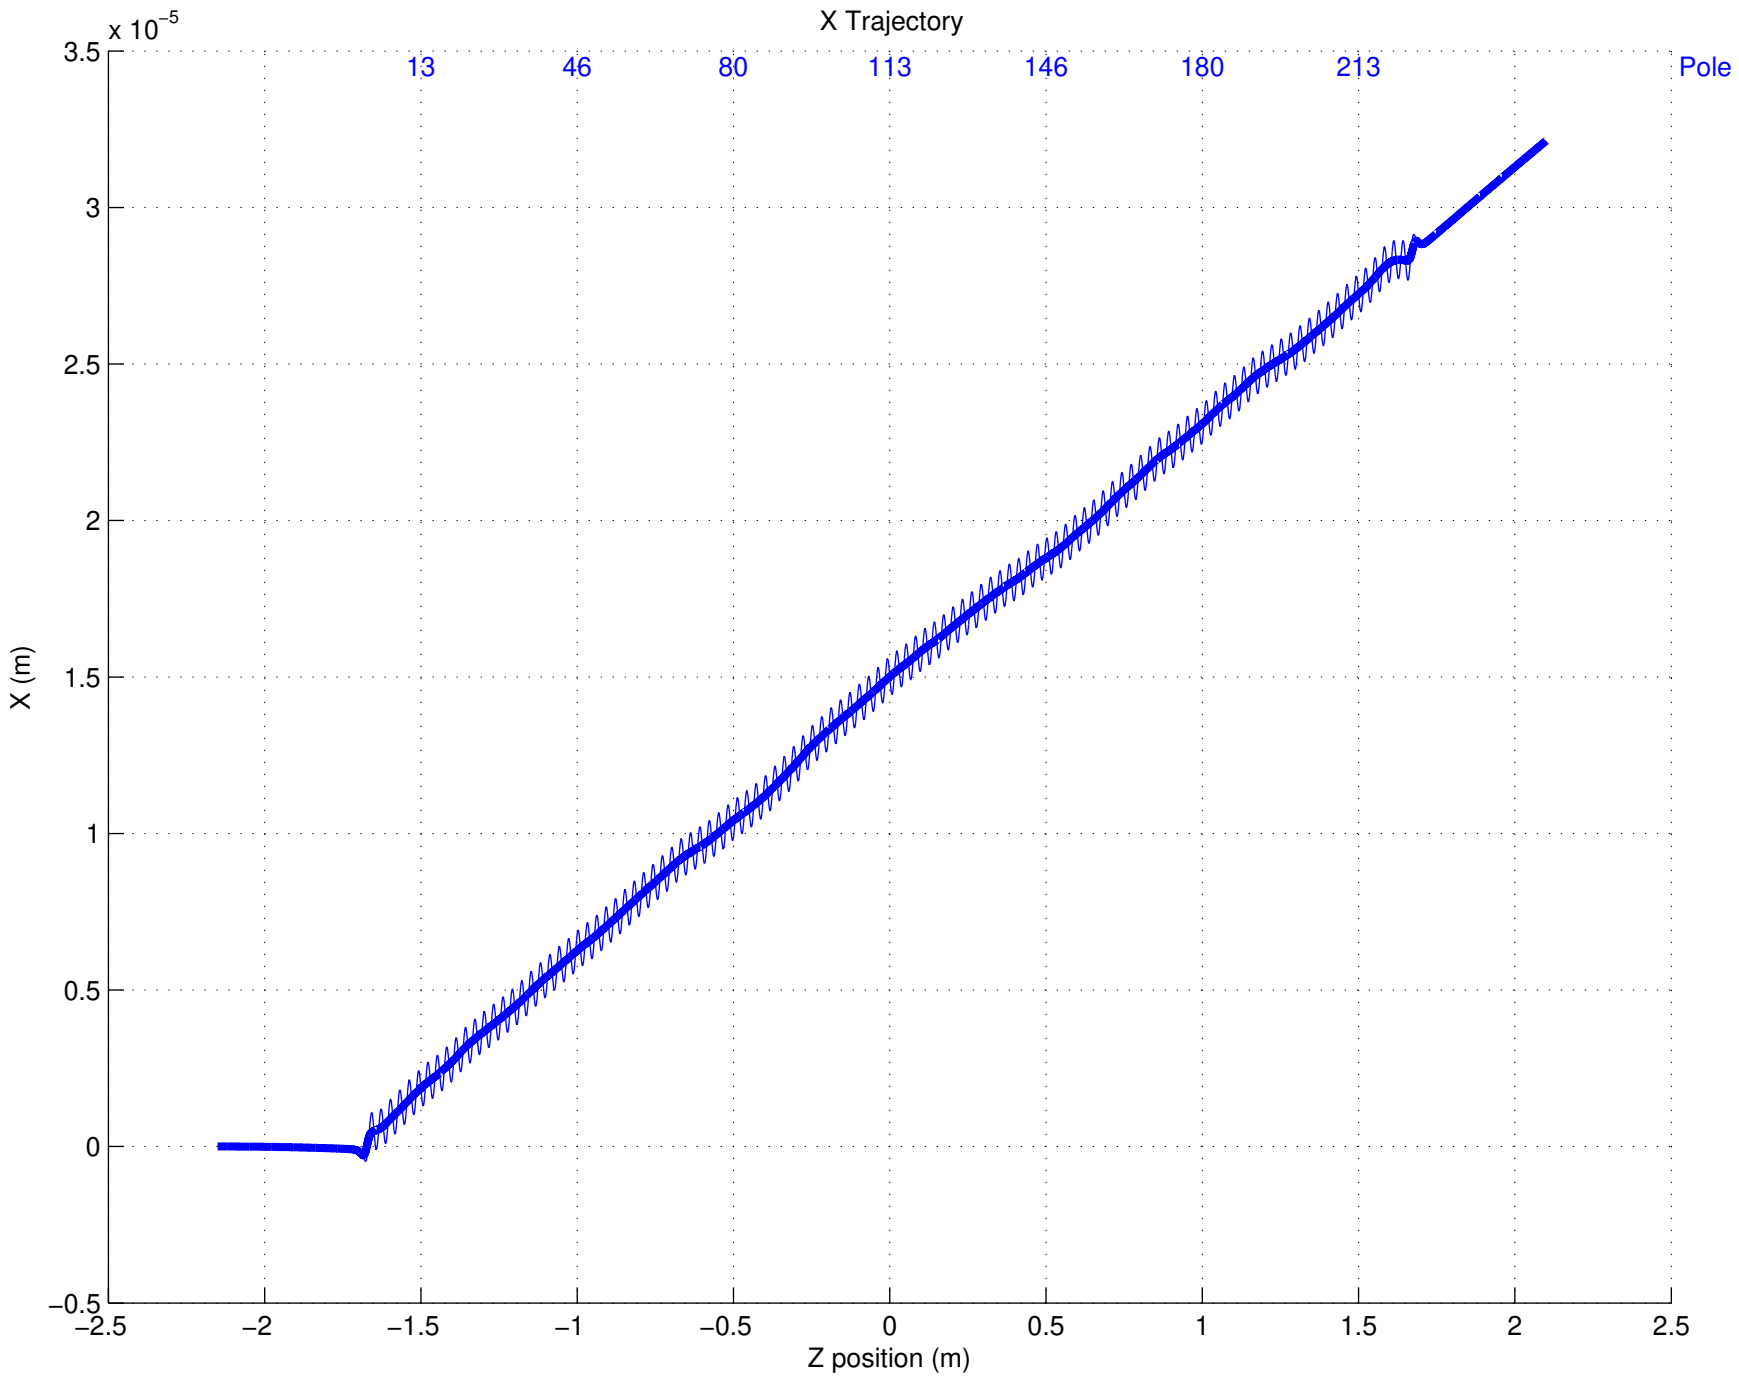
X Trajectory
x 10^-5
13
46
80
113
146
180
213
Pole
3.5
3
2.5
2
1.5
1
0.5
0
−0.5
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

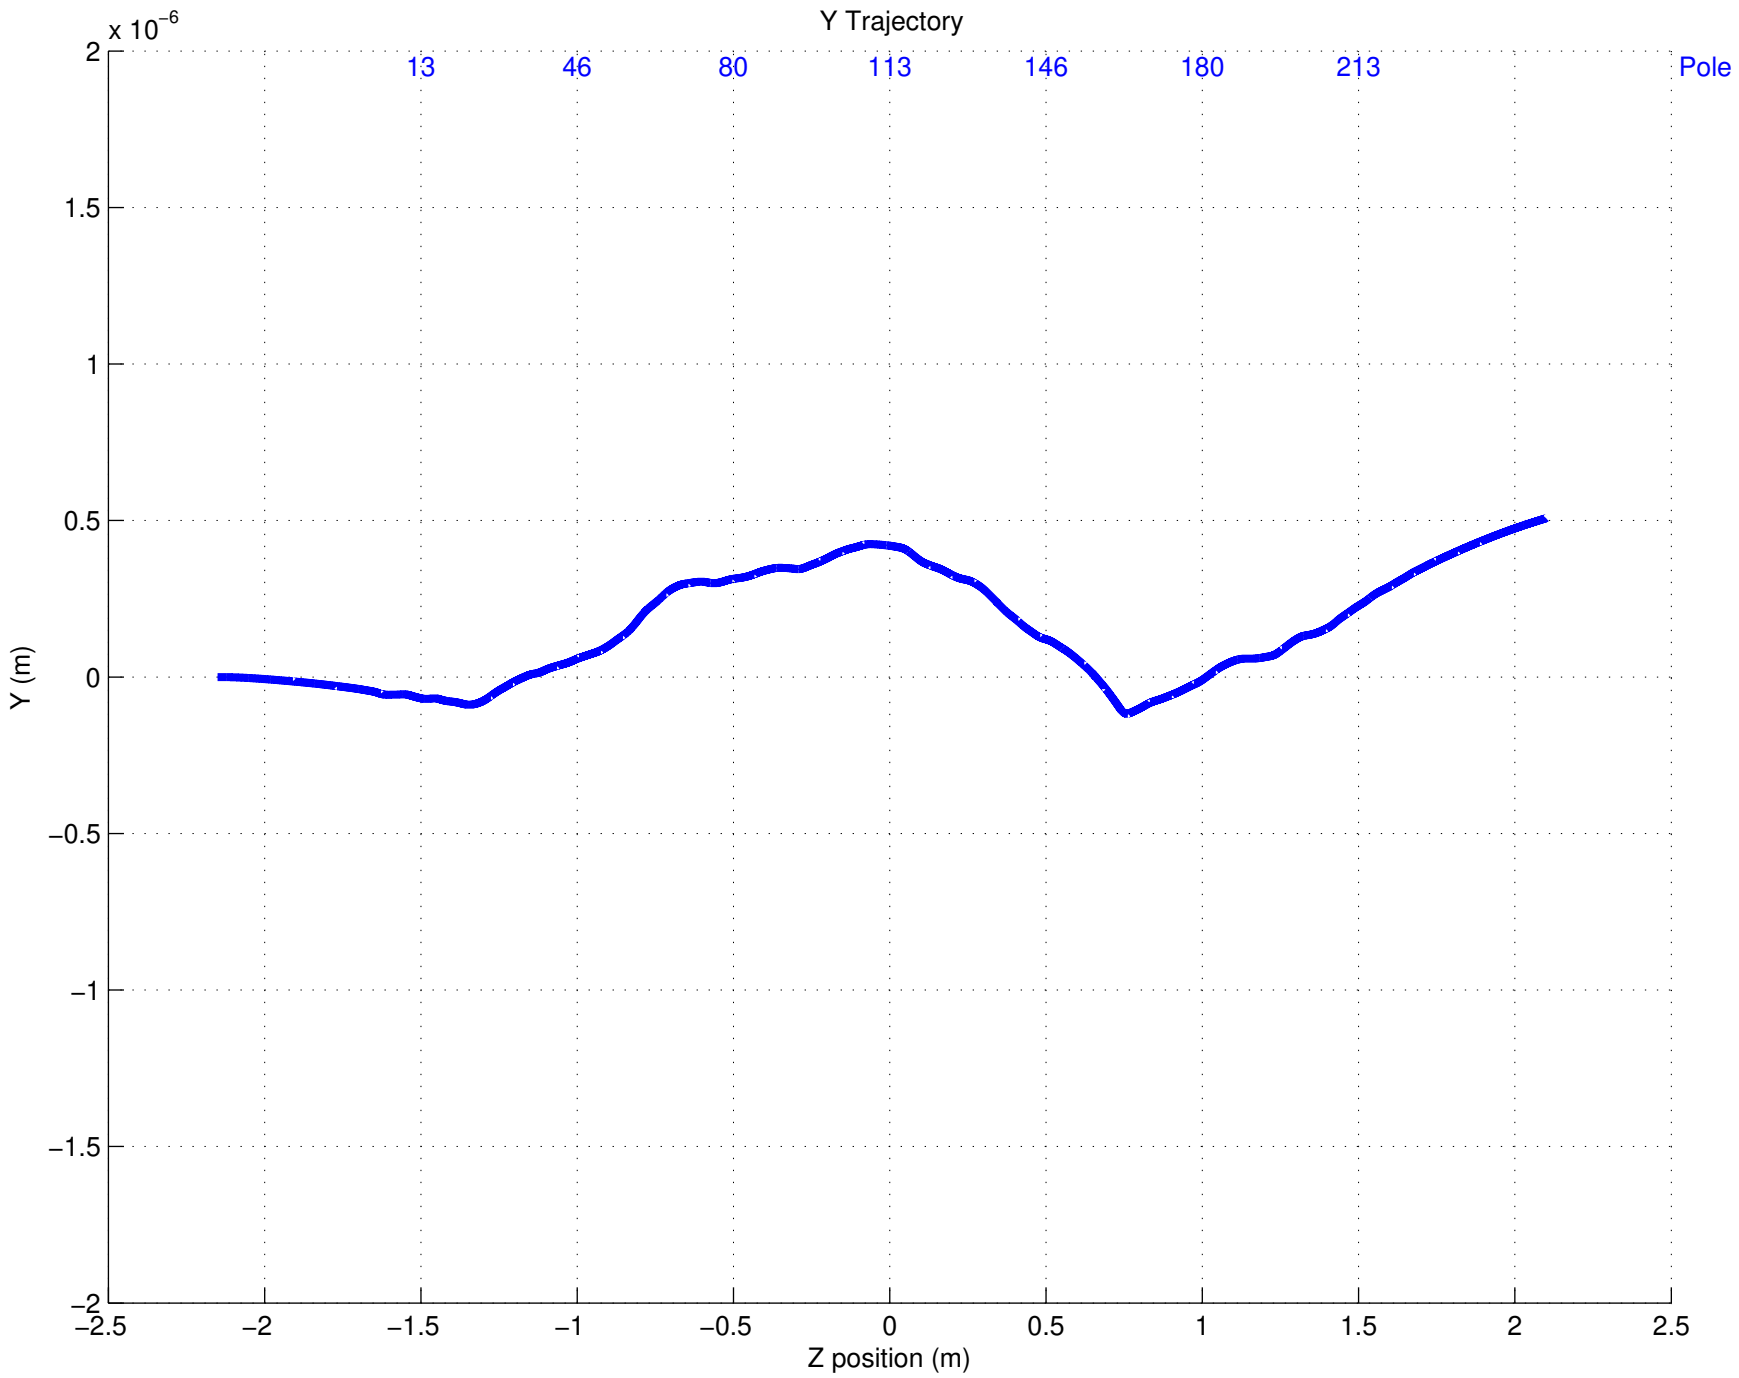
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

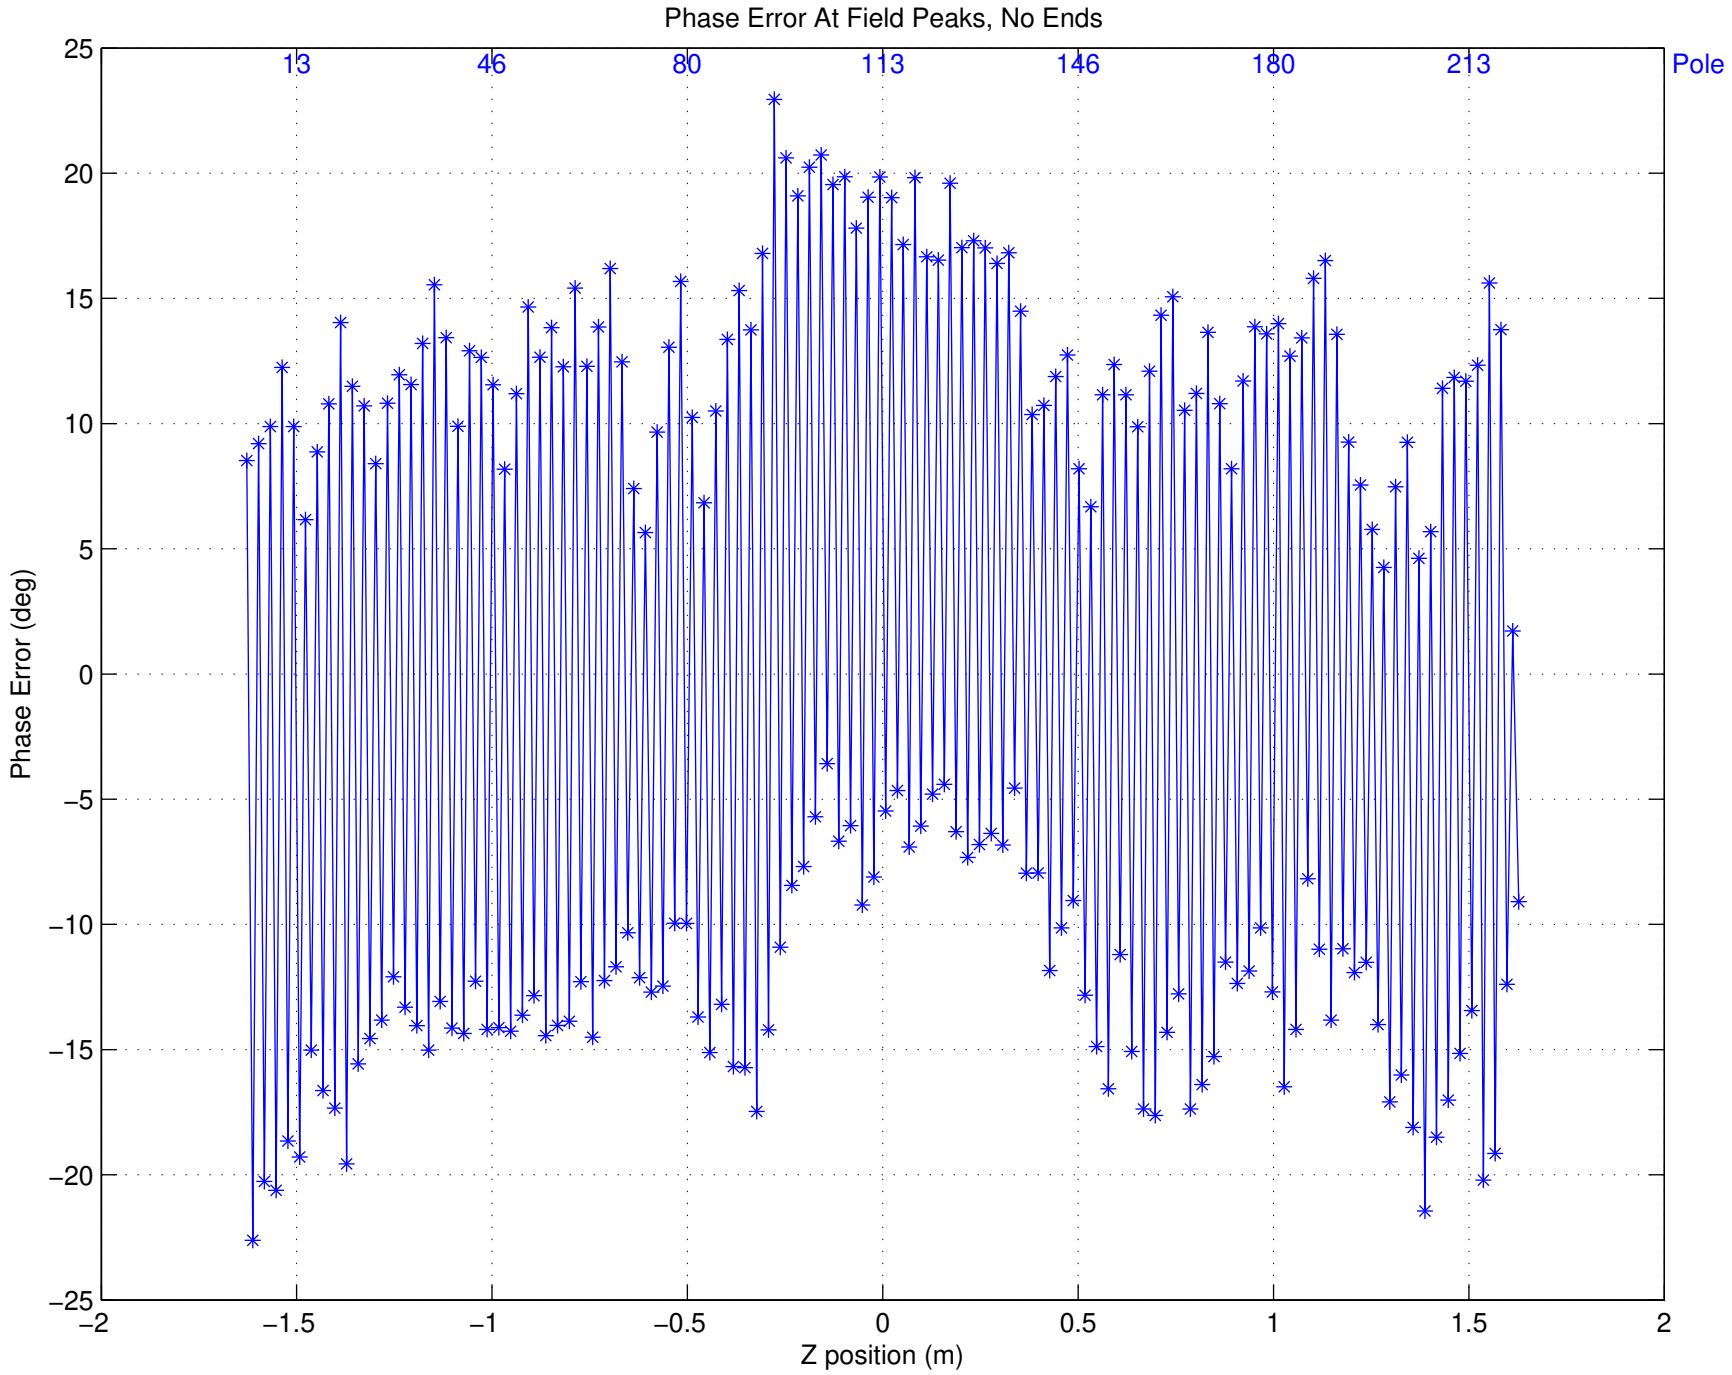

Phase Error: Ave = 0.000000 deg, RMS = 13.439726 deg

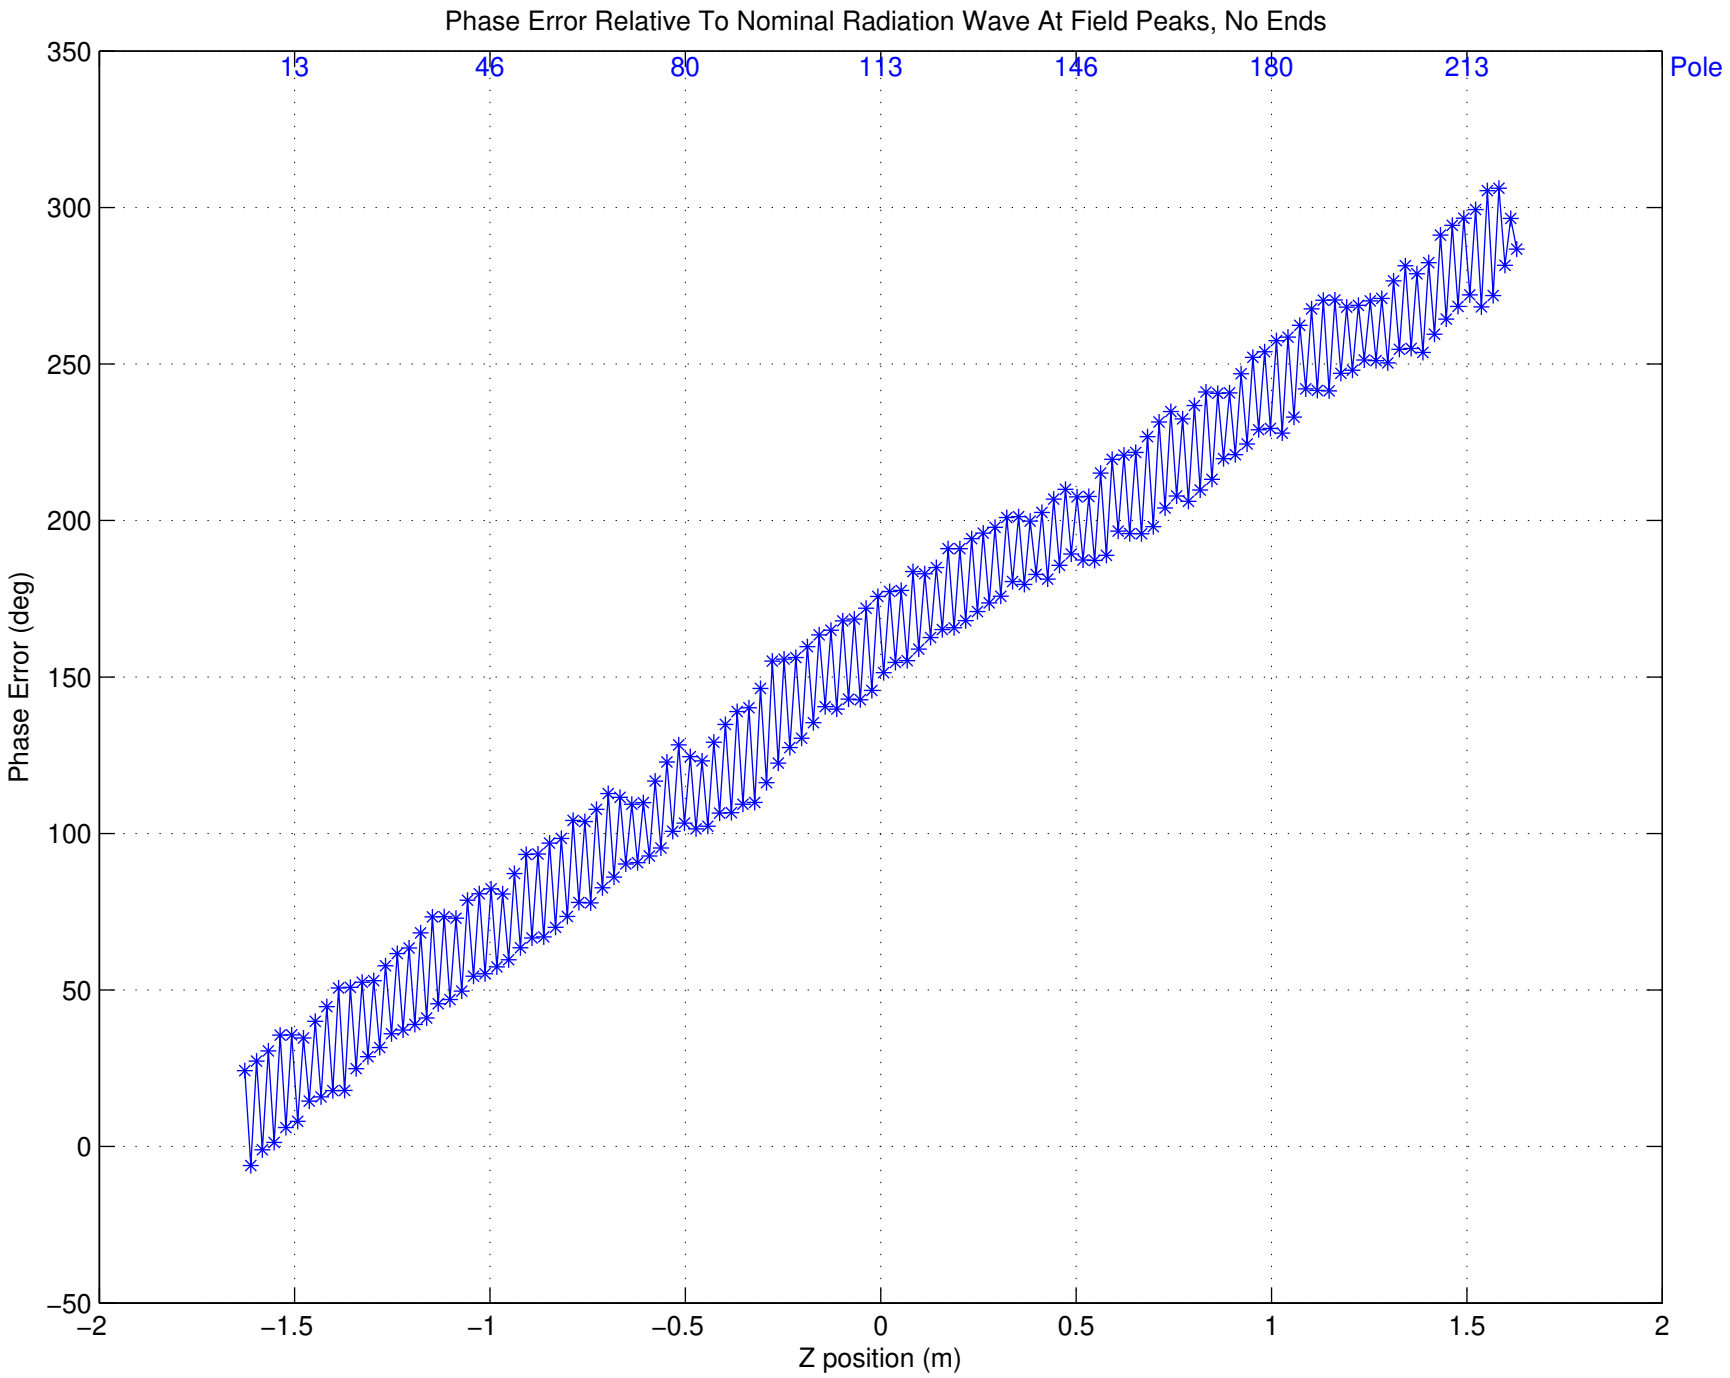
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
350
300
250
200
150
100
50
0
−50
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)