SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 05−23−2013
Time: 10:58:27

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−16
DATASET Number: 7
Tuning Stage: Fine Tuning
Run Number: 7
Measurement Type: Z Scans
Operator: YL
Comment: 0.1 mm on #224
Session first run: 7
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−16\DATASET0007\Fine Tuning\Z Scans\Run 007\bscanz.dat

Temperature (C)
L143−112000−16:−−> T1 19.95 −−> T2 19.95 −−> T5 19.90 −−> T3 19.95 −−> Air 19.89 −−> T4 19.93

Axes position (m) X:0.029704 Y:0.000233
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000944 V
Vy_0i = −0.003529 V

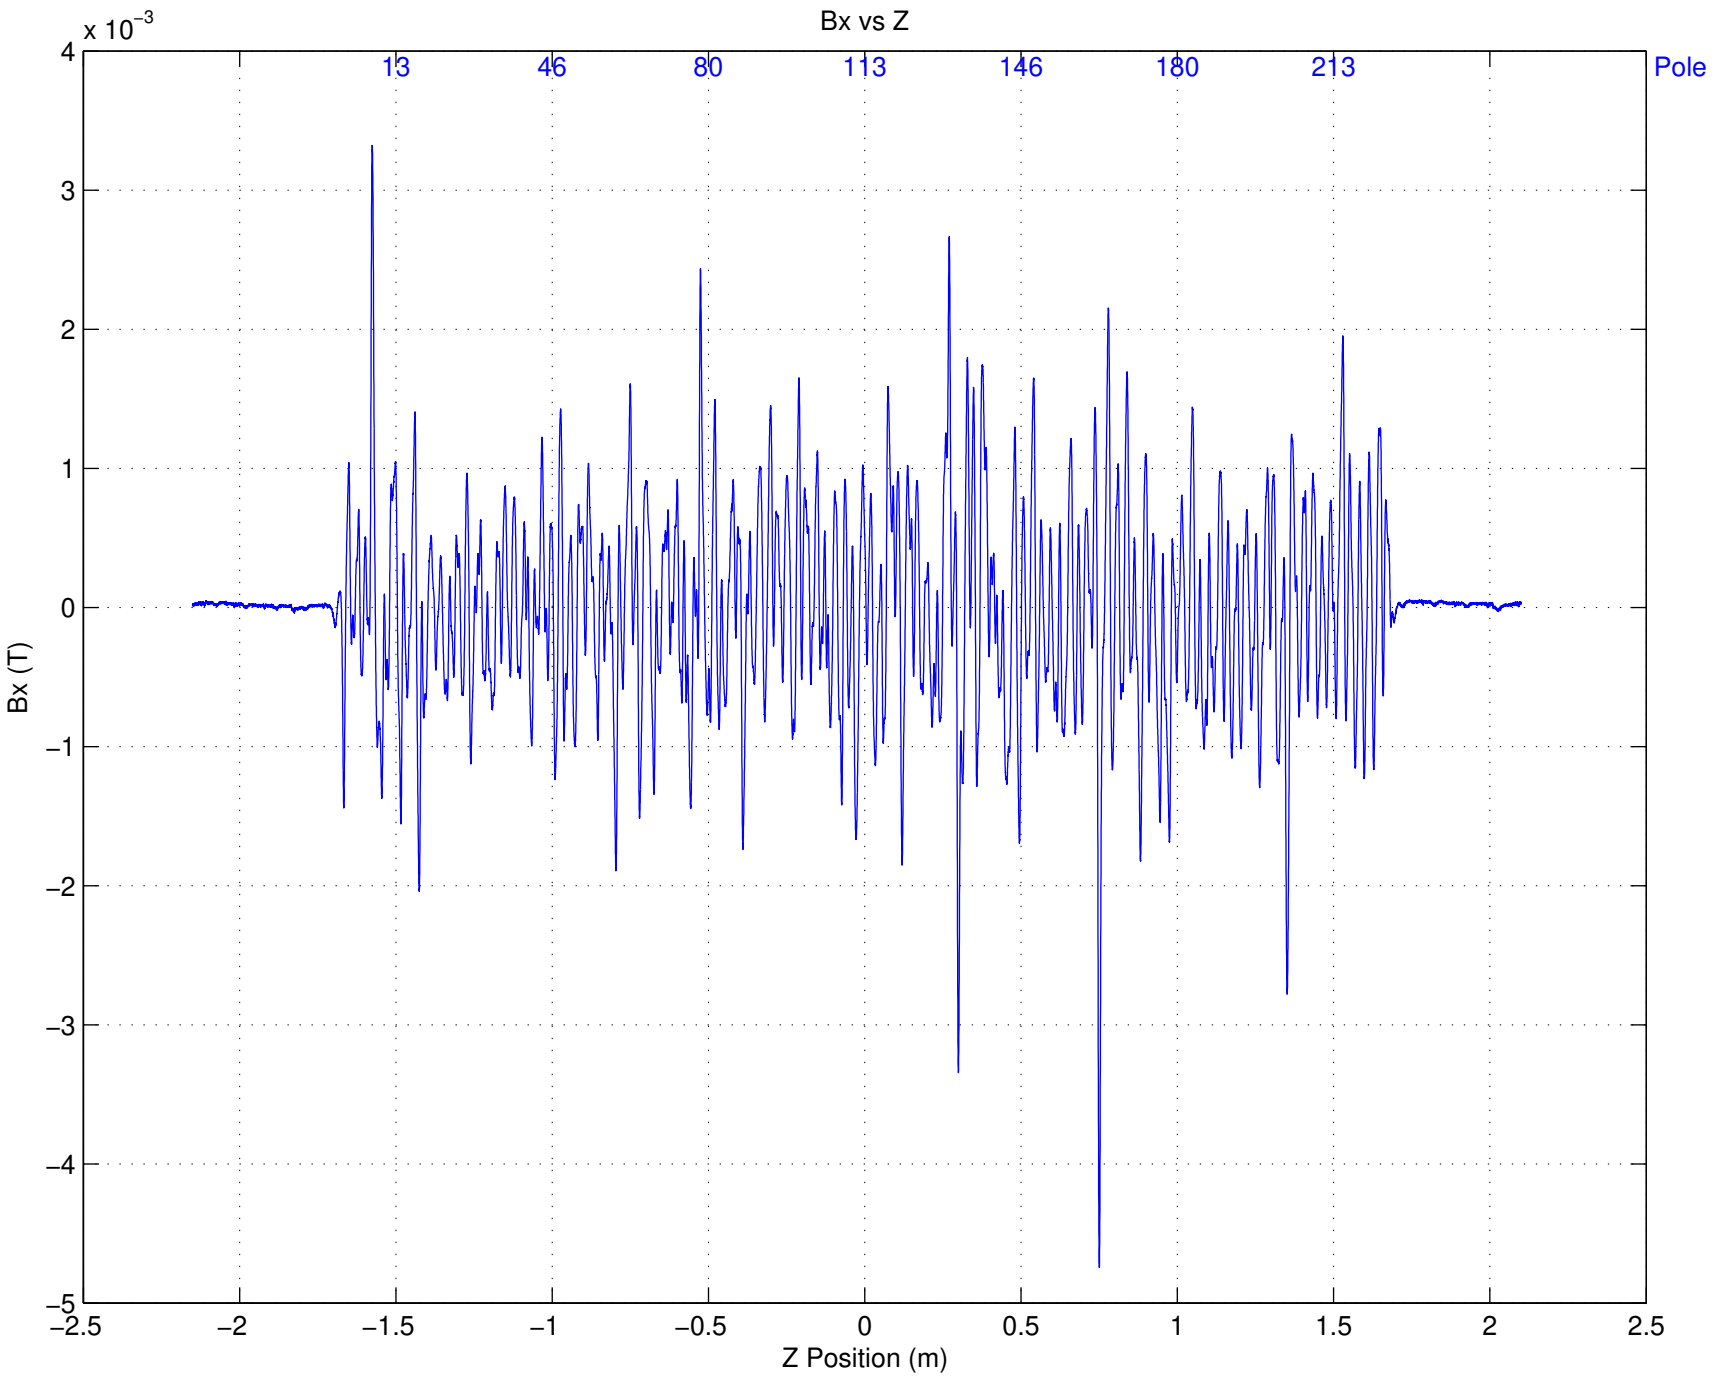
Bx vs Z
x 10^-3
13
46
80
113
146
180
213
Pole
Bx (T)
Z Position (m)
4
3
2
1
0
−1
−2
−3
−4
−5
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5

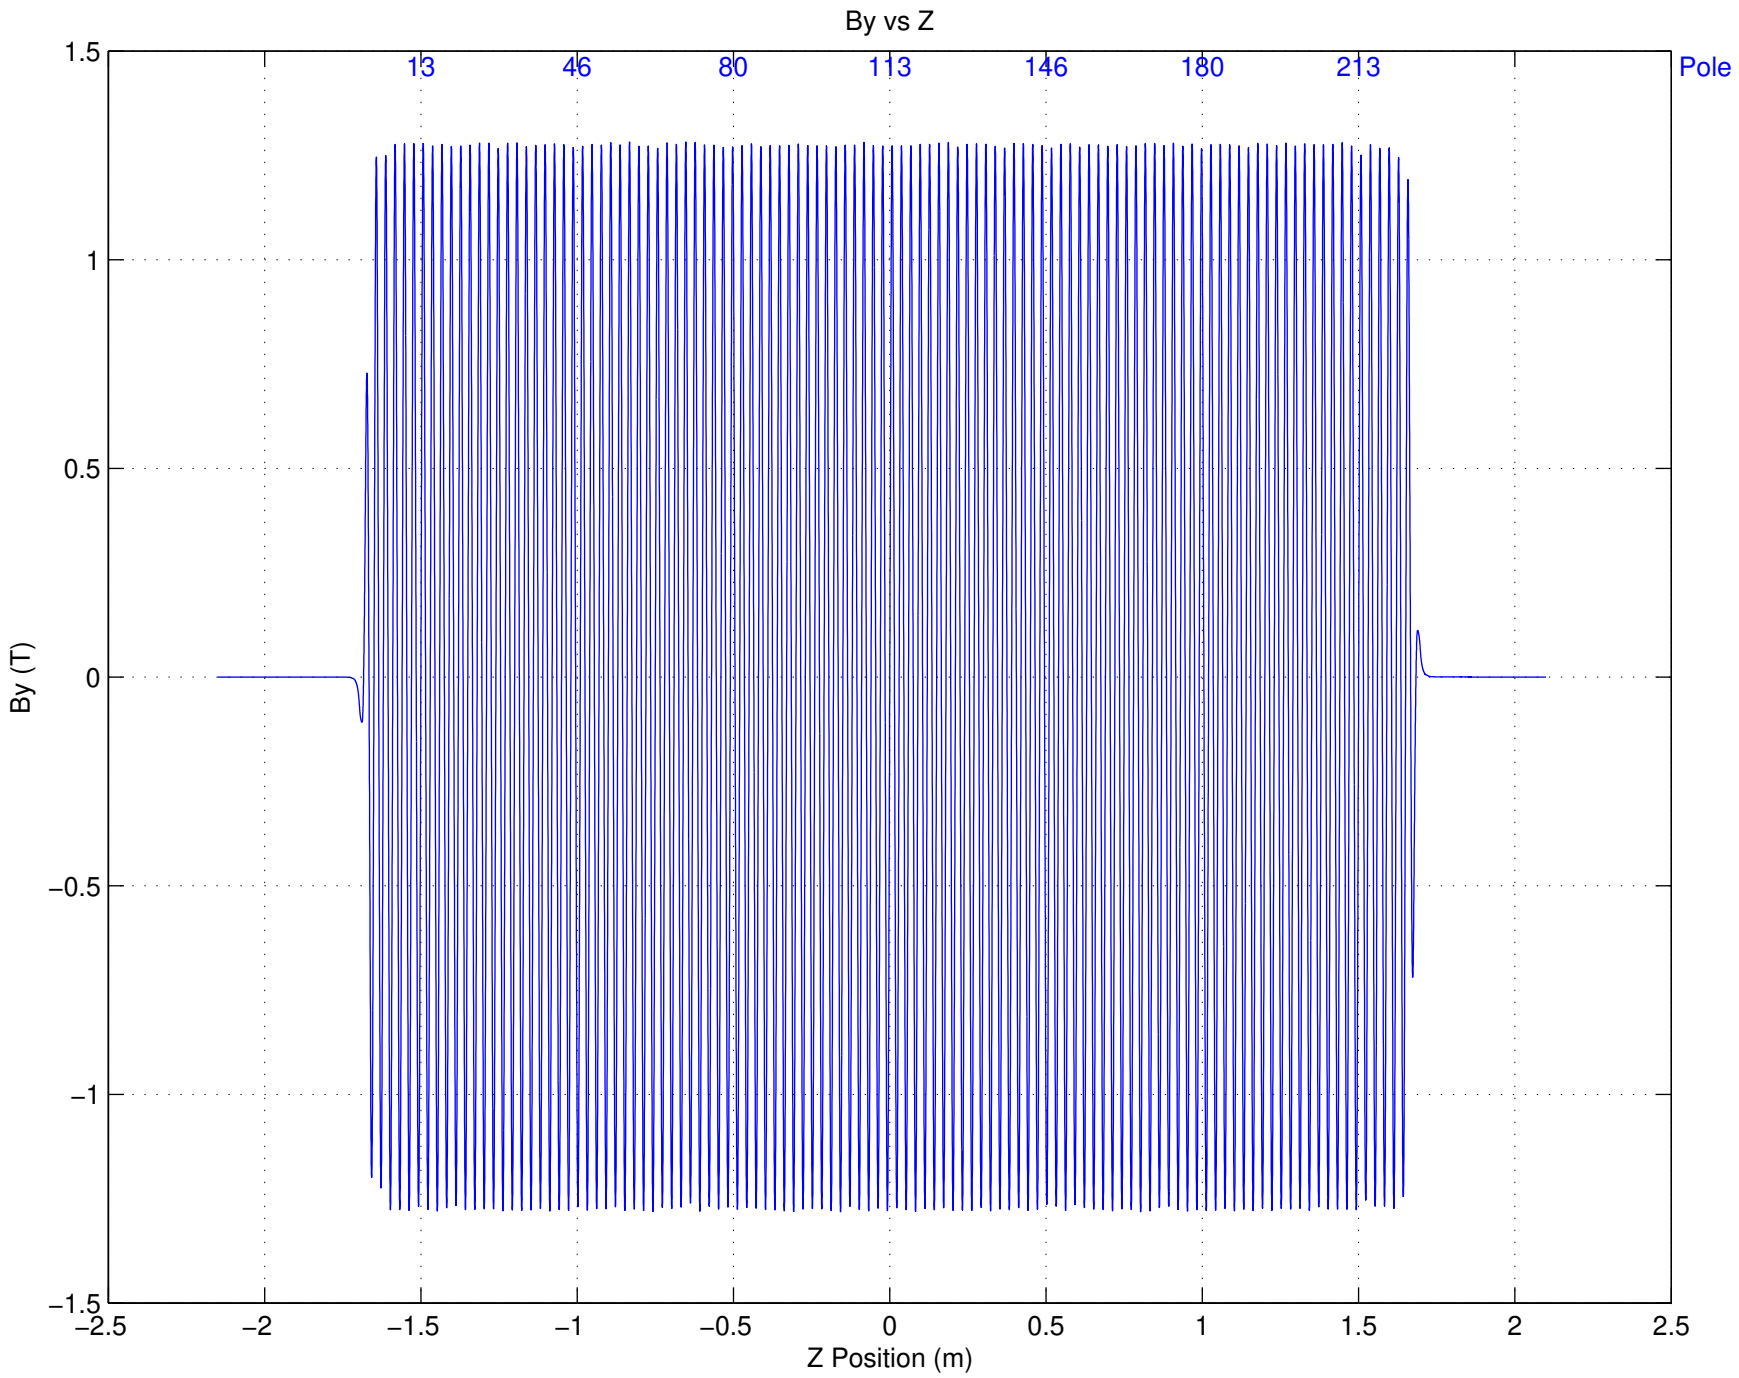
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

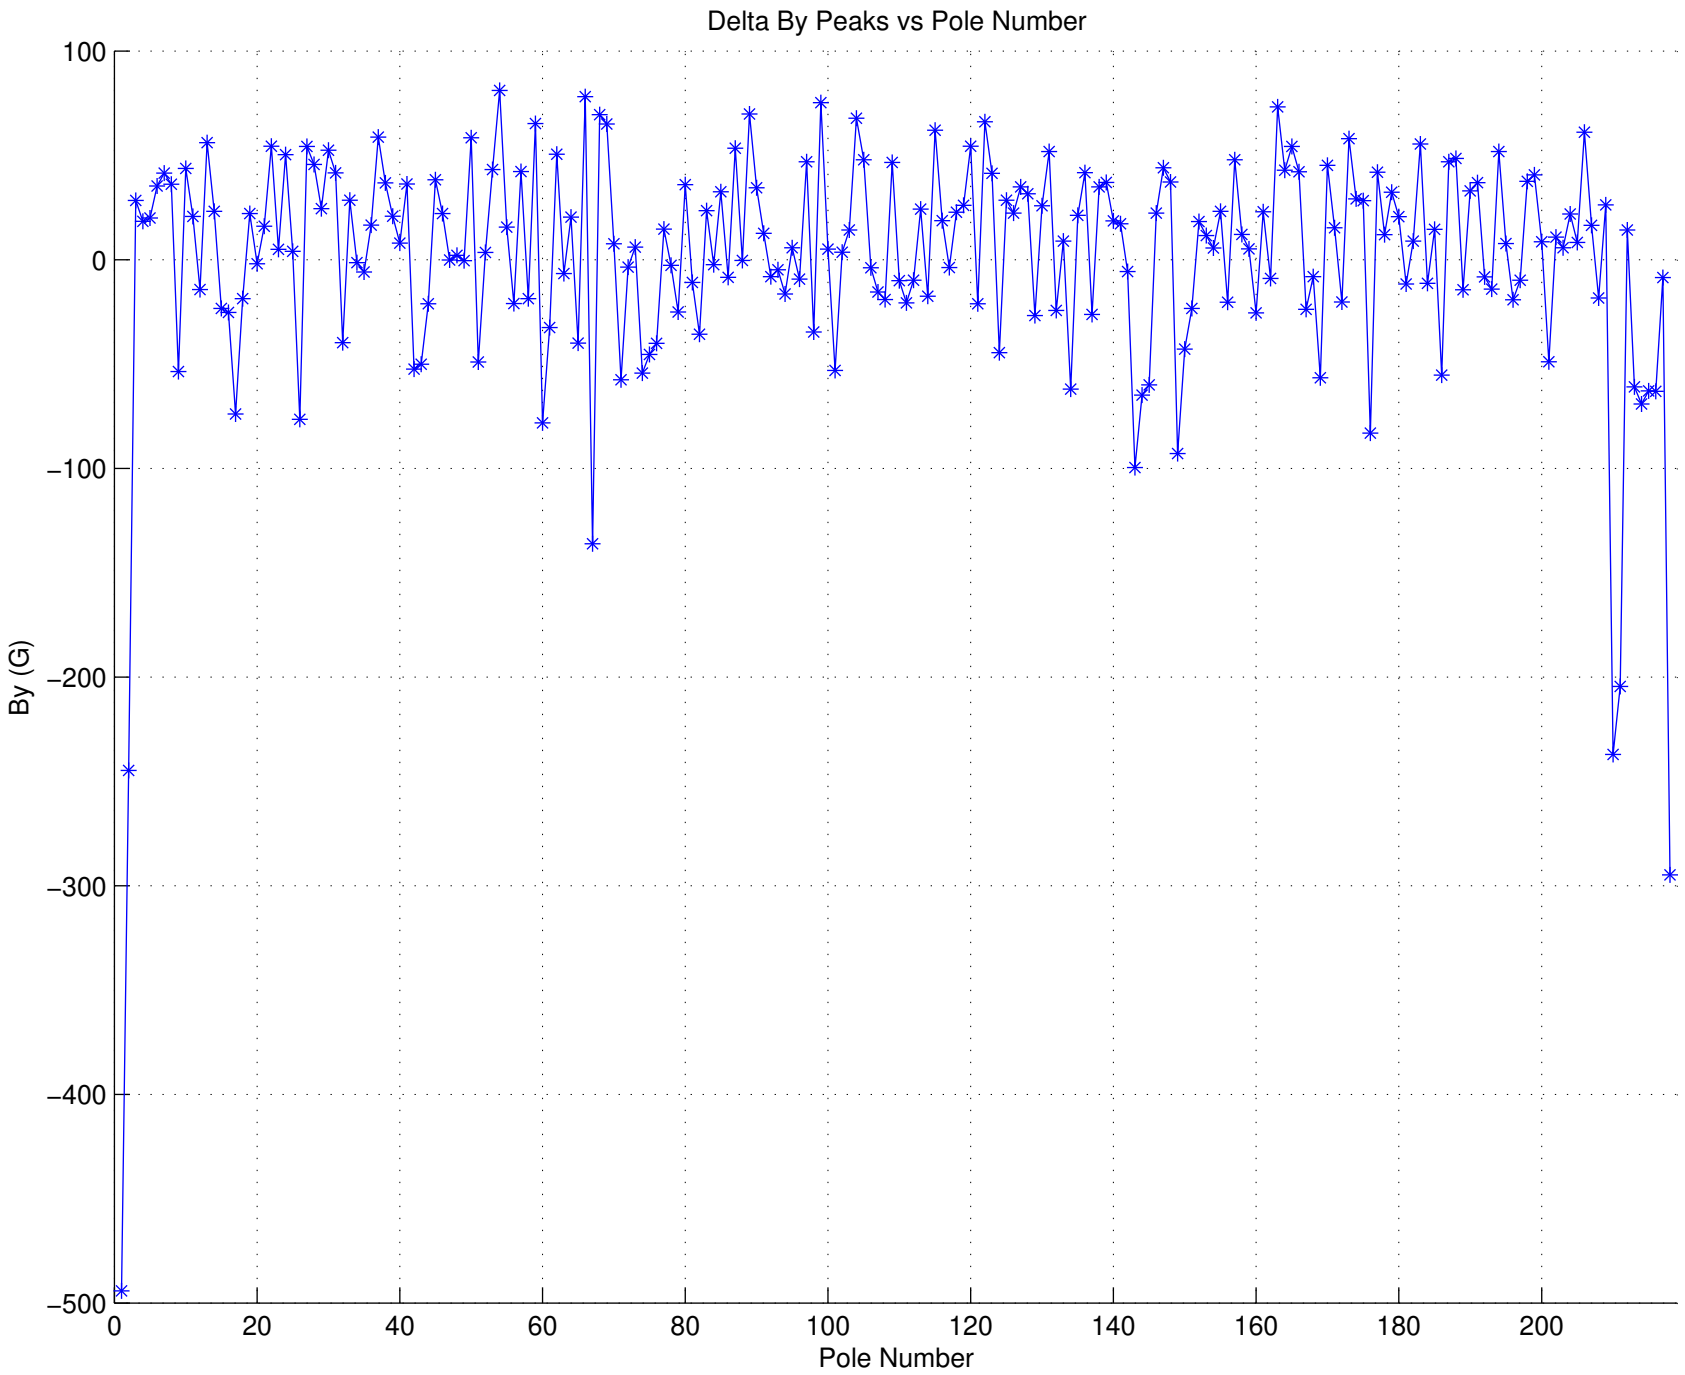
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
0
−100
−200
−300
−400
−500
0
20
40
60
80
100
120
140
160
180
200

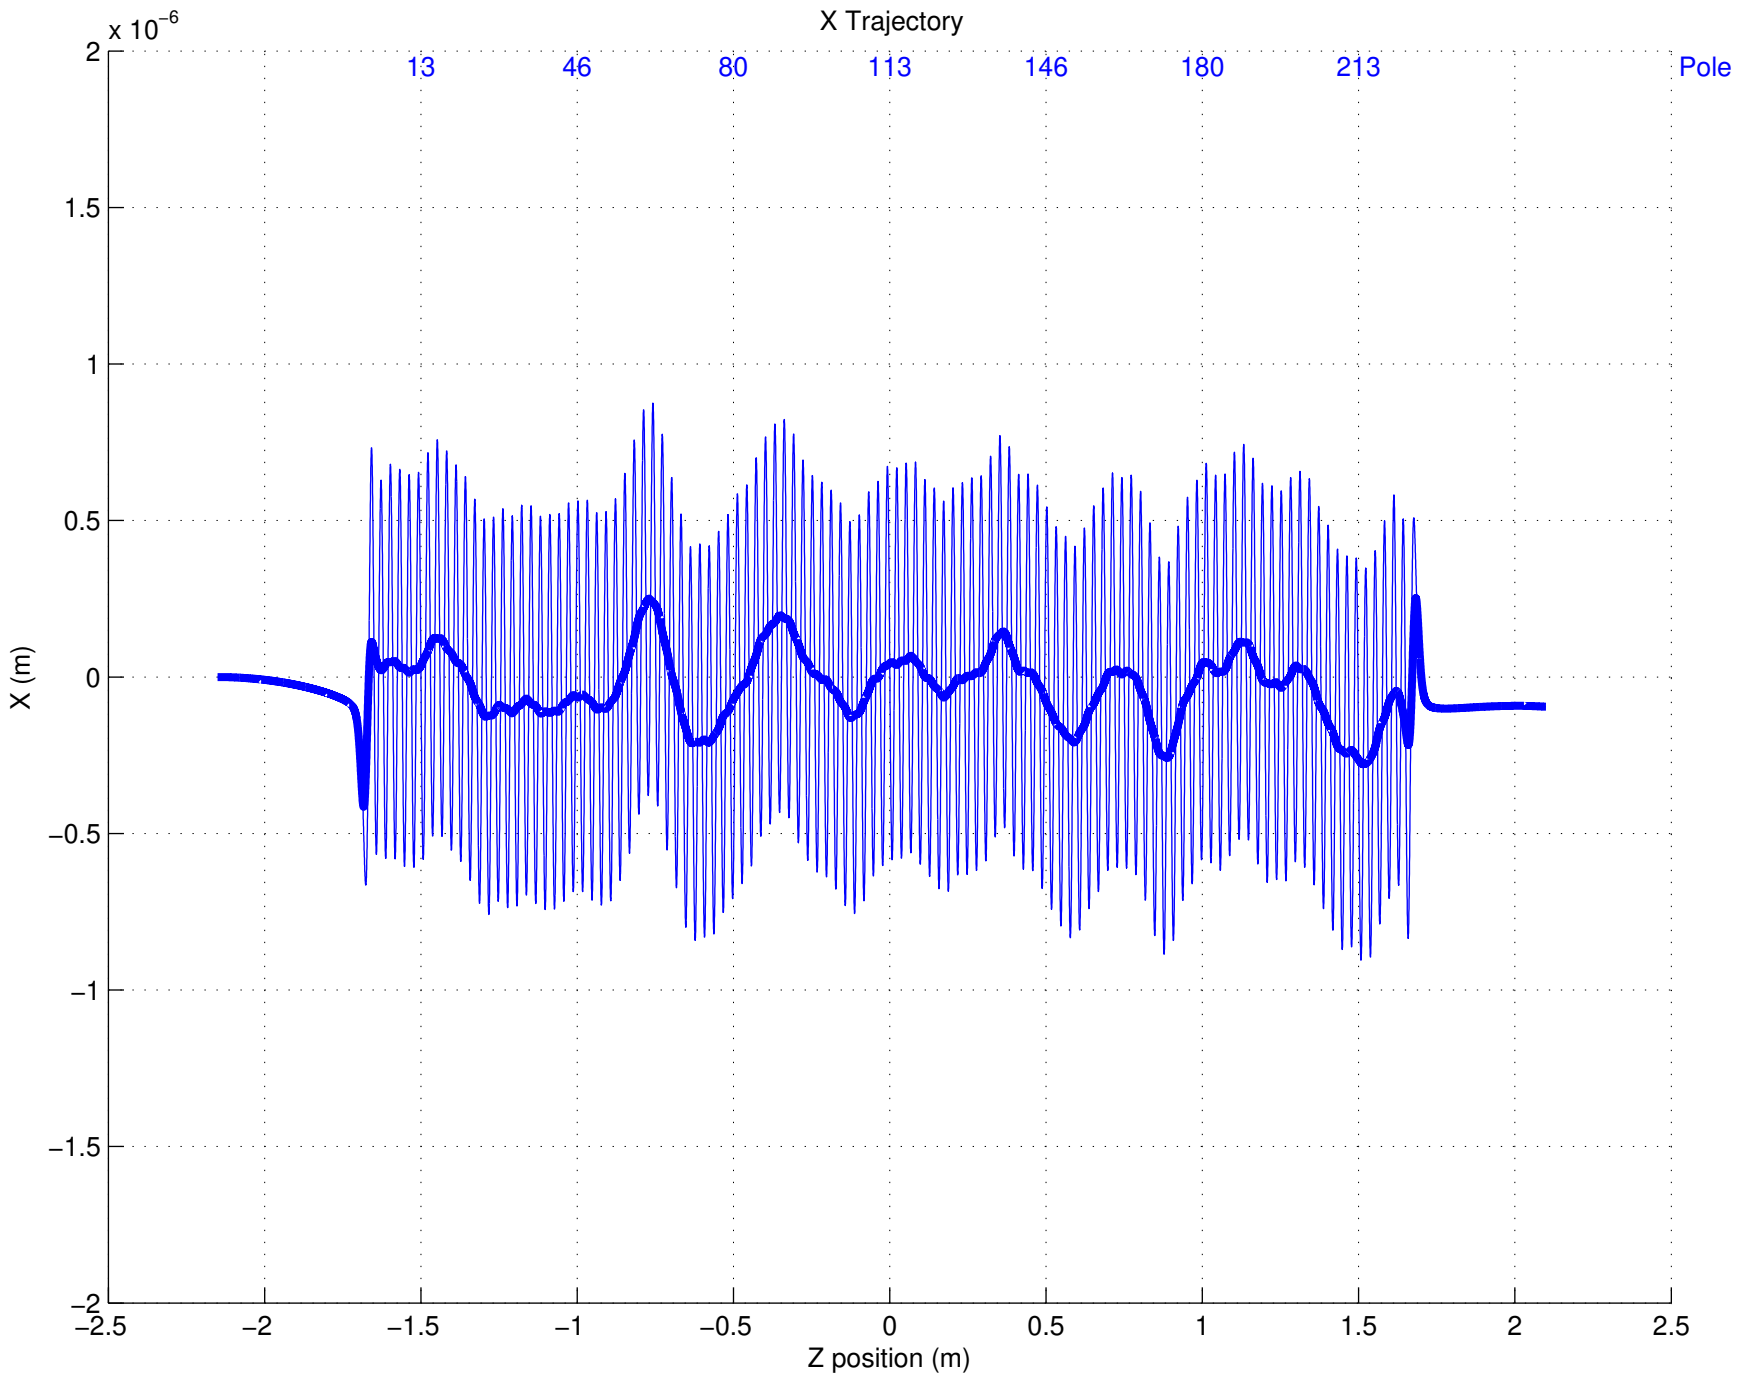
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

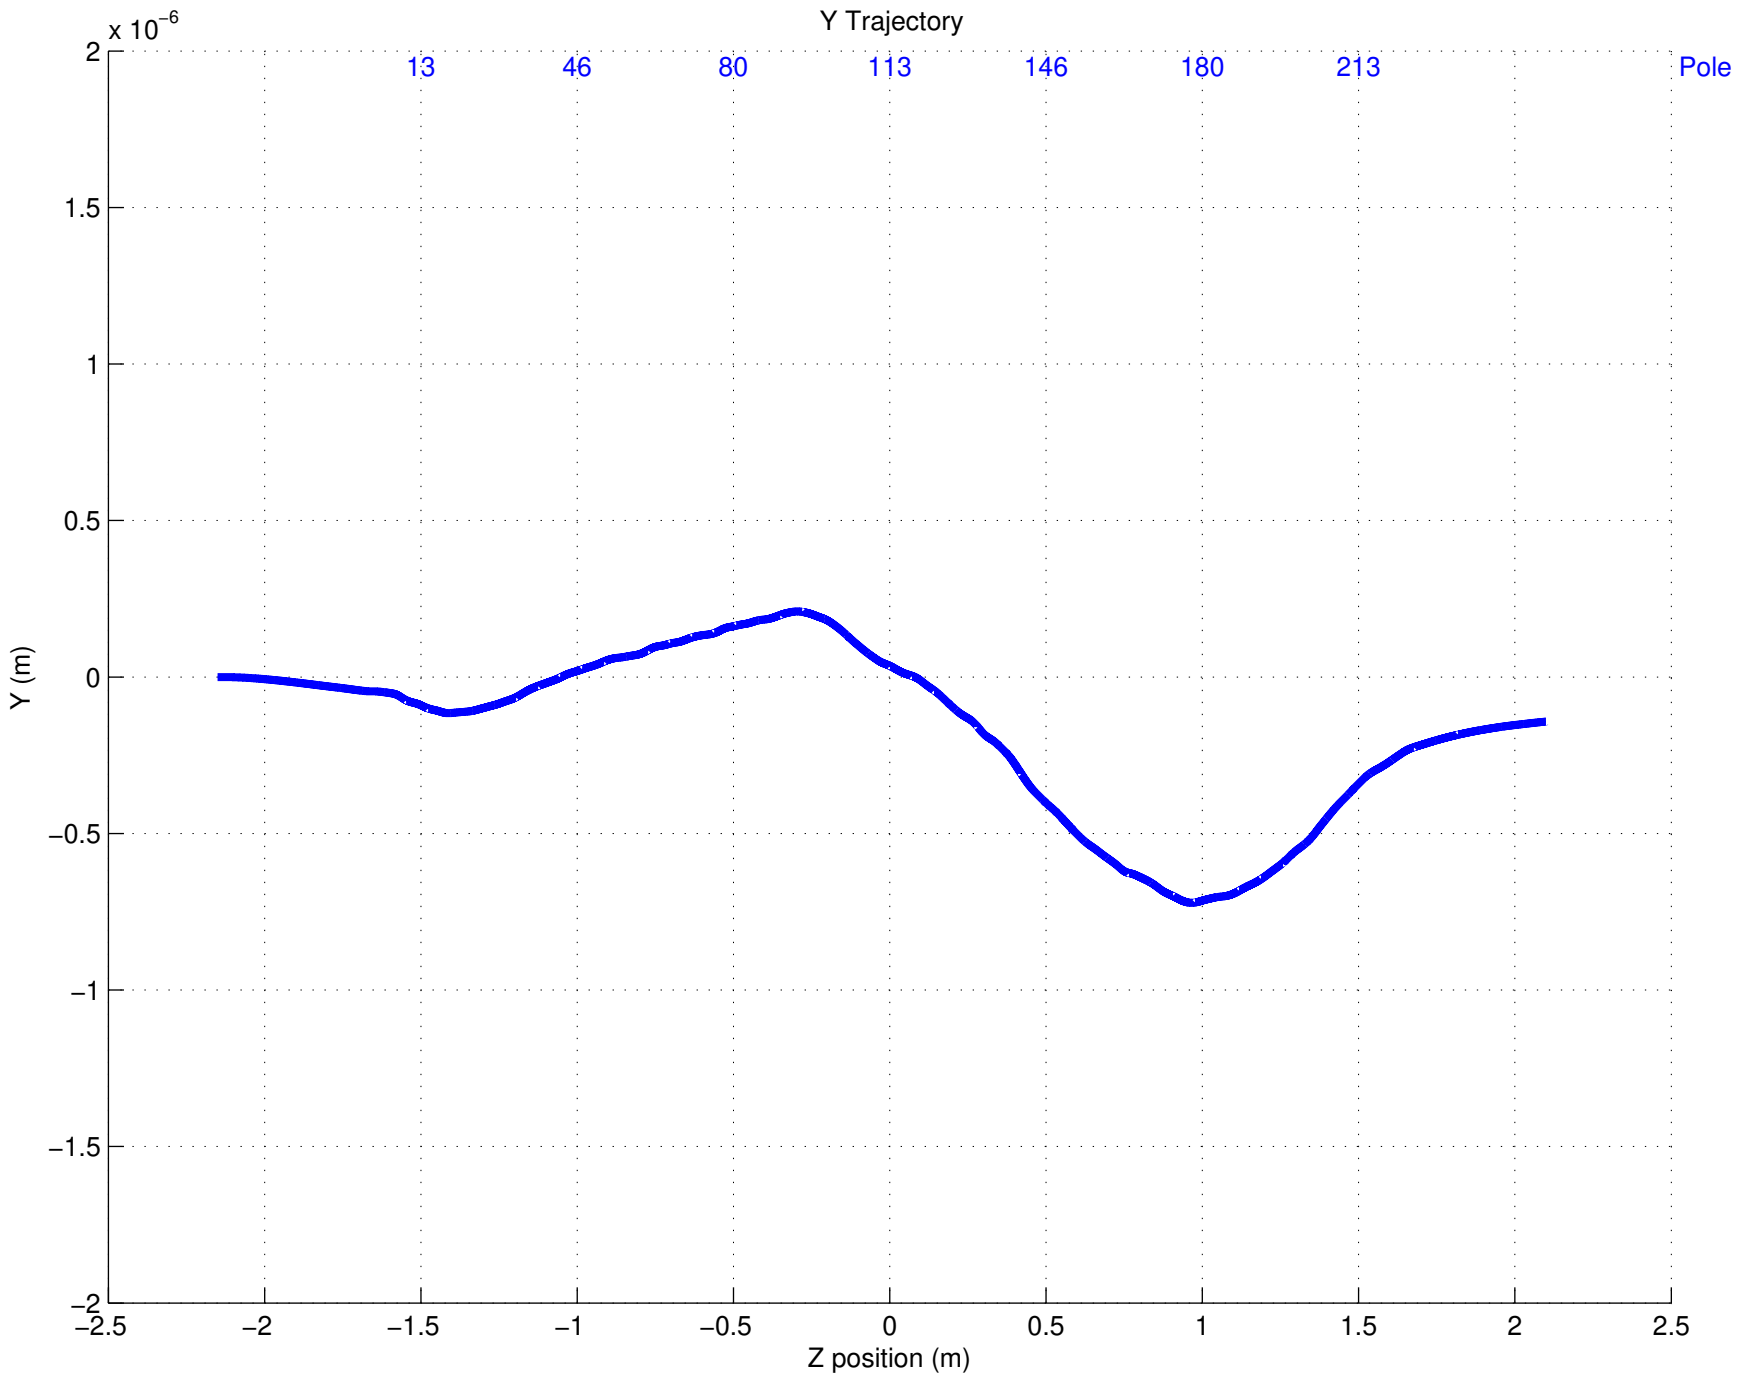
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

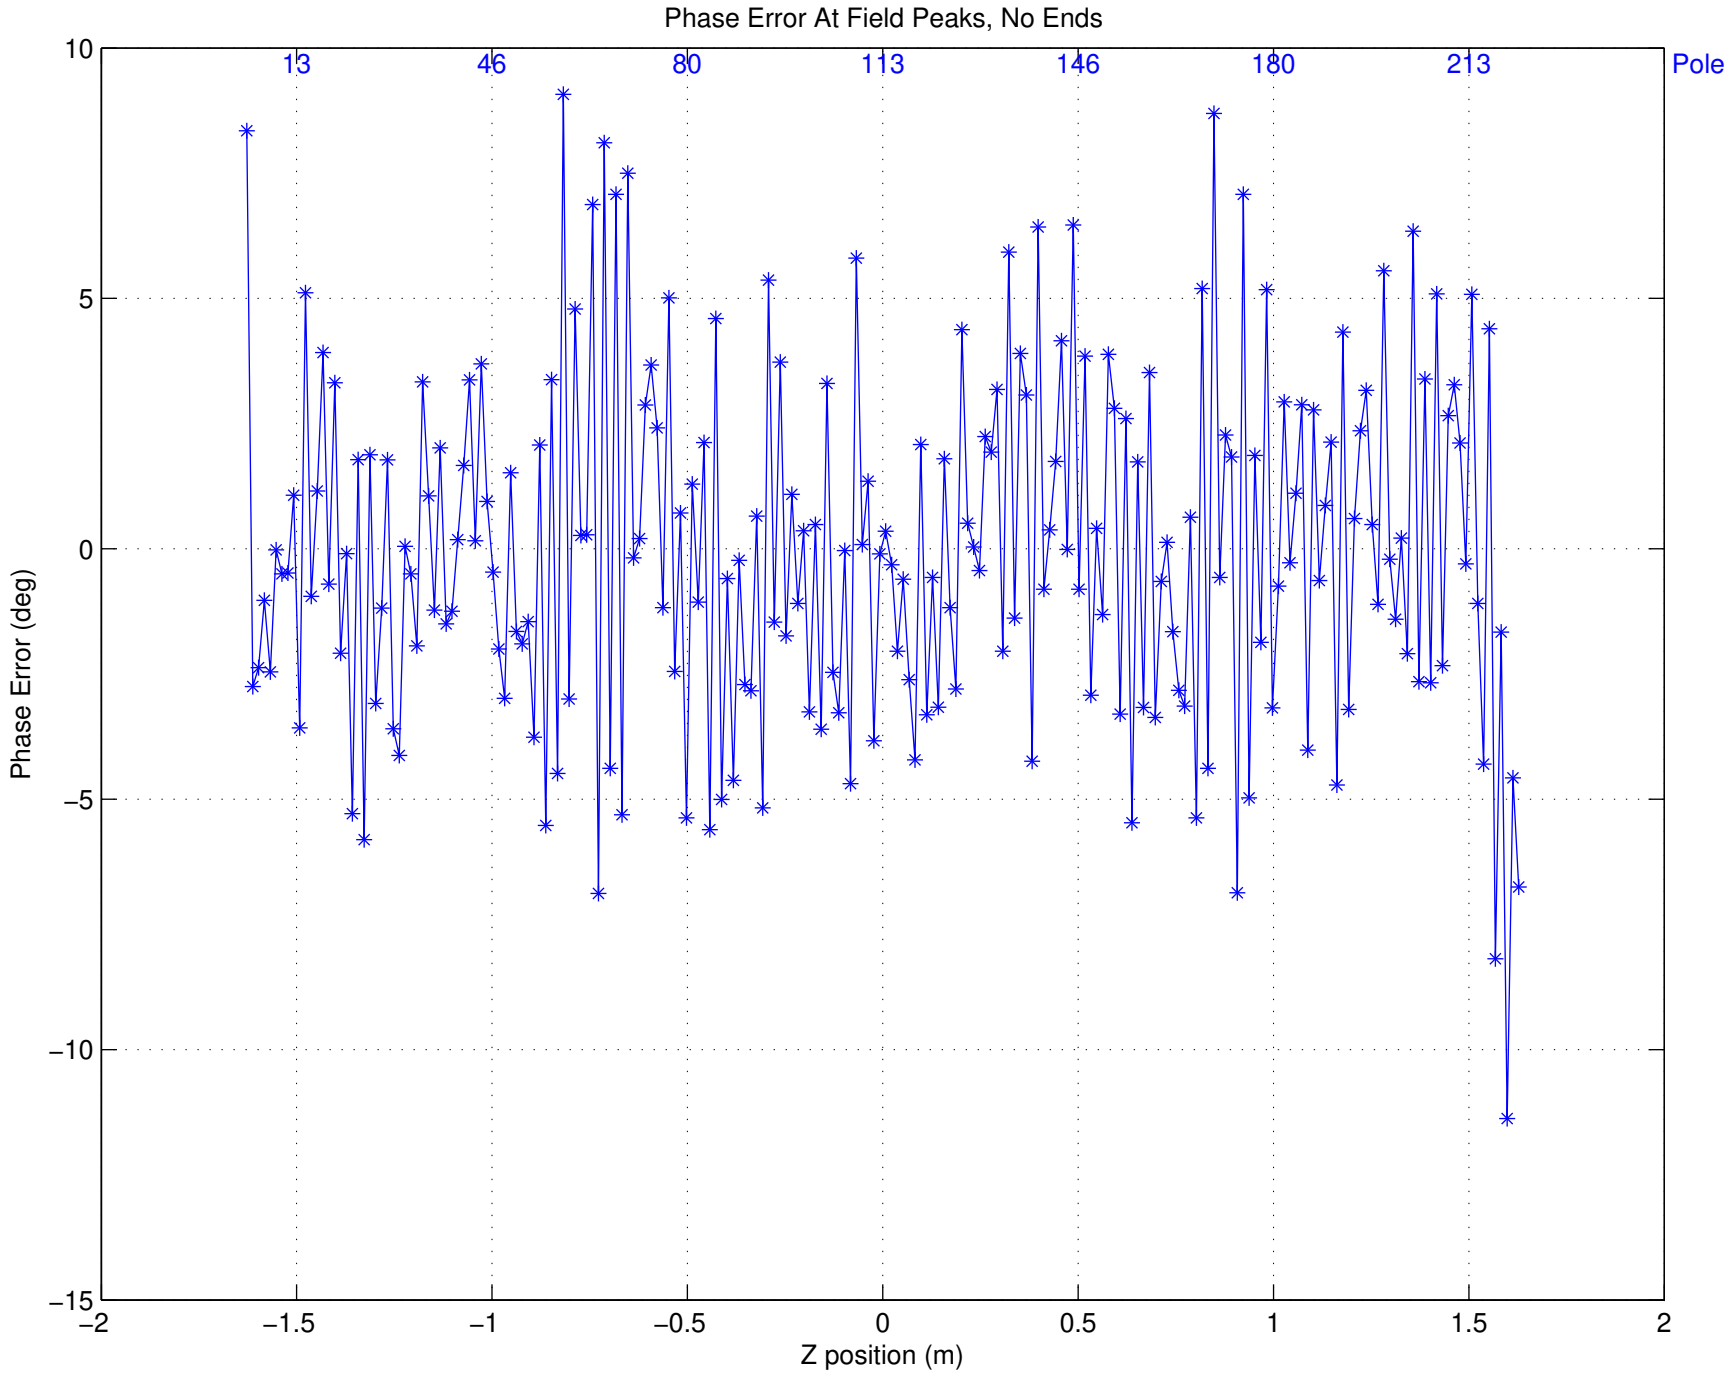

Phase Error: Ave = −0.000000 deg, RMS = 3.497699 deg

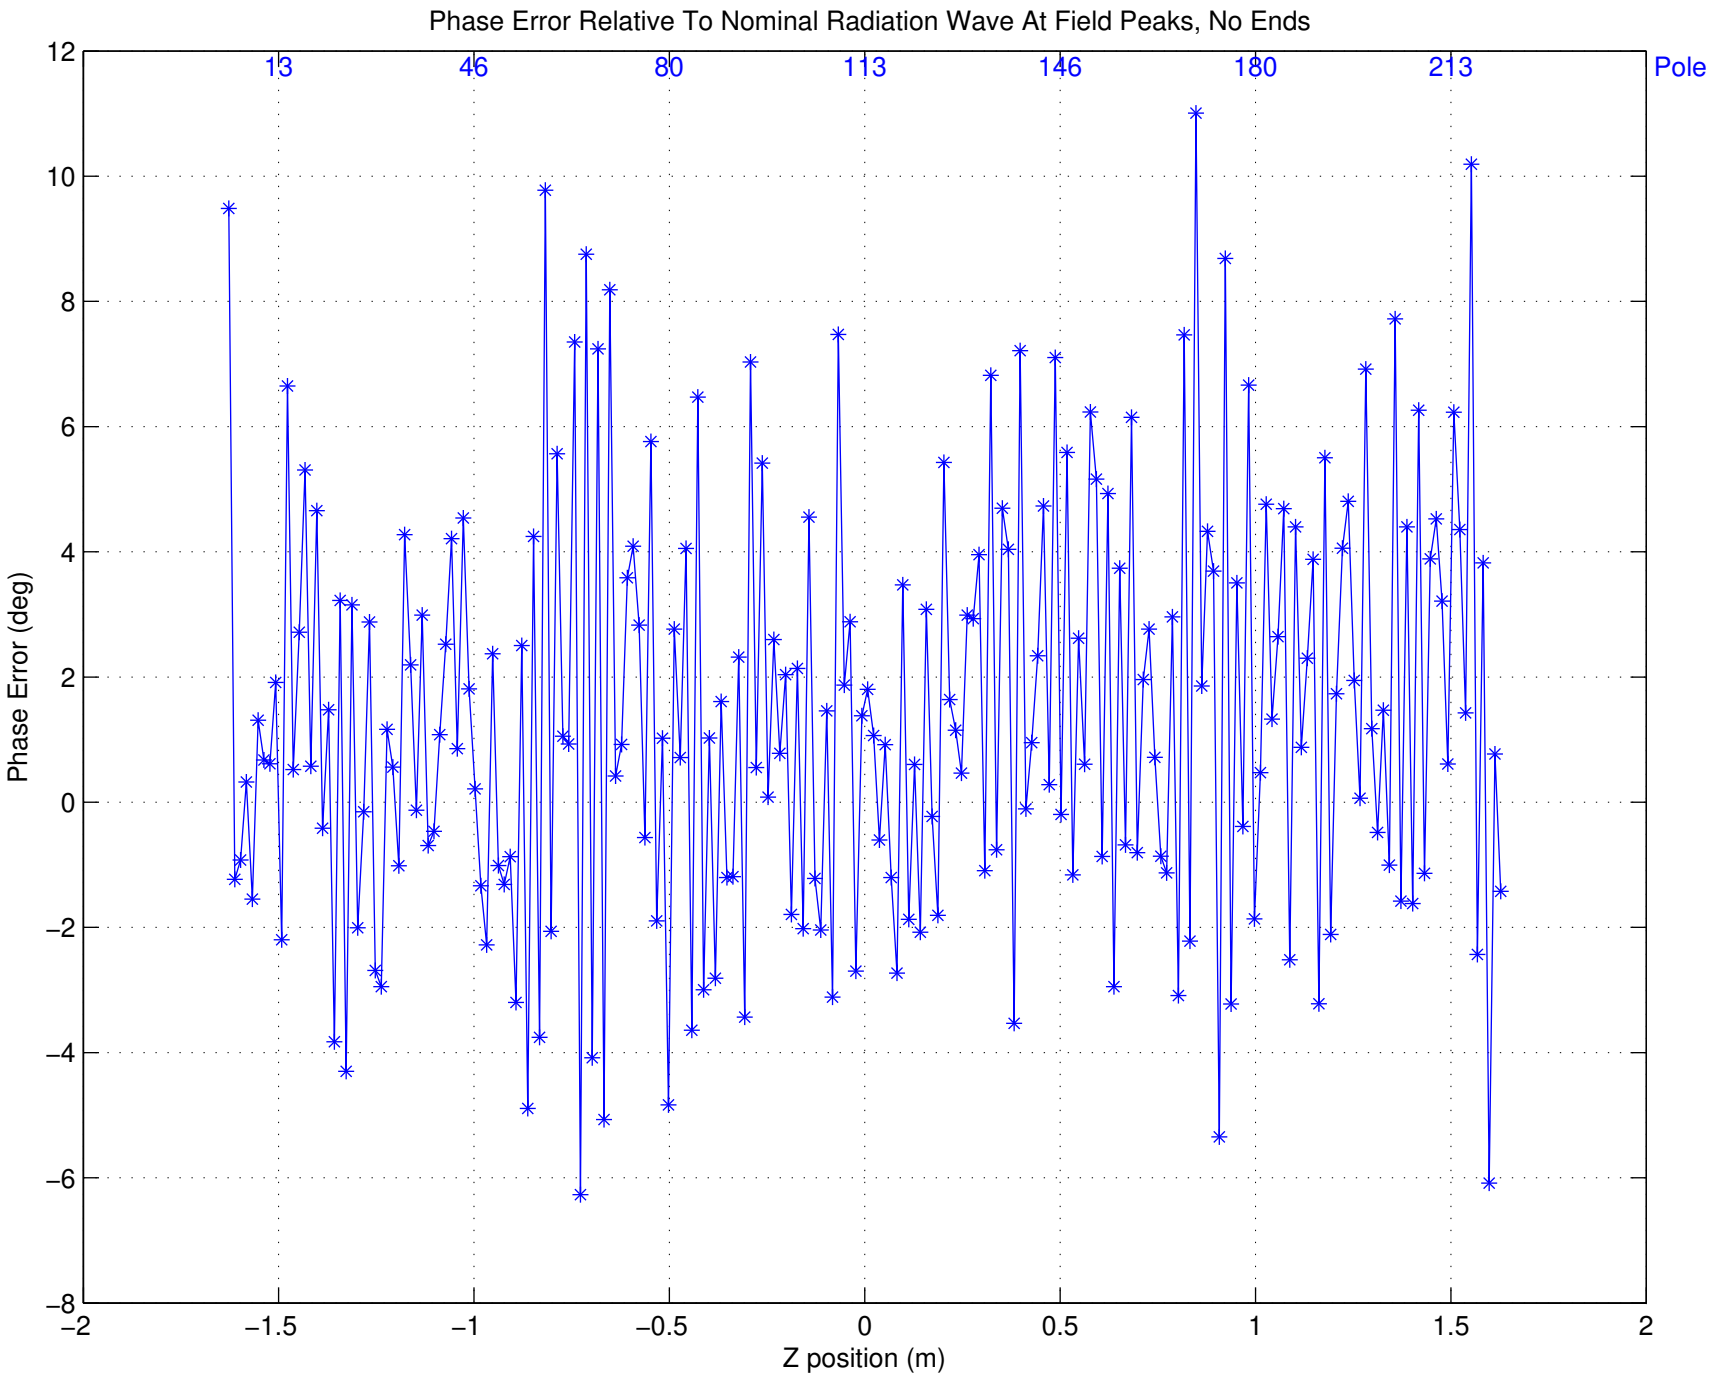
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
12
10
8
6
4
2
0
−2
−4
−6
−8
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)