SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 04−25−2012
Time: 11:08:47

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−31
DATASET Number: 6
Tuning Stage: Fine Tuning
Run Number: 10
Measurement Type: Z Scans
Operator: YL
Comment: find Y at min K; fourth gap adjustment
Session first run: 10
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−31\DATASET0006\Fine Tuning\Z Scans\Run 010\bscanz.dat

Temperature (C)
L143−112000−31:−−> T1 19.94 −−> T2 19.93 −−> T5 19.91 −−> T3 19.93 −−> Air 19.98 −−> T4 19.92

Axes position (m) X:0.029861 Y:0.000300
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000994 V
Vy_0i = −0.003189 V

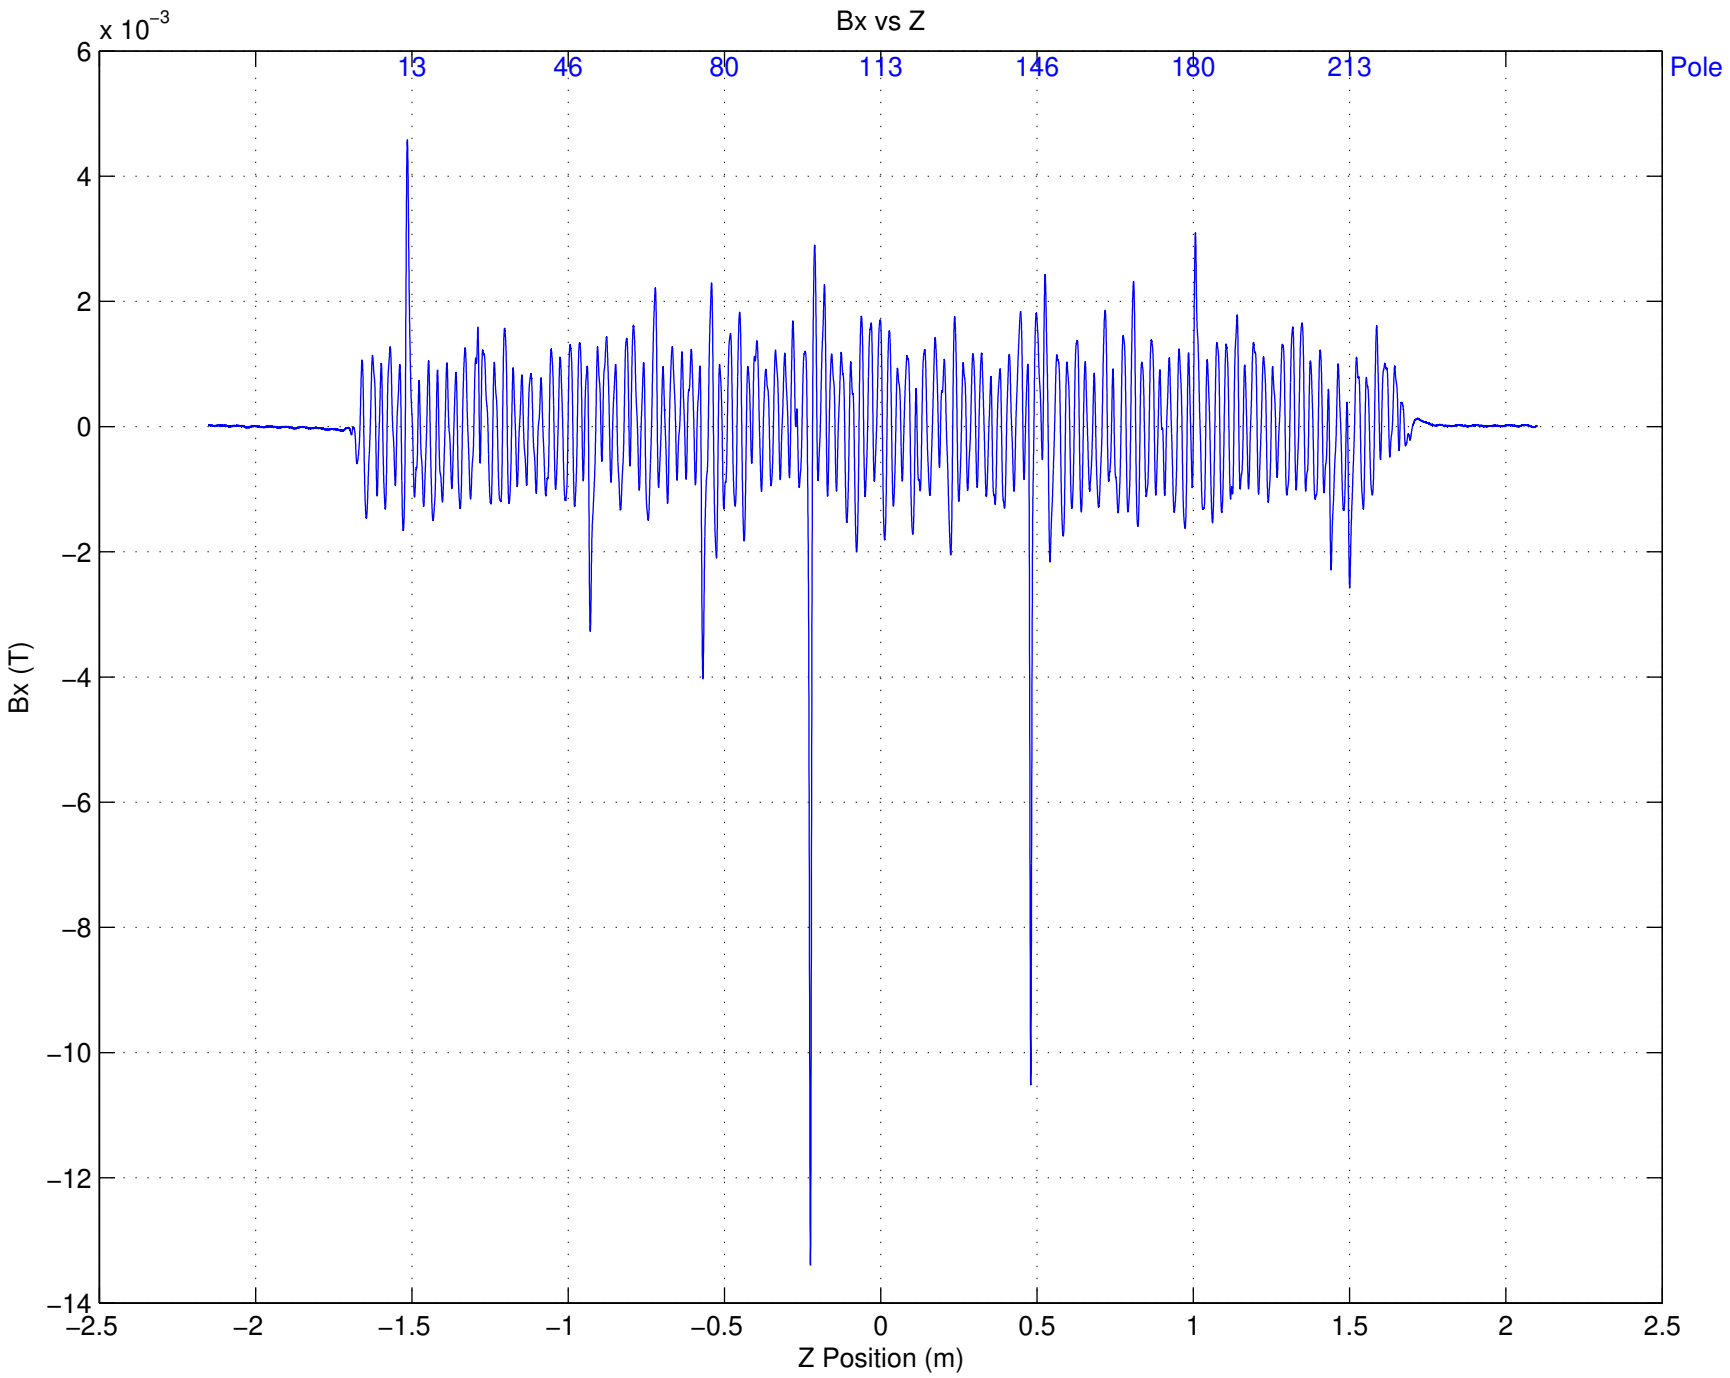
Bx vs Z
x 10^-3
6
4
2
0
−2
−4
−6
−8
−10
−12
−14
13
46
80
113
146
180
213
Pole
Bx (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

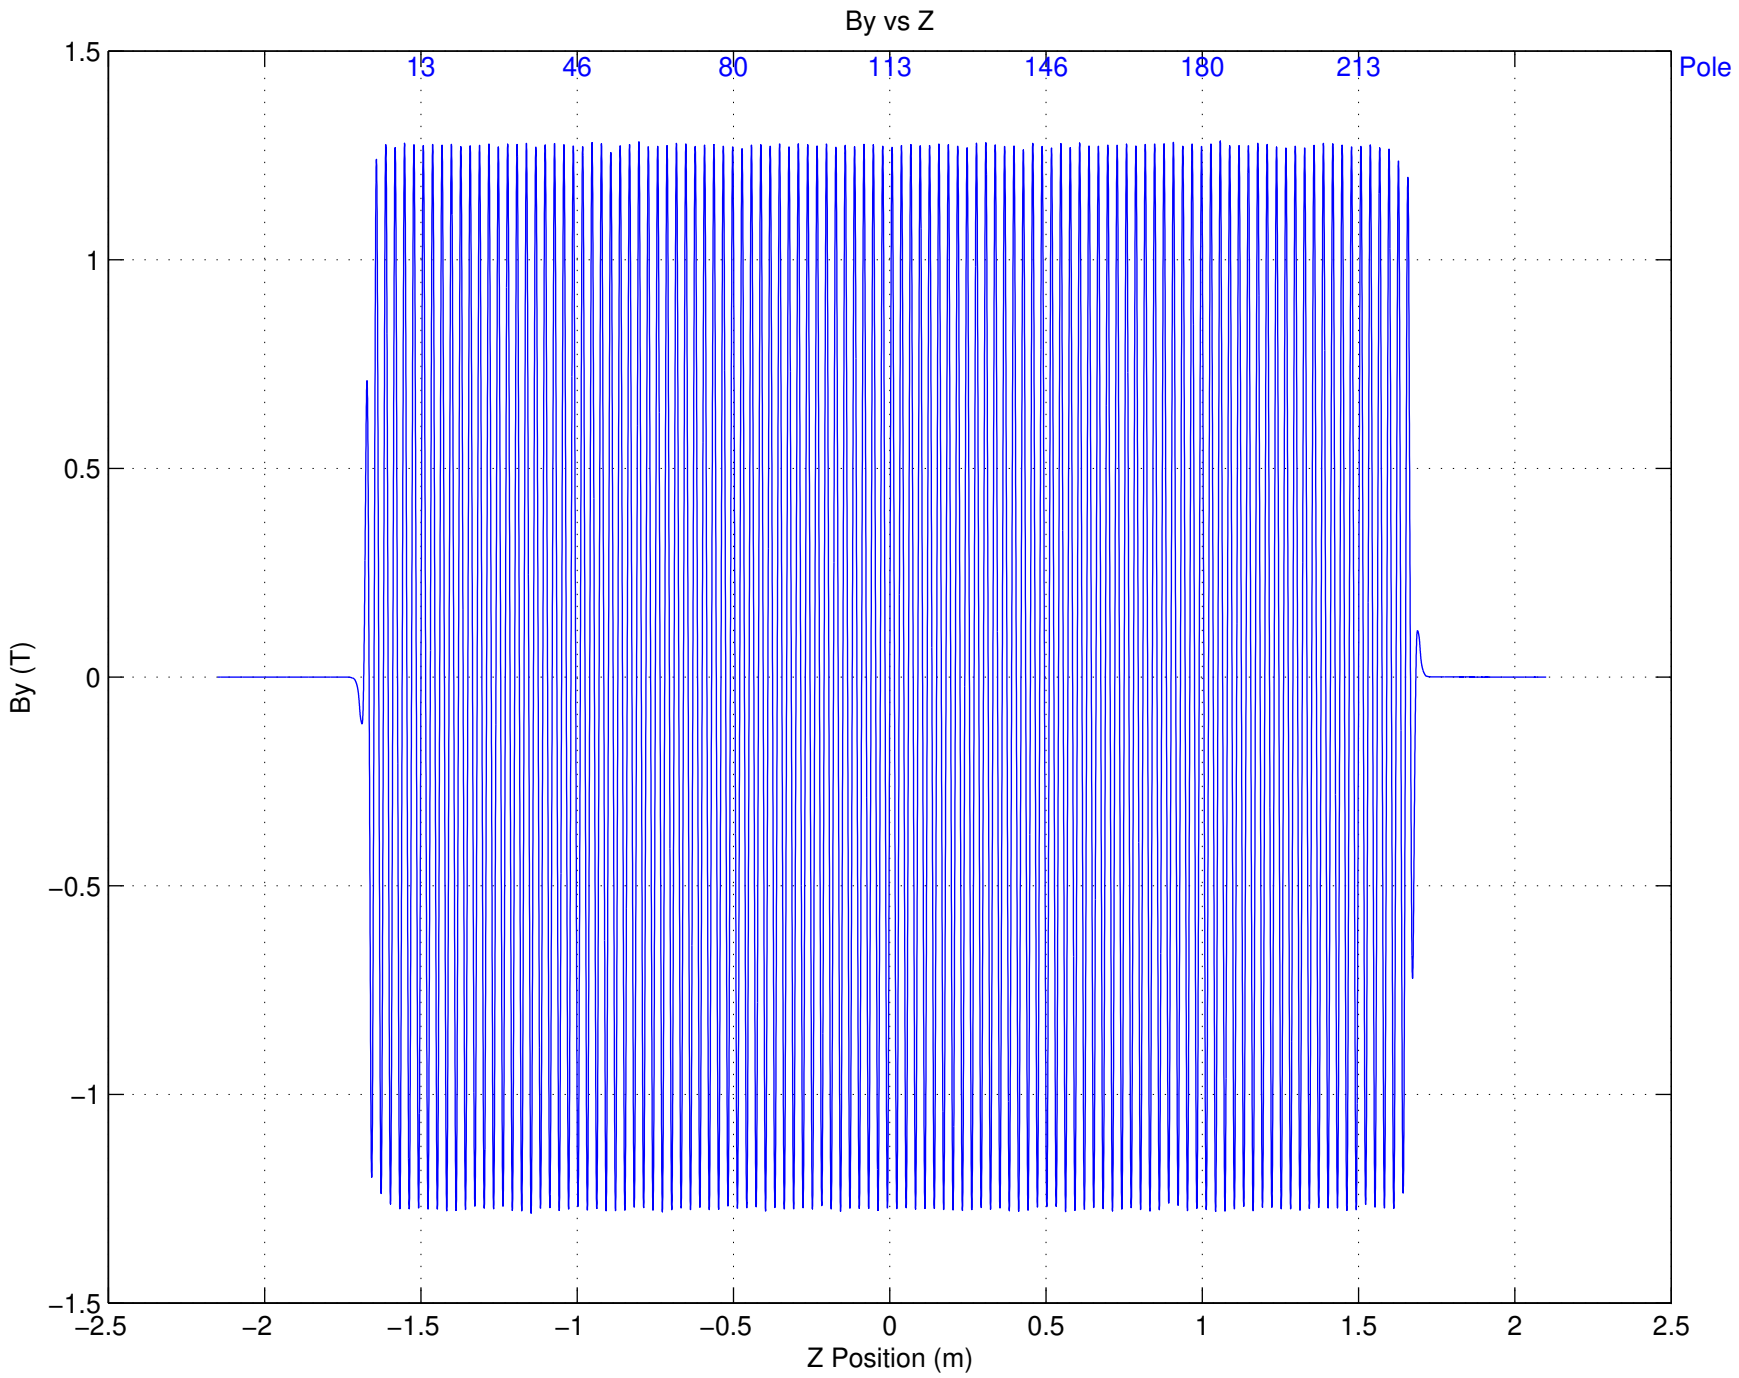
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

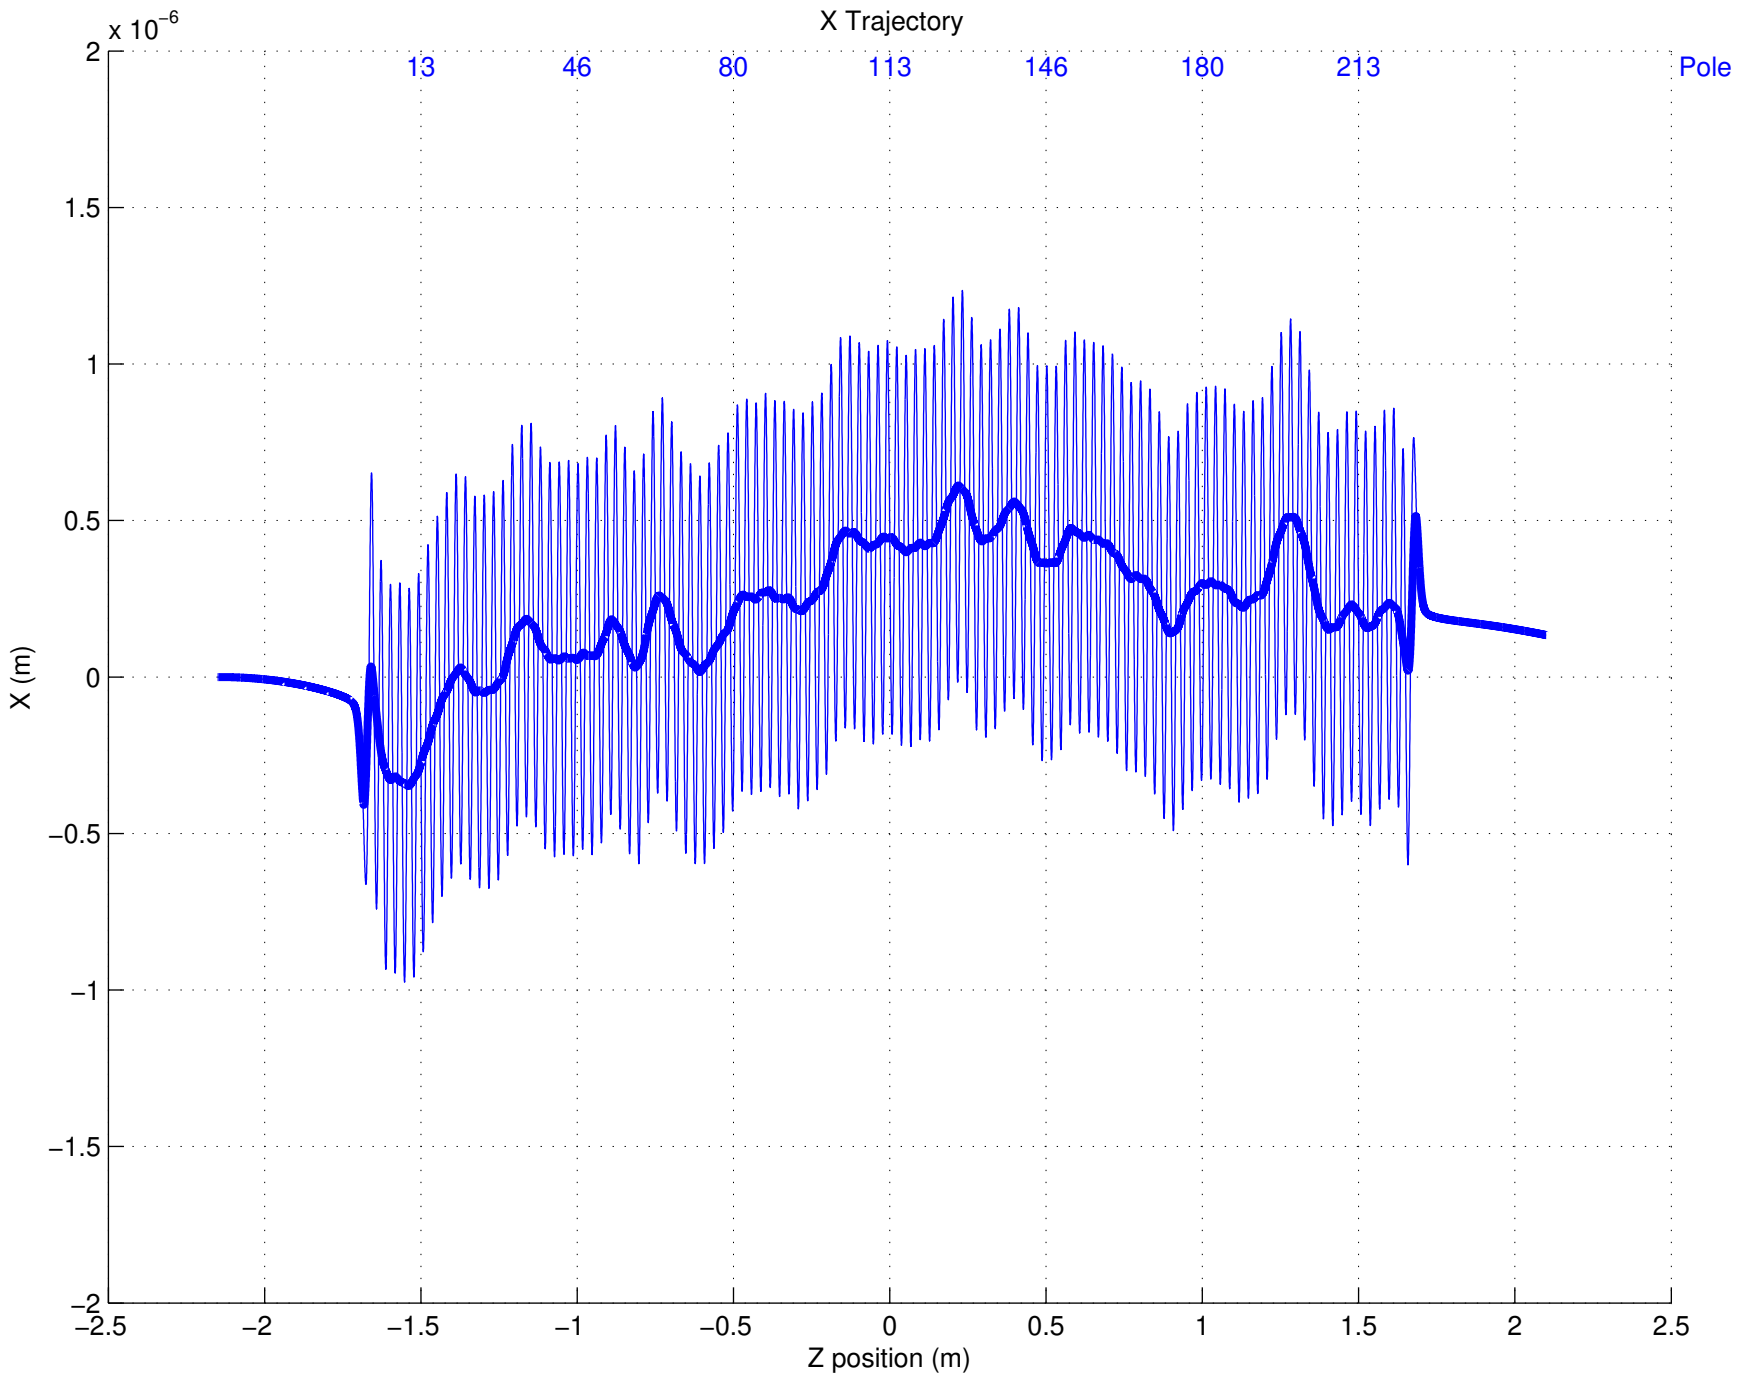
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

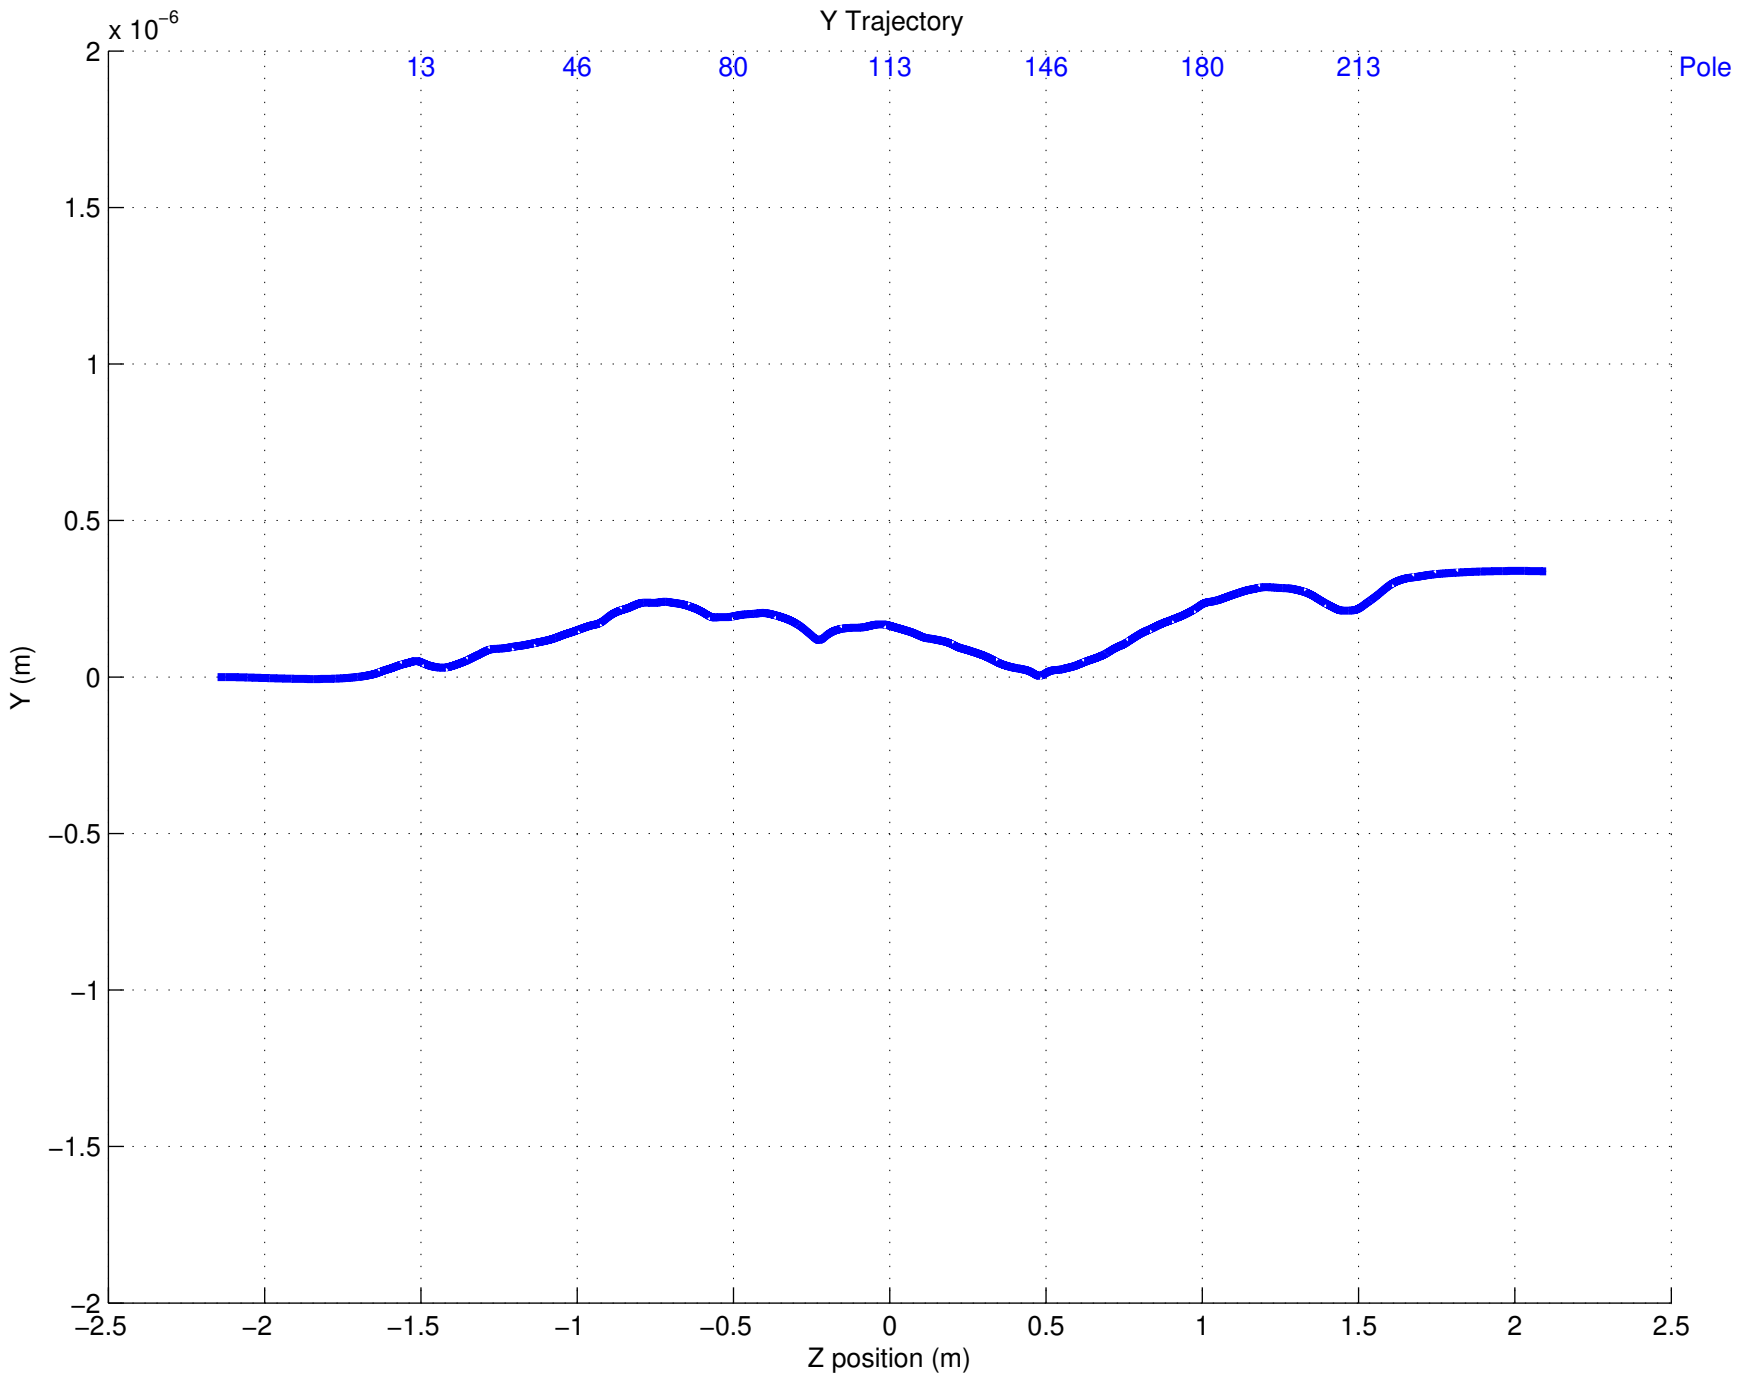
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

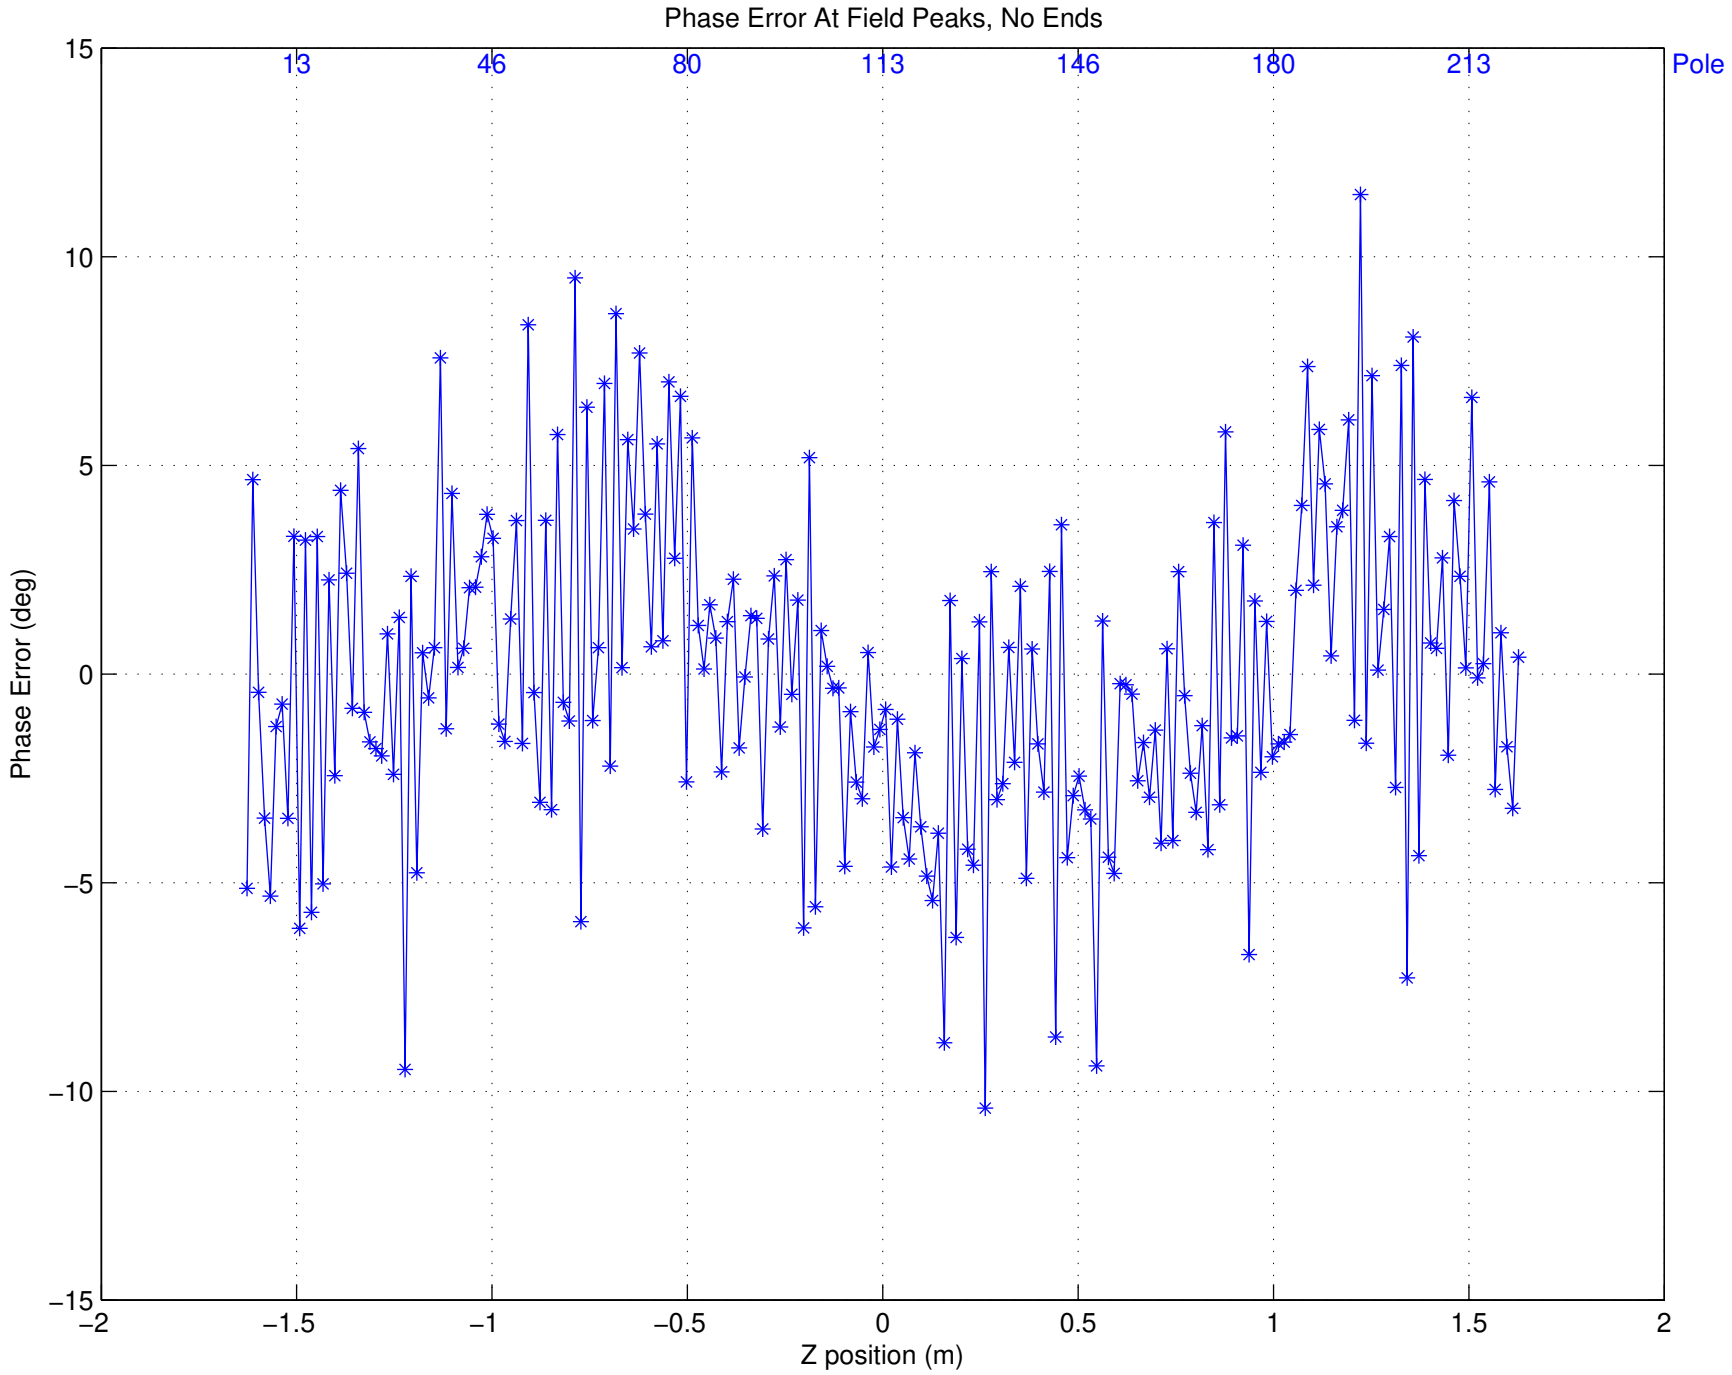

Phase Error: Ave = 0.000000 deg, RMS = 3.856759 deg

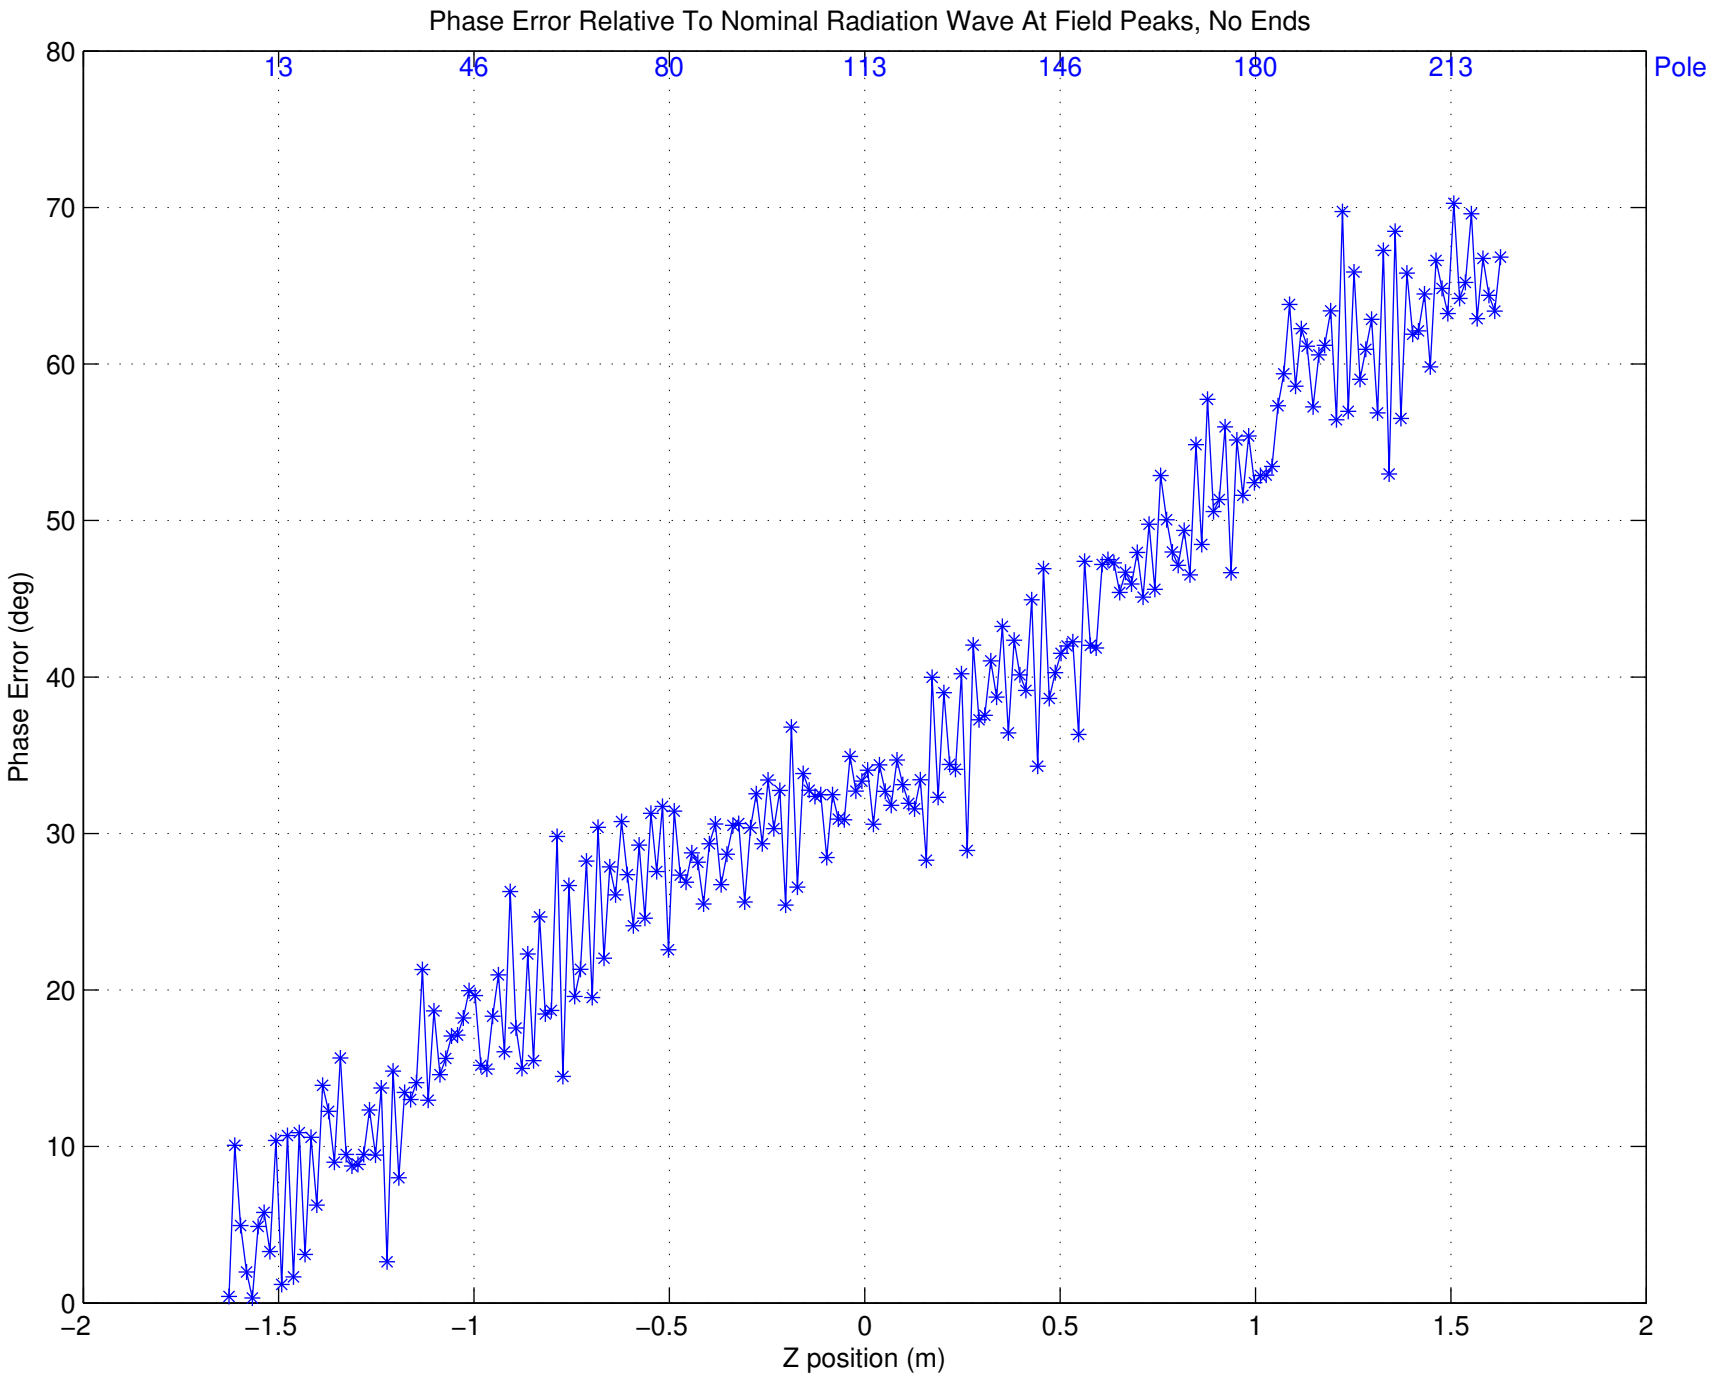
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
80
70
60
50
40
30
20
10
0
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)