SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 05−08−2012
Time: 09:13:29

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−31
DATASET Number: 6
Tuning Stage: Fine Tuning
Run Number: 26
Measurement Type: Z Scans
Operator: YL
Comment: find Y at min K before final scans, exit phase corrected
Session first run: 26
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−31\DATASET0006\Fine Tuning\Z Scans\Run 026\bscanz.dat

Temperature (C)
L143−112000−31:−−> T1 19.95 −−> T2 19.94 −−> T5 19.92 −−> T3 19.93 −−> Air 19.92 −−> T4 19.93

Axes position (m) X:0.029922 Y:0.000277
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000964 V
Vy_0i = −0.003395 V

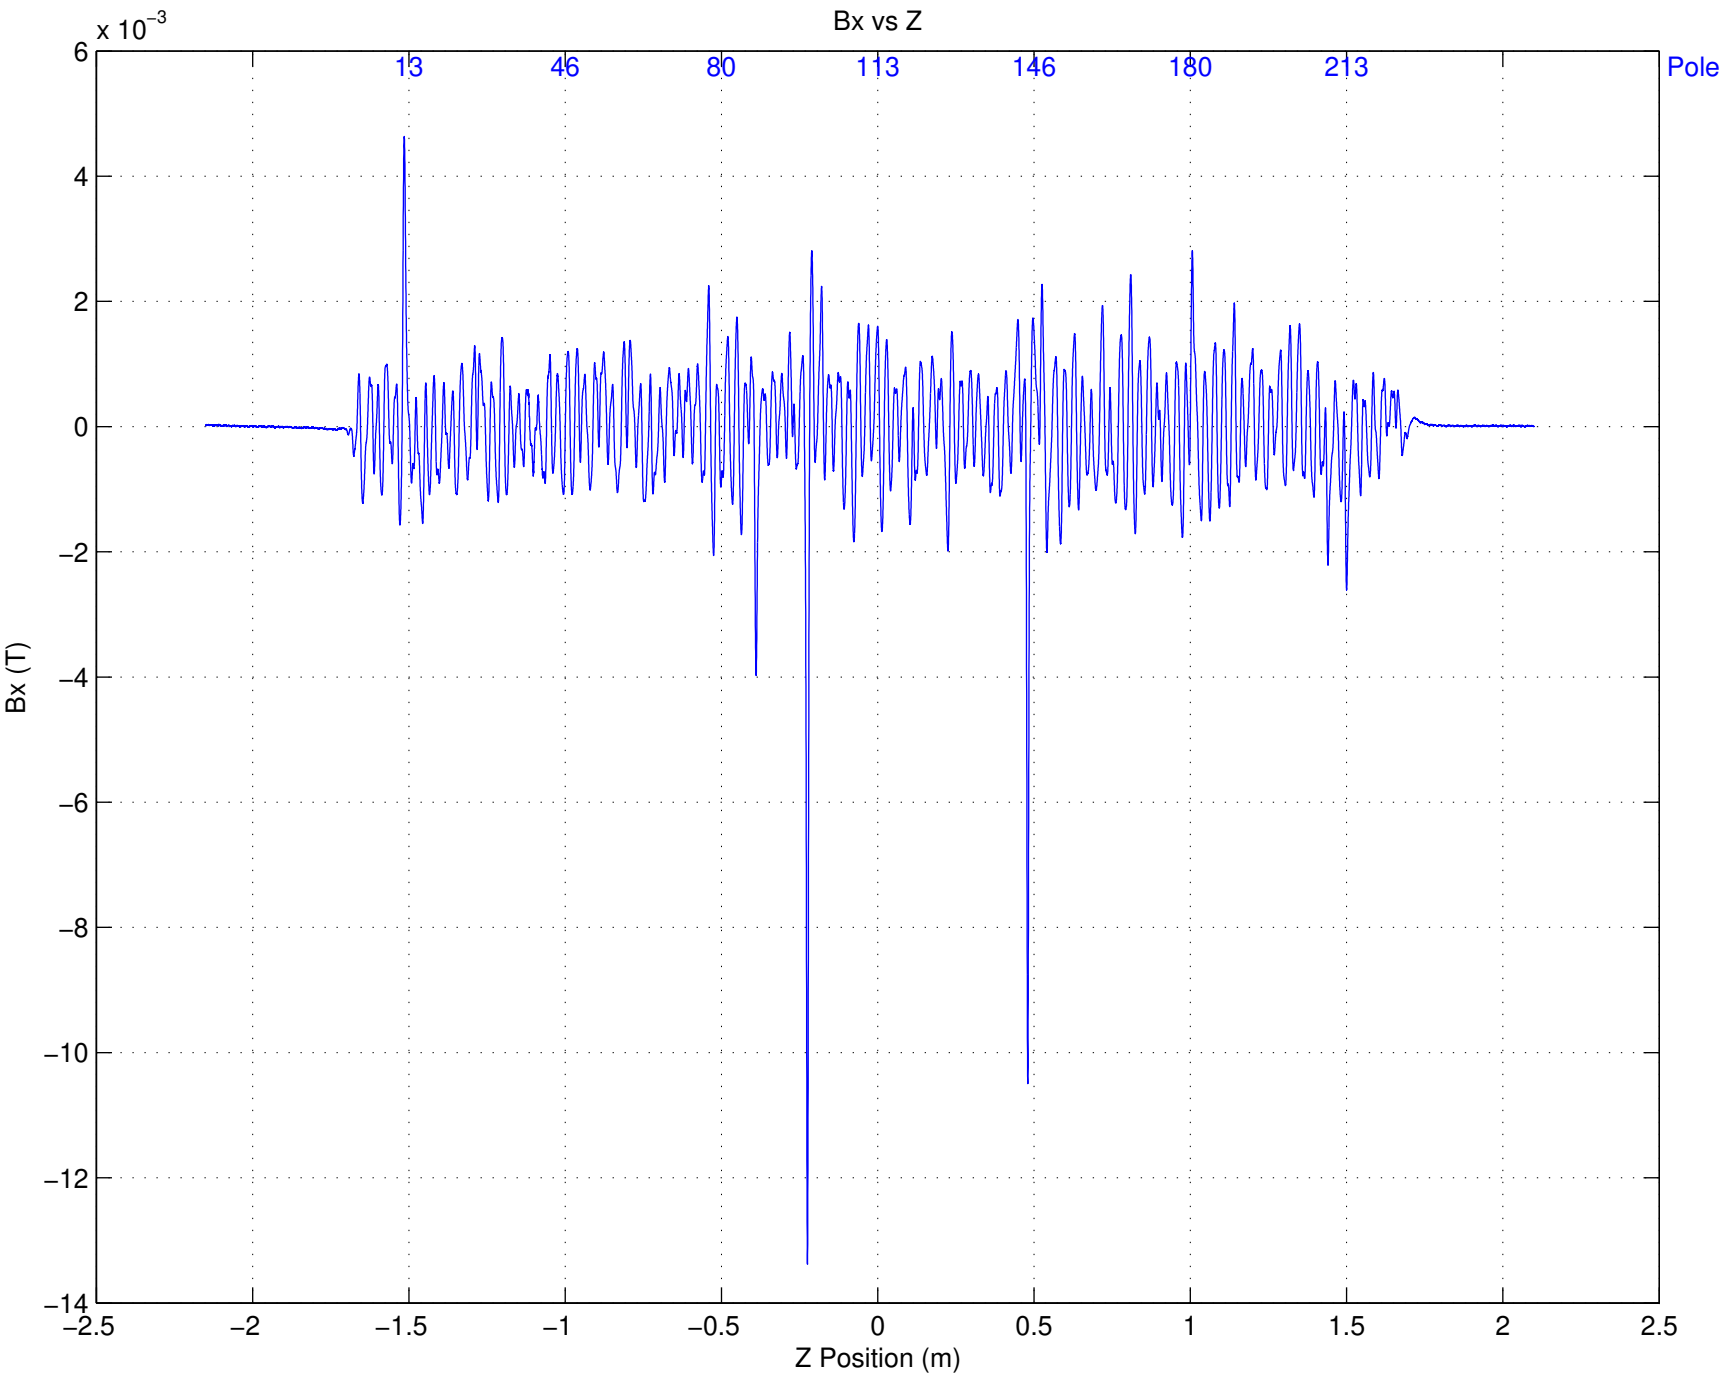
Bx vs Z
x 10^-3
6
4
2
0
−2
−4
−6
−8
−10
−12
−14
13
46
80
113
146
180
213
Pole
Bx (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

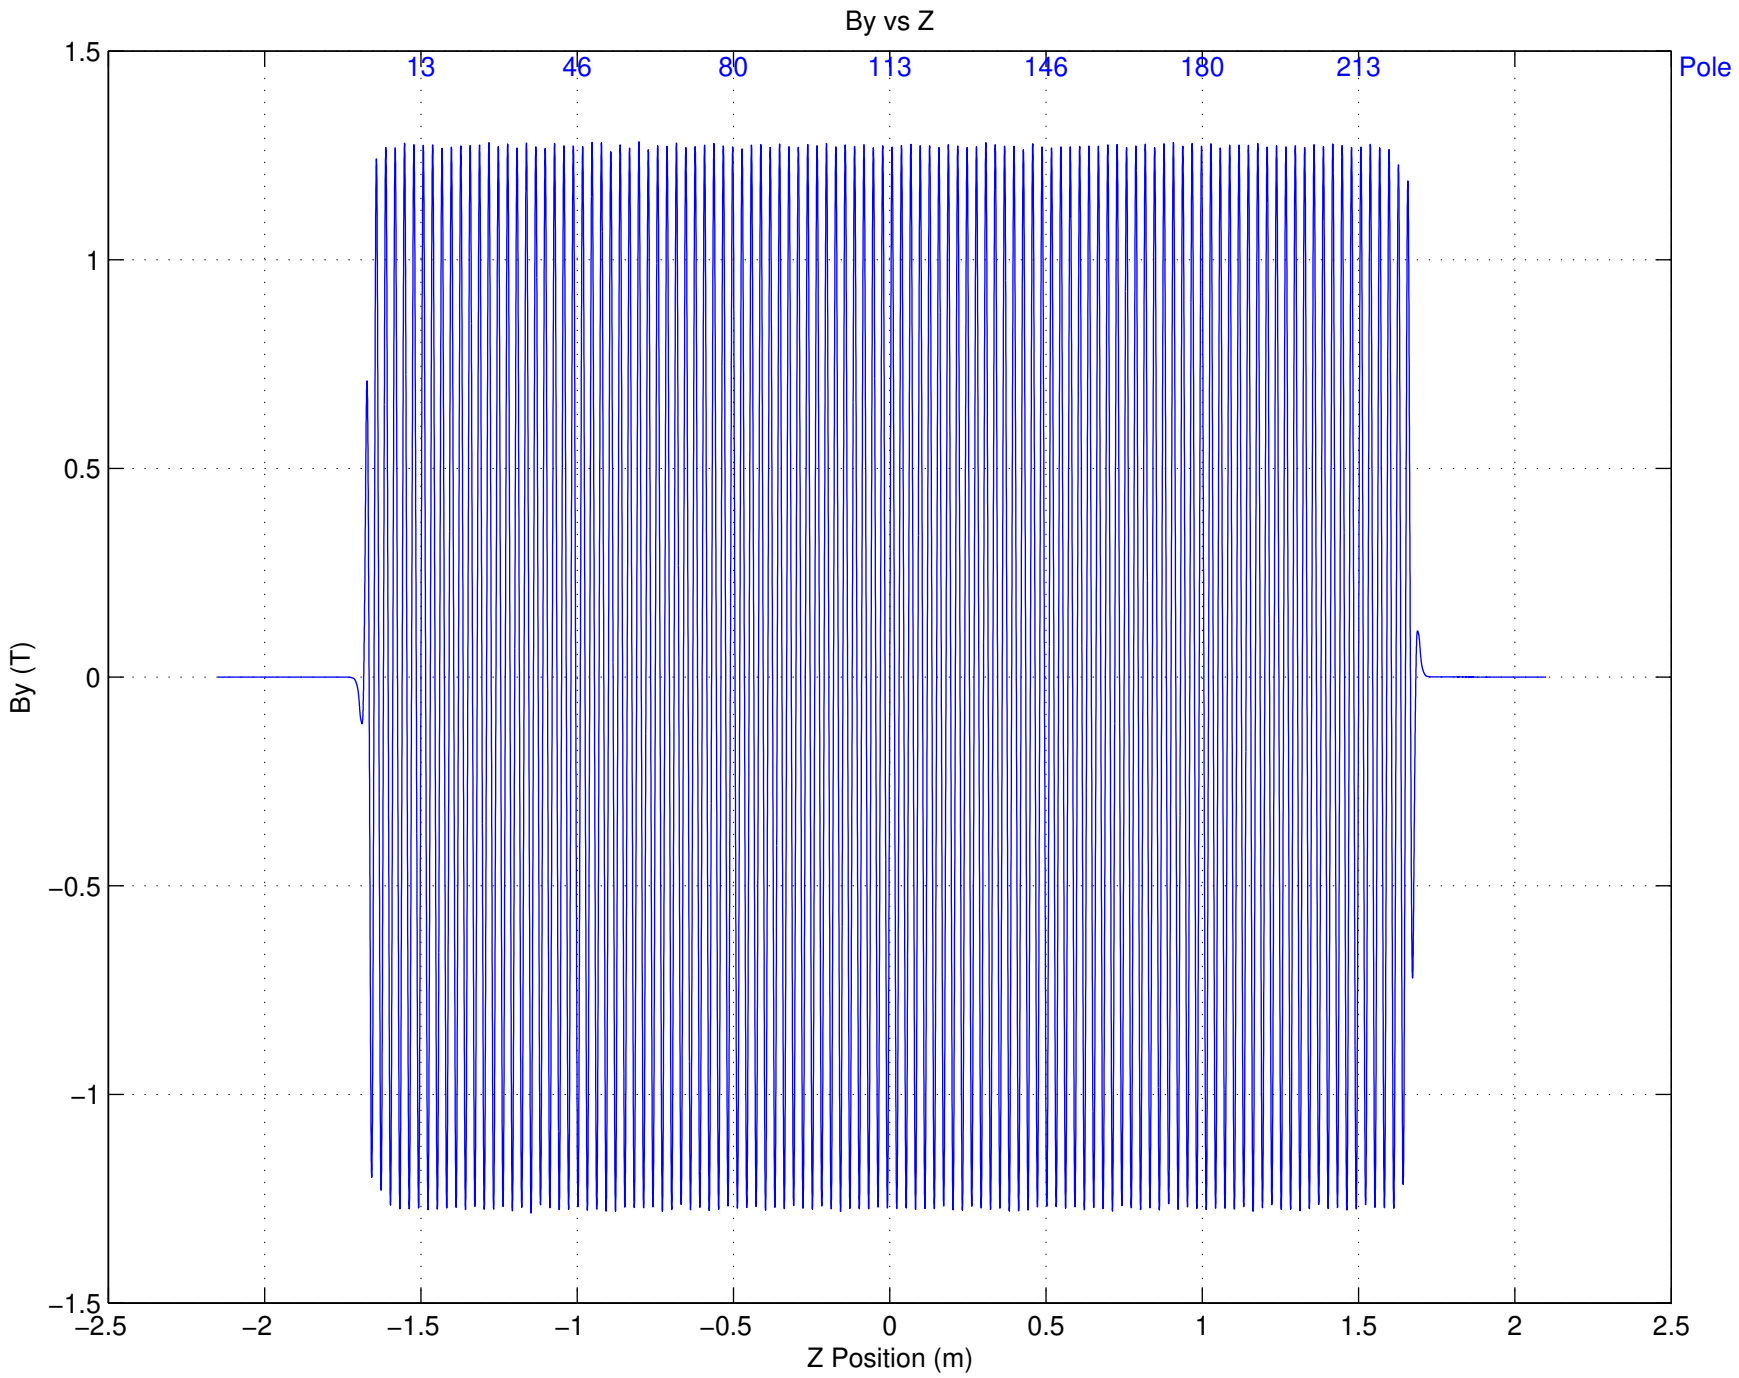
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

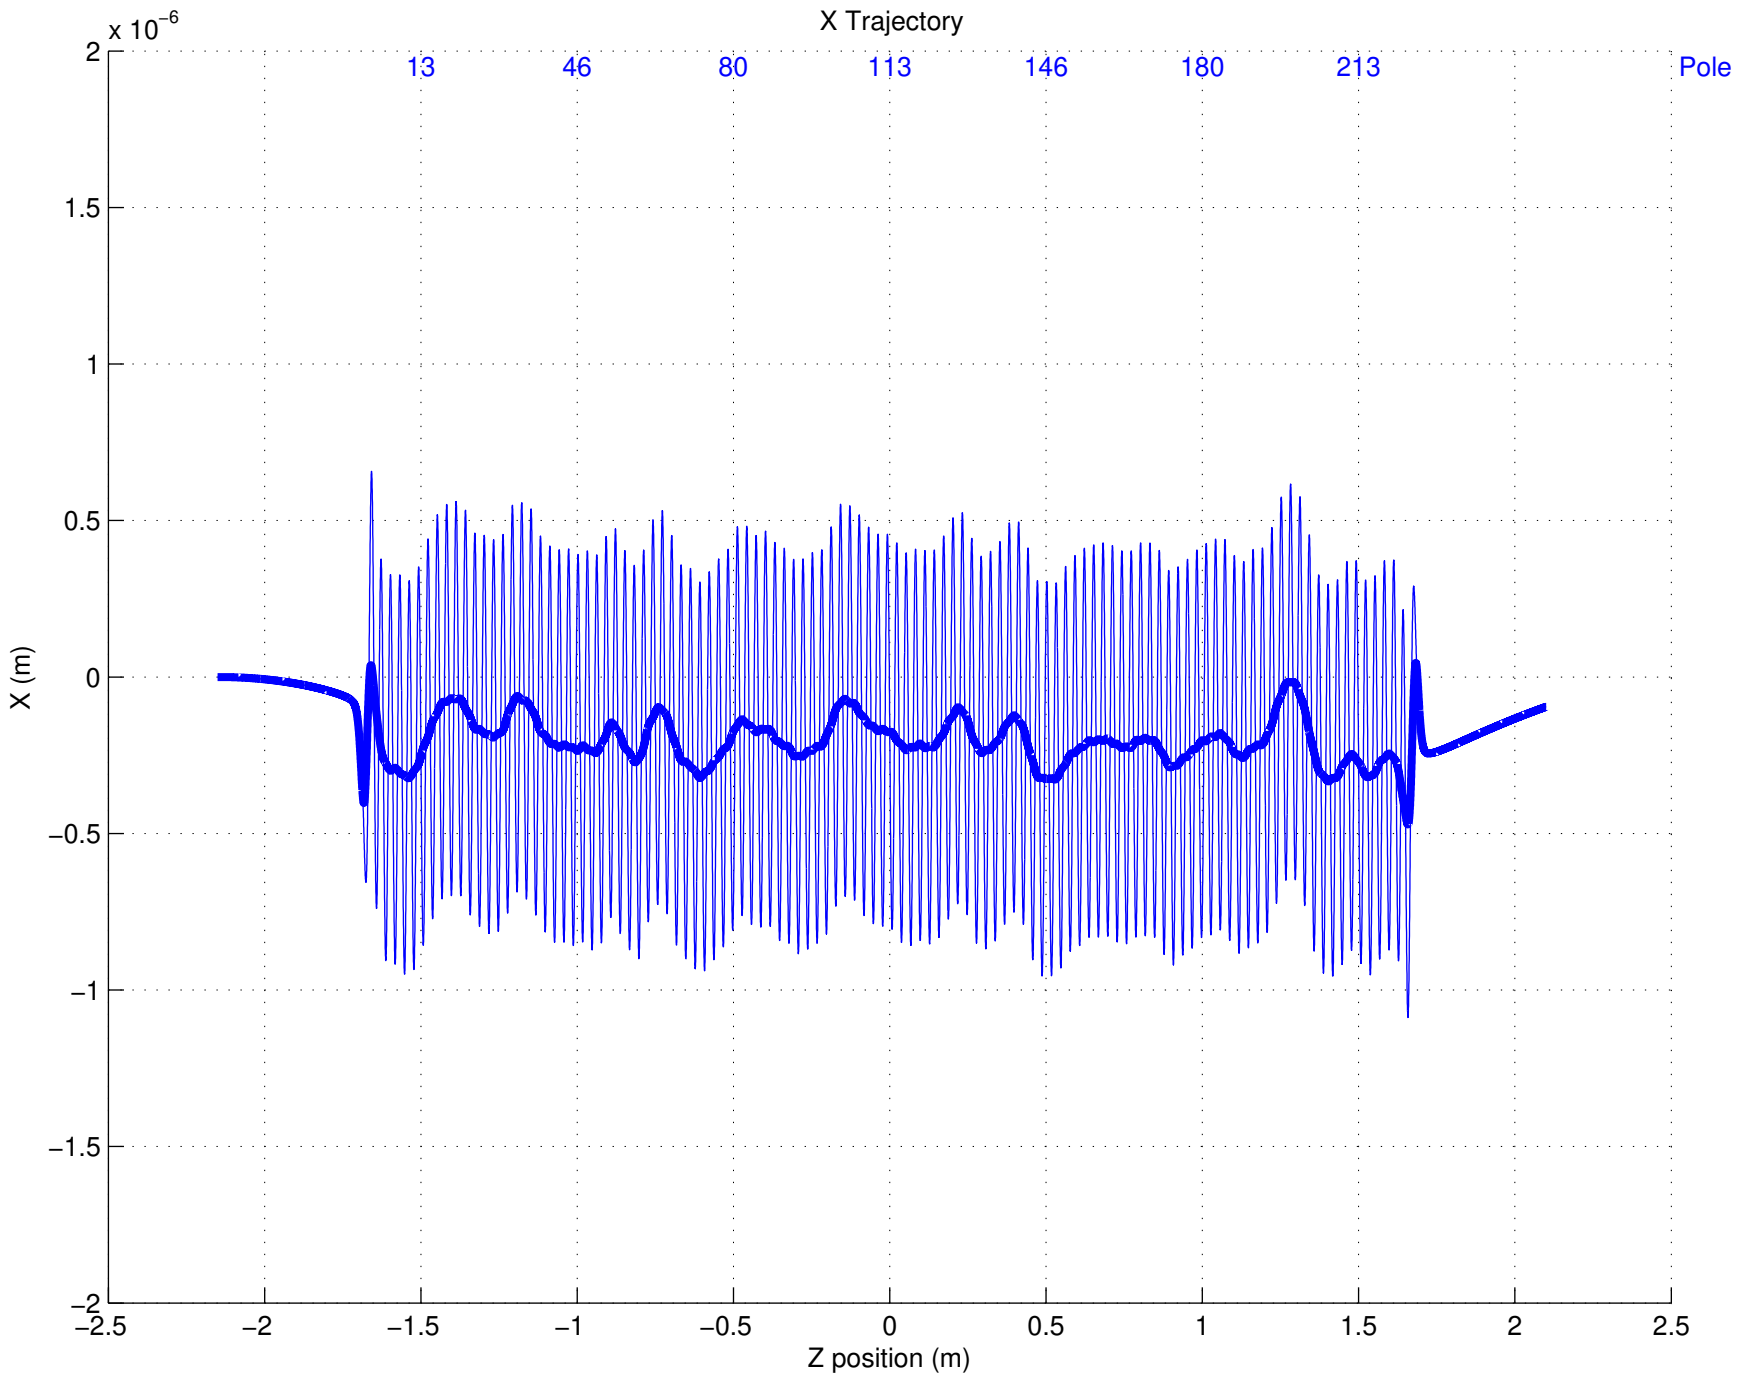
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

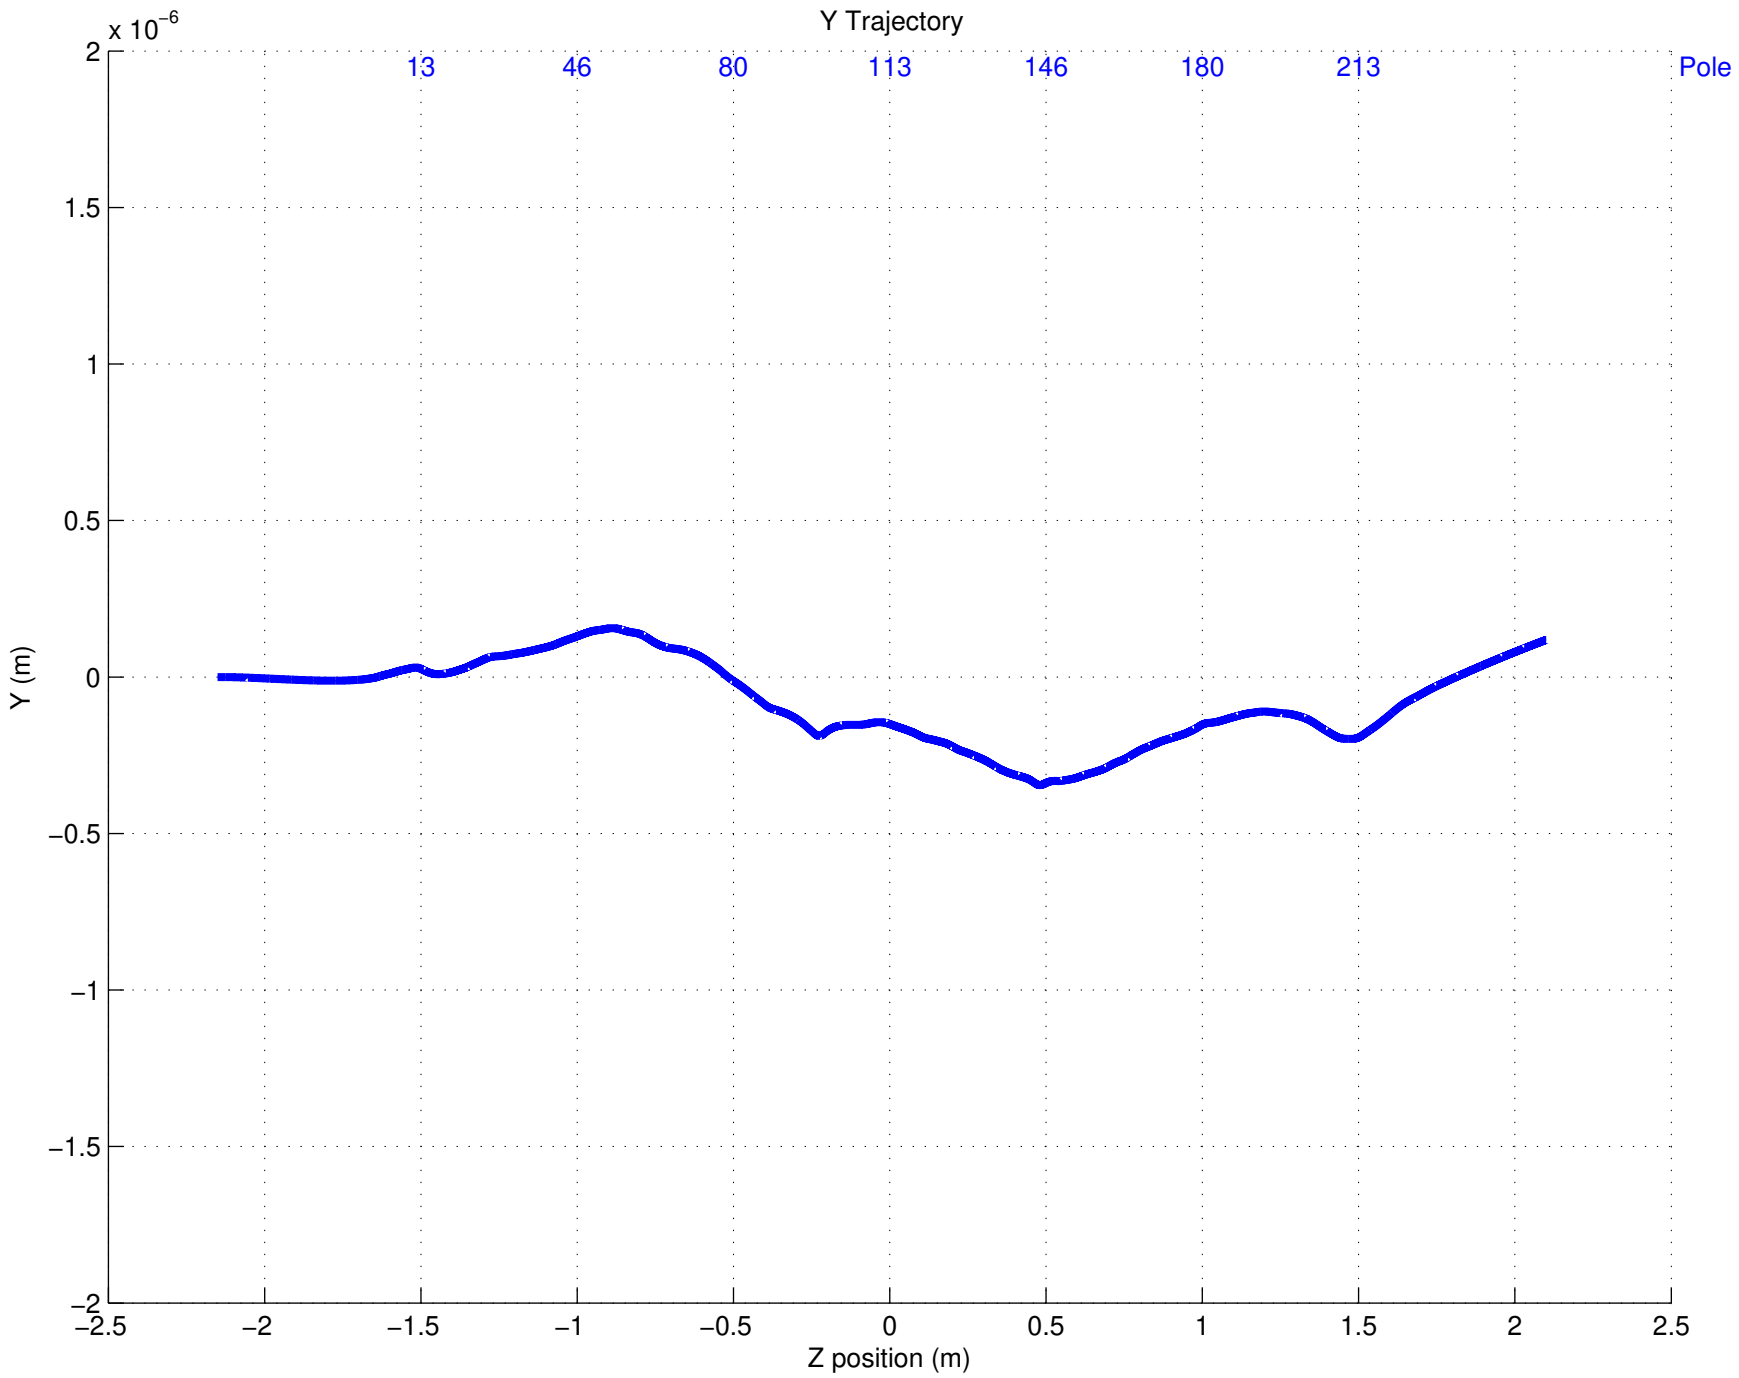
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

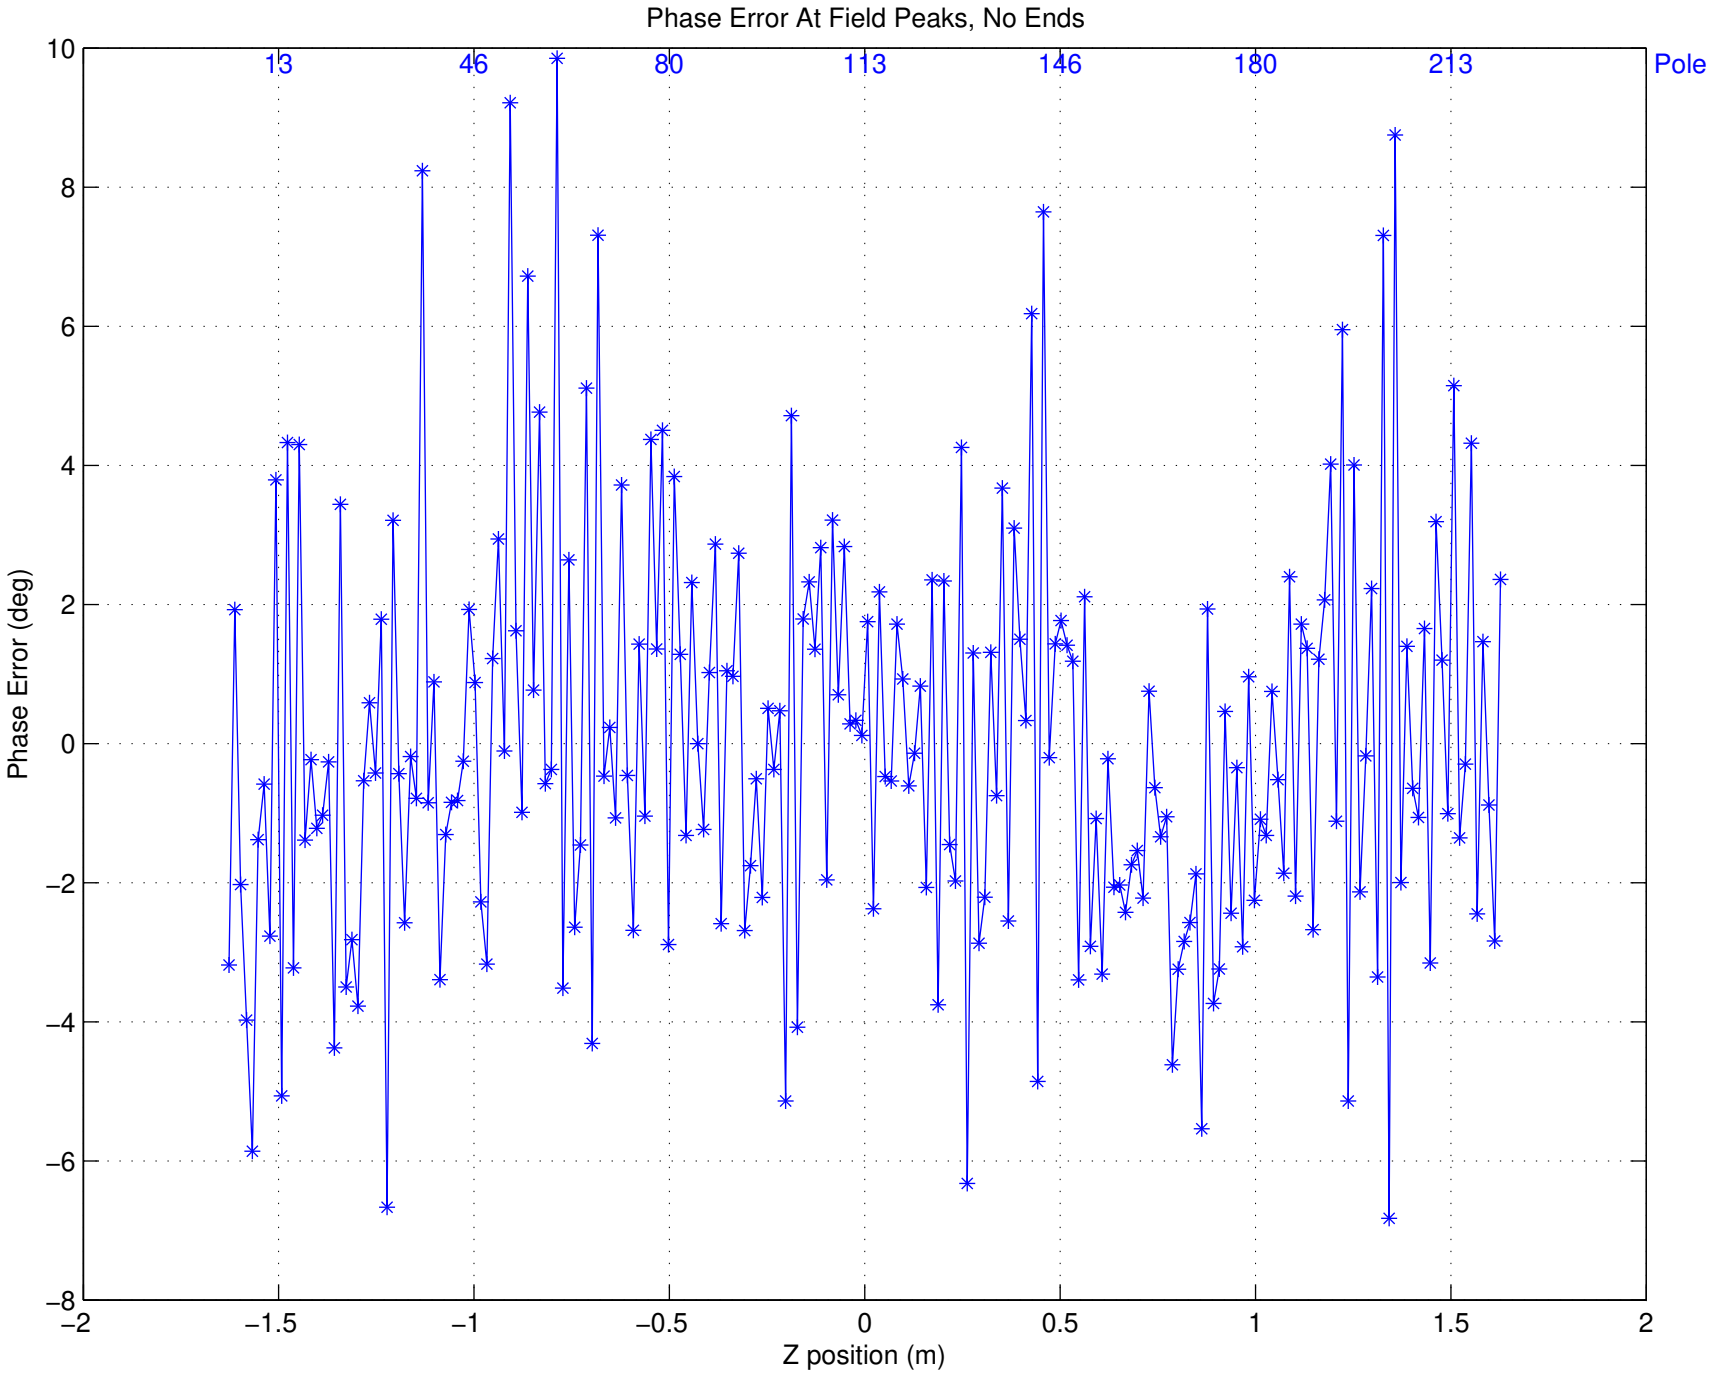

Phase Error: Ave = −0.000000 deg, RMS = 3.006151 deg

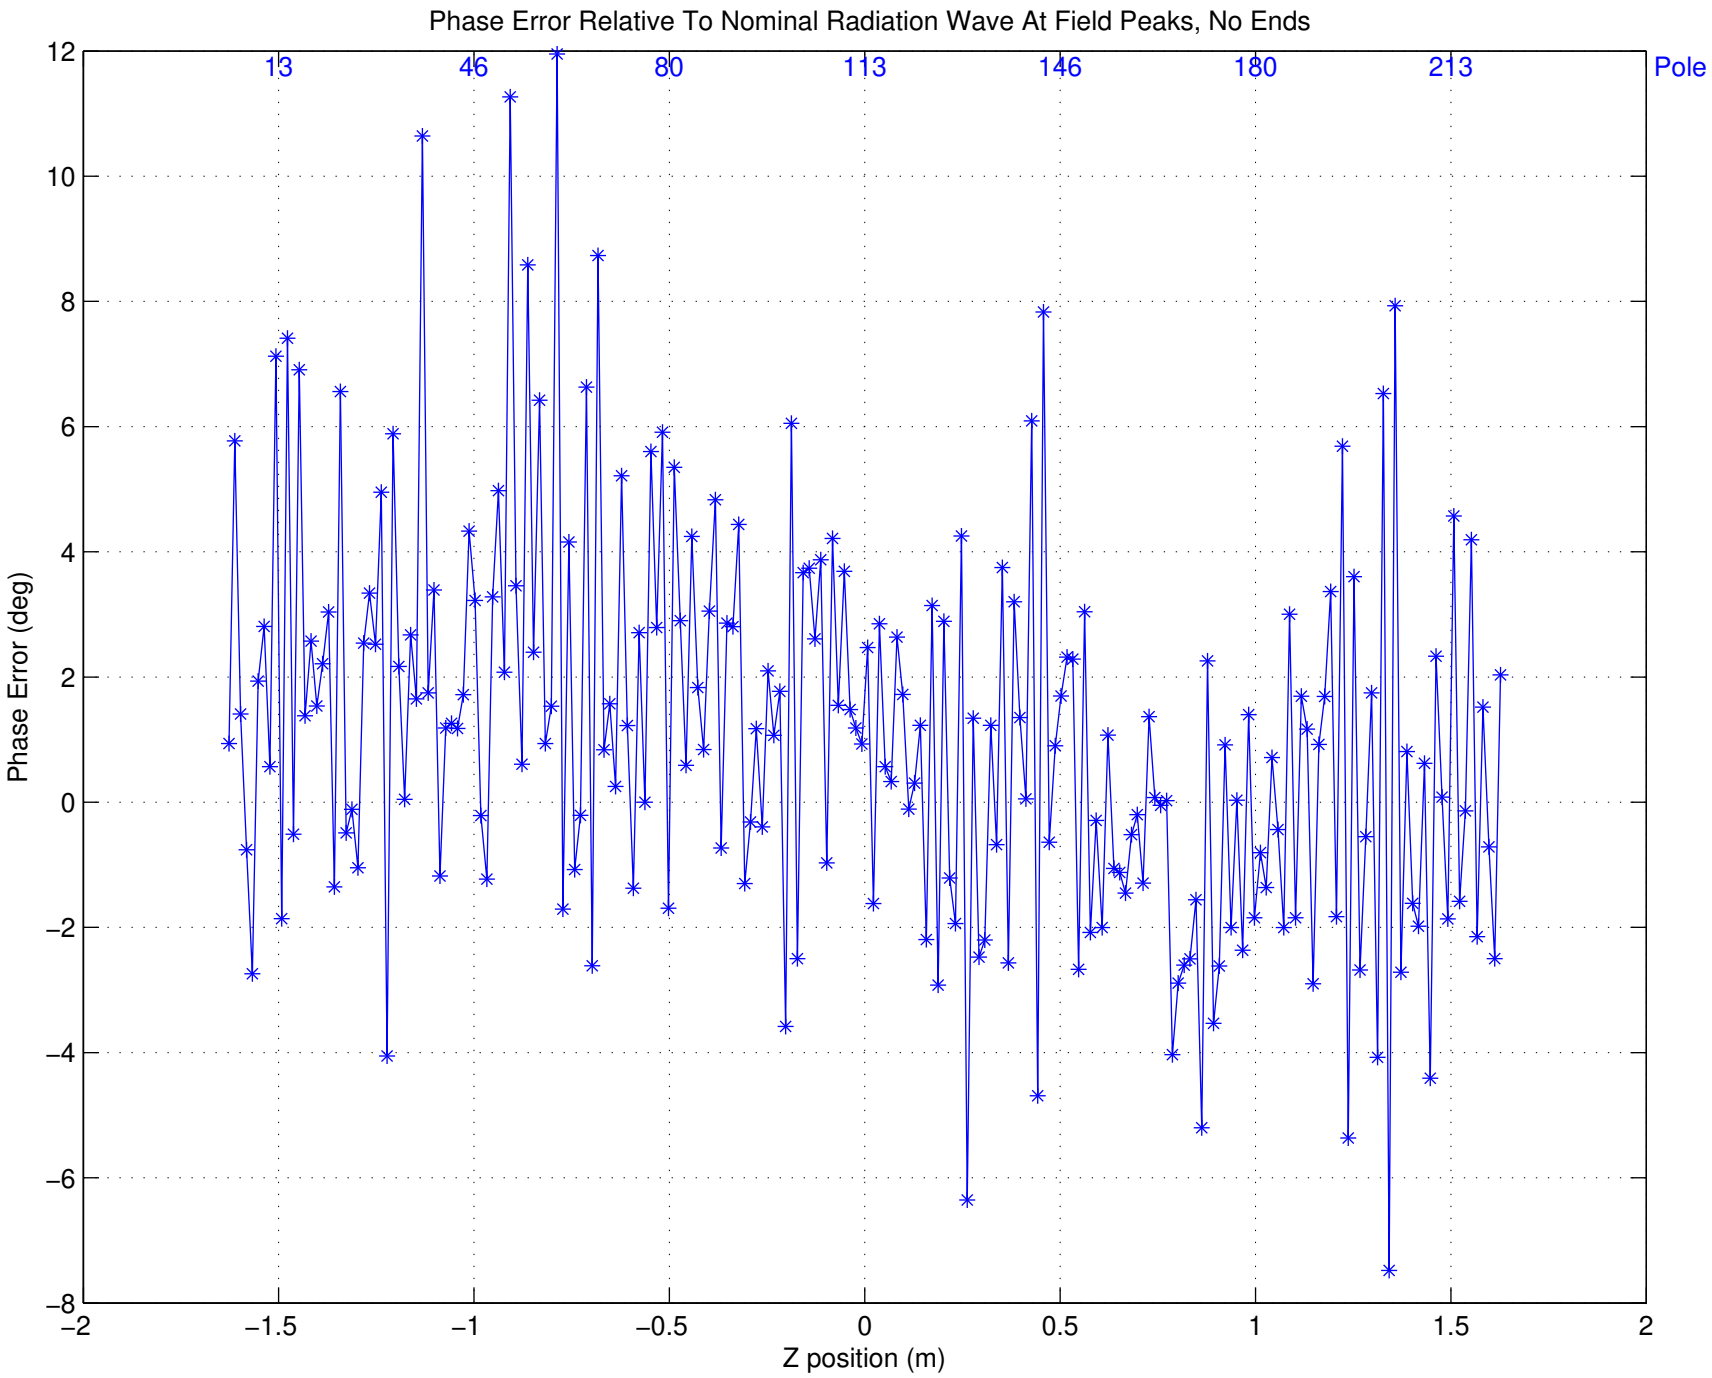
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
12
10
8
6
4
2
0
−2
−4
−6
−8
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)