SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 04−06−2012
Time: 13:39:22

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−32
DATASET Number: 5
Tuning Stage: Fine Tuning
Run Number: 2
Measurement Type: Z Scans
Operator: YL
Comment: find Y at min K; first gap iteration
Session first run: 2
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−32\DATASET0005\Fine Tuning\Z Scans\Run 002\bscanz.dat

Temperature (C)
L143−112000−32:−−> T1 20.02 −−> T2 20.01 −−> T5 20.01 −−> T3 20.01 −−> Air 19.95 −−> T4 20.01

Axes position (m) X:0.029646 Y:0.000223
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001009 V
Vy_0i = −0.003690 V

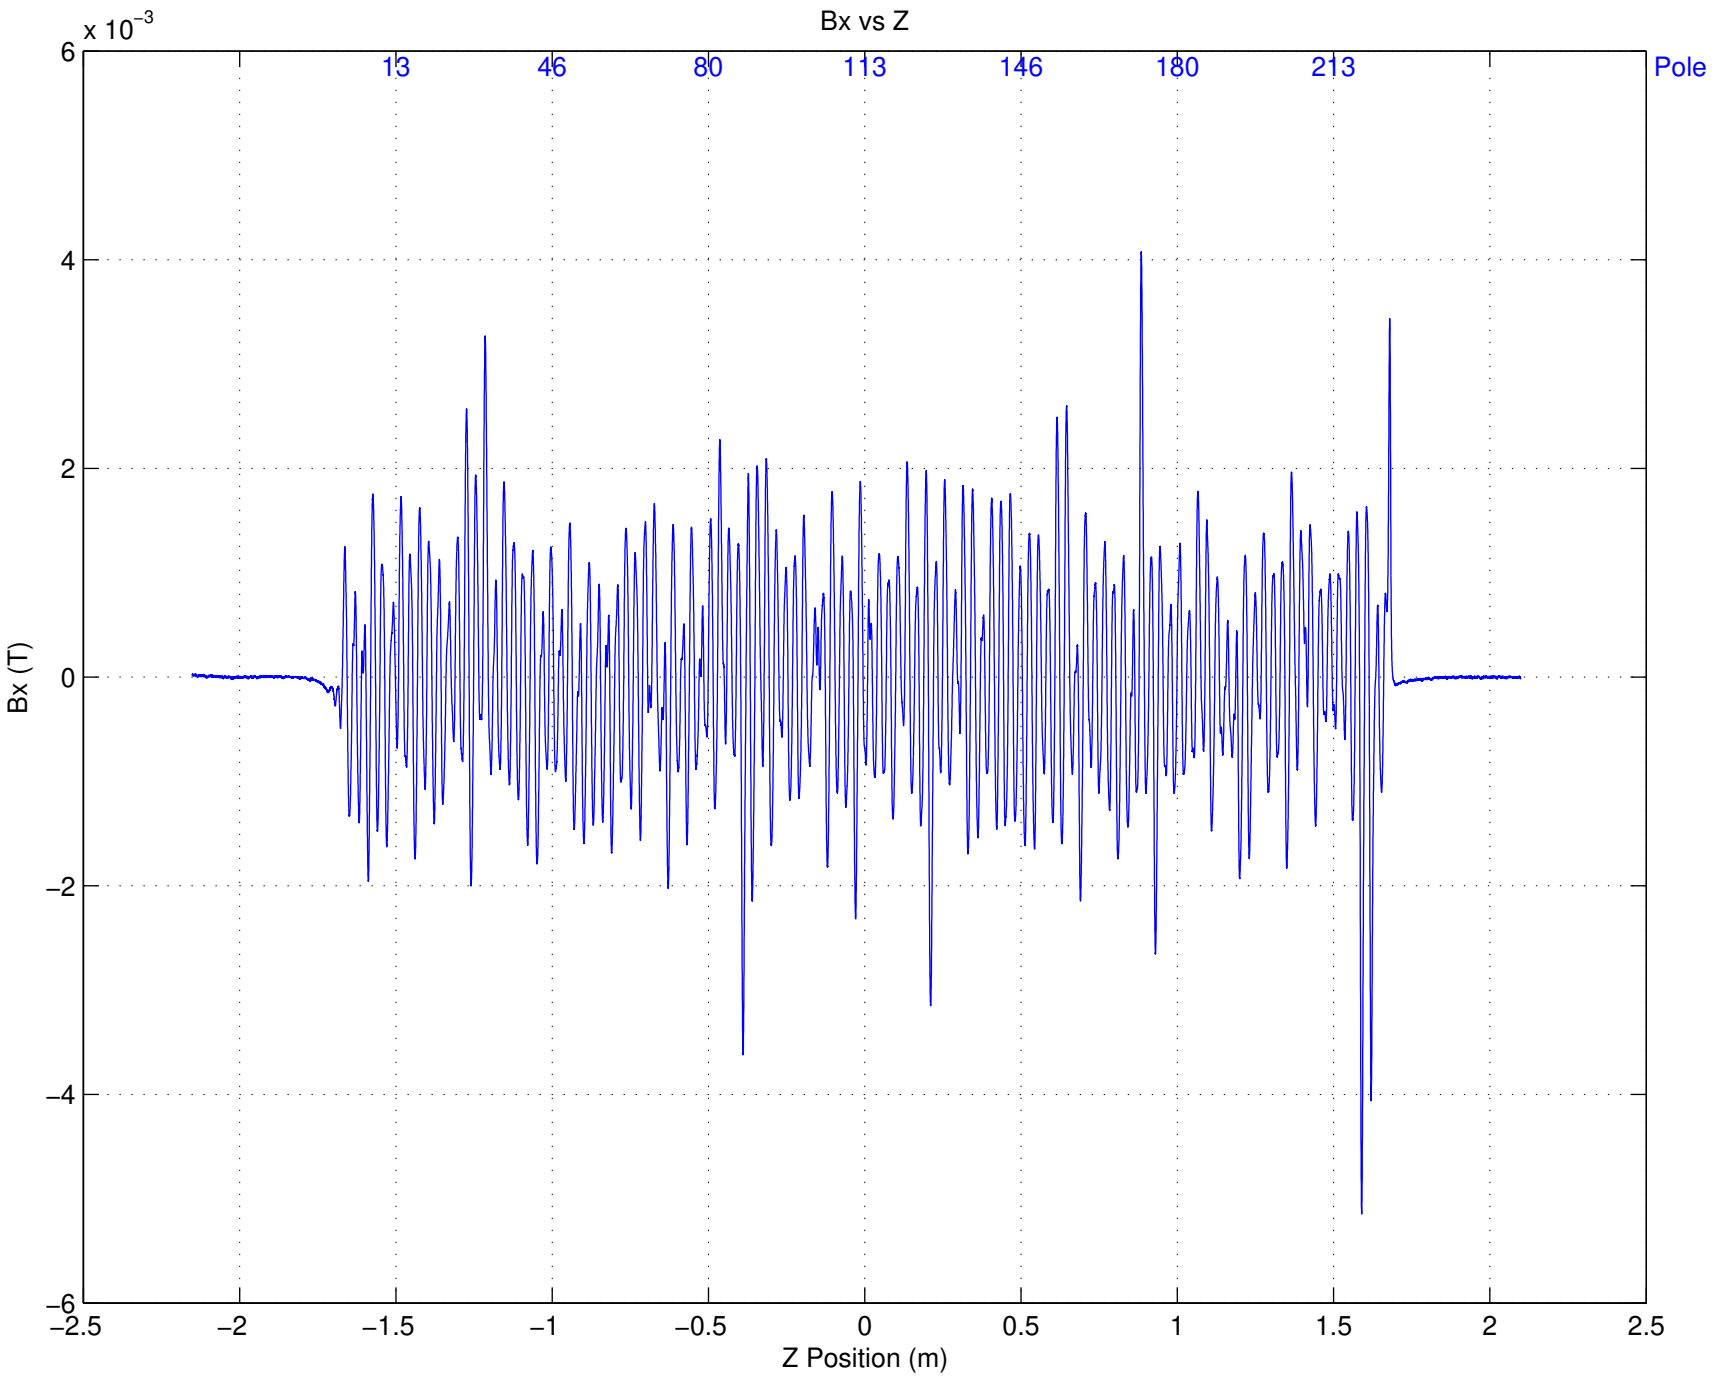
Bx vs Z
x 10^-3
6
4
2
0
−2
−4
−6
Bx (T)
13
46
80
113
146
180
213
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

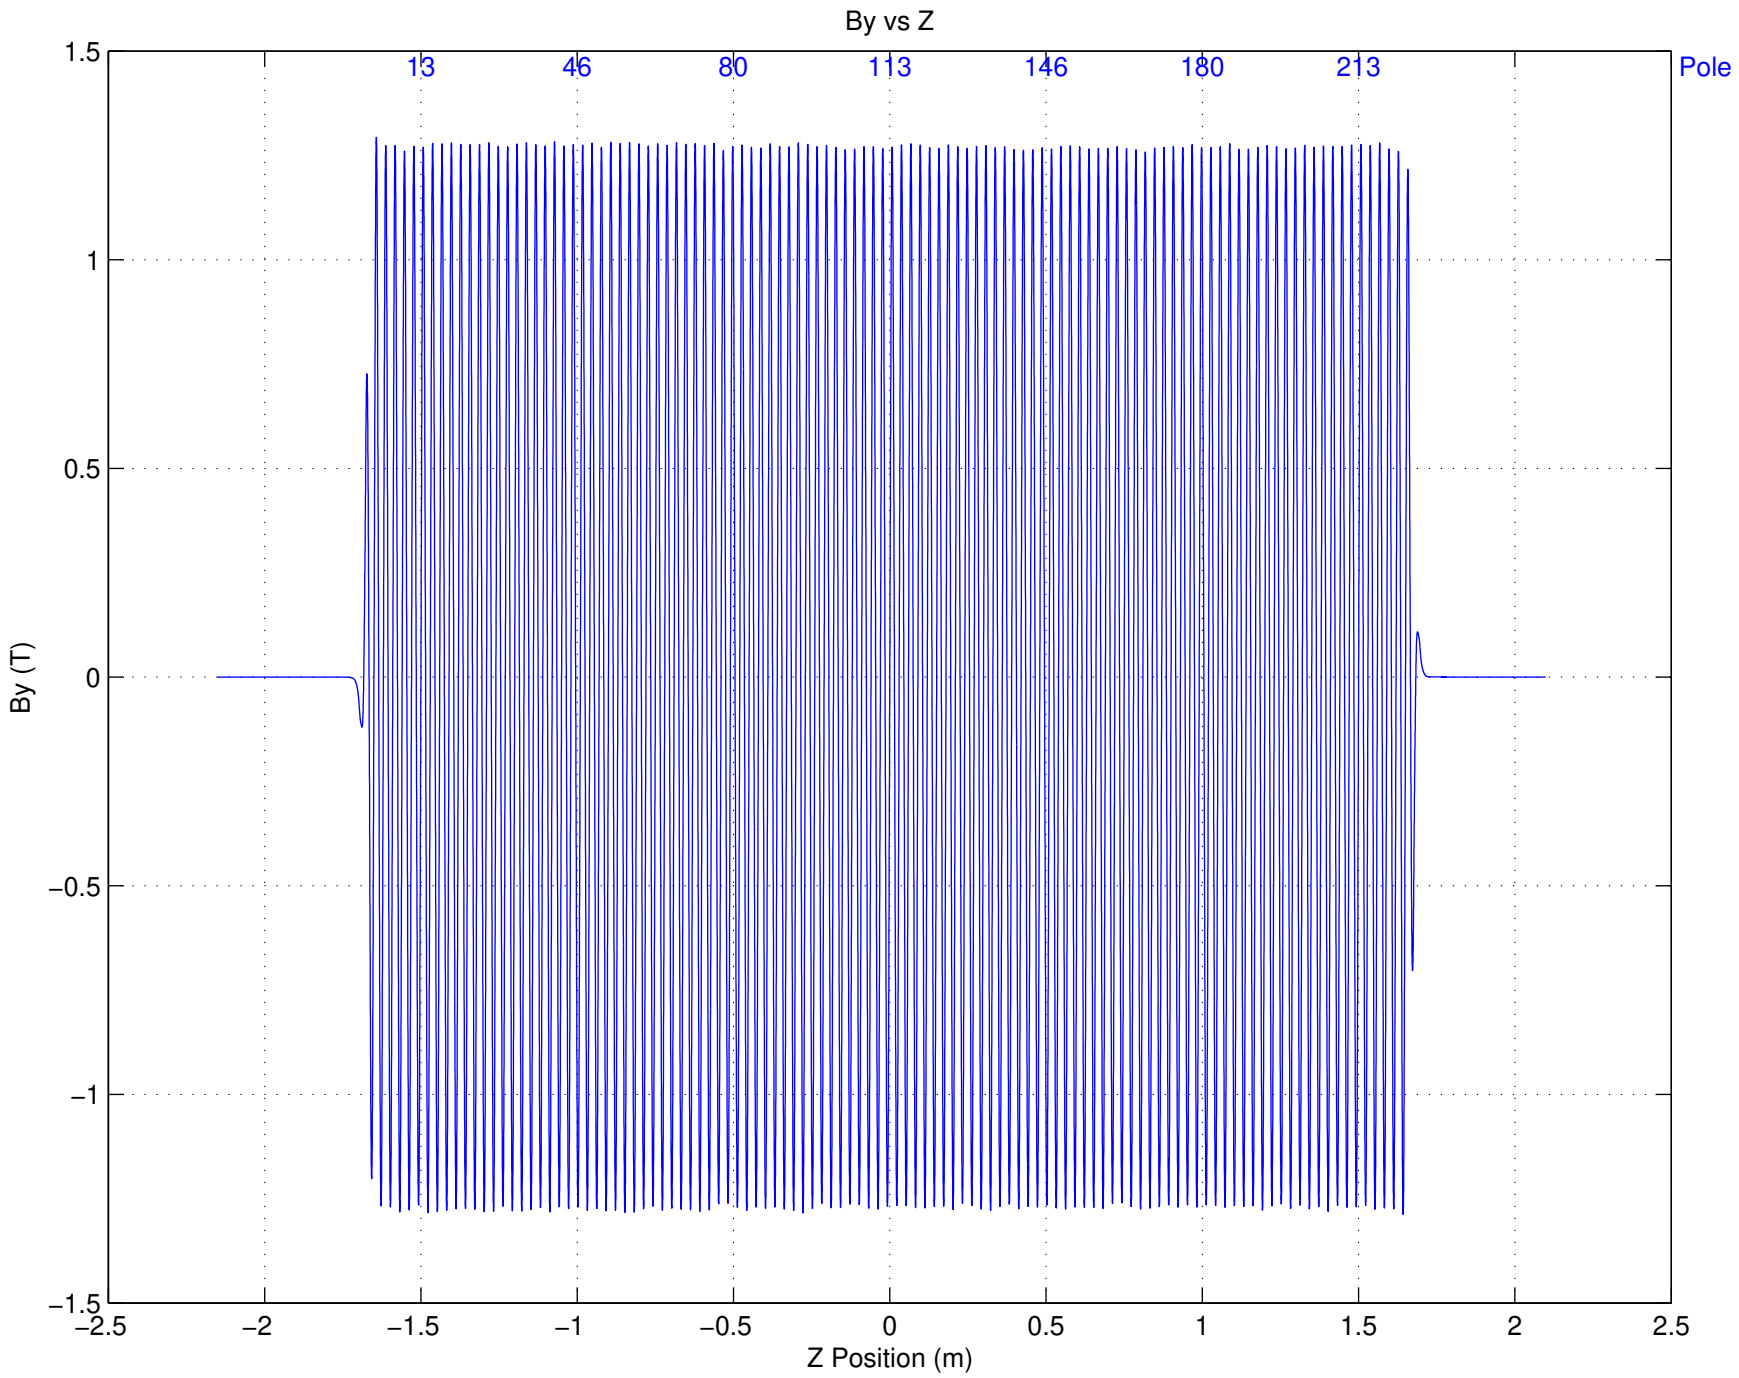
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

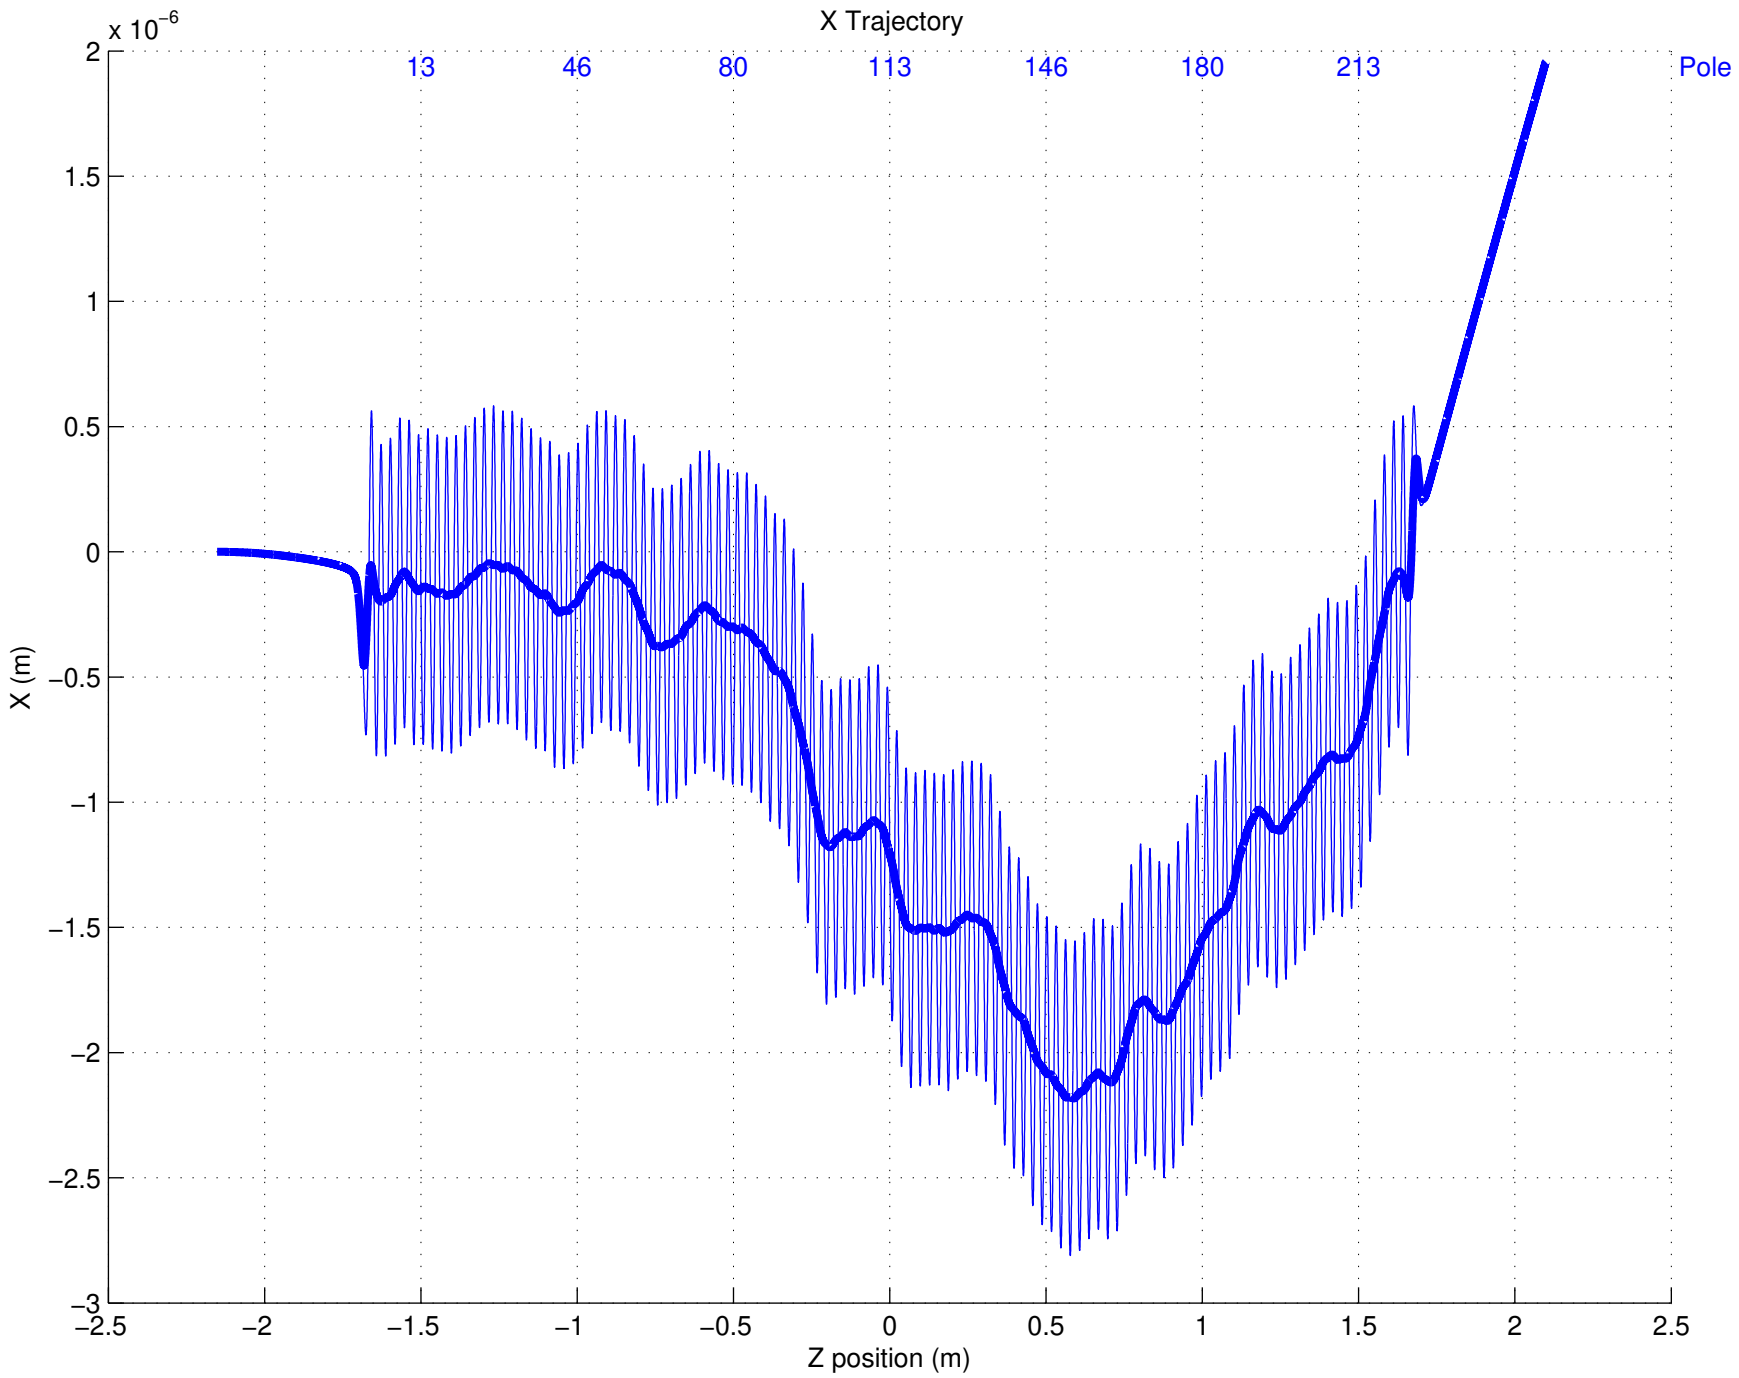
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

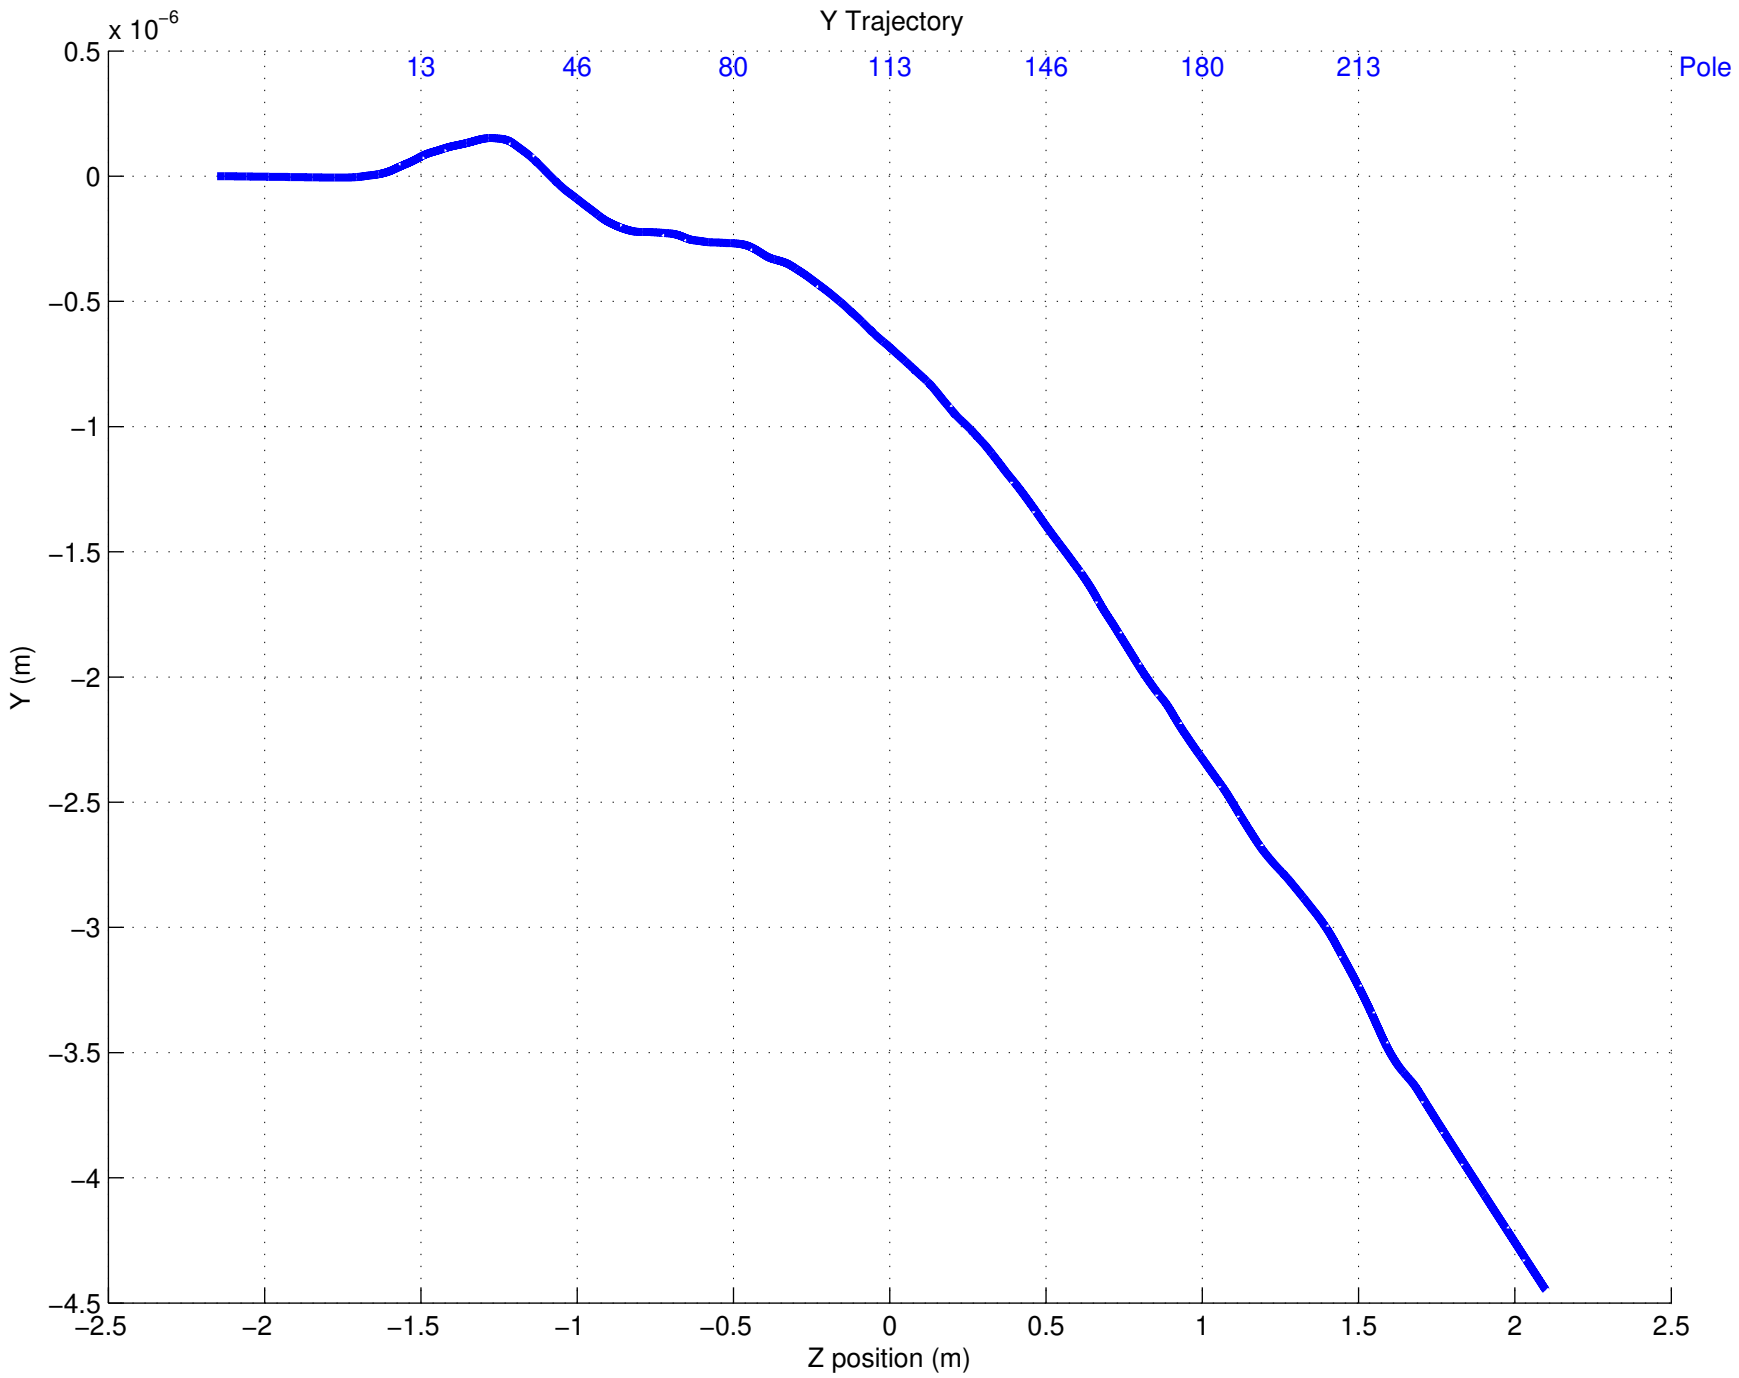
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−3.5
−4
−4.5
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

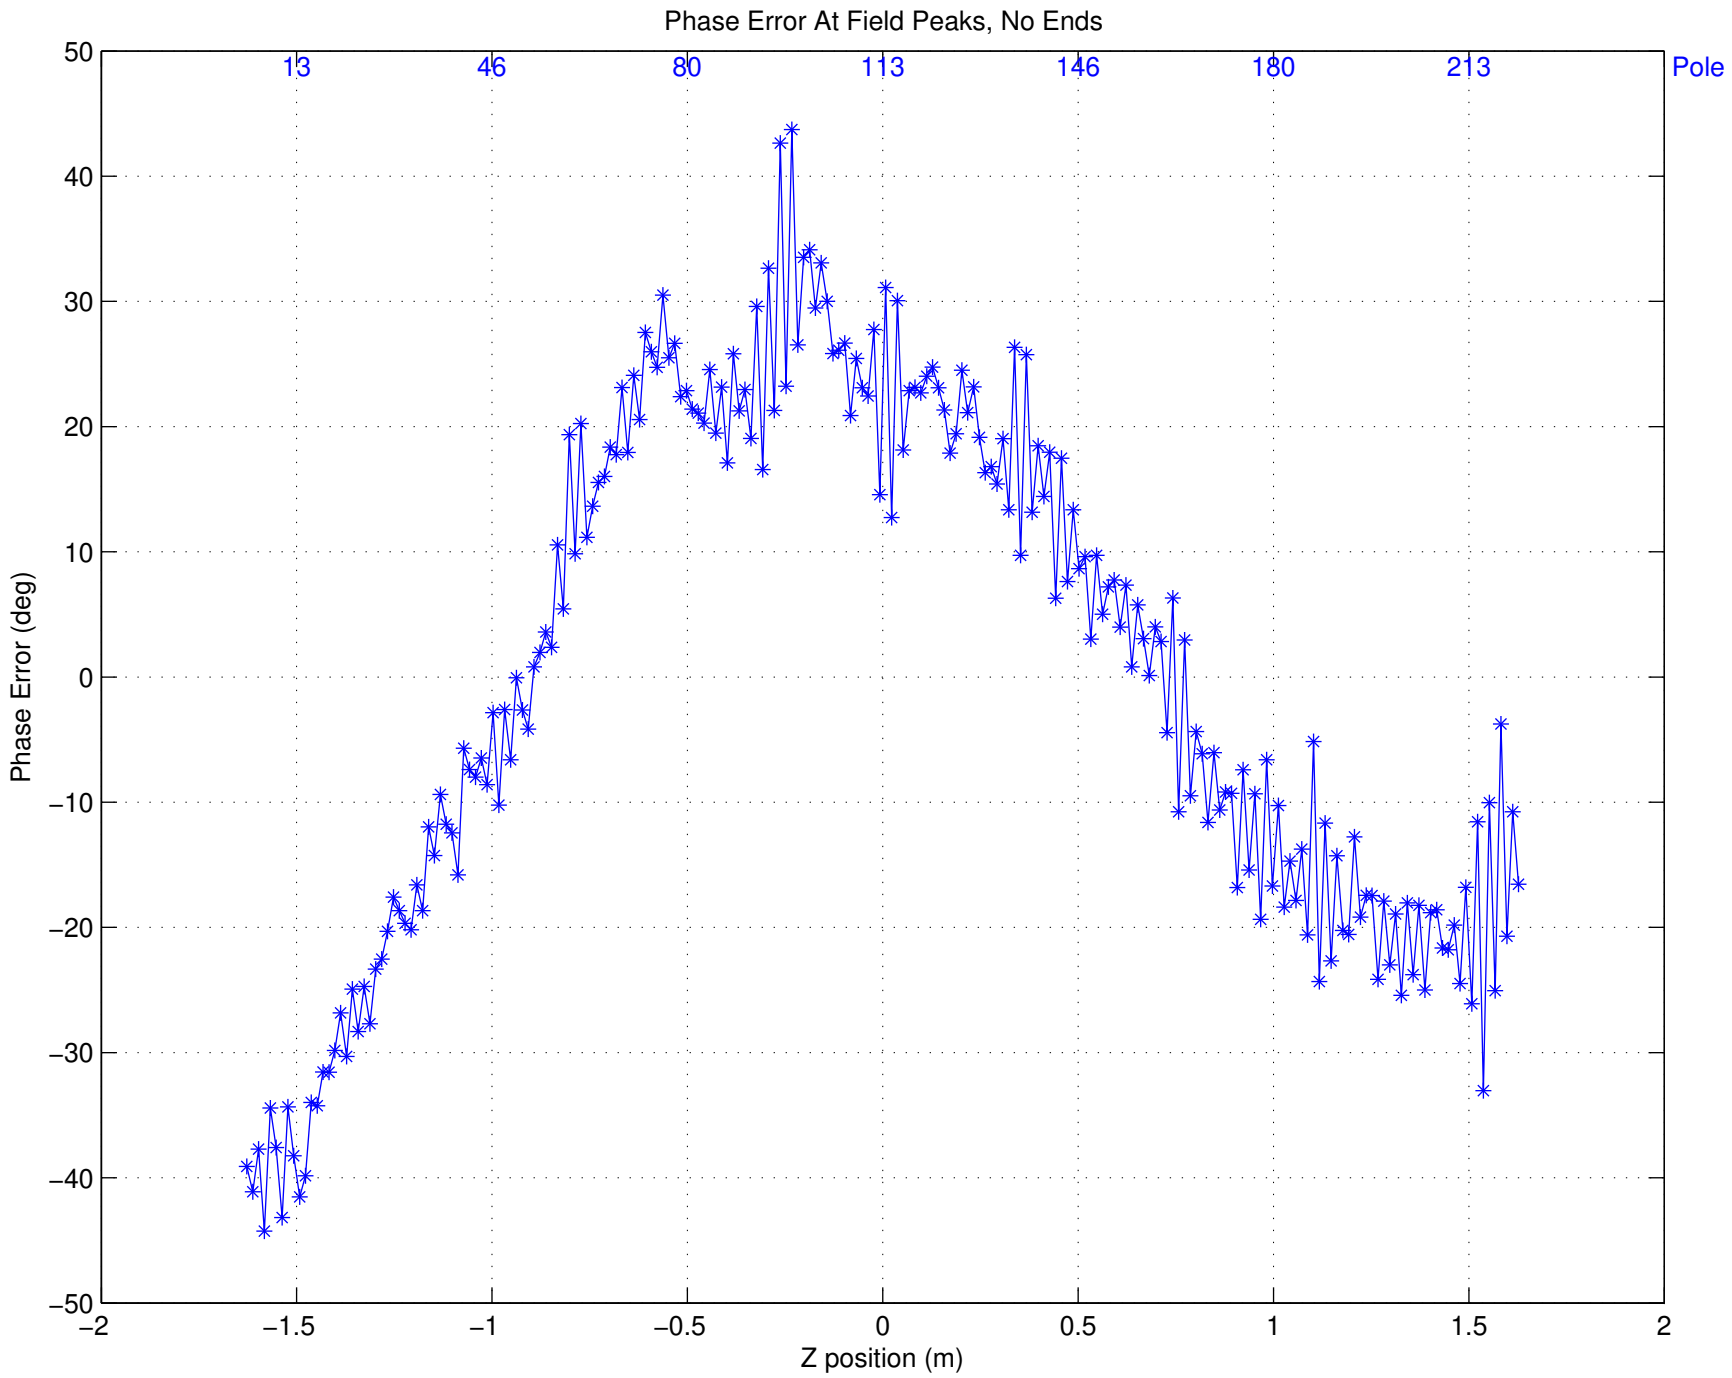

Phase Error: Ave = 0.000000 deg, RMS = 21.034224 deg

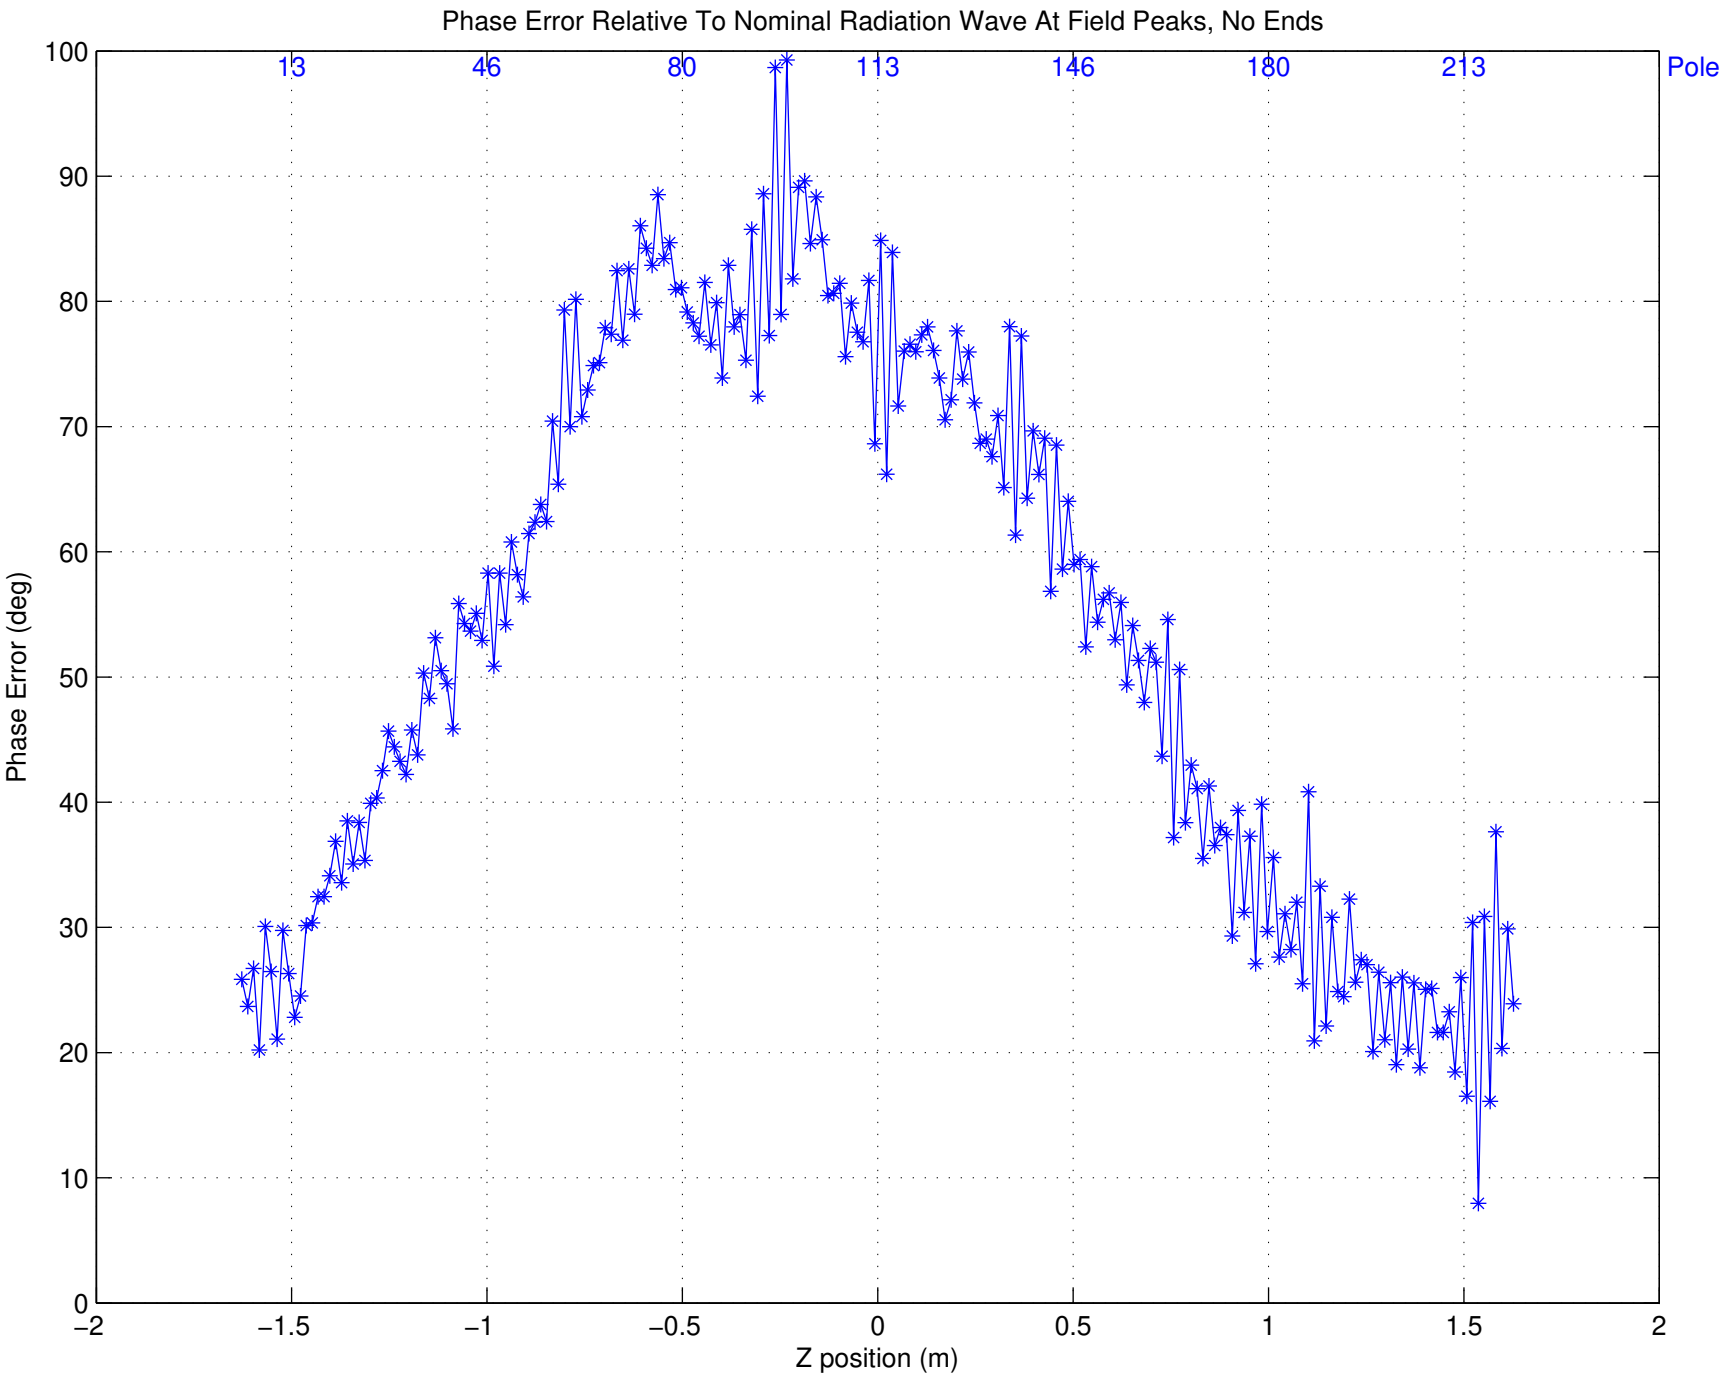
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
100
90
80
70
60
50
40
30
20
10
0
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)