SLAC Magnetic Measurements

EPU Analysis
−−−−−−−−−−−

Parameters:
INPUT−FILE−DIR =V:\MET\MagServe\MagData\DELTA\Delta data\Assembled Measurements\Final Measurements\CPLMF\KR0
INPUT−FILE−NAME =hall2−anal−probe1−field.dat
INPUT−FILE−TYPE =ZBXYZH
CORR−REQUIRED =0
GAMMA =26671.59
NOM−LAMBDA−U =0
NOM−K−VALUE =0
NOM−LAMBDA−R =0
NUM−POLES =196
NUM−END−POLES =4
CELL−LENGTH =3.656

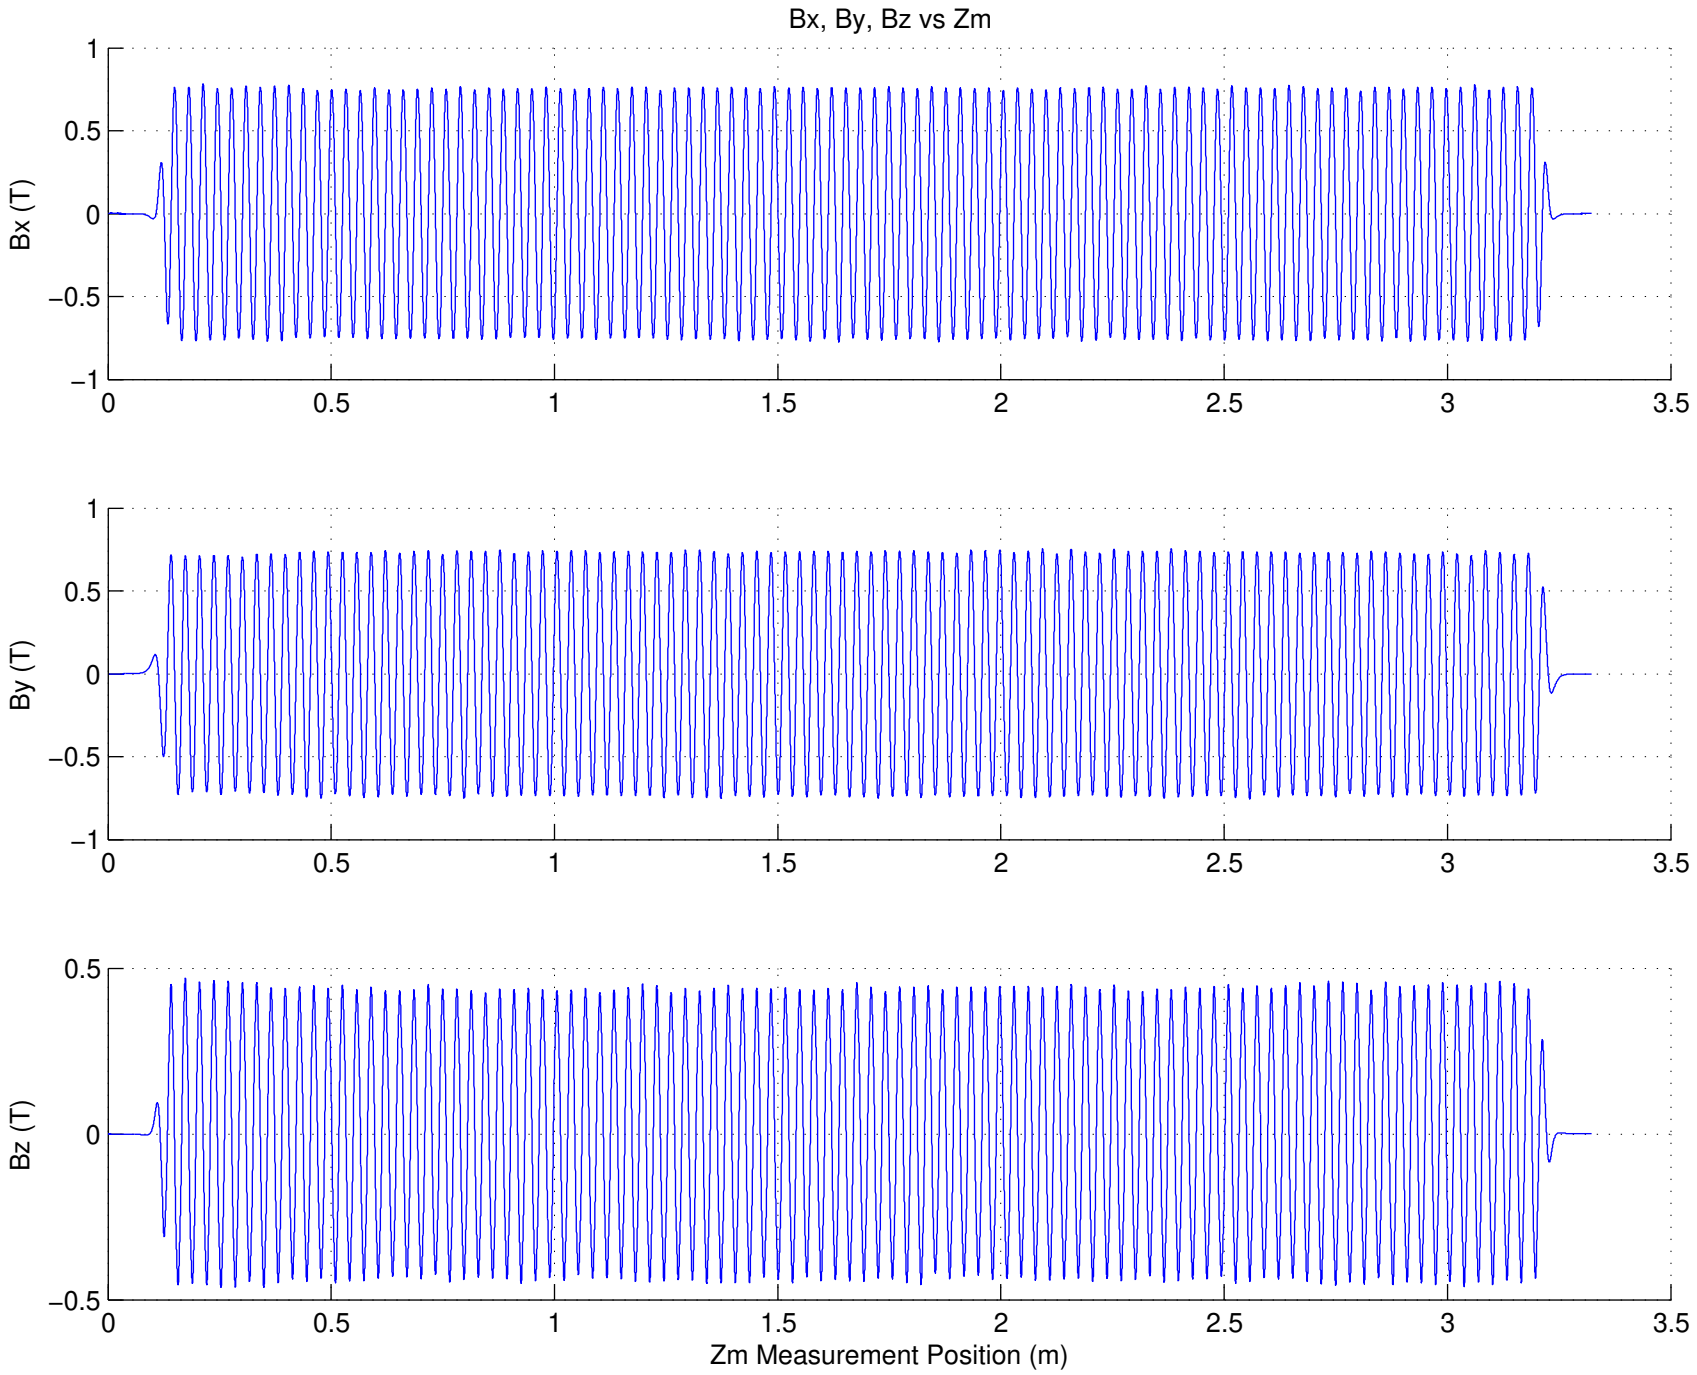
Bx, By, Bz vs Zm
Bx (T)
By (T)
Bz (T)
1
0.5
0
−0.5
−1
0
0.5
1
1.5
2
2.5
3
3.5
Zm Measurement Position (m)

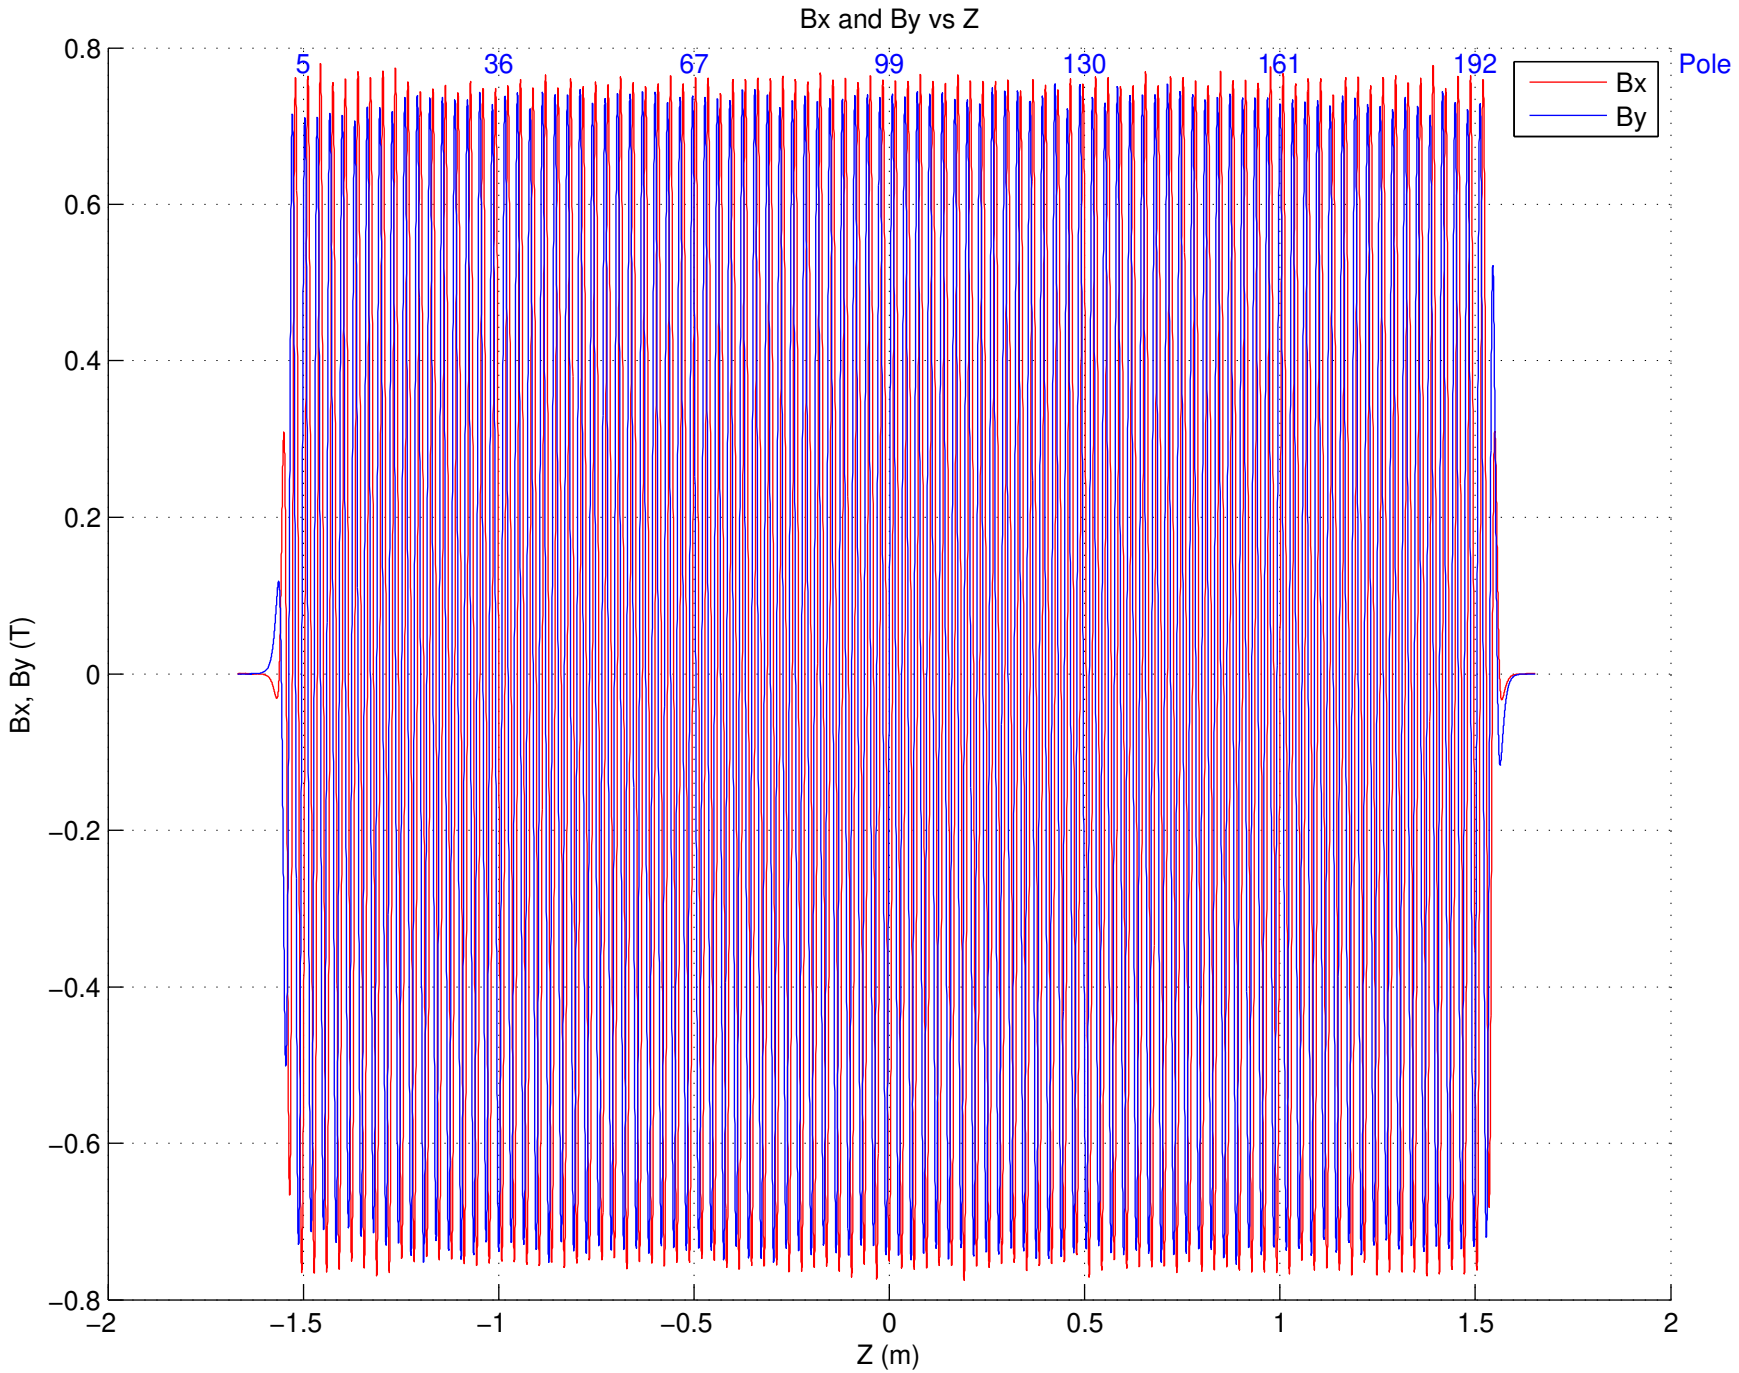
Bx and By vs Z
5
36
67
99
130
161
192
Pole
Bx
By
0.8
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
Bx, By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

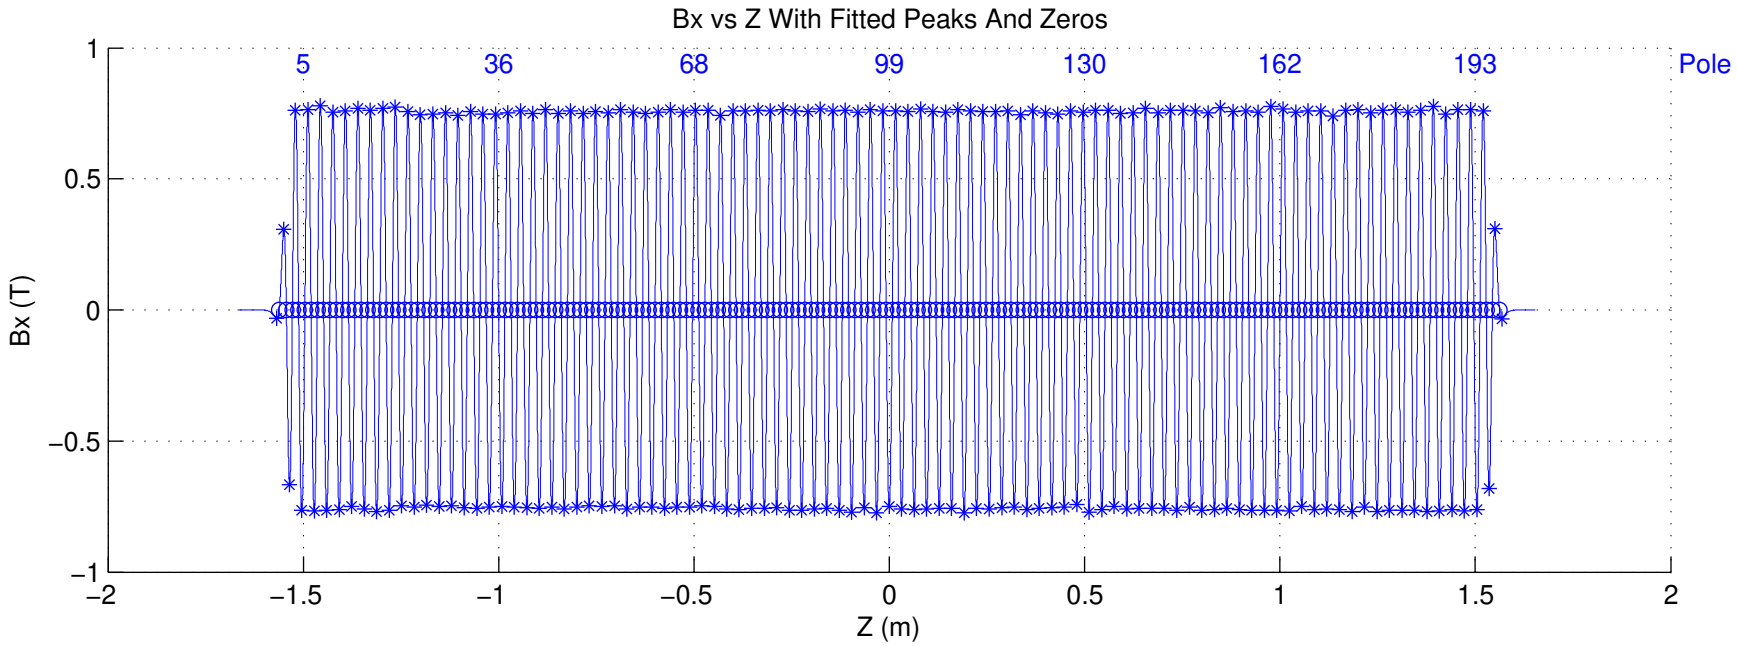
Bx vs Z With Fitted Peaks And Zeros
5
36
68
99
130
162
193
Pole
1
0.5
0
−0.5
−1
Bx (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

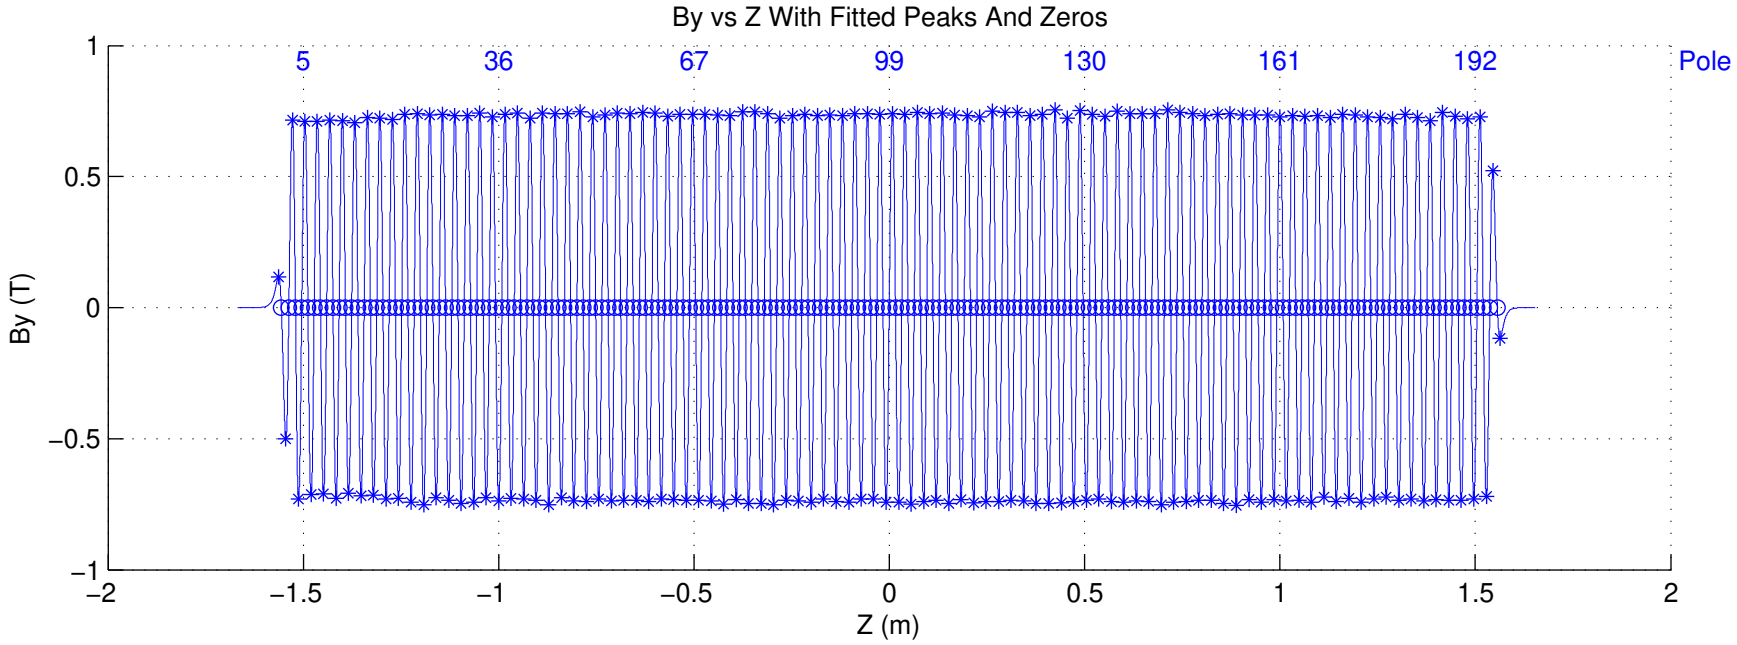
By vs Z With Fitted Peaks And Zeros
5
36
67
99
130
161
192
Pole
1
0.5
0
−0.5
−1
By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

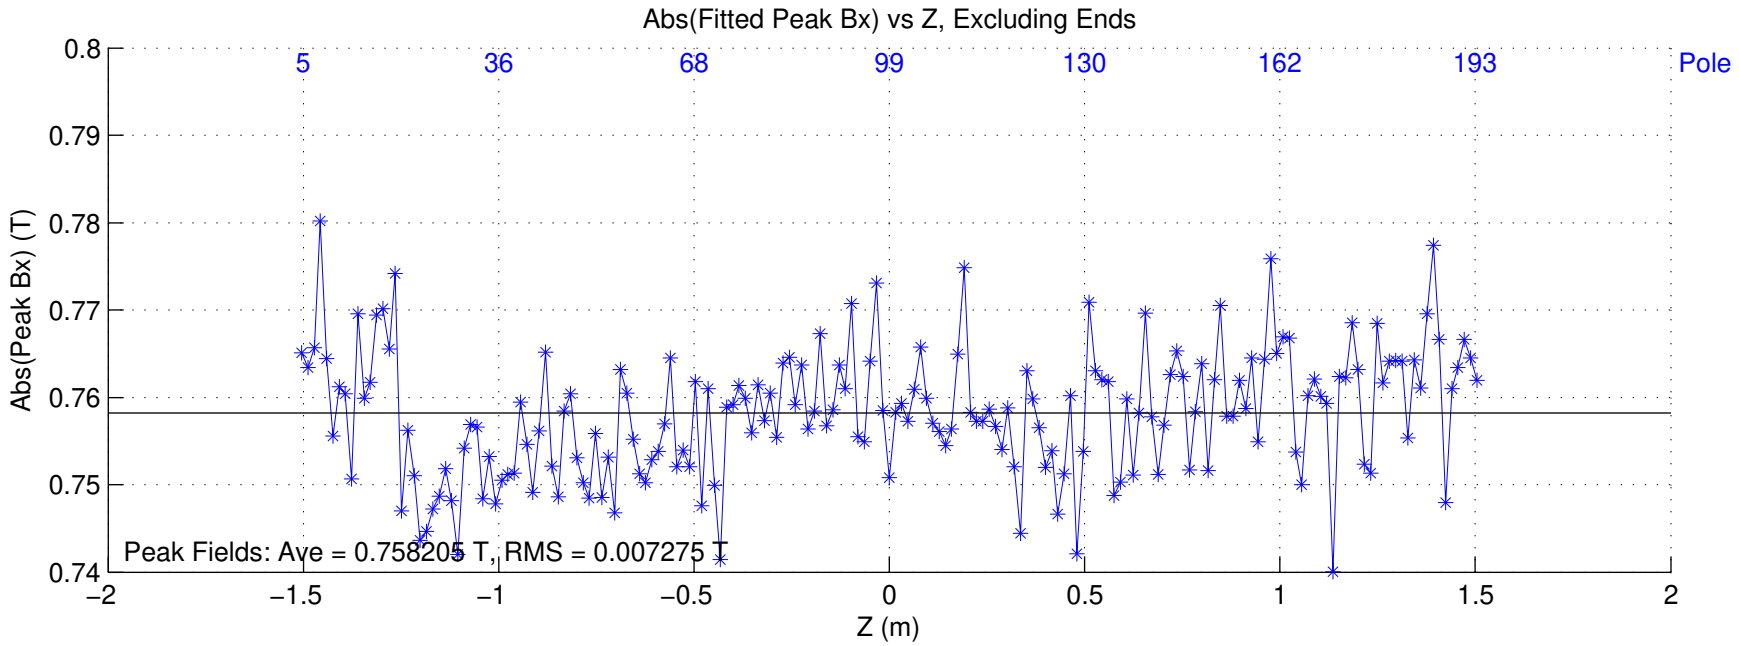
Abs(Fitted Peak Bx) vs Z, Excluding Ends
5
36
68
99
130
162
193
Pole
0.8
0.79
0.78
0.77
0.76
0.75
0.74
Abs(Peak Bx) (T)
Peak Fields: Ave = 0.758205 T, RMS = 0.007275 T
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

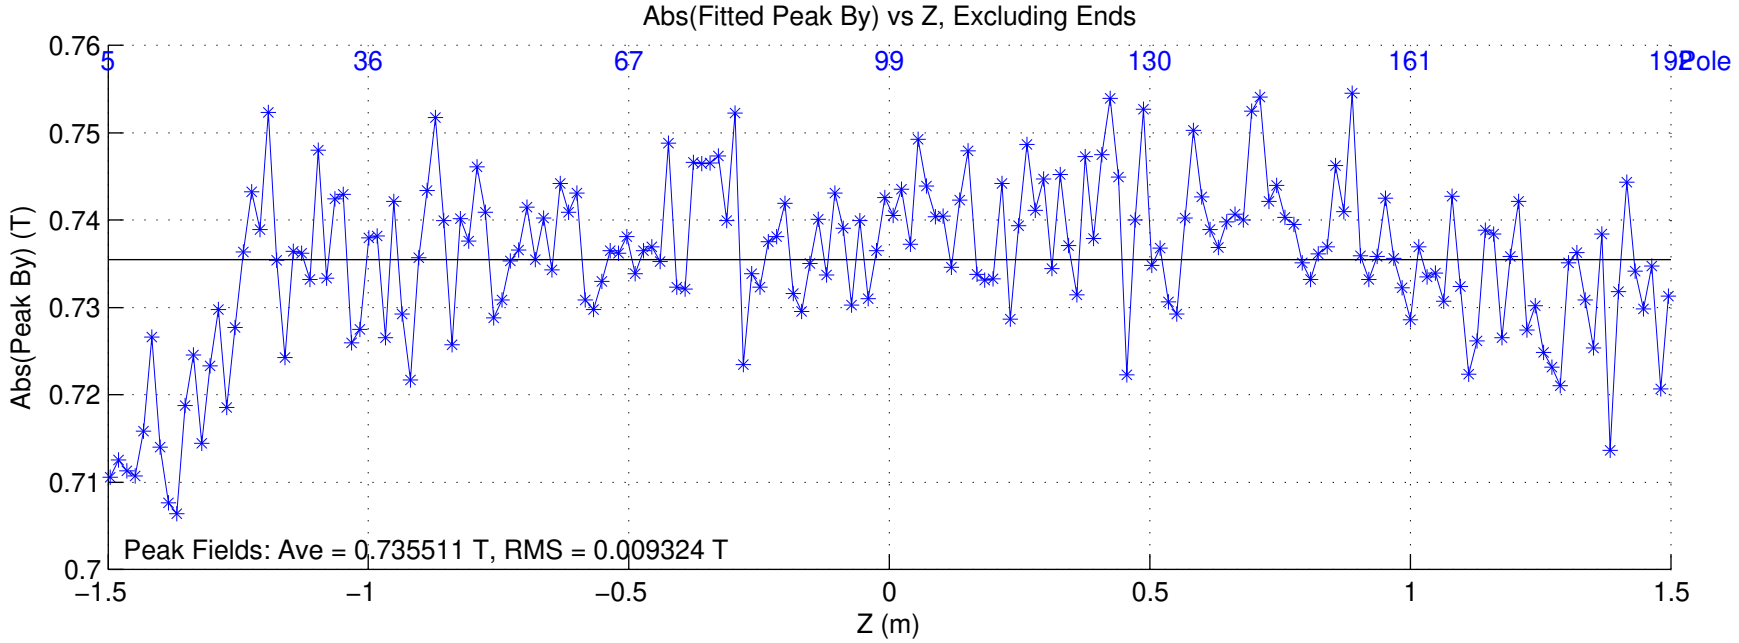
Abs(Fitted Peak By) vs Z, Excluding Ends
5
36
67
99
130
161
192
Pole
0.76
0.75
0.74
0.73
0.72
0.71
0.7
Abs(Peak By) (T)
Peak Fields: Ave = 0.735511 T, RMS = 0.009324 T
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

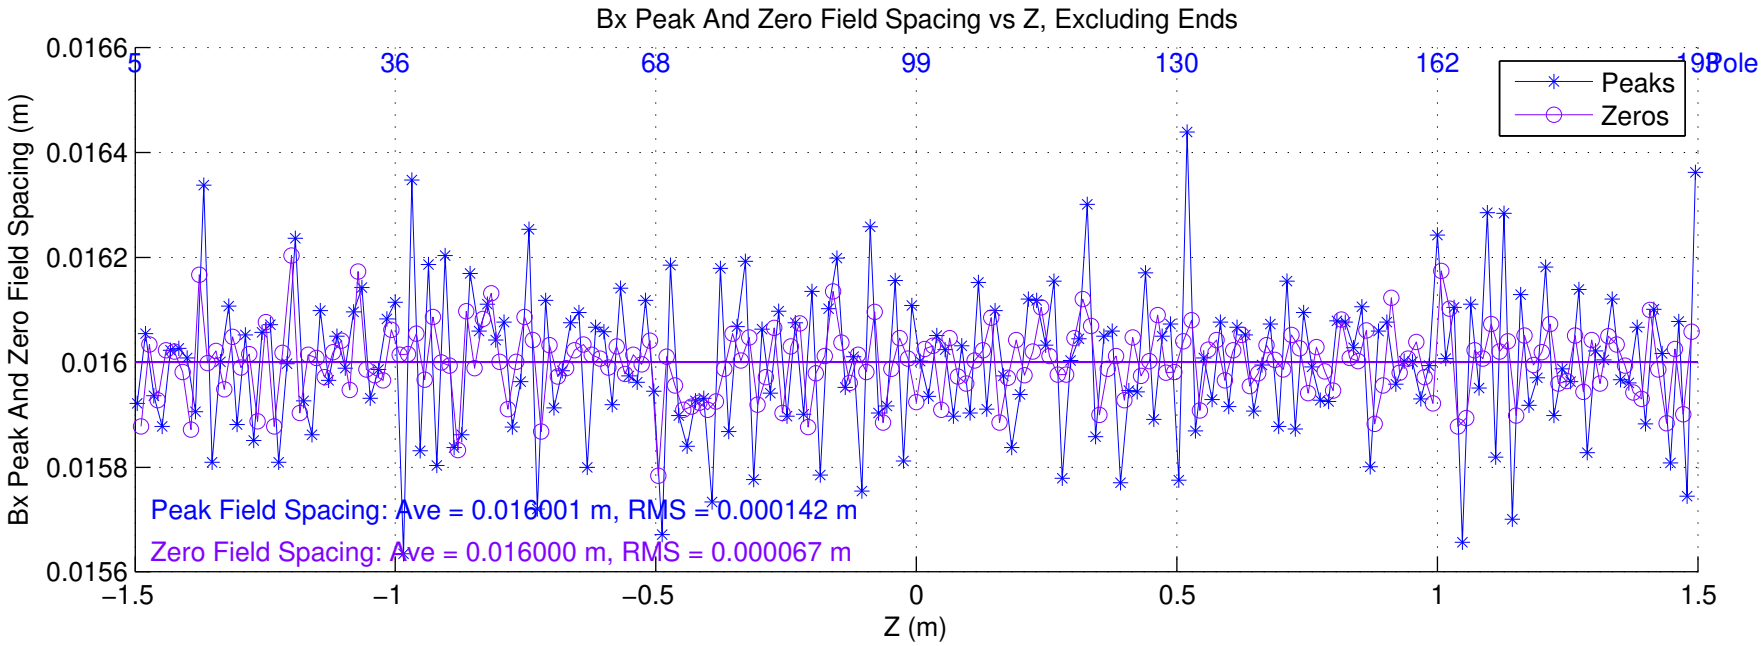
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016001 m, RMS = 0.000142 m
Zero Field Spacing: Ave = 0.016000 m, RMS = 0.000067 m

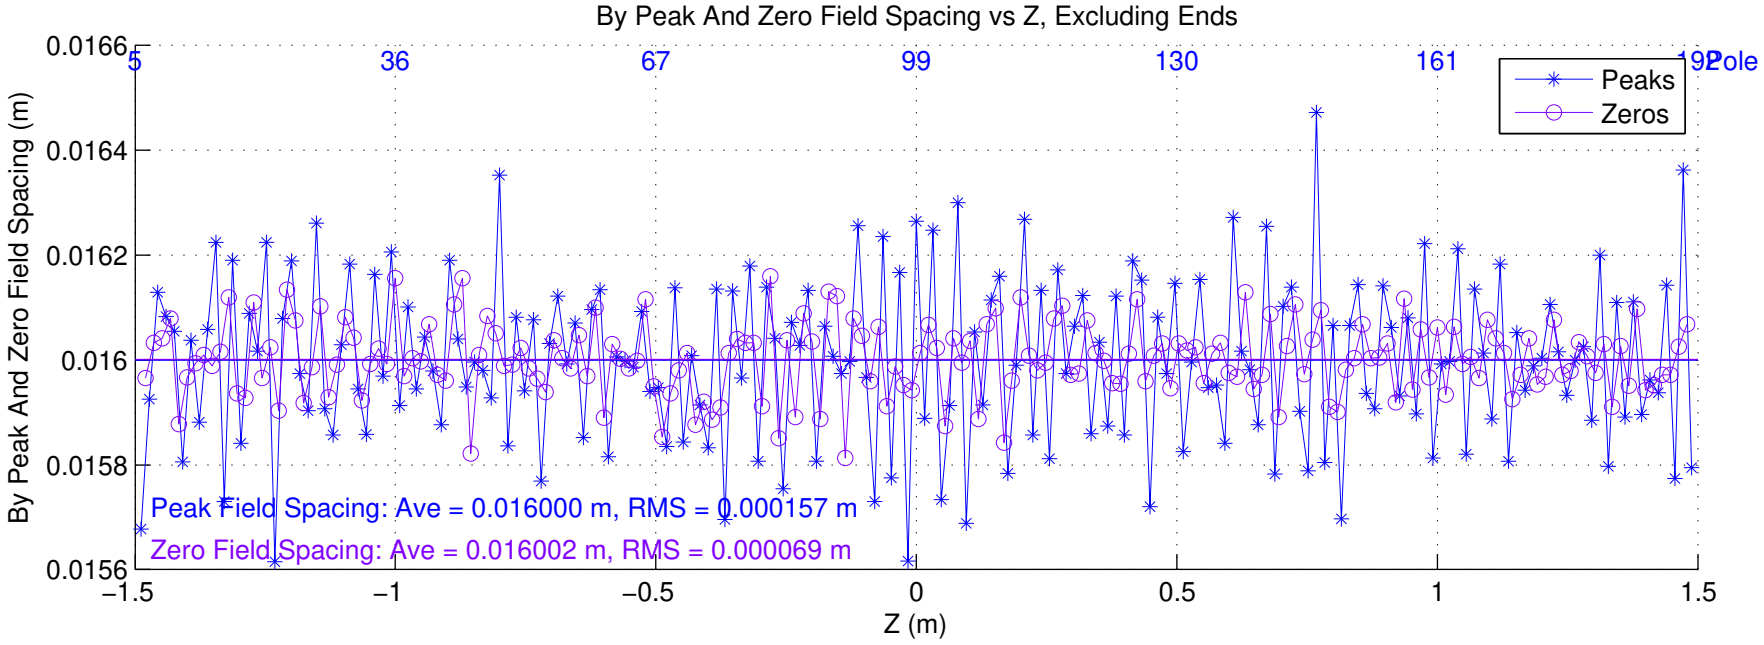
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016000 m, RMS = 0.000157 m
Zero Field Spacing: Ave = 0.016002 m, RMS = 0.000069 m

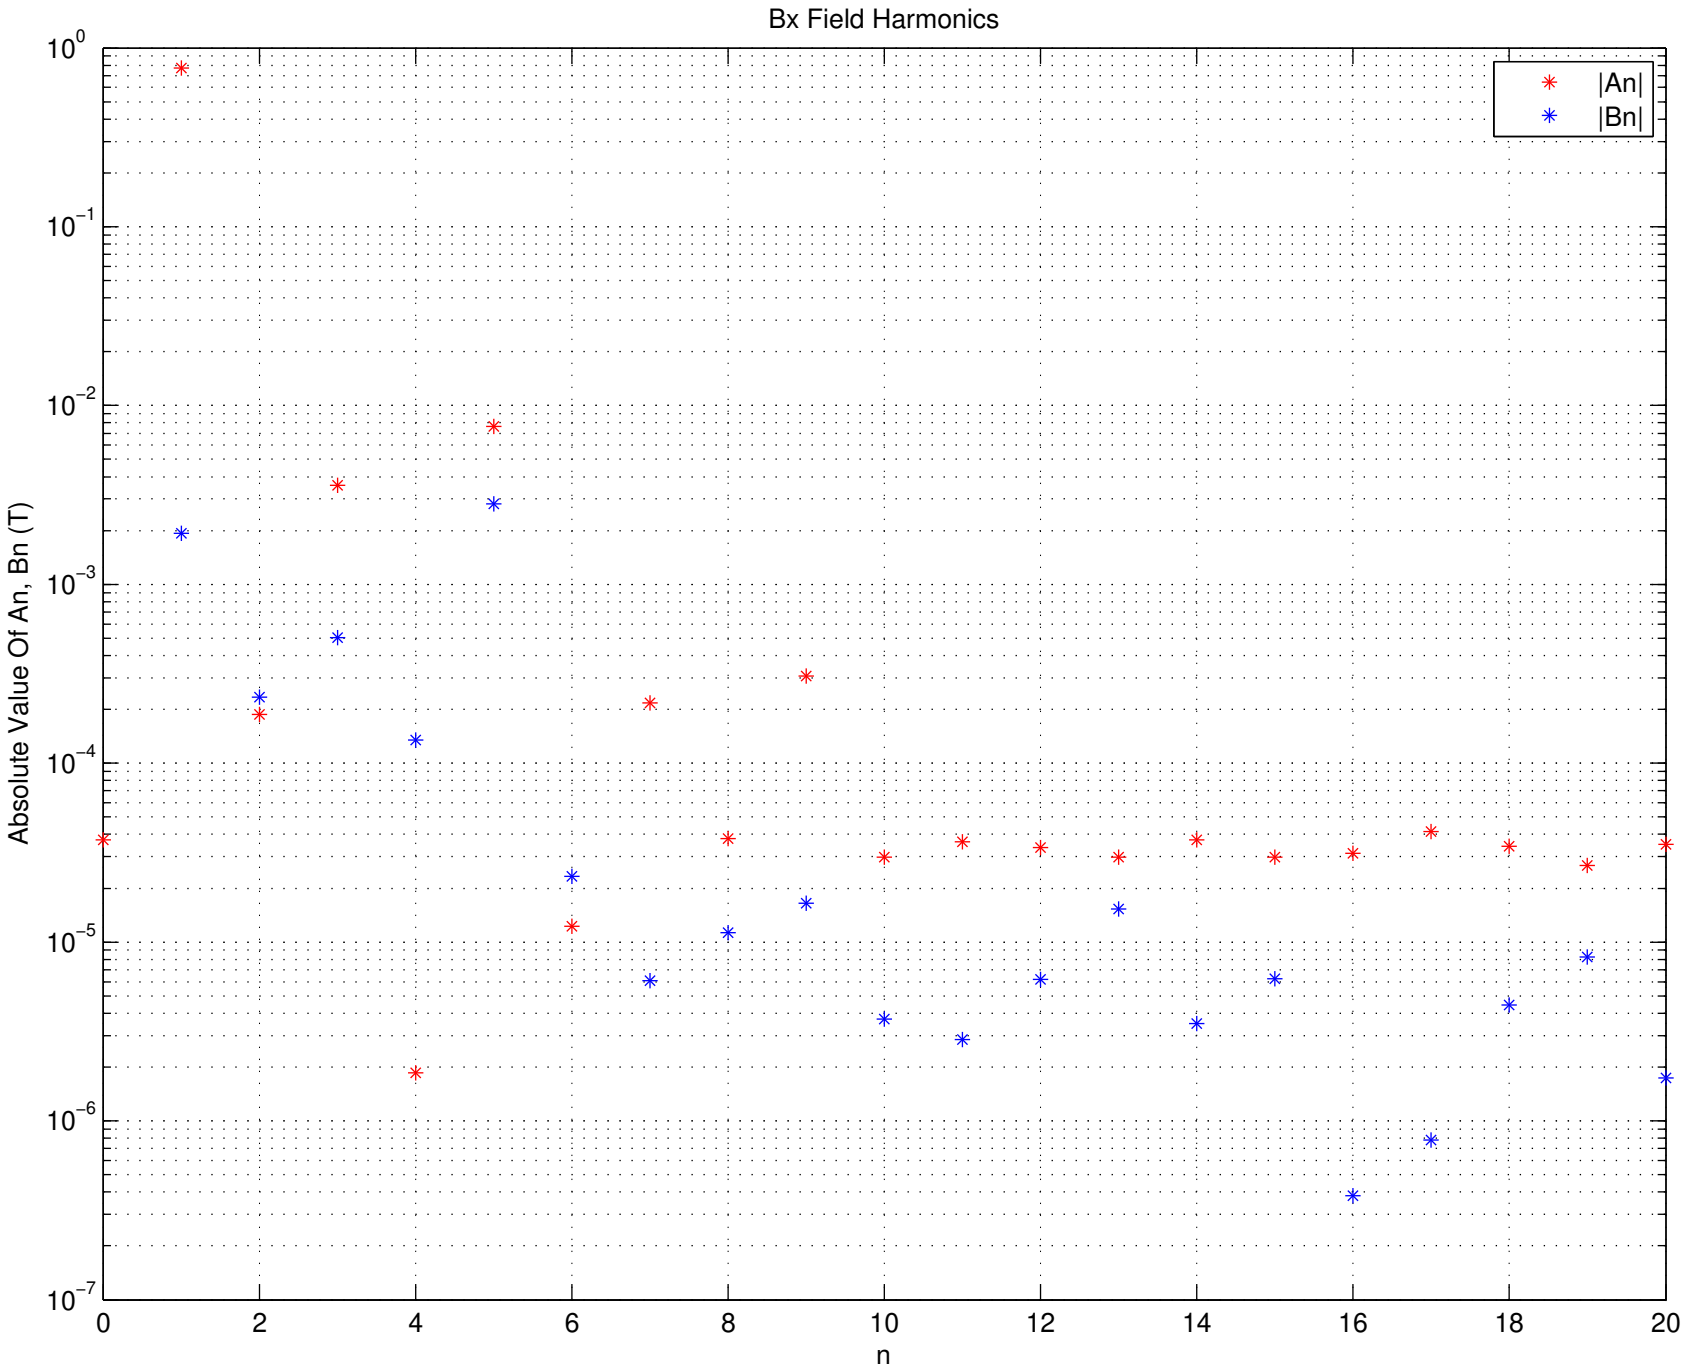
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
0
2
4
6
8
10
12
14
16
18
20

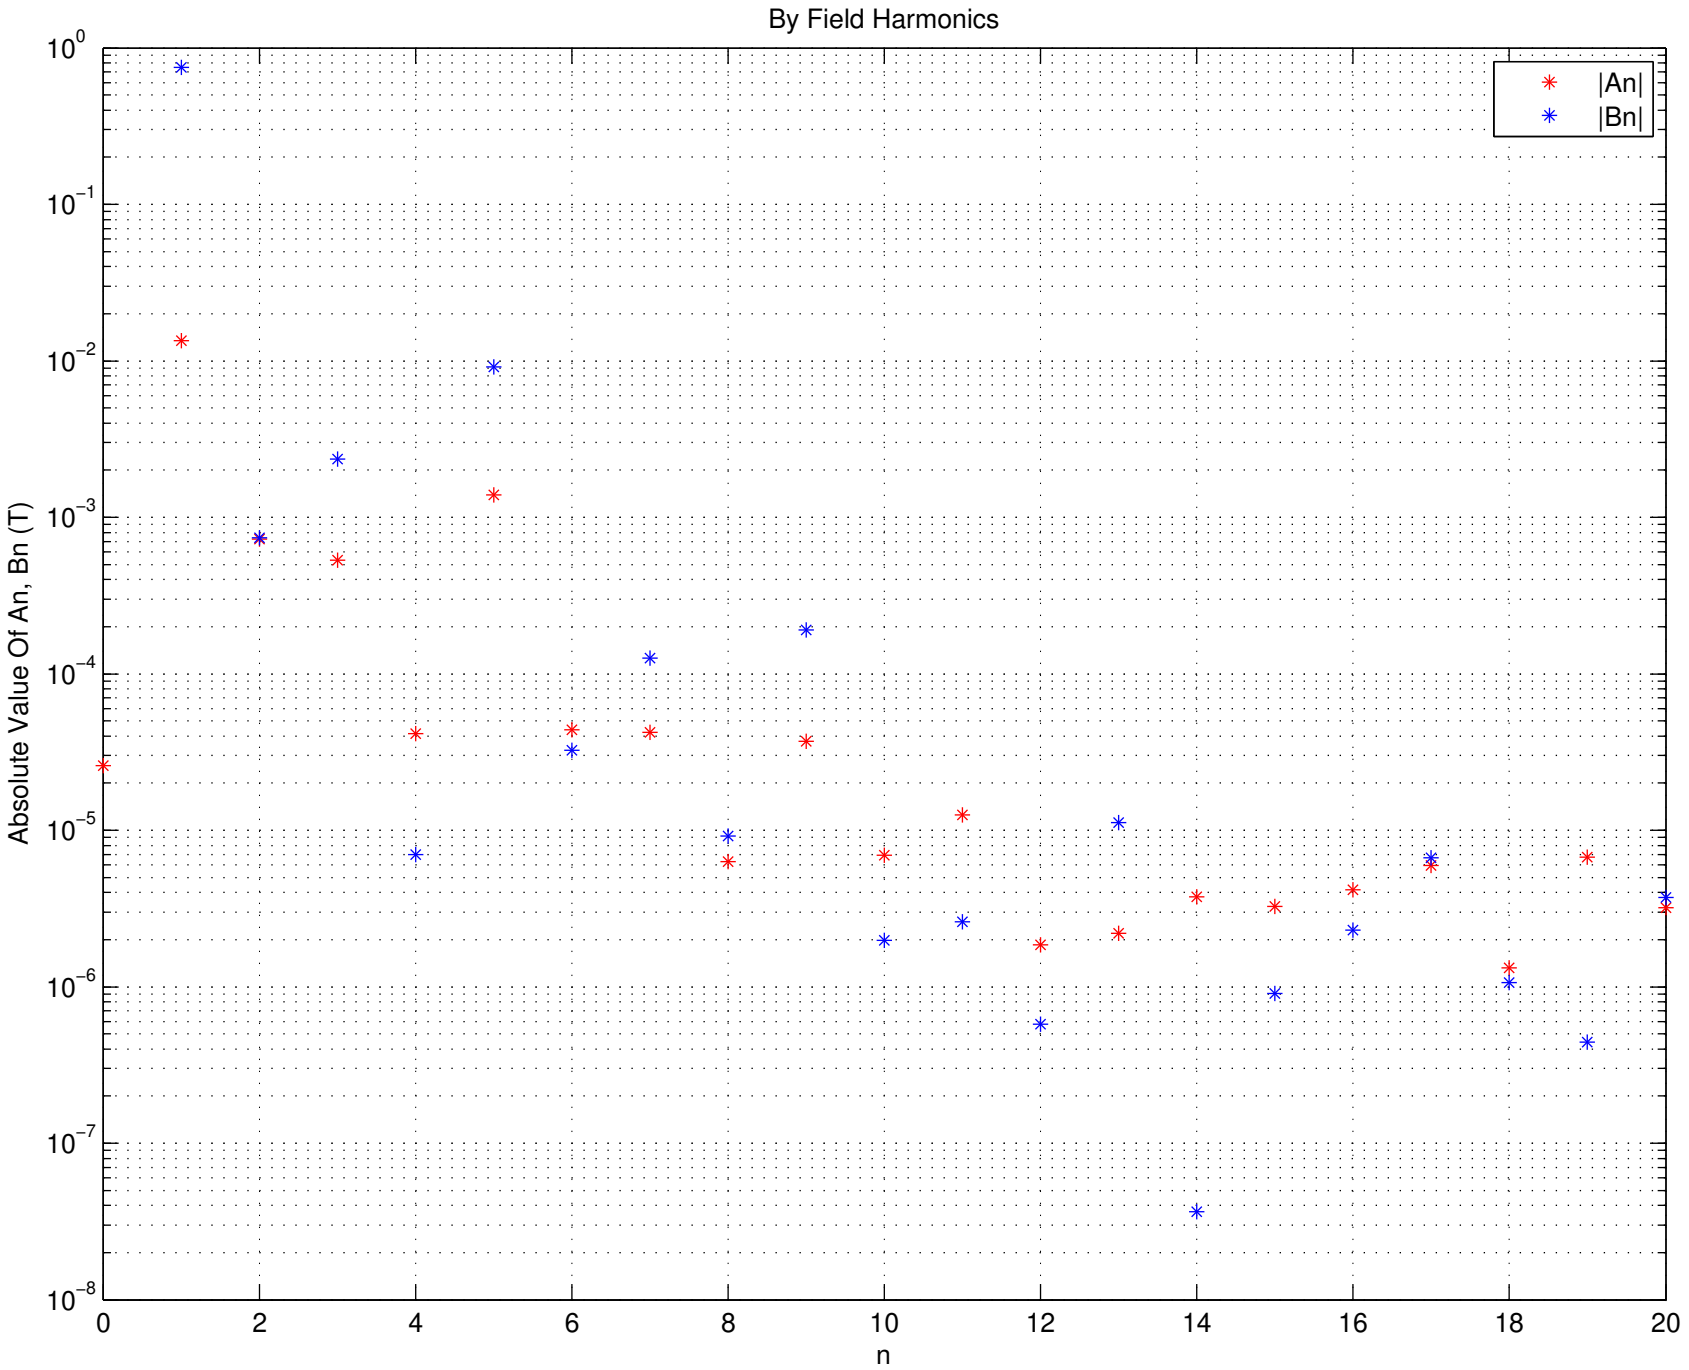
By Field Harmonics
Absolute Value Of An, Bn (T)
n
|An|
|Bn|
10^0
10^-1
10^-2
10^-3
10^-4
10^-5
10^-6
10^-7
10^-8
0
2
4
6
8
10
12
14
16
18
20

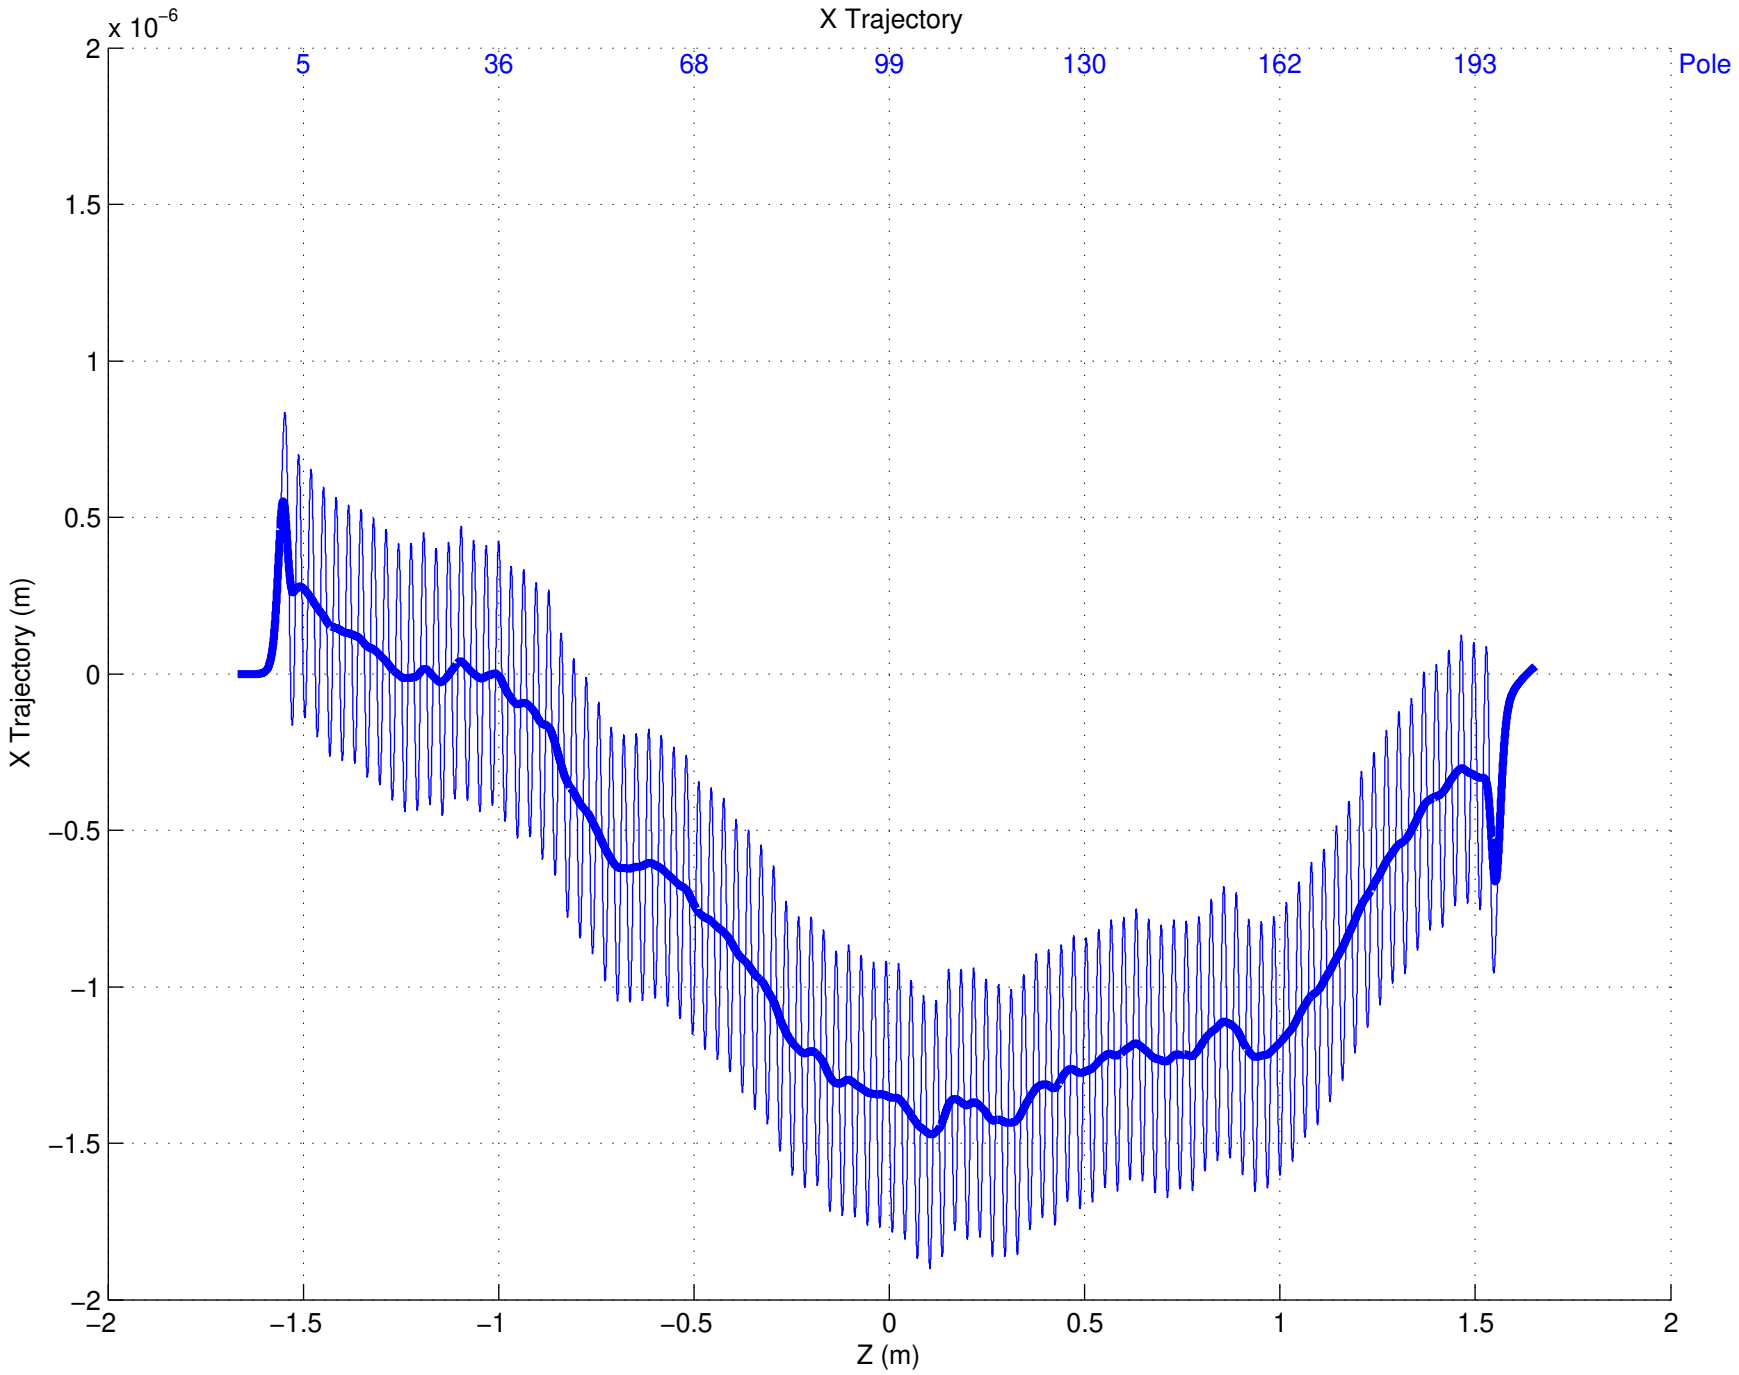
X Trajectory
x 10^-6
5
36
68
99
130
162
193
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

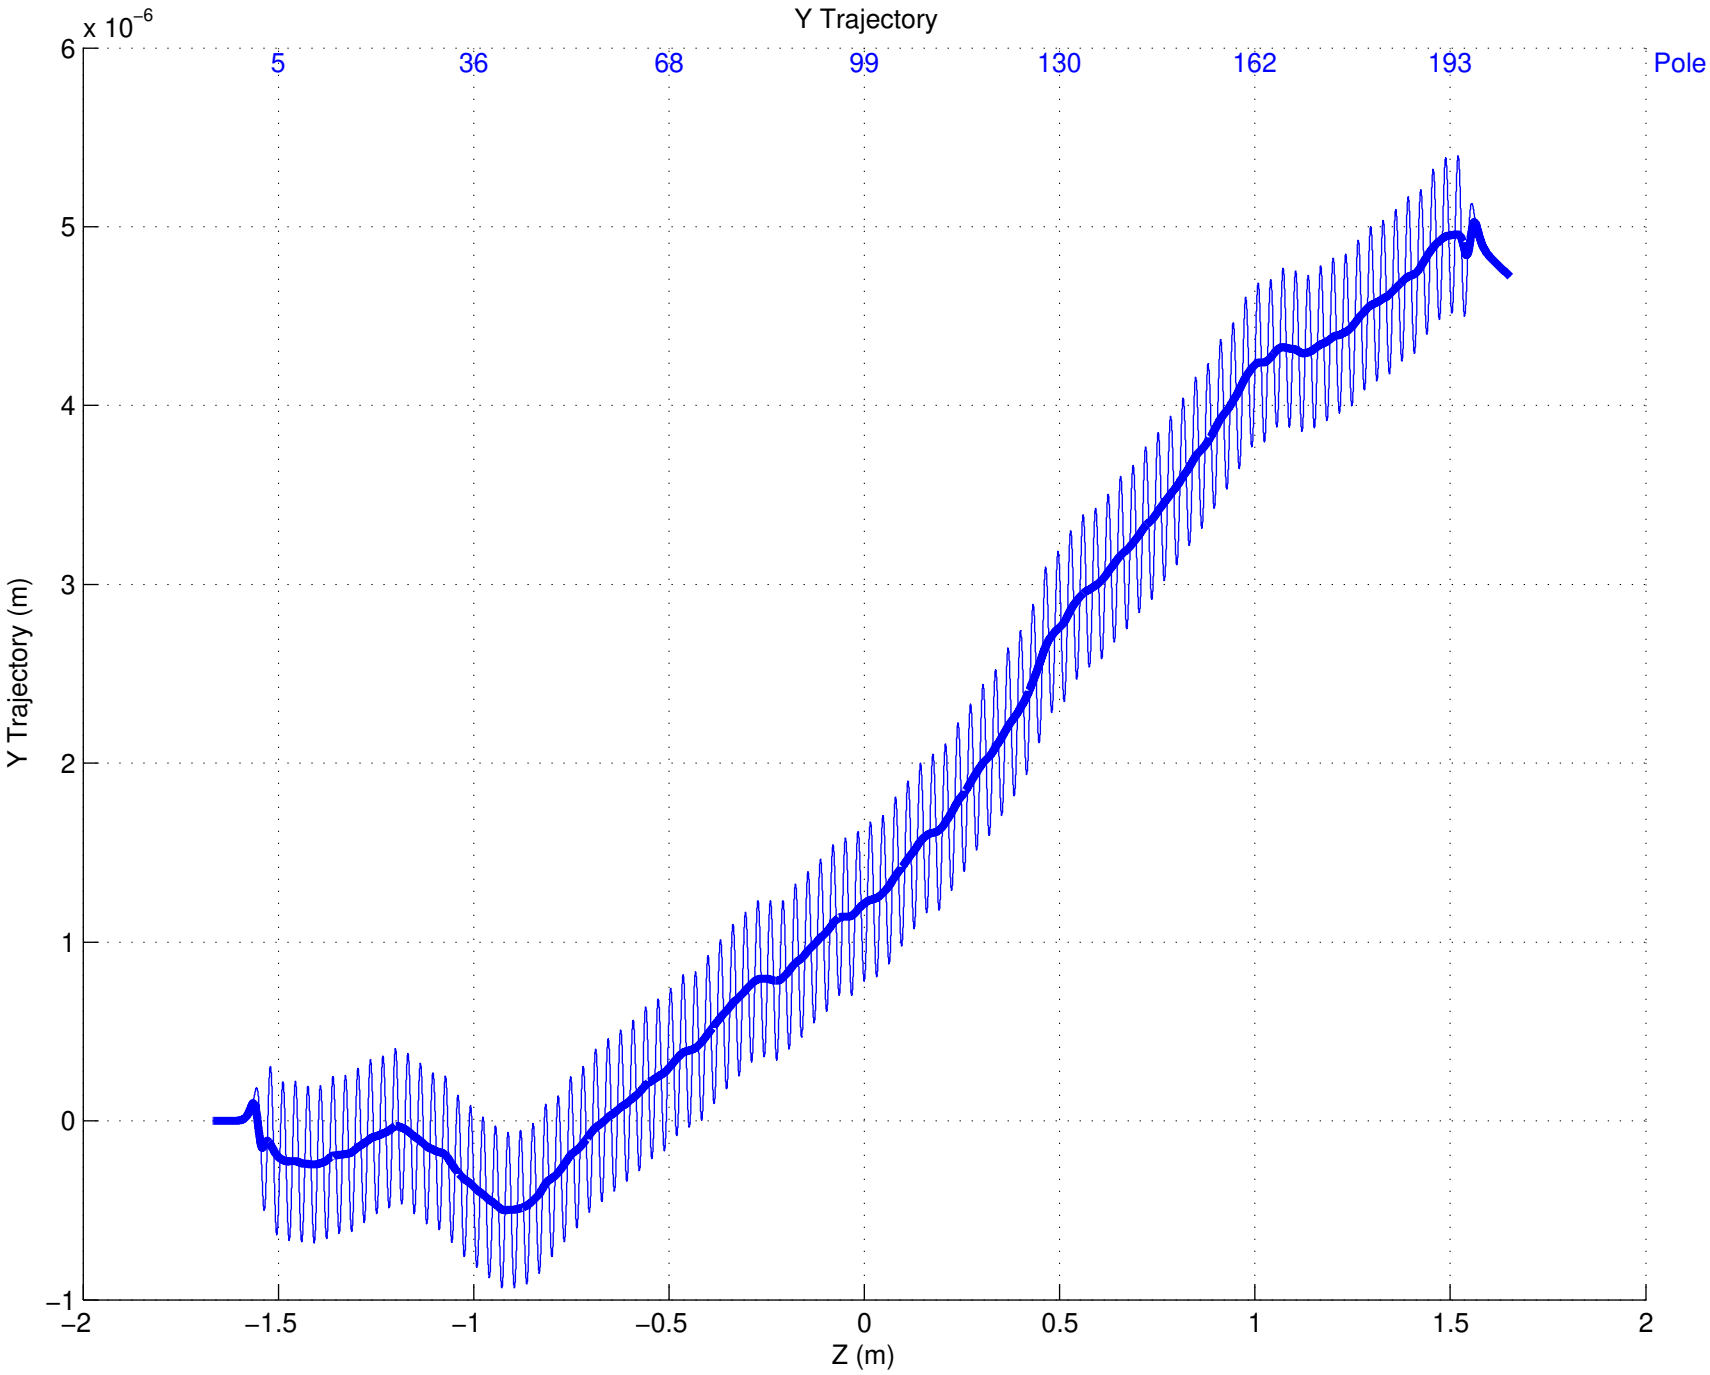
Y Trajectory
x 10^-6
6
5
4
3
2
1
0
−1
5
36
68
99
130
162
193
Pole
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

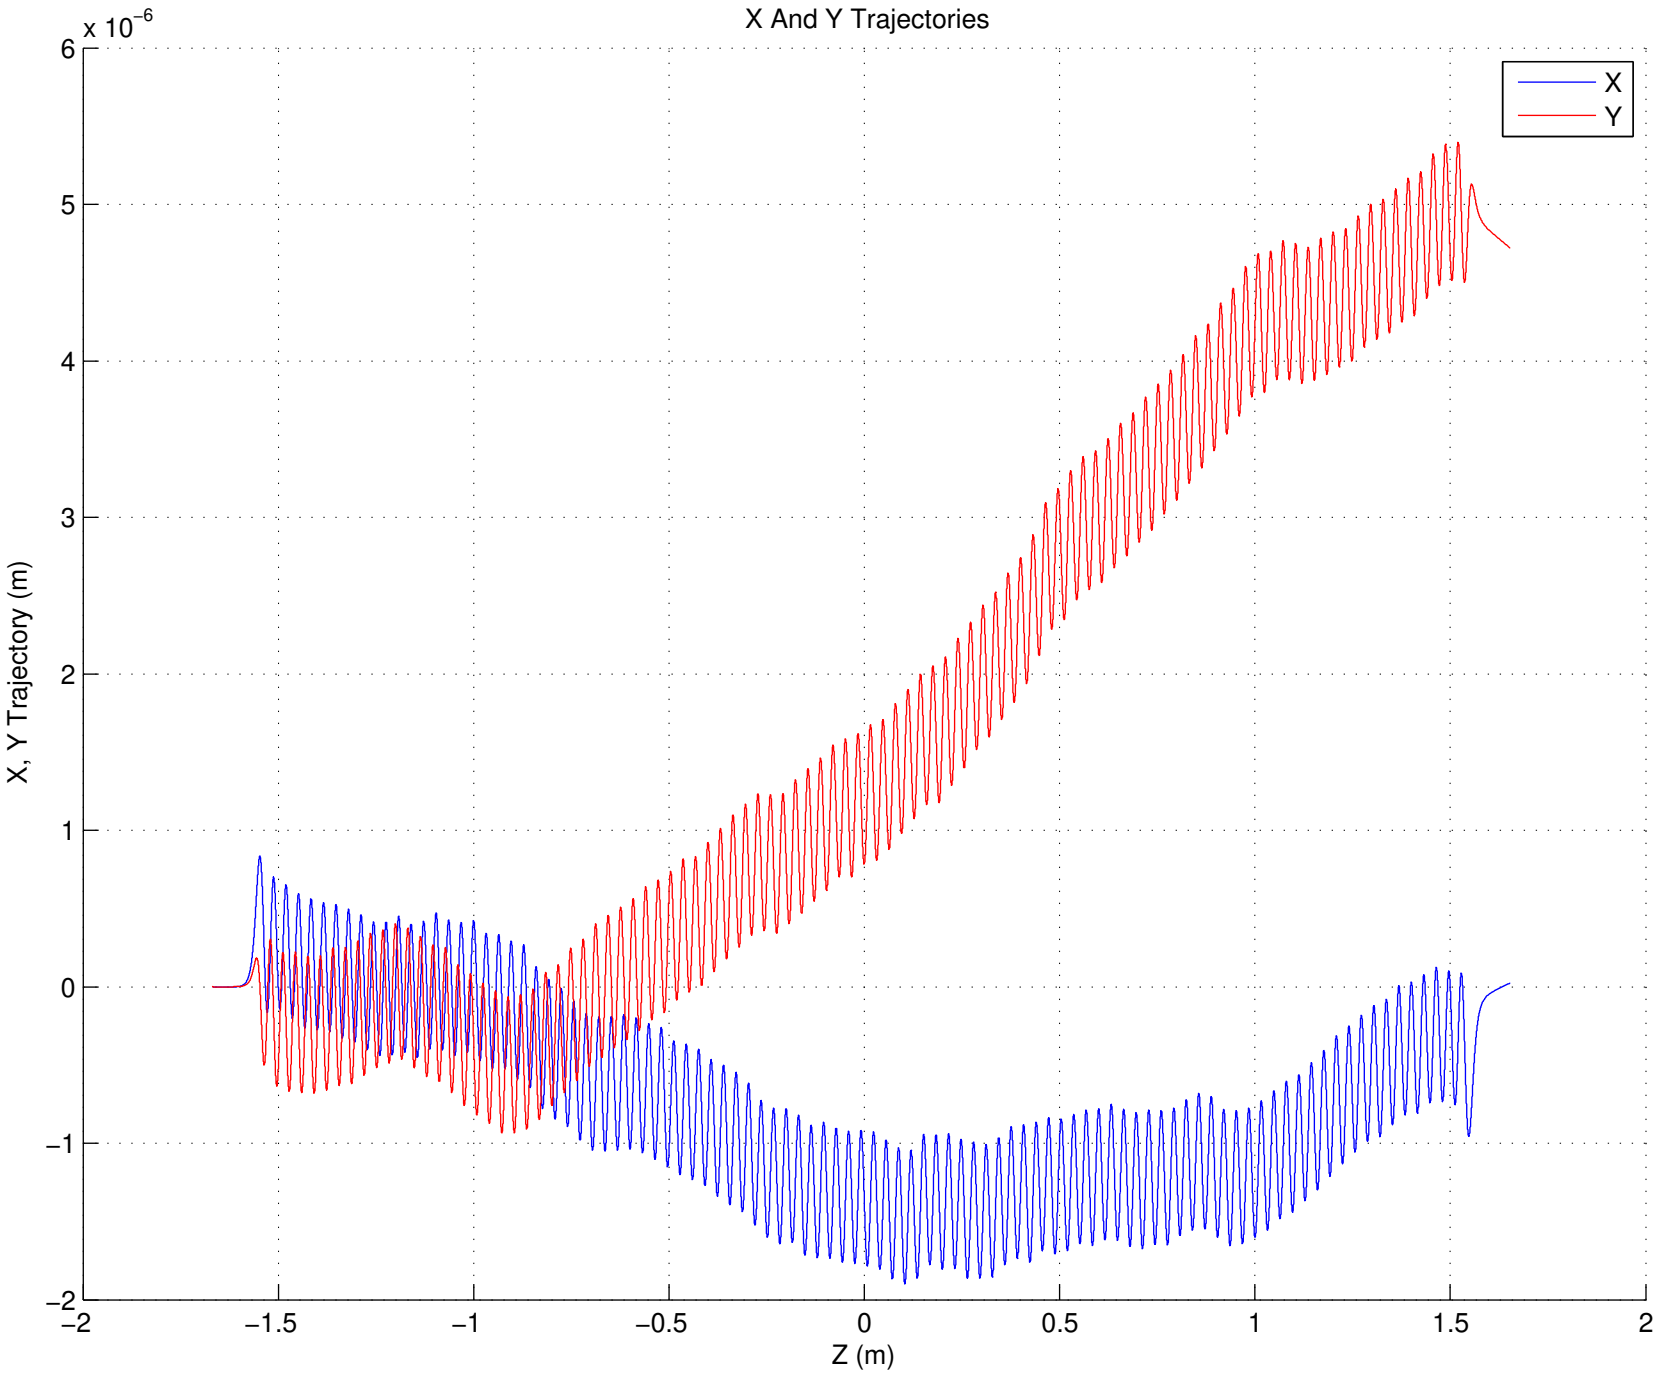
X And Y Trajectories
x 10^-6
X
Y
X, Y Trajectory (m)
Z (m)
6
5
4
3
2
1
0
−1
−2
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

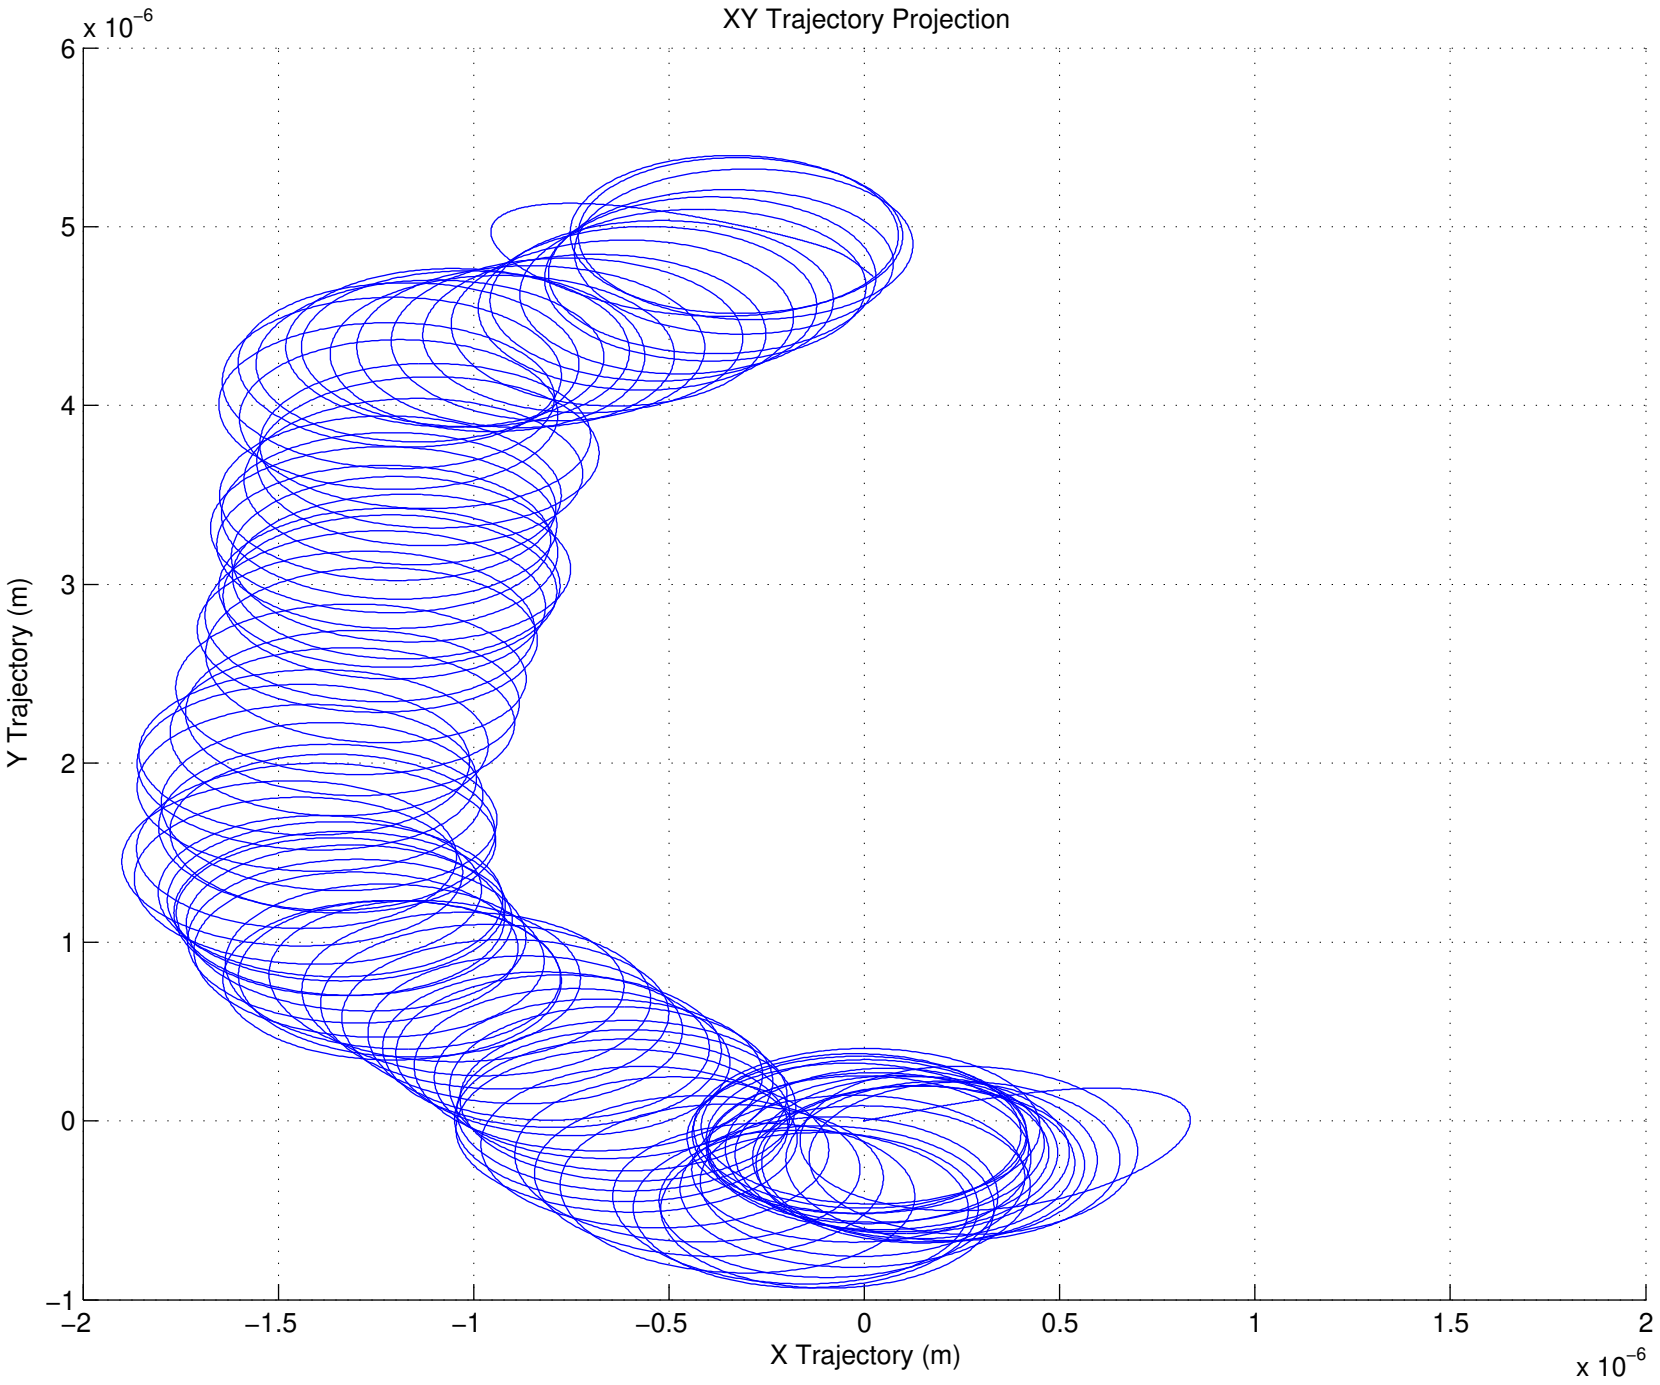
XY Trajectory Projection
x 10^-6
6
5
4
3
2
1
0
−1
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
X Trajectory (m)
x 10^-6

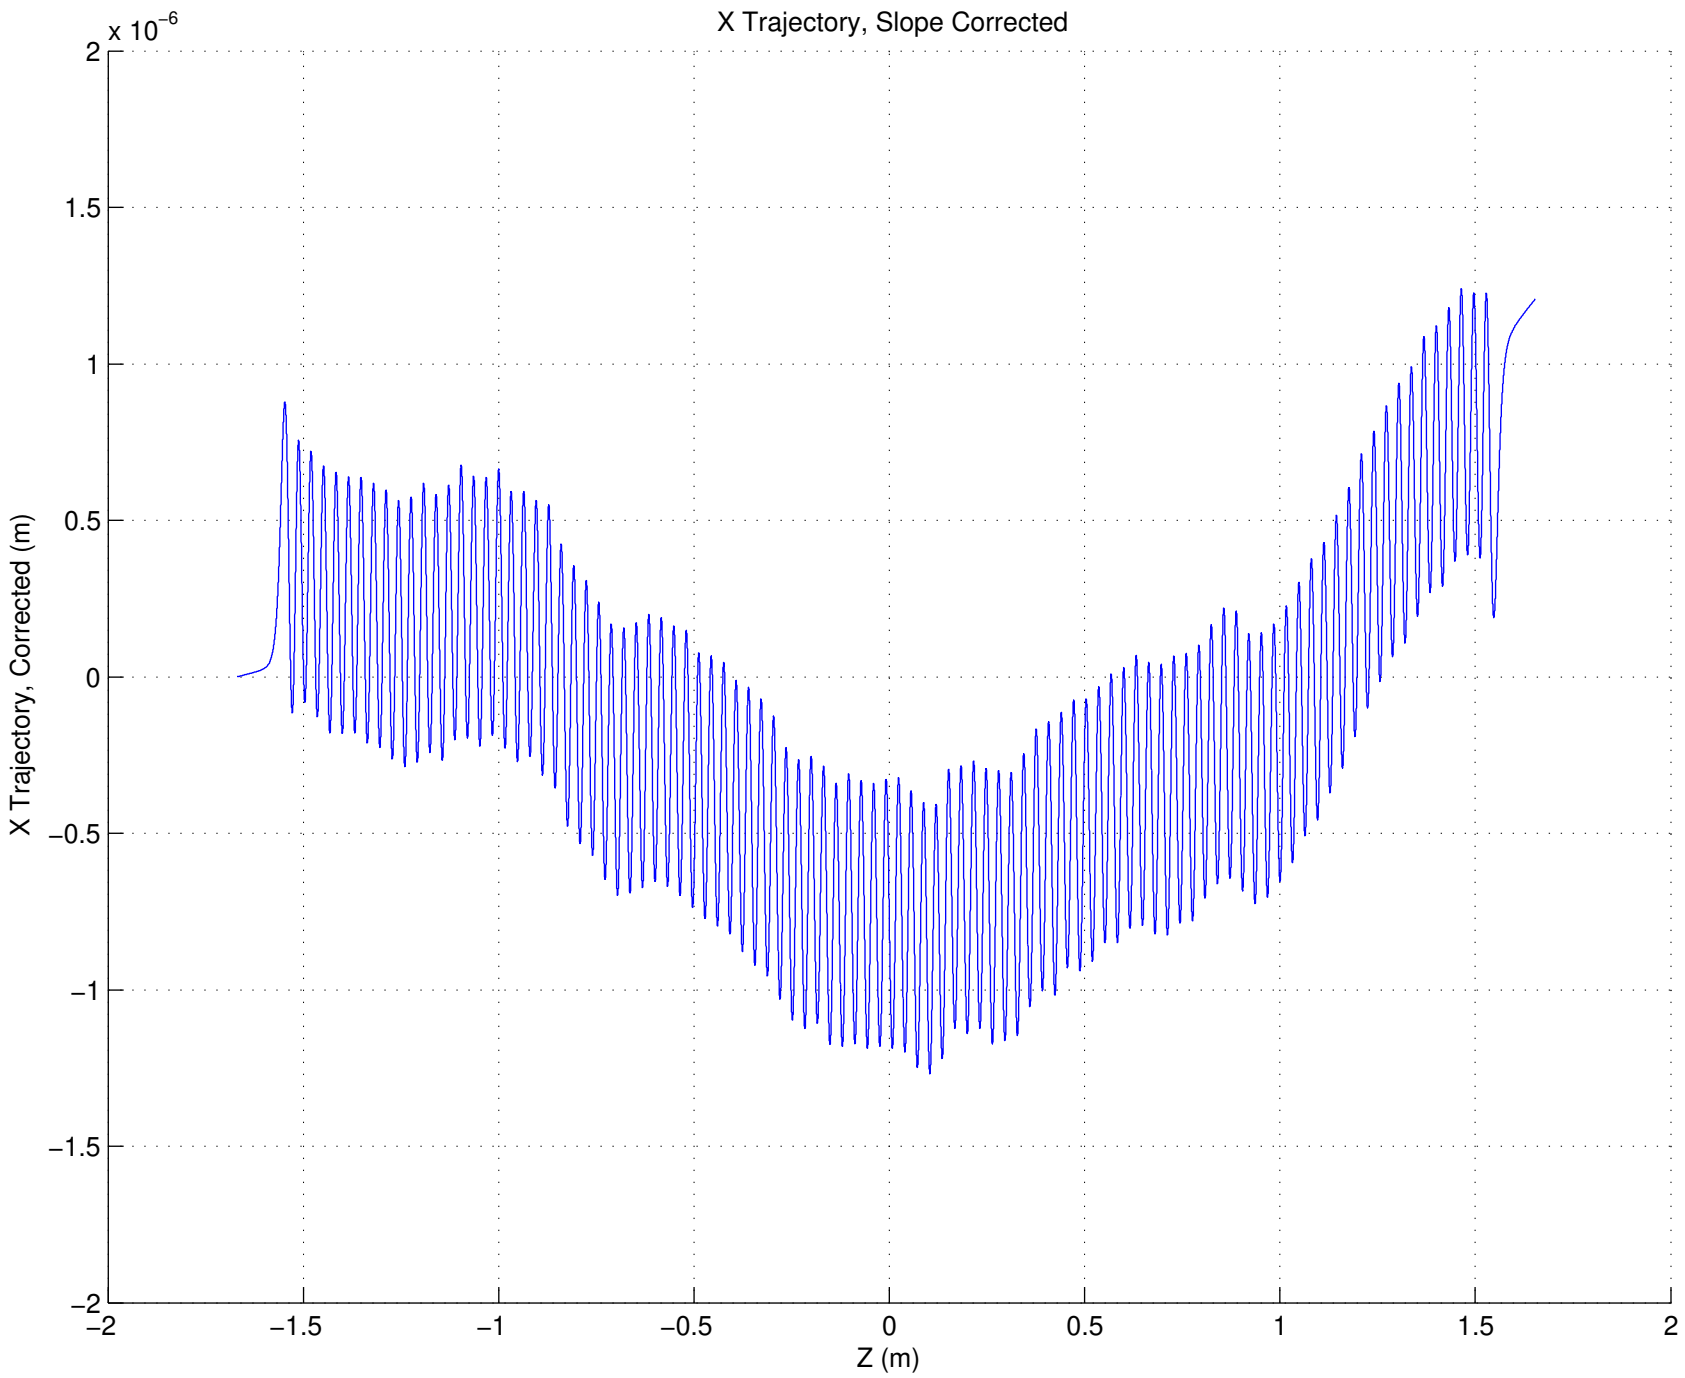
X Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

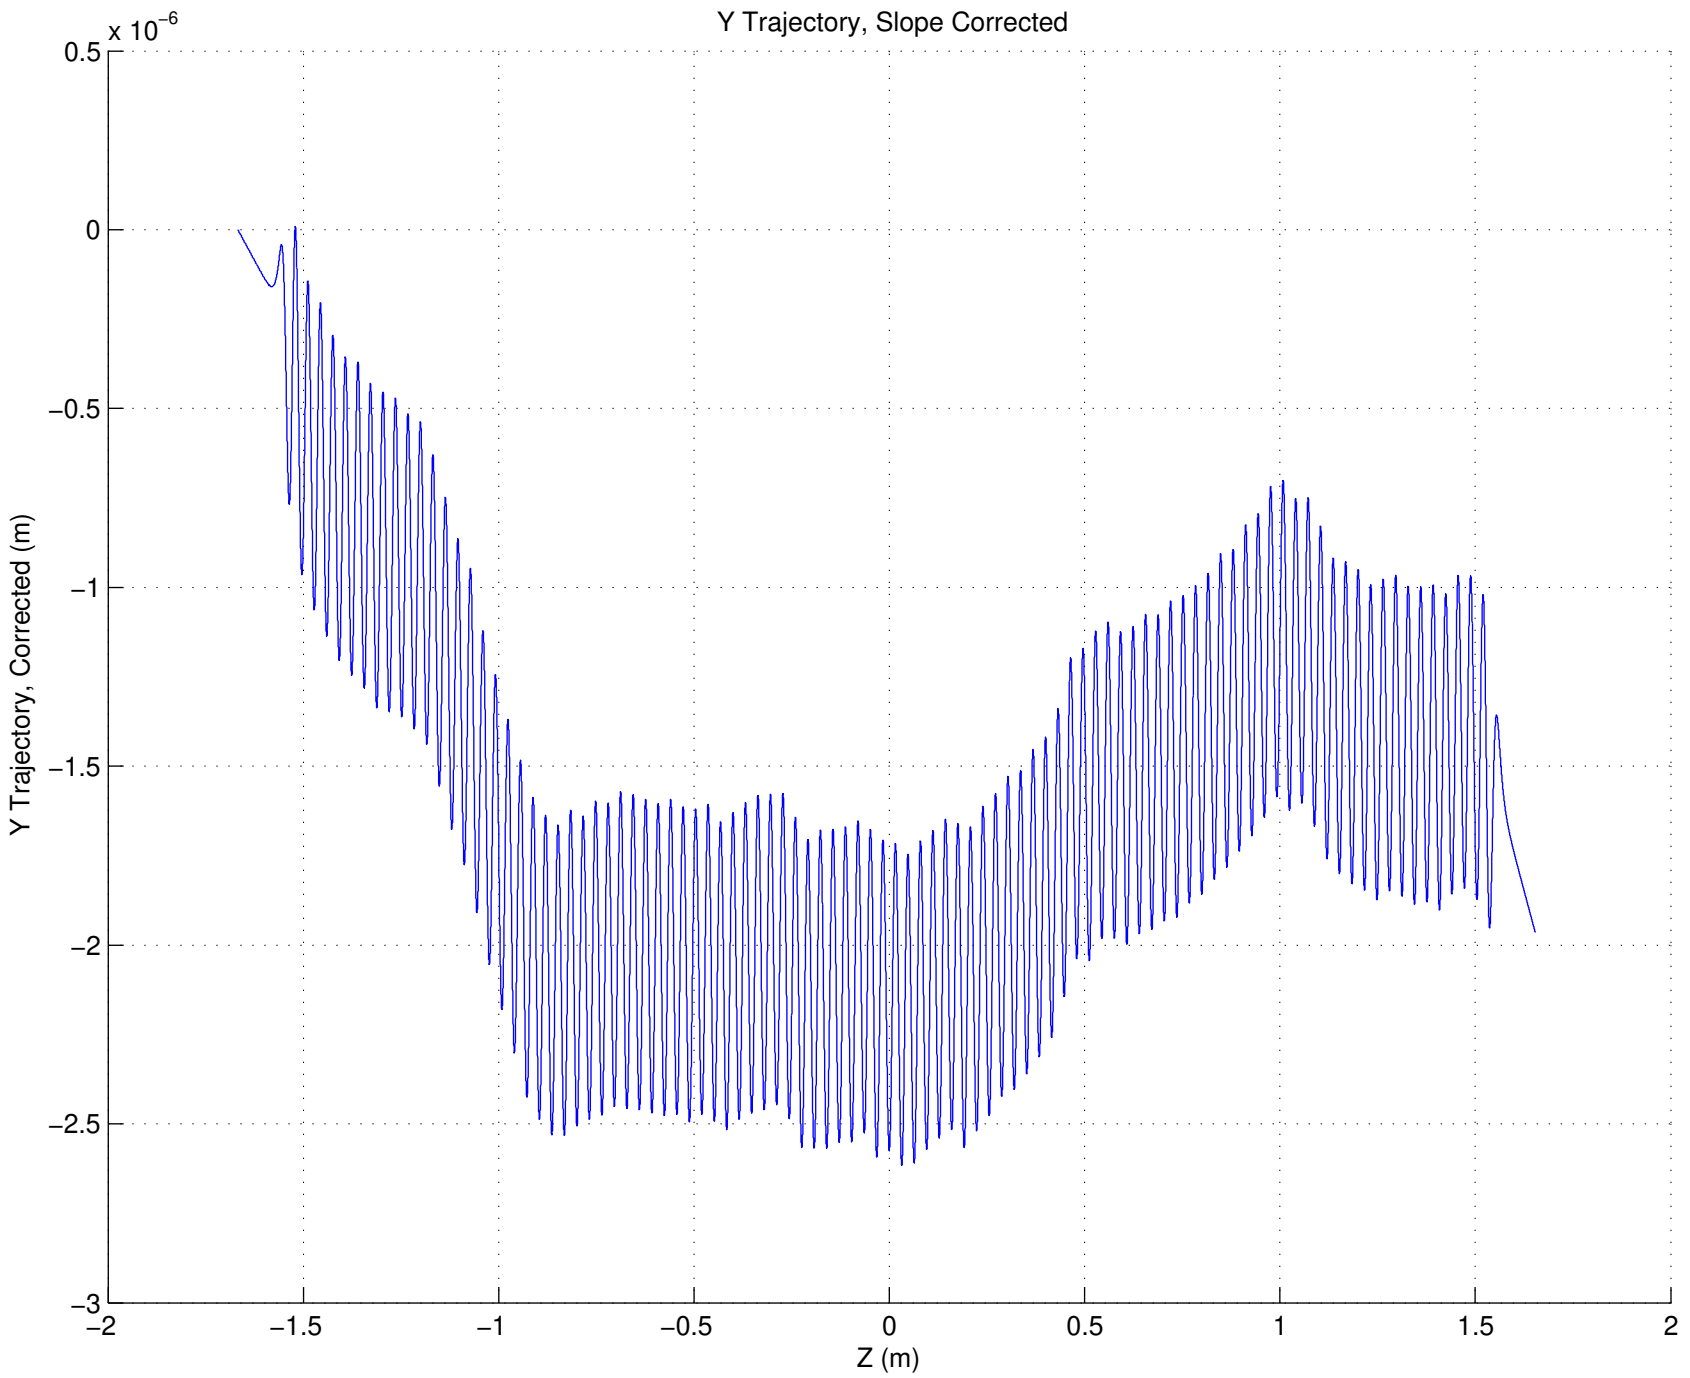
Y Trajectory, Slope Corrected
x 10^-6
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
Y Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

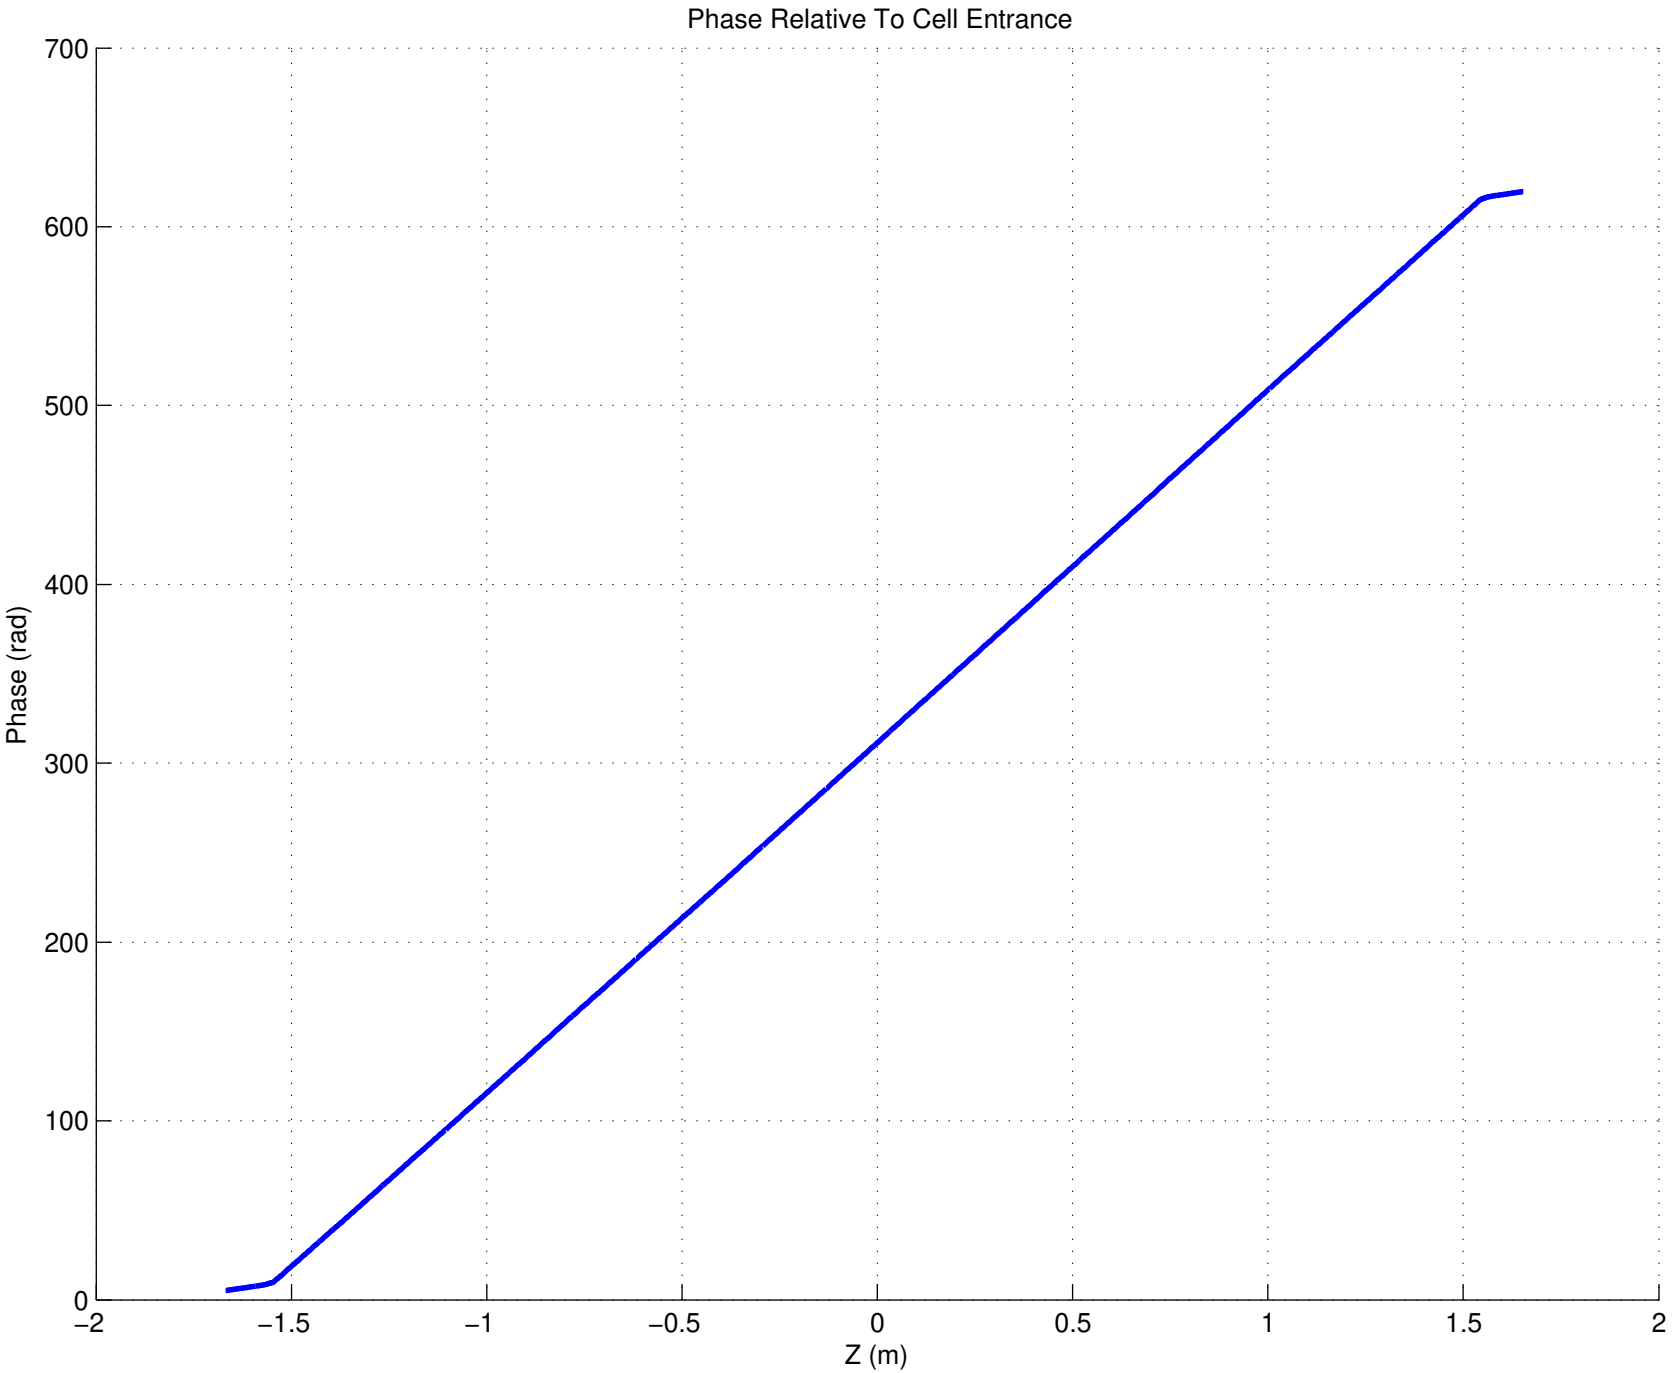
Phase Relative To Cell Entrance
Phase (rad)
Z (m)
700
600
500
400
300
200
100
0
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

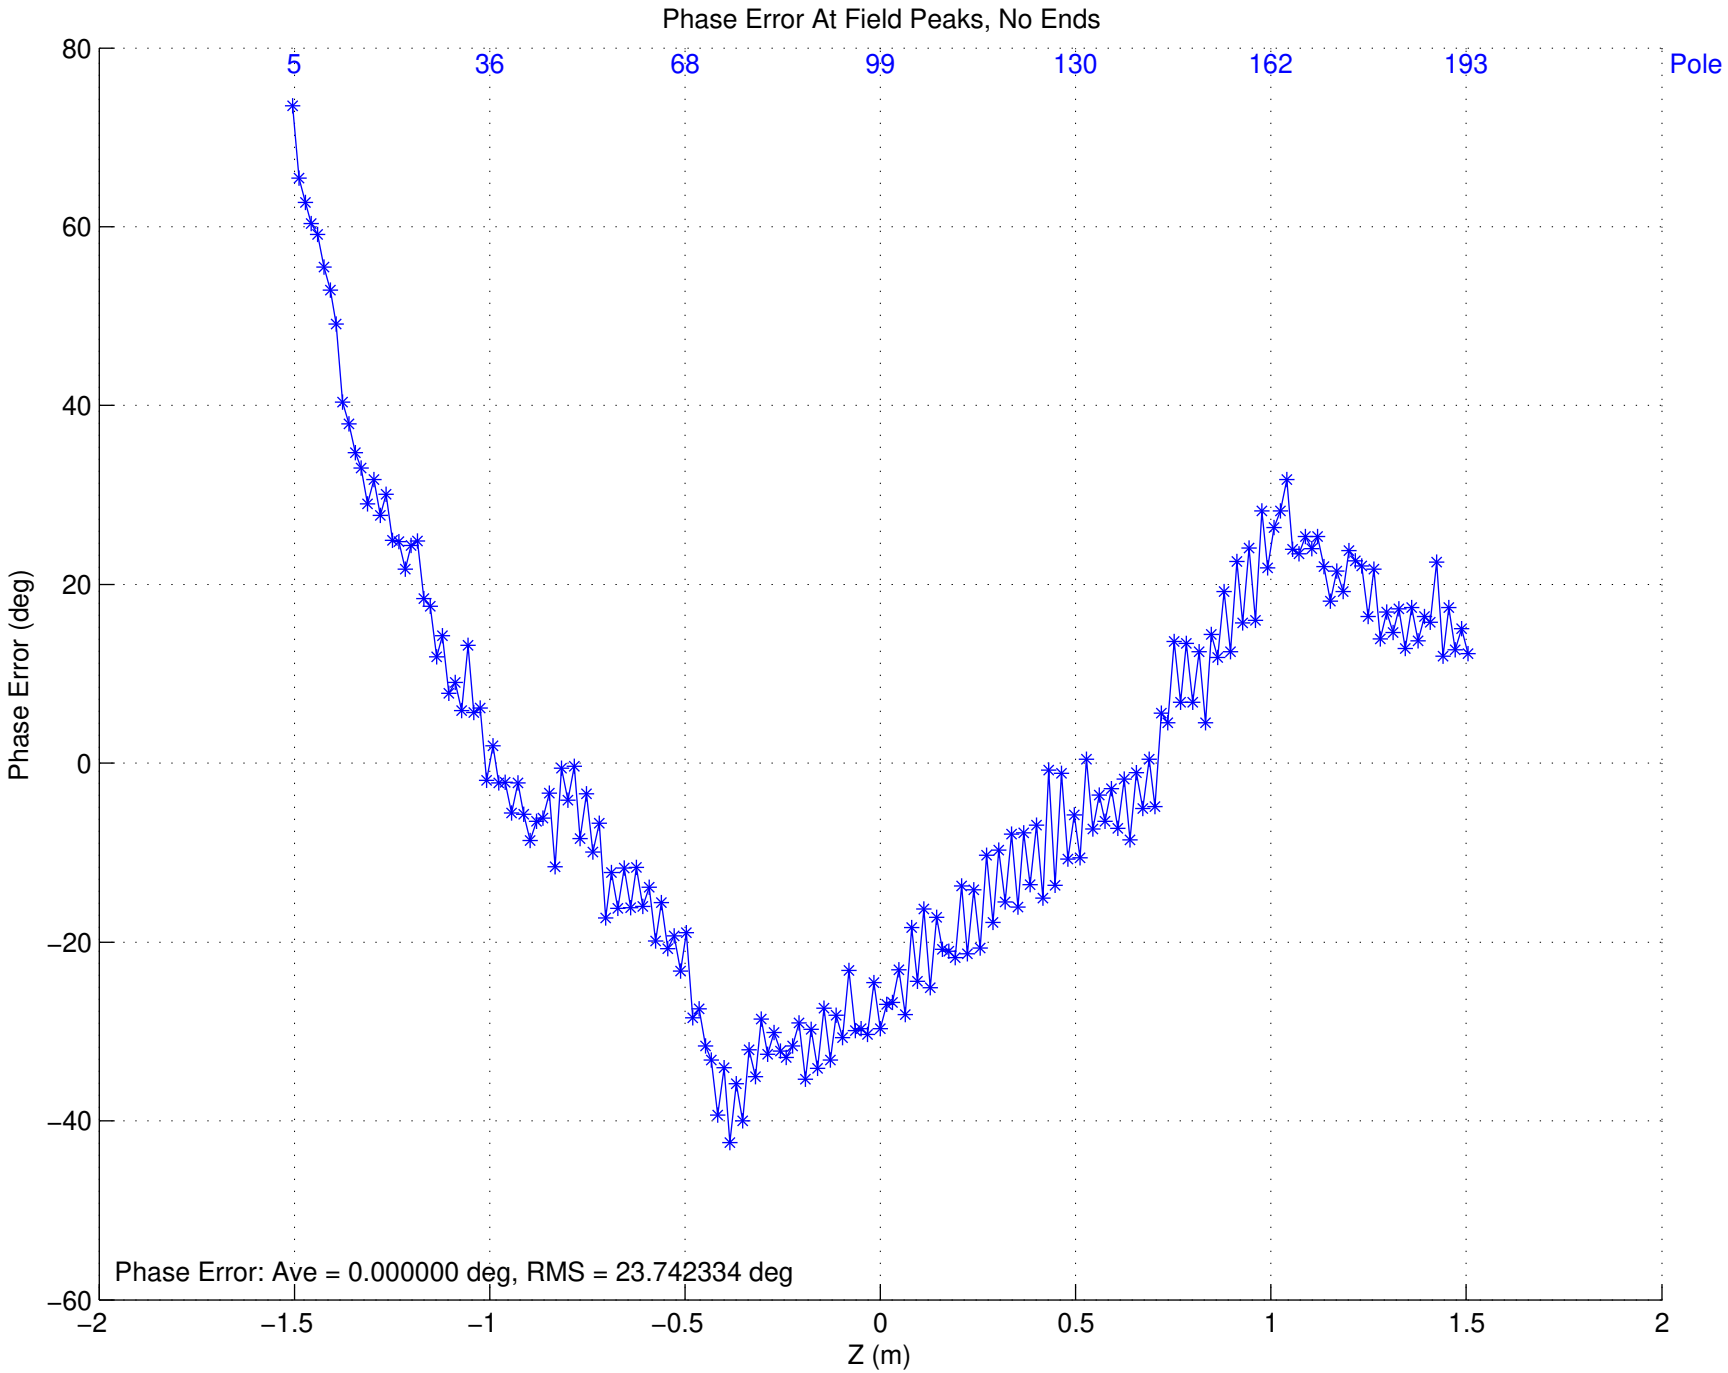
Phase Error At Field Peaks, No Ends
5
36
68
99
130
162
193
Pole
80
60
40
20
0
−20
−40
−60
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)
Phase Error: Ave = 0.000000 deg, RMS = 23.742334 deg

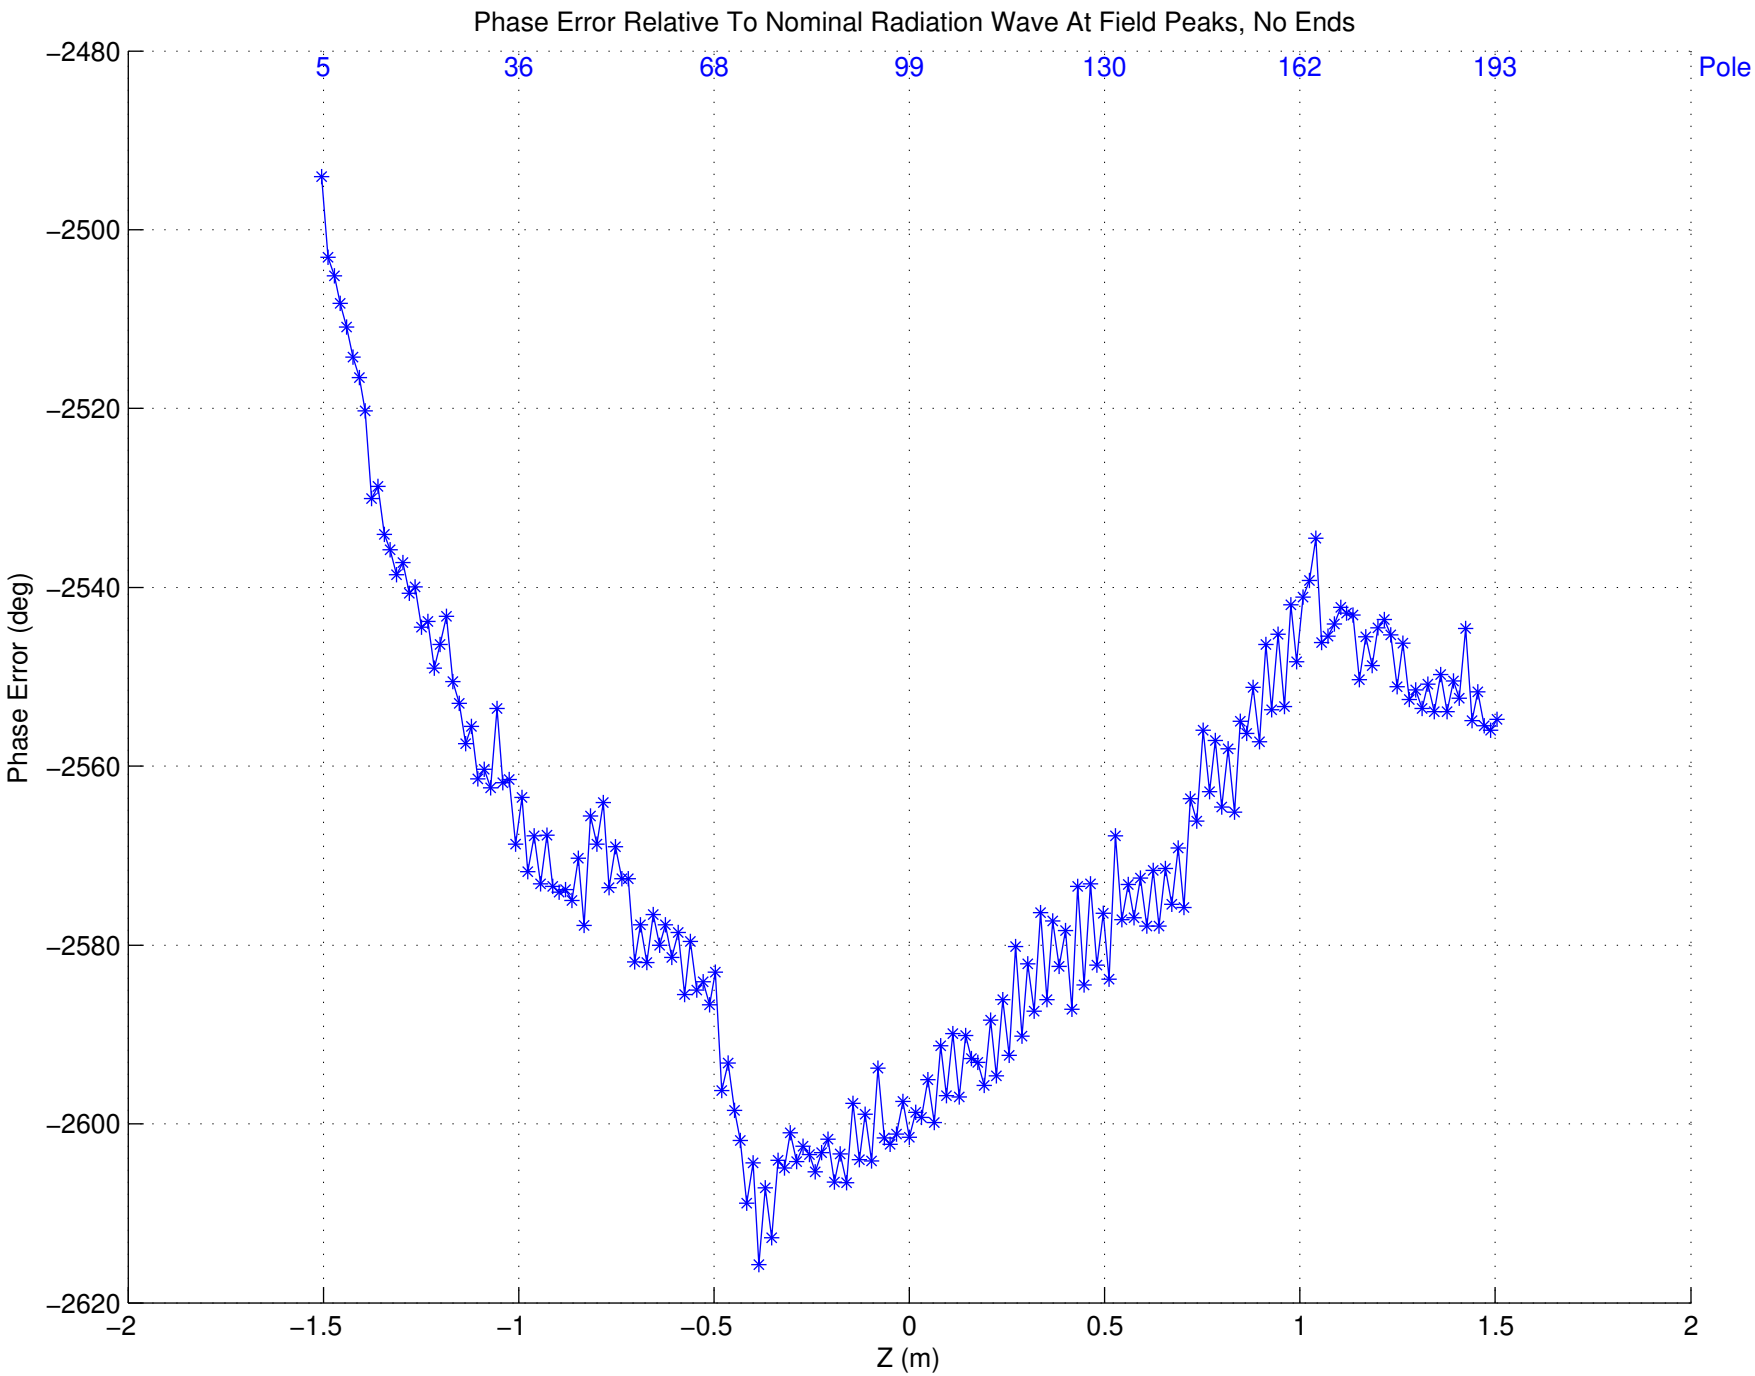
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
5
36
68
99
130
162
193
Pole
−2480
−2500
−2520
−2540
−2560
−2580
−2600
−2620
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

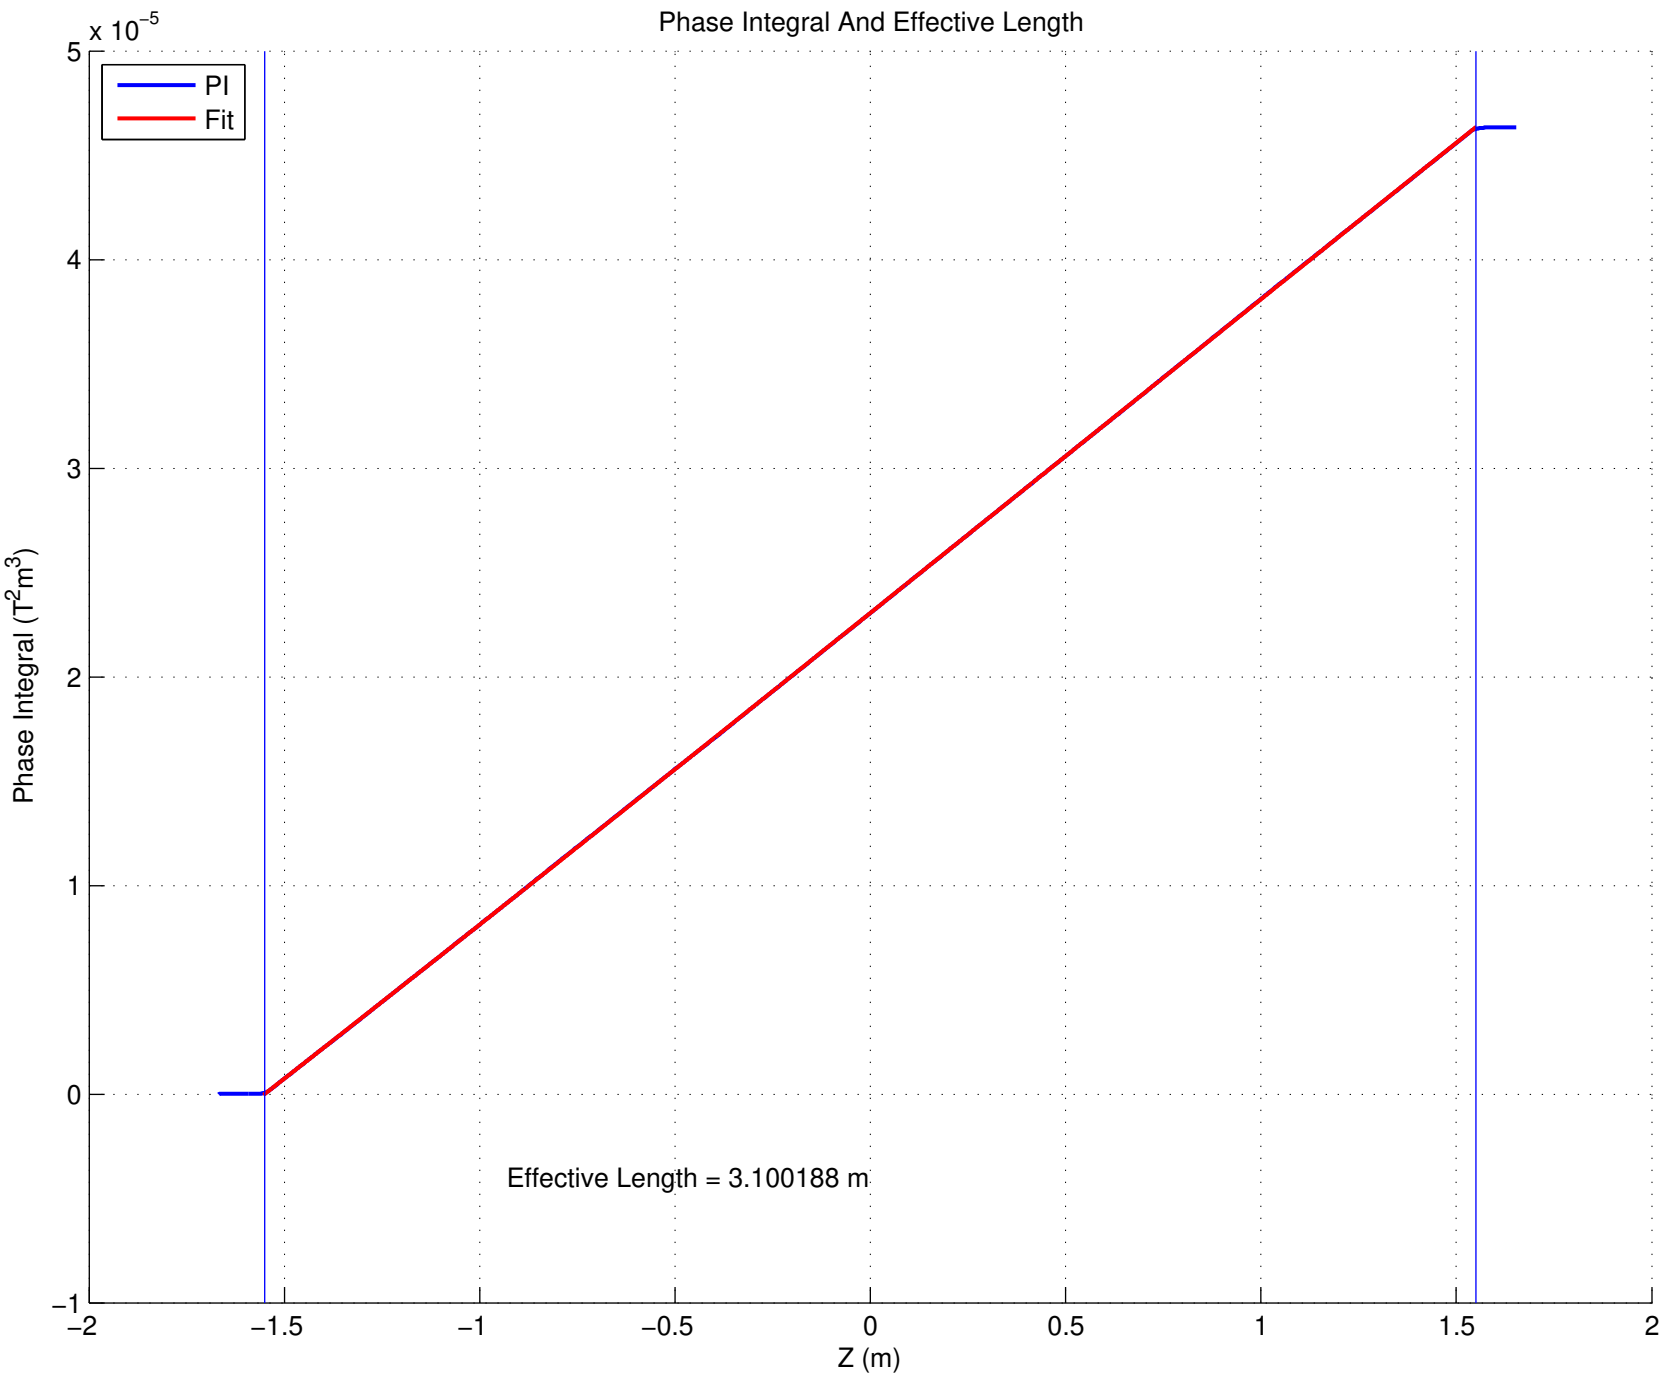
Phase Integral And Effective Length
x 10^-5
PI
Fit
Phase Integral (T^2m^3)
Z (m)
Effective Length = 3.100188 m
5
4
3
2
1
0
−1
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

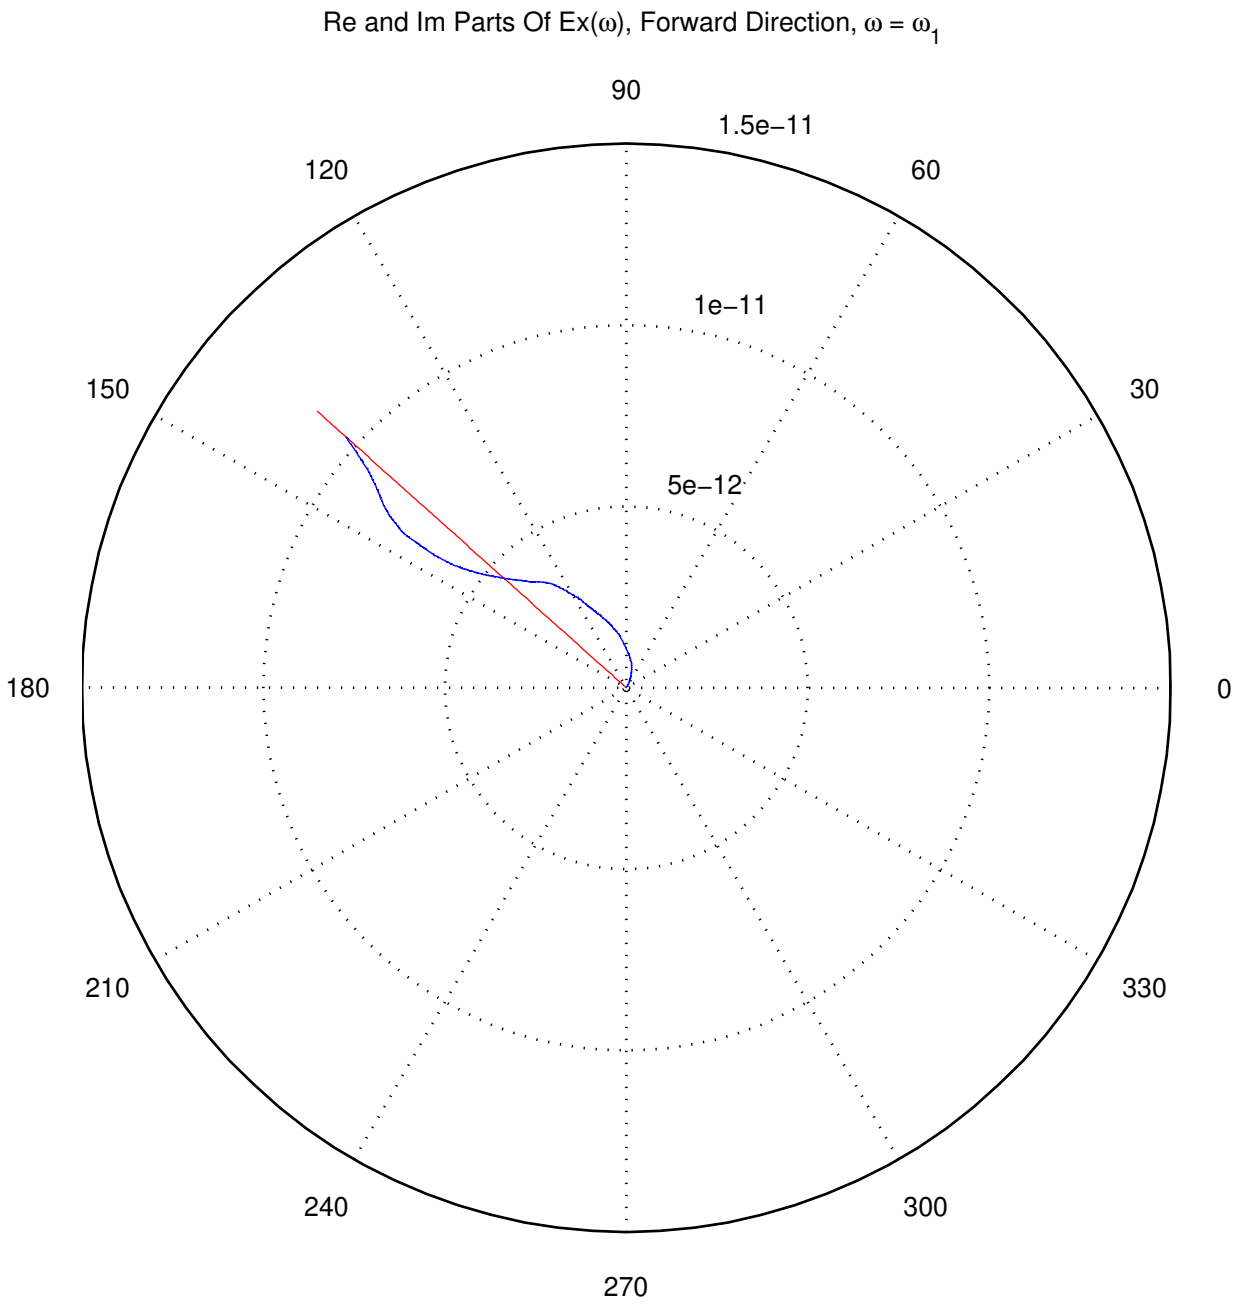
Re and Im Parts Of Ex(ω), Forward Direction, ω = ω1
90
1.5e−11
120
60
1e−11
150
30
5e−12
180
0
210
330
240
300
270

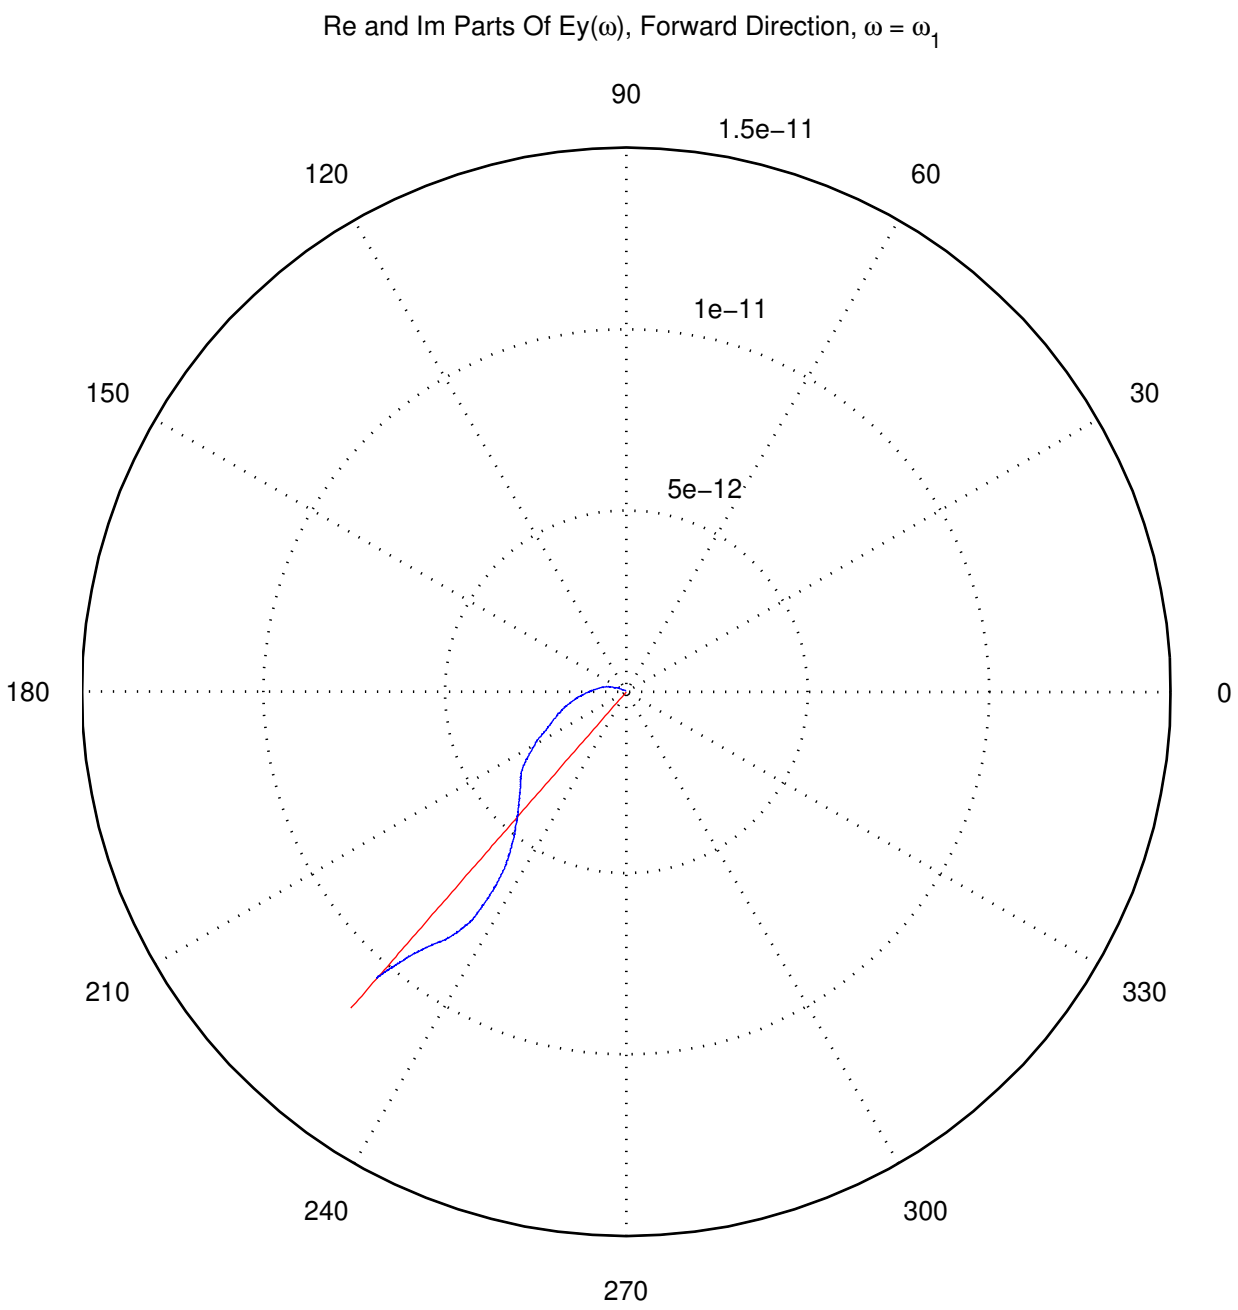
Re and Im Parts Of Ey(ω), Forward Direction, ω = ω1
90
1.5e−11
120
60
1e−11
150
30
5e−12
180
0
210
330
240
300
270

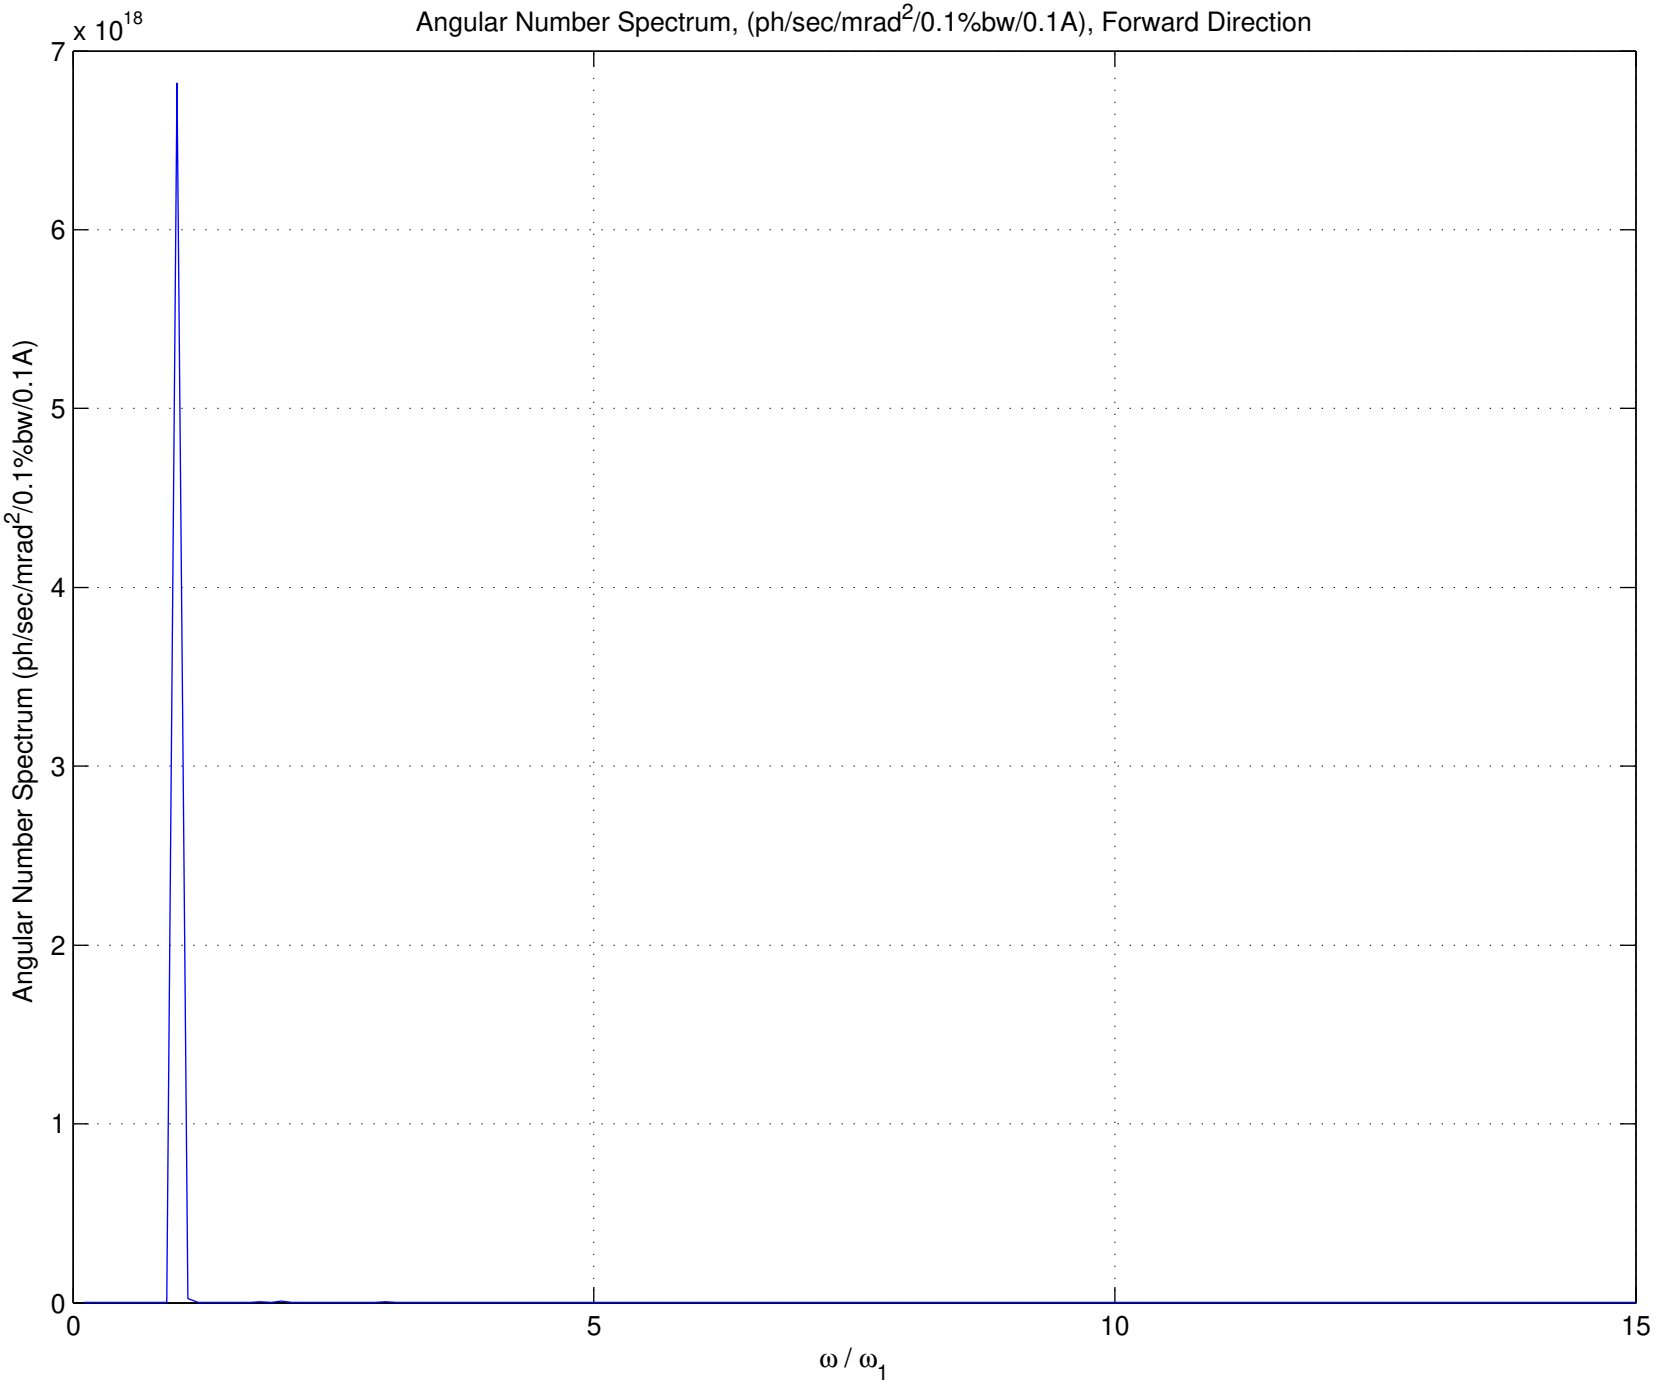
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
7
6
5
4
3
2
1
0
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
0
5
10
15
ω / ω1

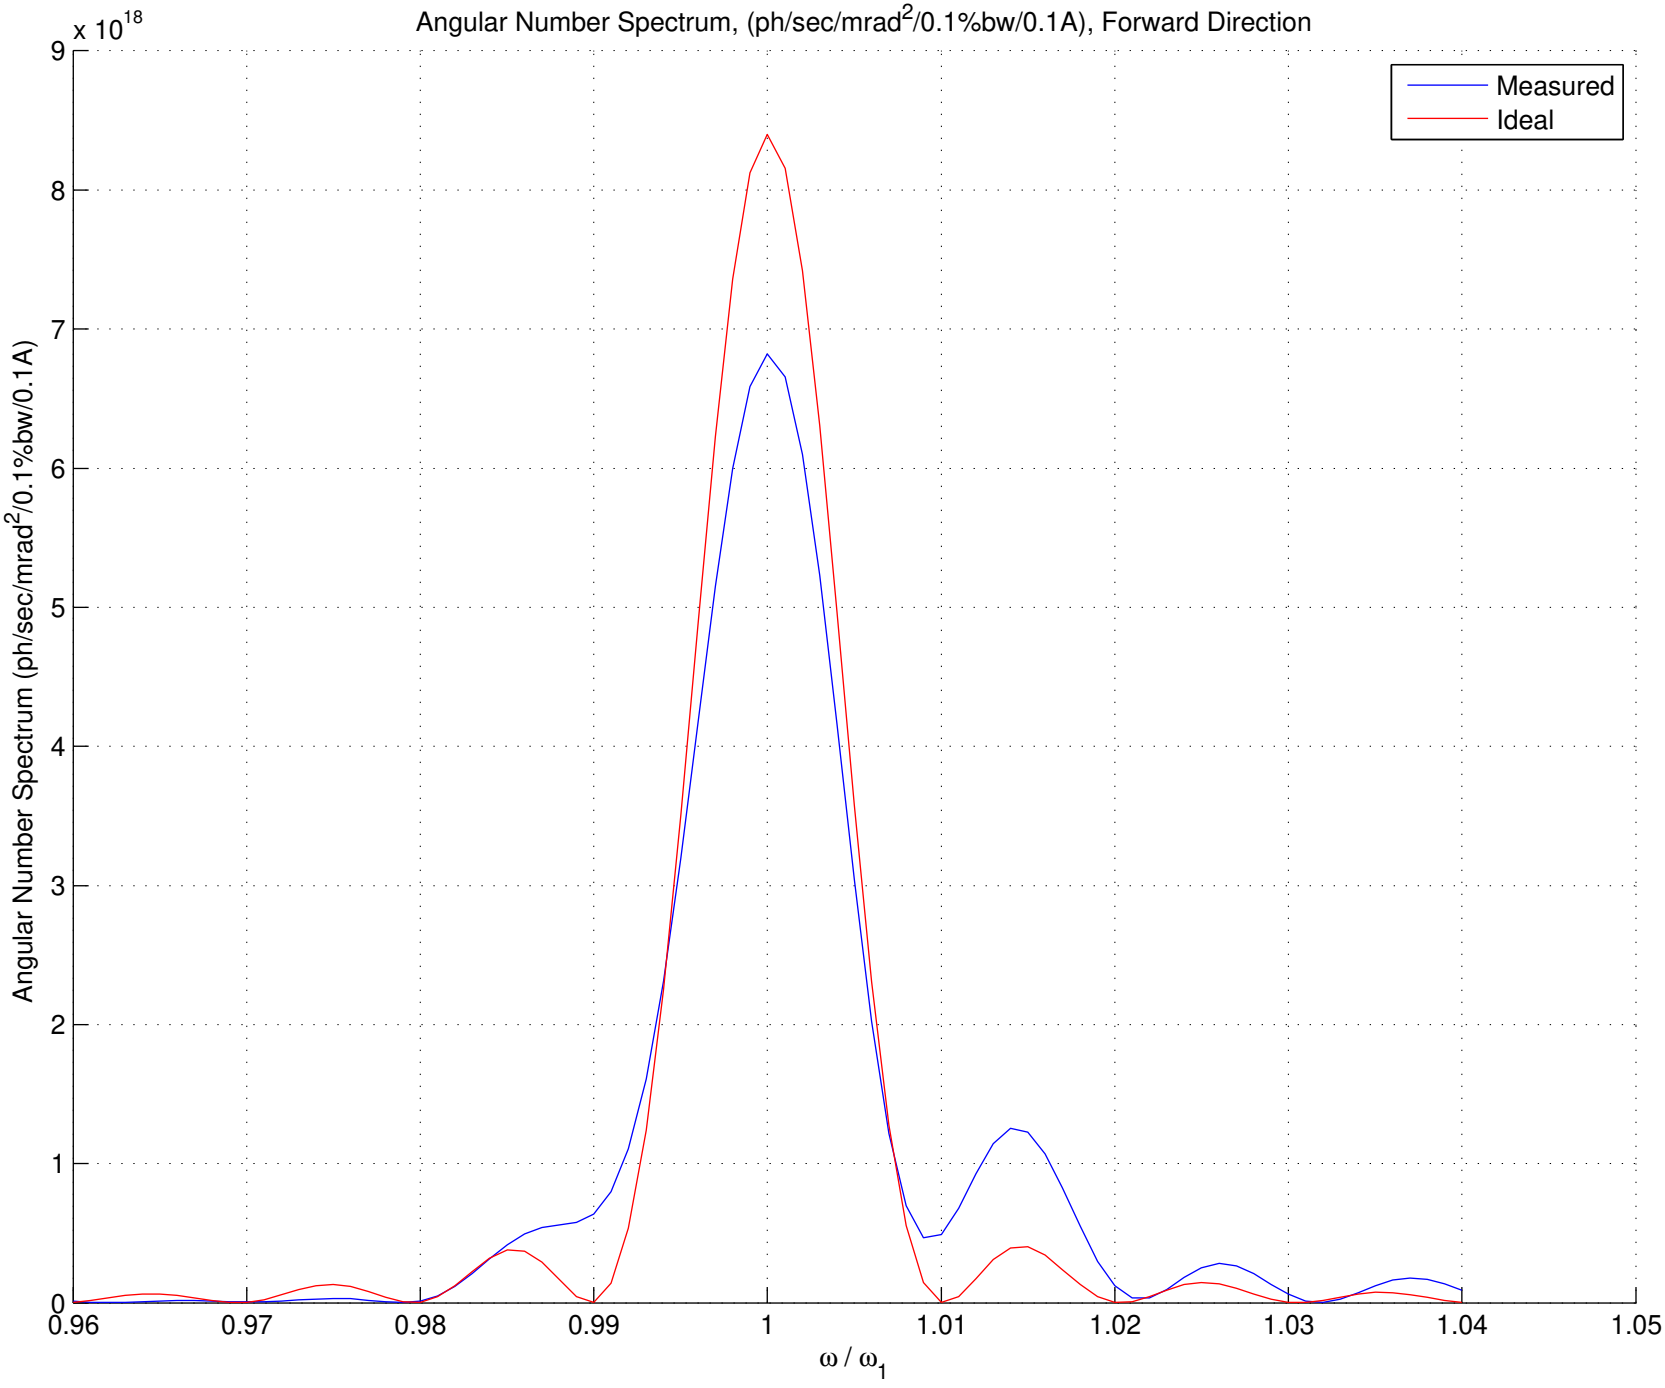
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
Measured
Ideal
0
1
2
3
4
5
6
7
8
9
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05

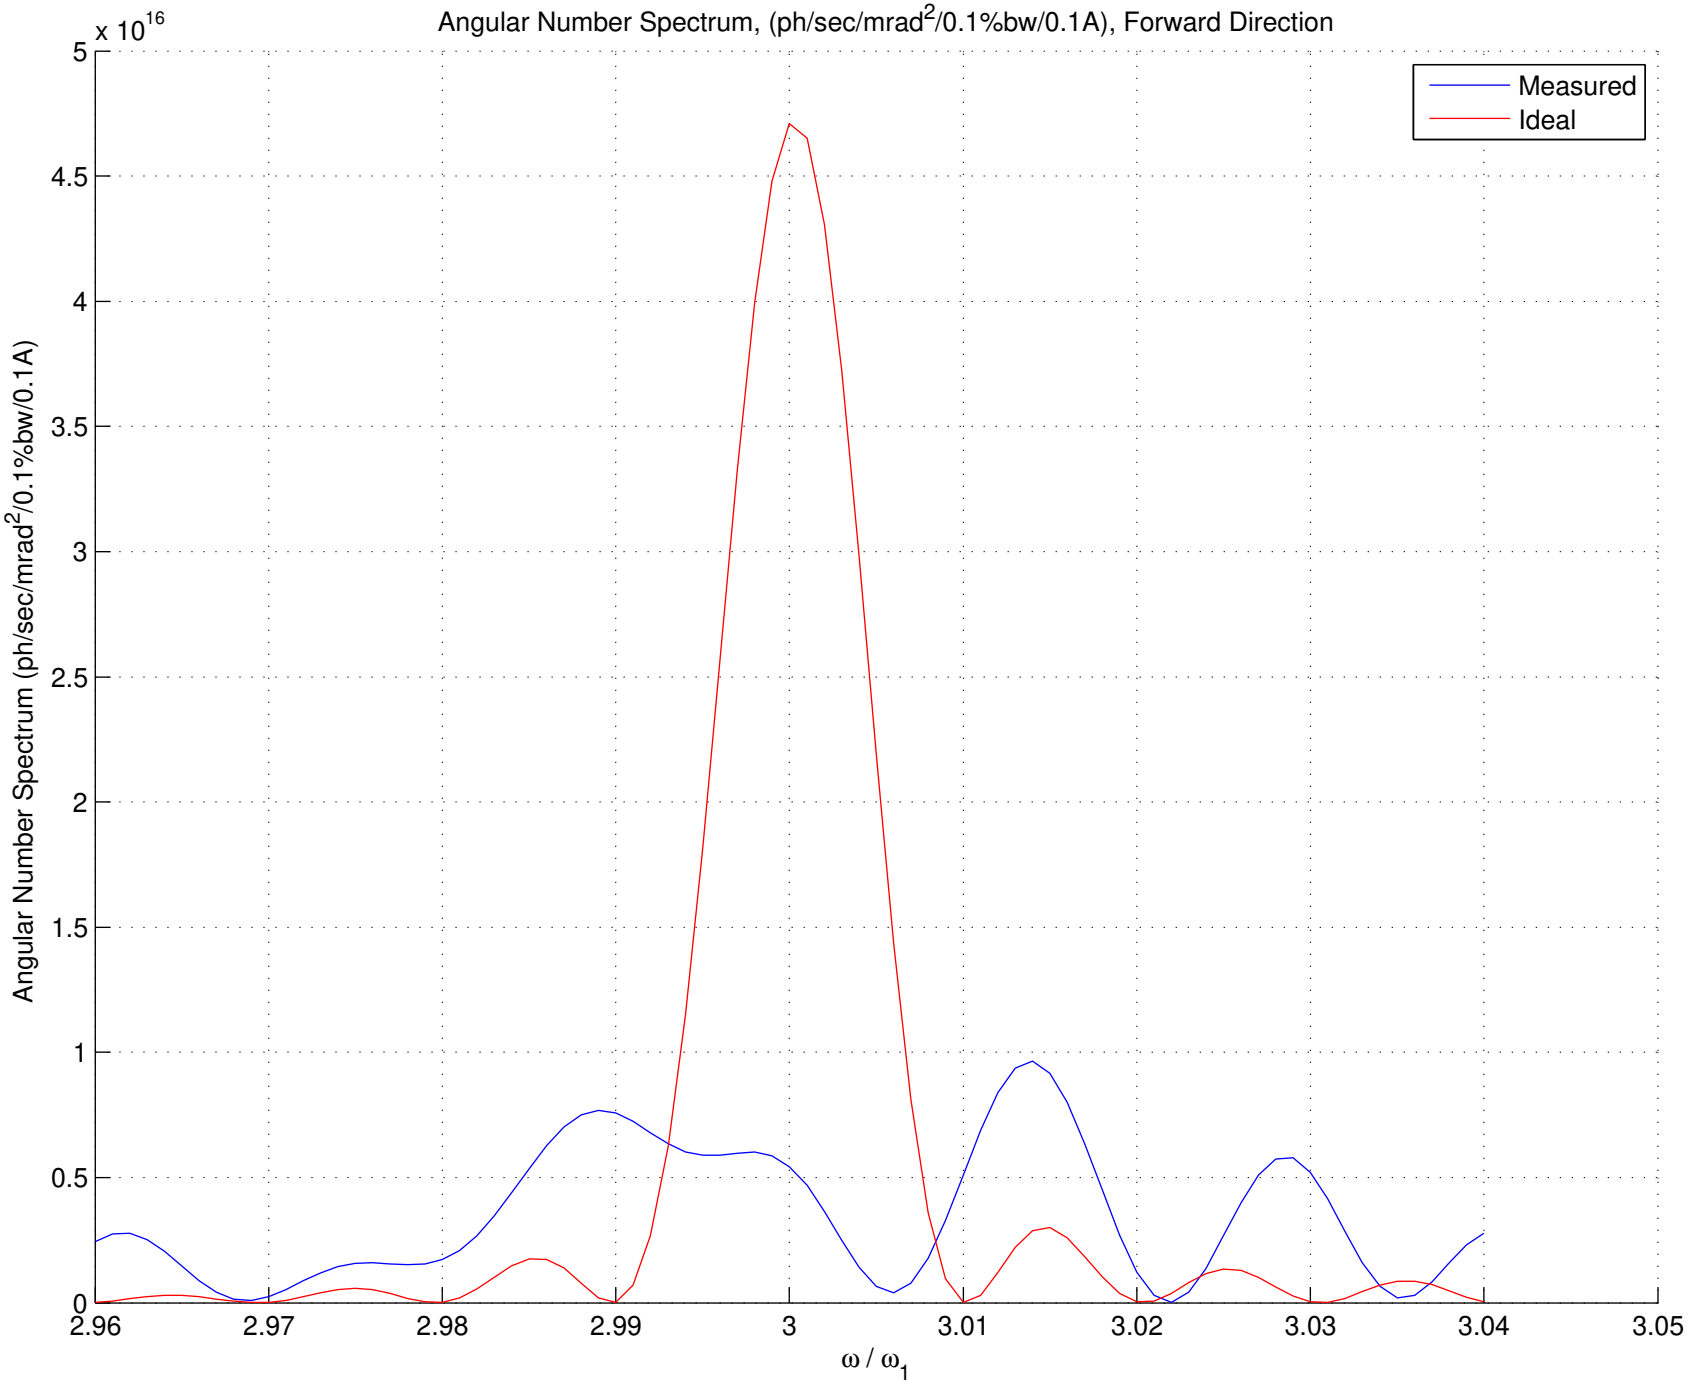
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{16}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
ω / ω_1
0
0.5
1
1.5
2
2.5
3
3.5
4
4.5
5
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05

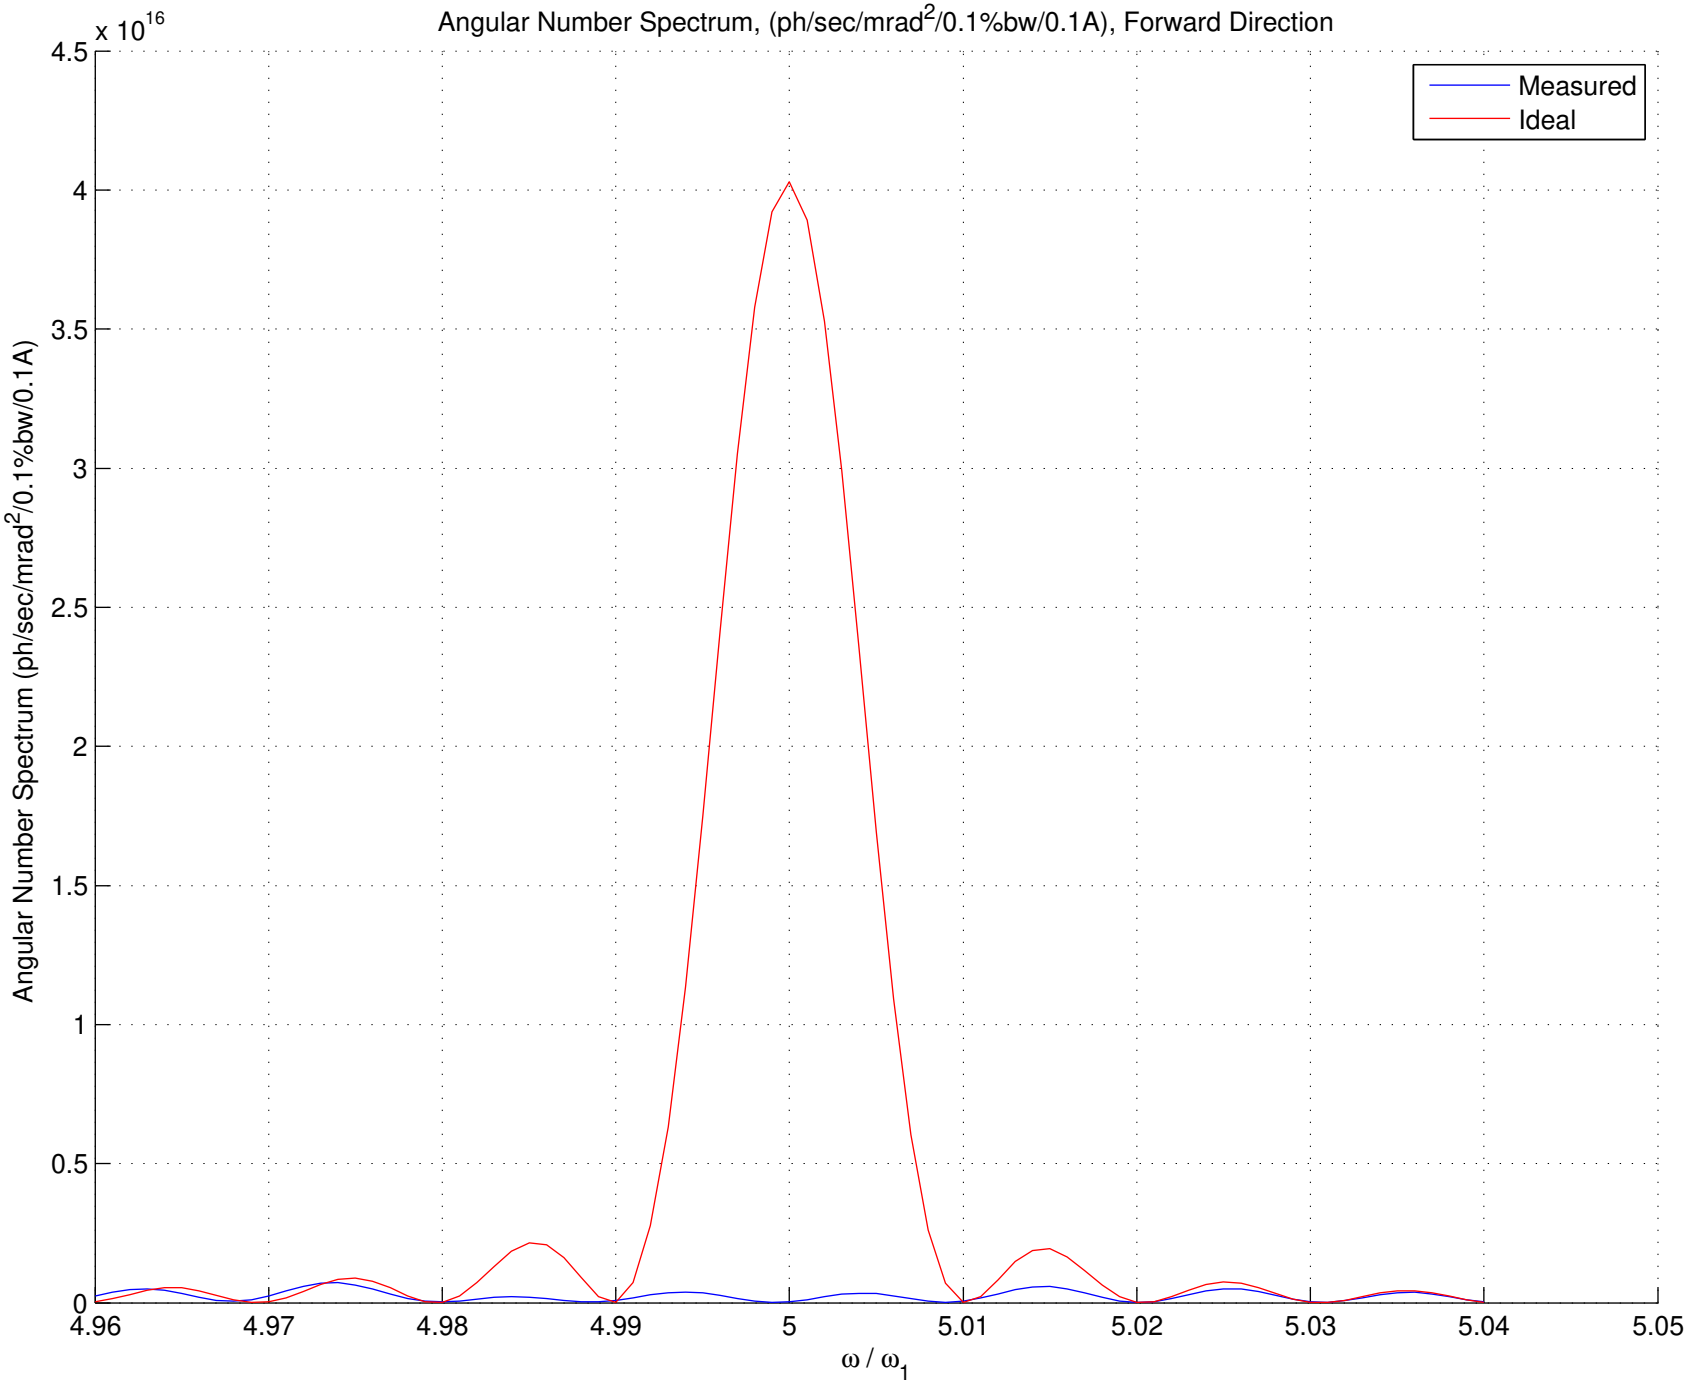
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^16
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05
ω / ω1