SLAC Magnetic Measurements

EPU Analysis
––––––––––––

Parameters:
INPUT–FILE–DIR =V:\MET\MagServe\MagData\DELTA\Delta data\Assembled Measurements\Final Measurements\LP24N\KR05
INPUT–FILE–NAME =hall2–anal–probe2–field.dat
INPUT–FILE–TYPE =ZBXYZH
CORR–REQUIRED =0
GAMMA =26671.59
NOM–LAMBDA–U =0
NOM–K–VALUE =0
NOM–LAMBDA–R =0
NUM–POLES =196
NUM–END–POLES =4
CELL–LENGTH =3.656

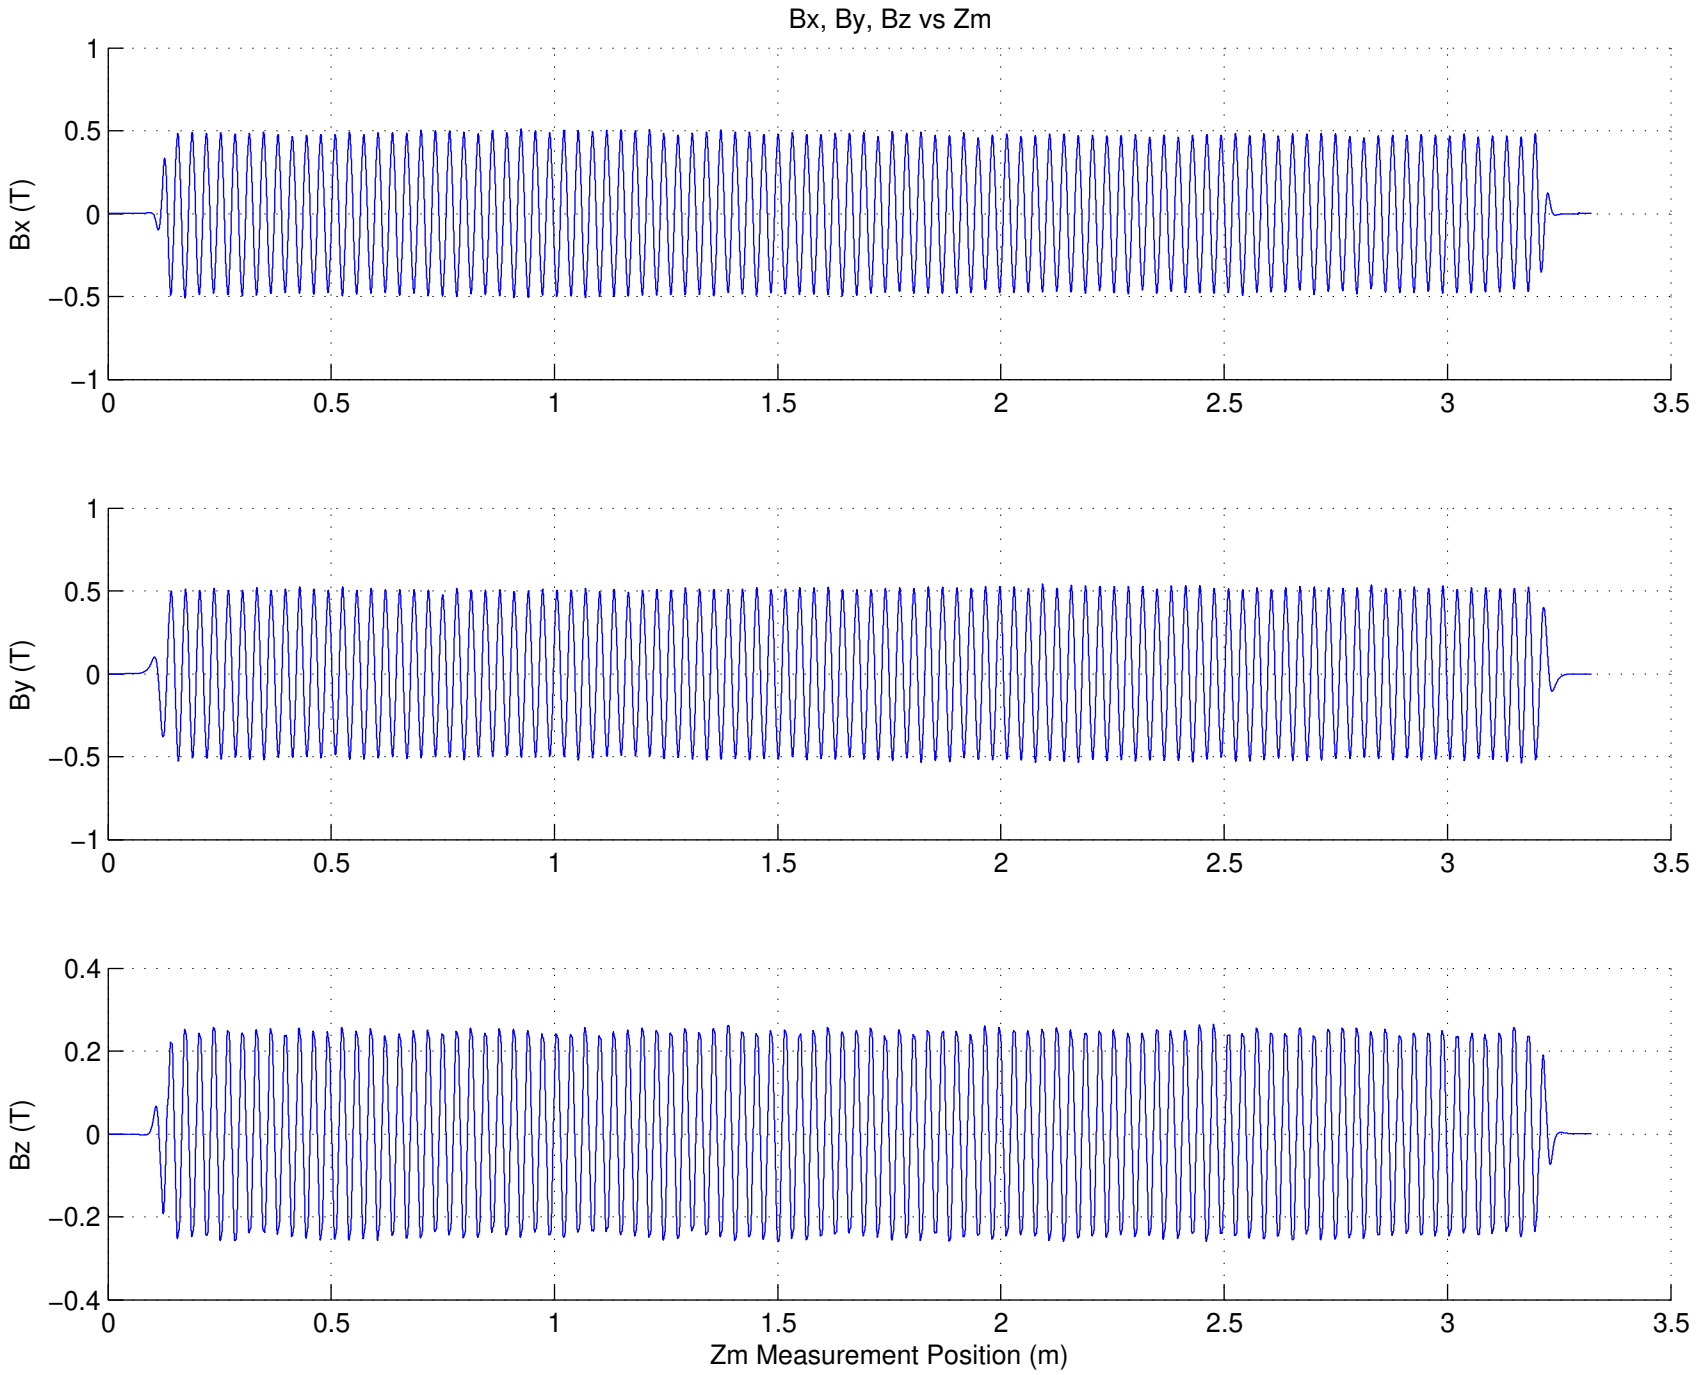
Bx, By, Bz vs Zm
Bx (T)
By (T)
Bz (T)
Zm Measurement Position (m)
1
0.5
0
−0.5
−1
0.4
0.2
−0.2
−0.4
0
0.5
1
1.5
2
2.5
3
3.5

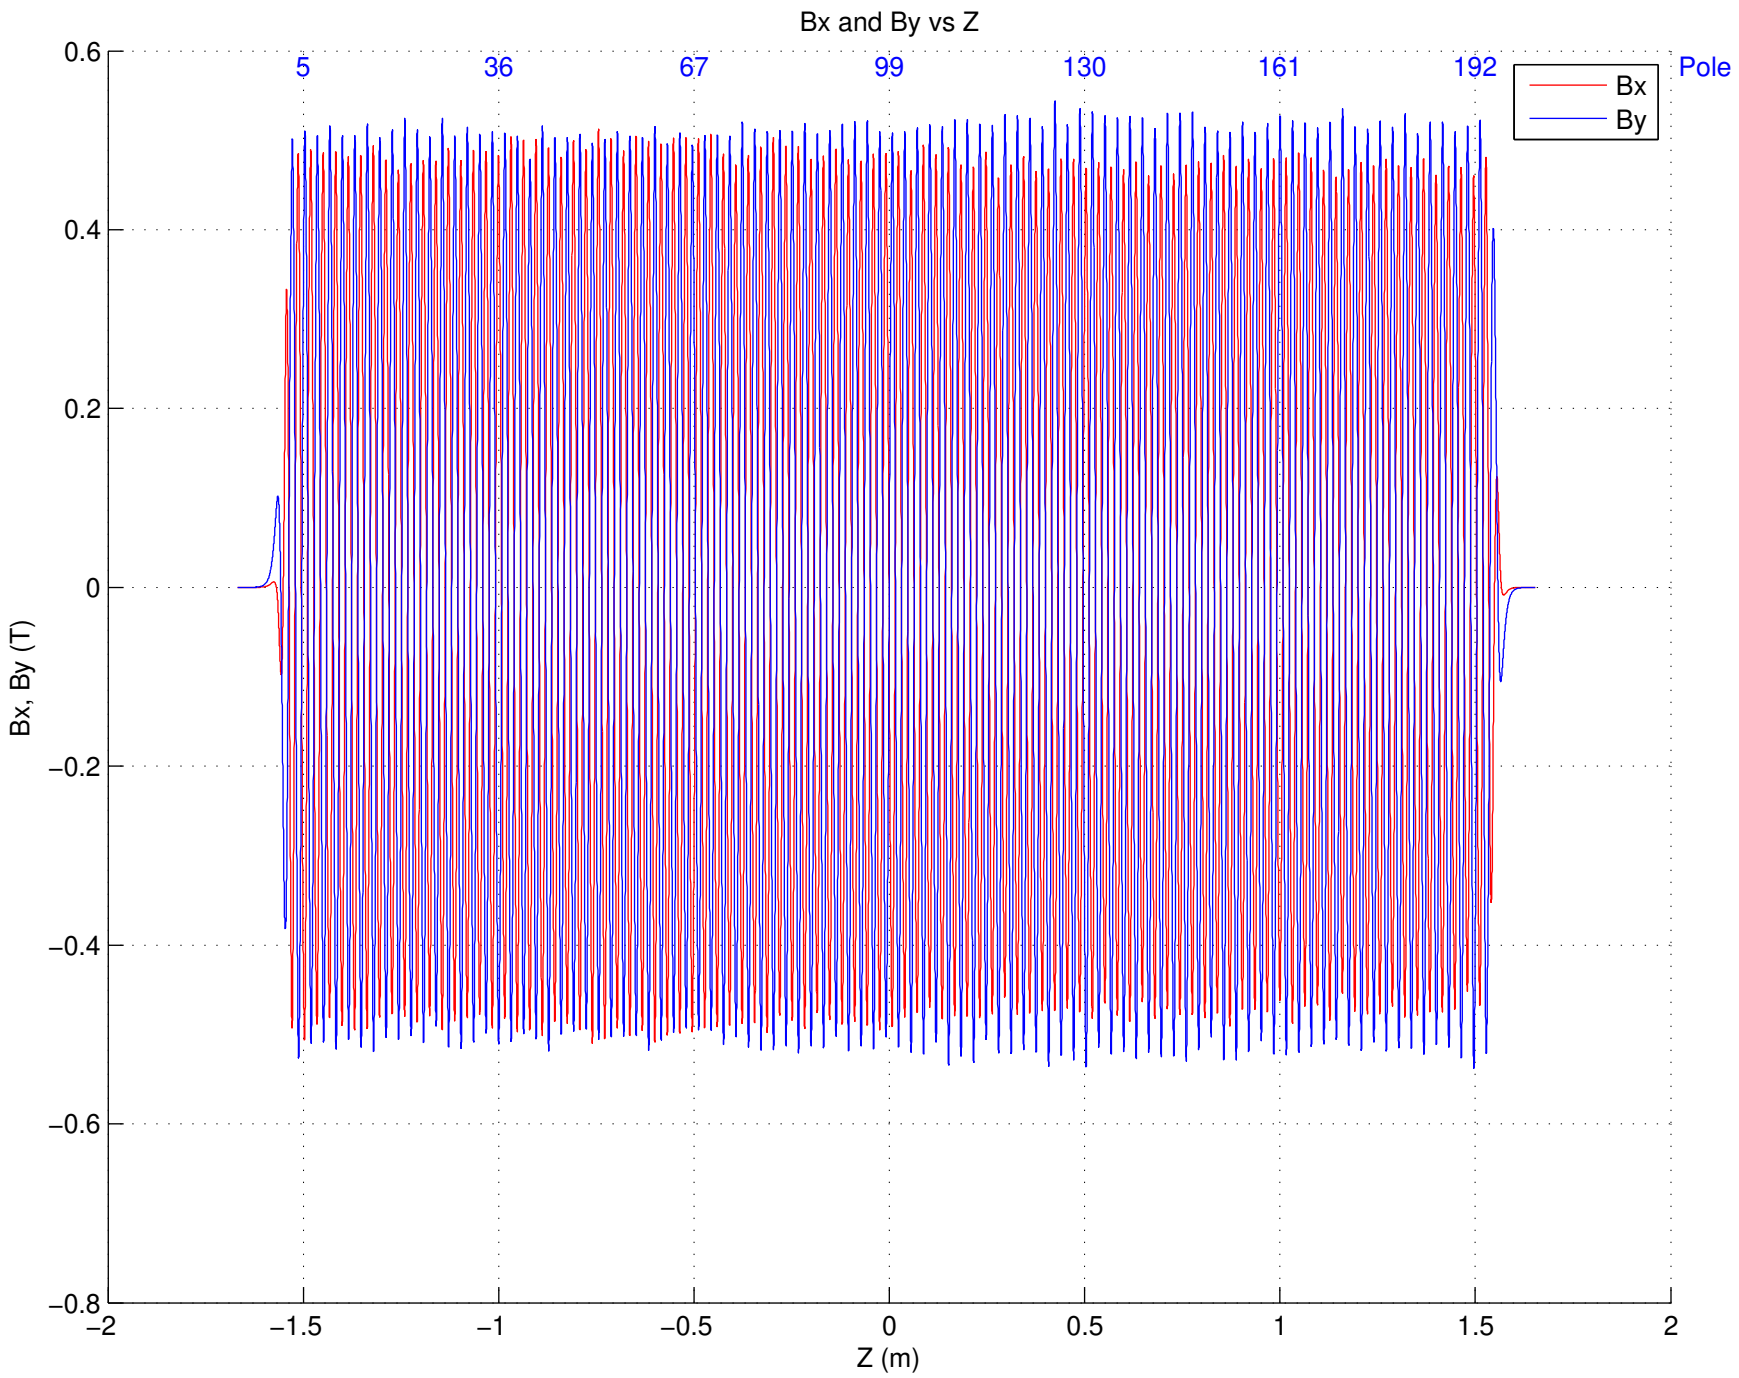
Bx and By vs Z
5
36
67
99
130
161
192
Pole
Bx
By
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
Bx, By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

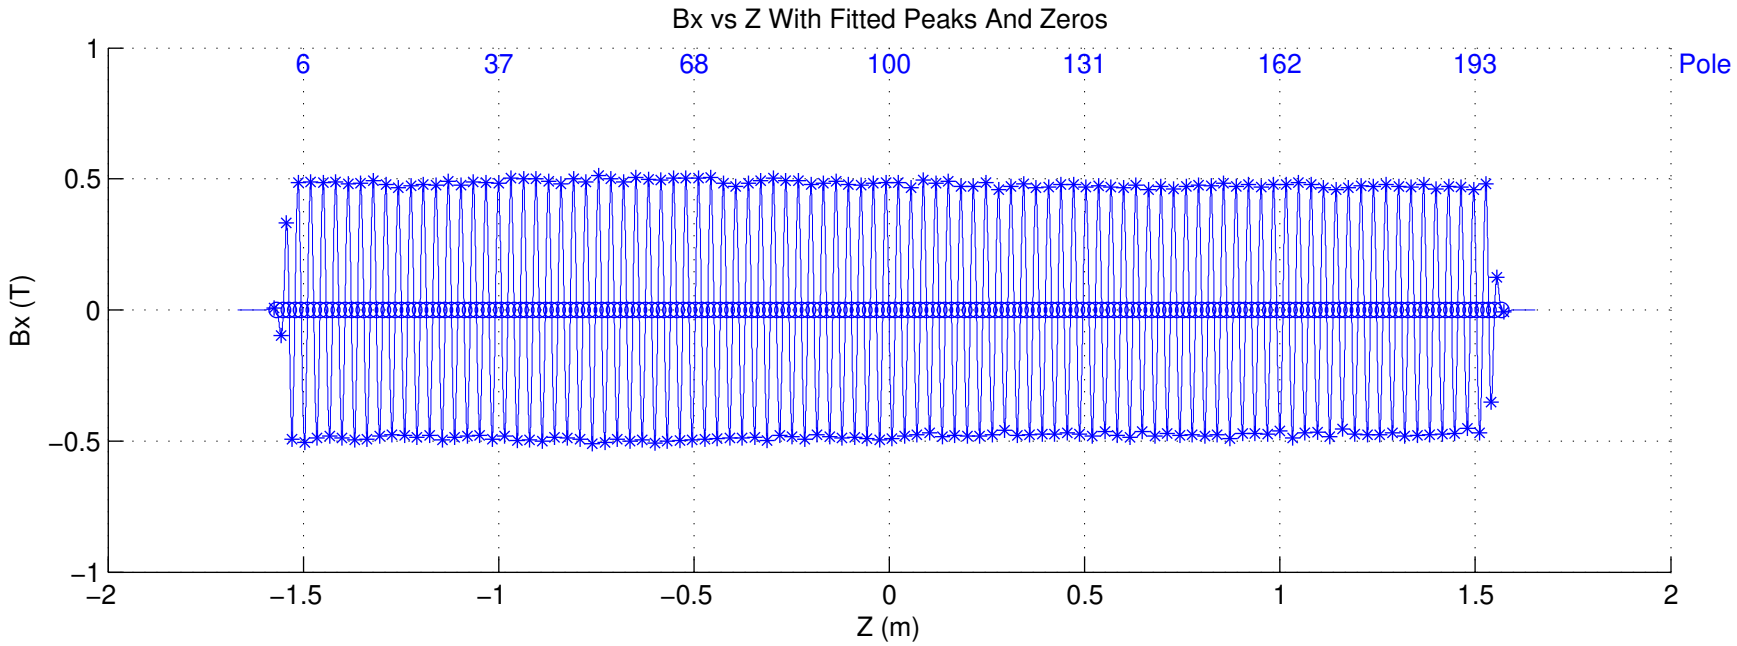
Bx vs Z With Fitted Peaks And Zeros
6
37
68
100
131
162
193
Pole
1
0.5
0
−0.5
−1
Bx (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

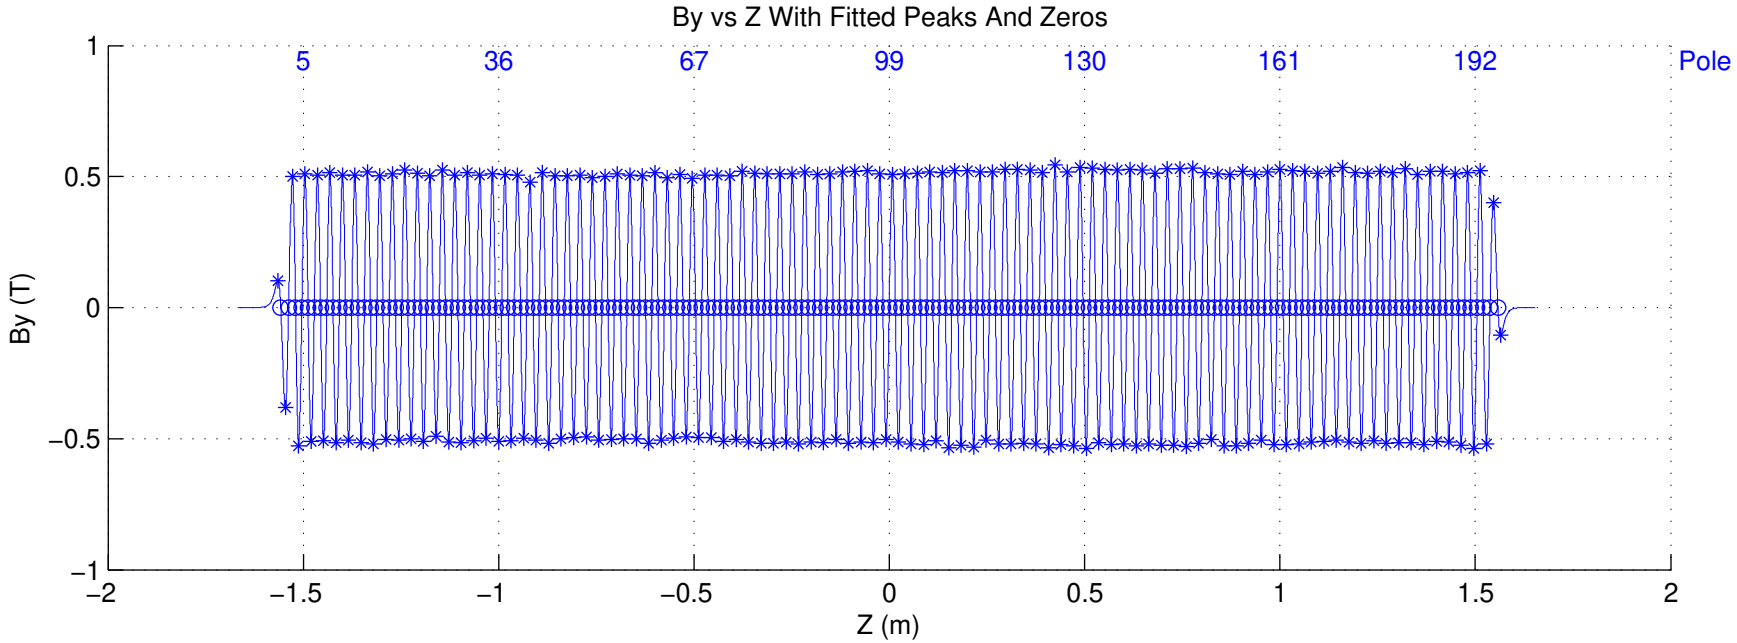
By vs Z With Fitted Peaks And Zeros
5
36
67
99
130
161
192
Pole
1
0.5
0
−0.5
−1
By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

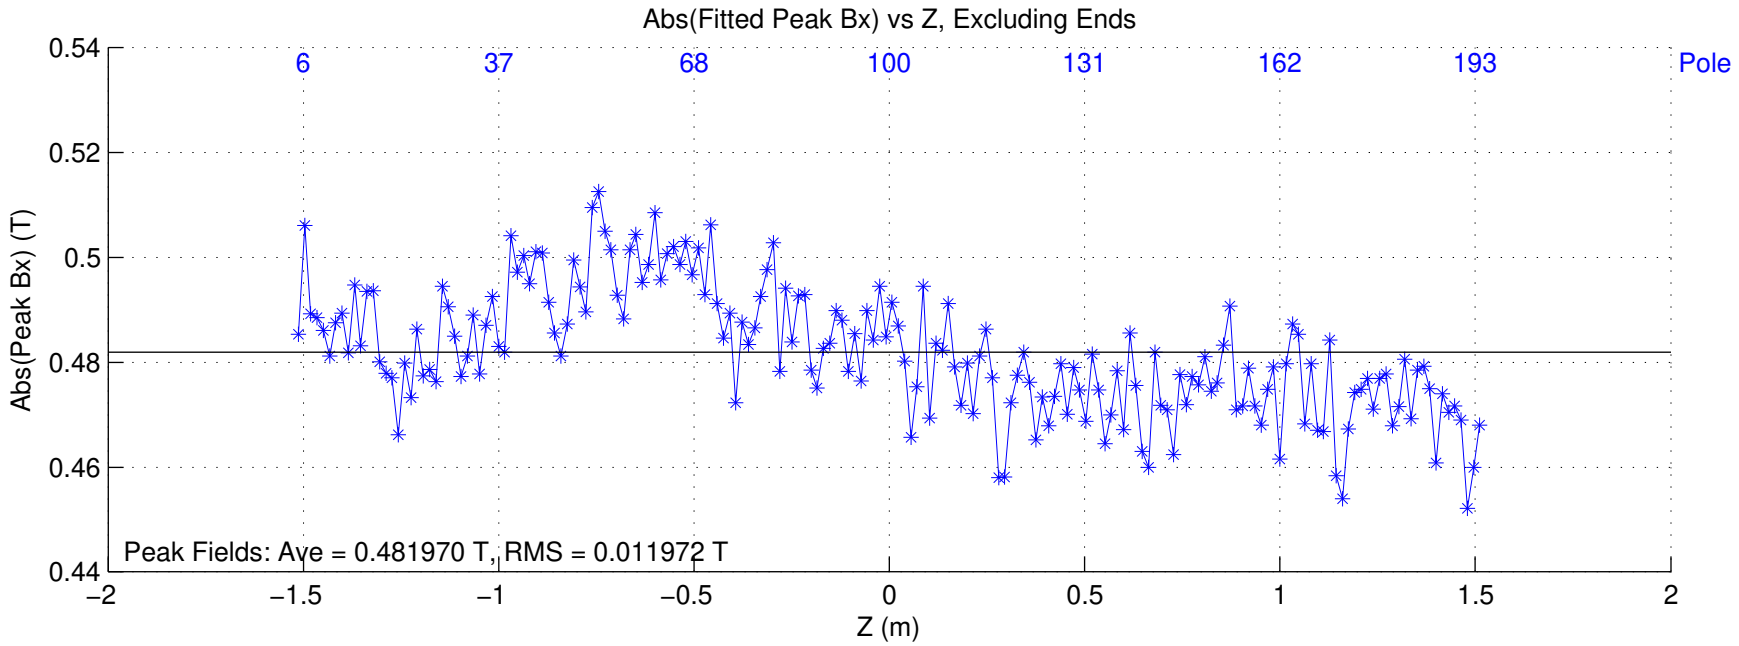
Abs(Fitted Peak Bx) vs Z, Excluding Ends
6
37
68
100
131
162
193
Pole
0.54
0.52
0.5
0.48
0.46
0.44
Abs(Peak Bx) (T)
Peak Fields: Ave = 0.481970 T, RMS = 0.011972 T
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

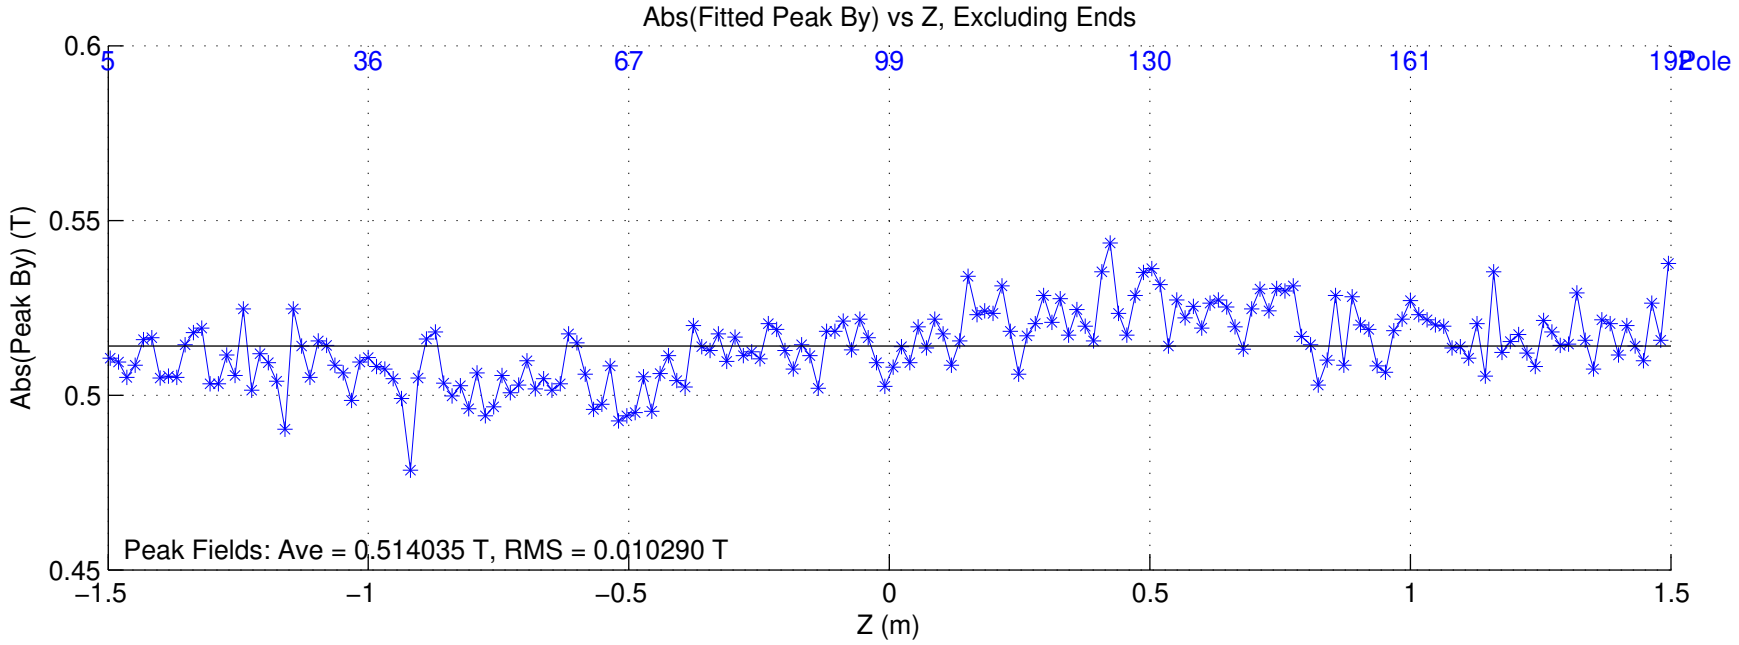
Abs(Fitted Peak By) vs Z, Excluding Ends
5
36
67
99
130
161
192
Pole
0.6
0.55
0.5
0.45
Abs(Peak By) (T)
Peak Fields: Ave = 0.514035 T, RMS = 0.010290 T
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

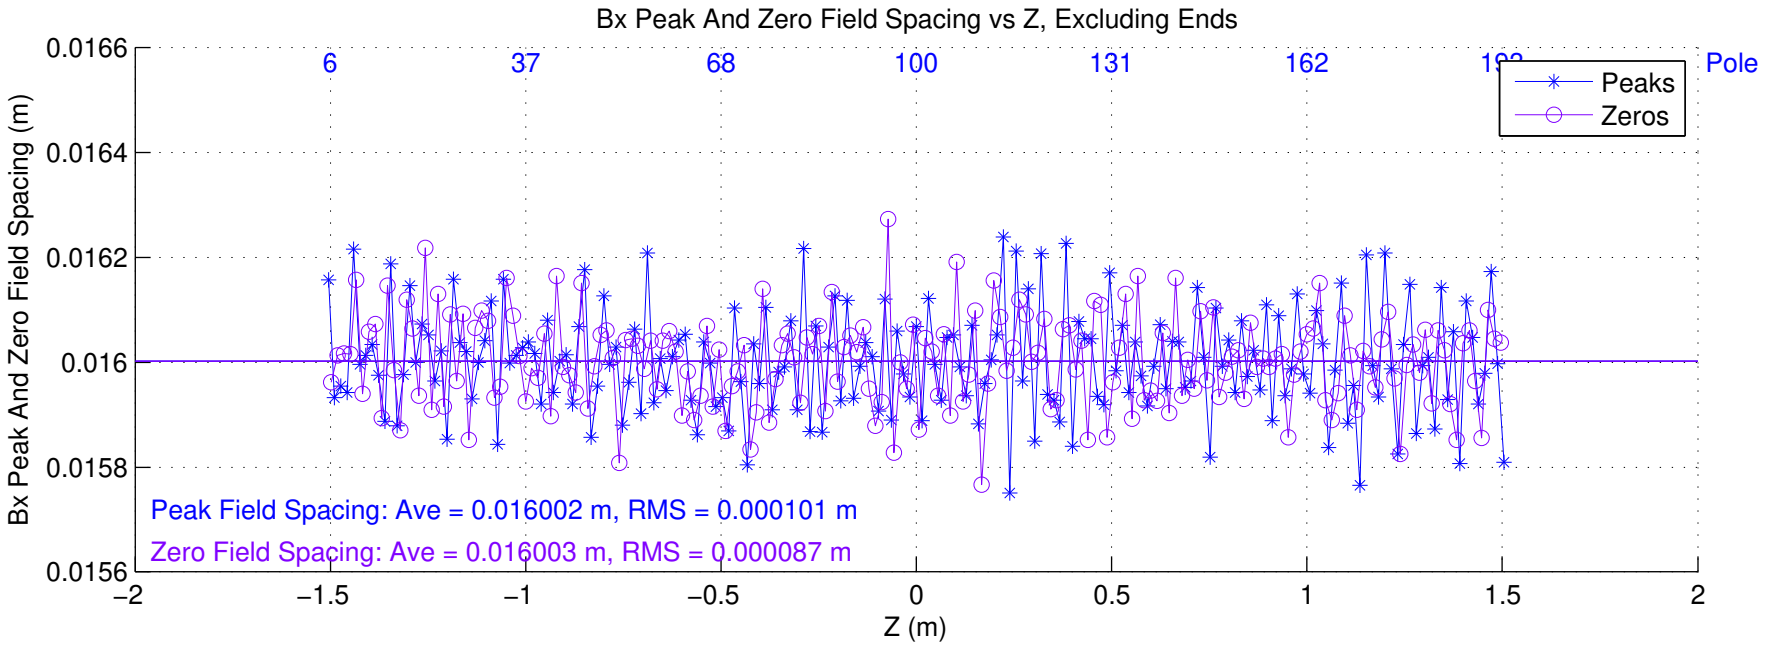
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016002 m, RMS = 0.000101 m
Zero Field Spacing: Ave = 0.016003 m, RMS = 0.000087 m

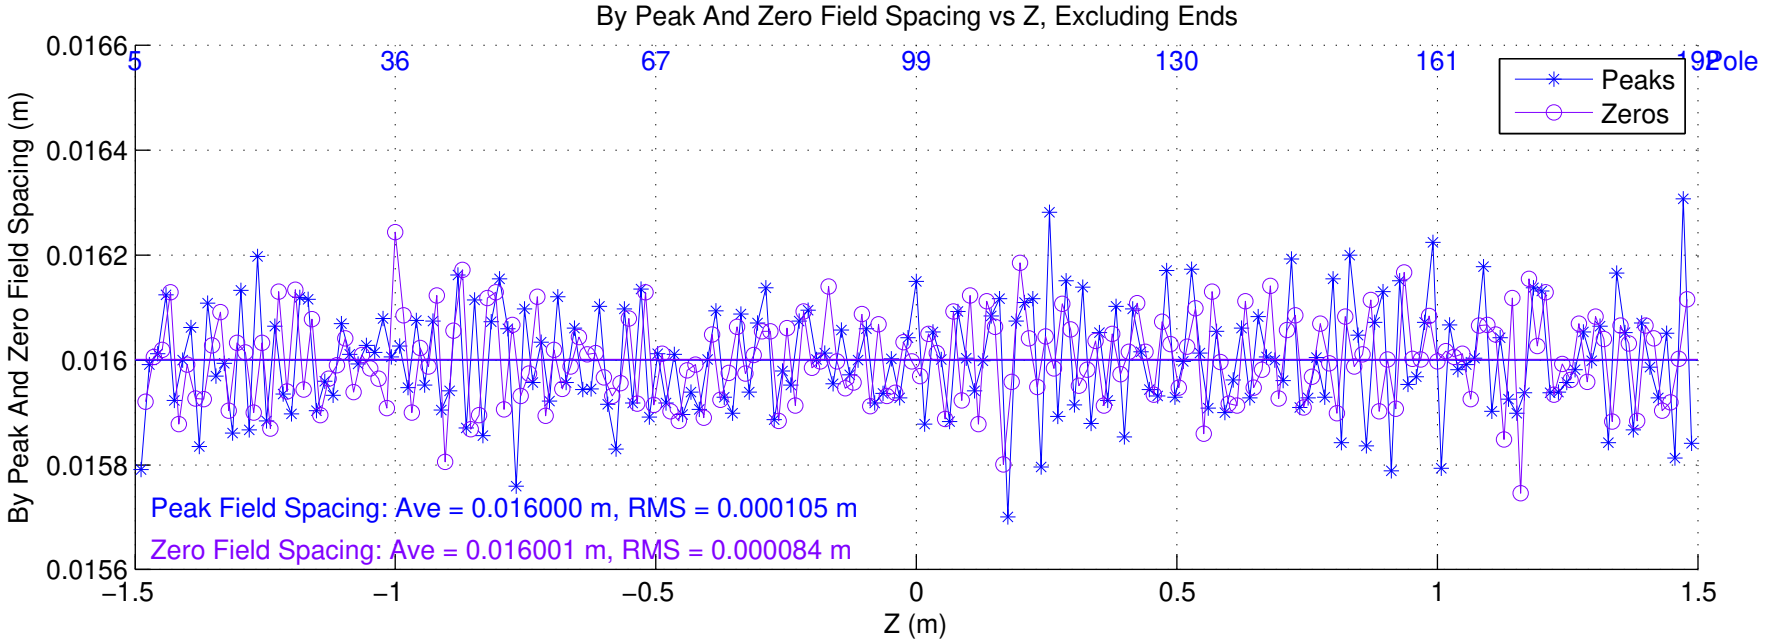
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016000 m, RMS = 0.000105 m
Zero Field Spacing: Ave = 0.016001 m, RMS = 0.000084 m

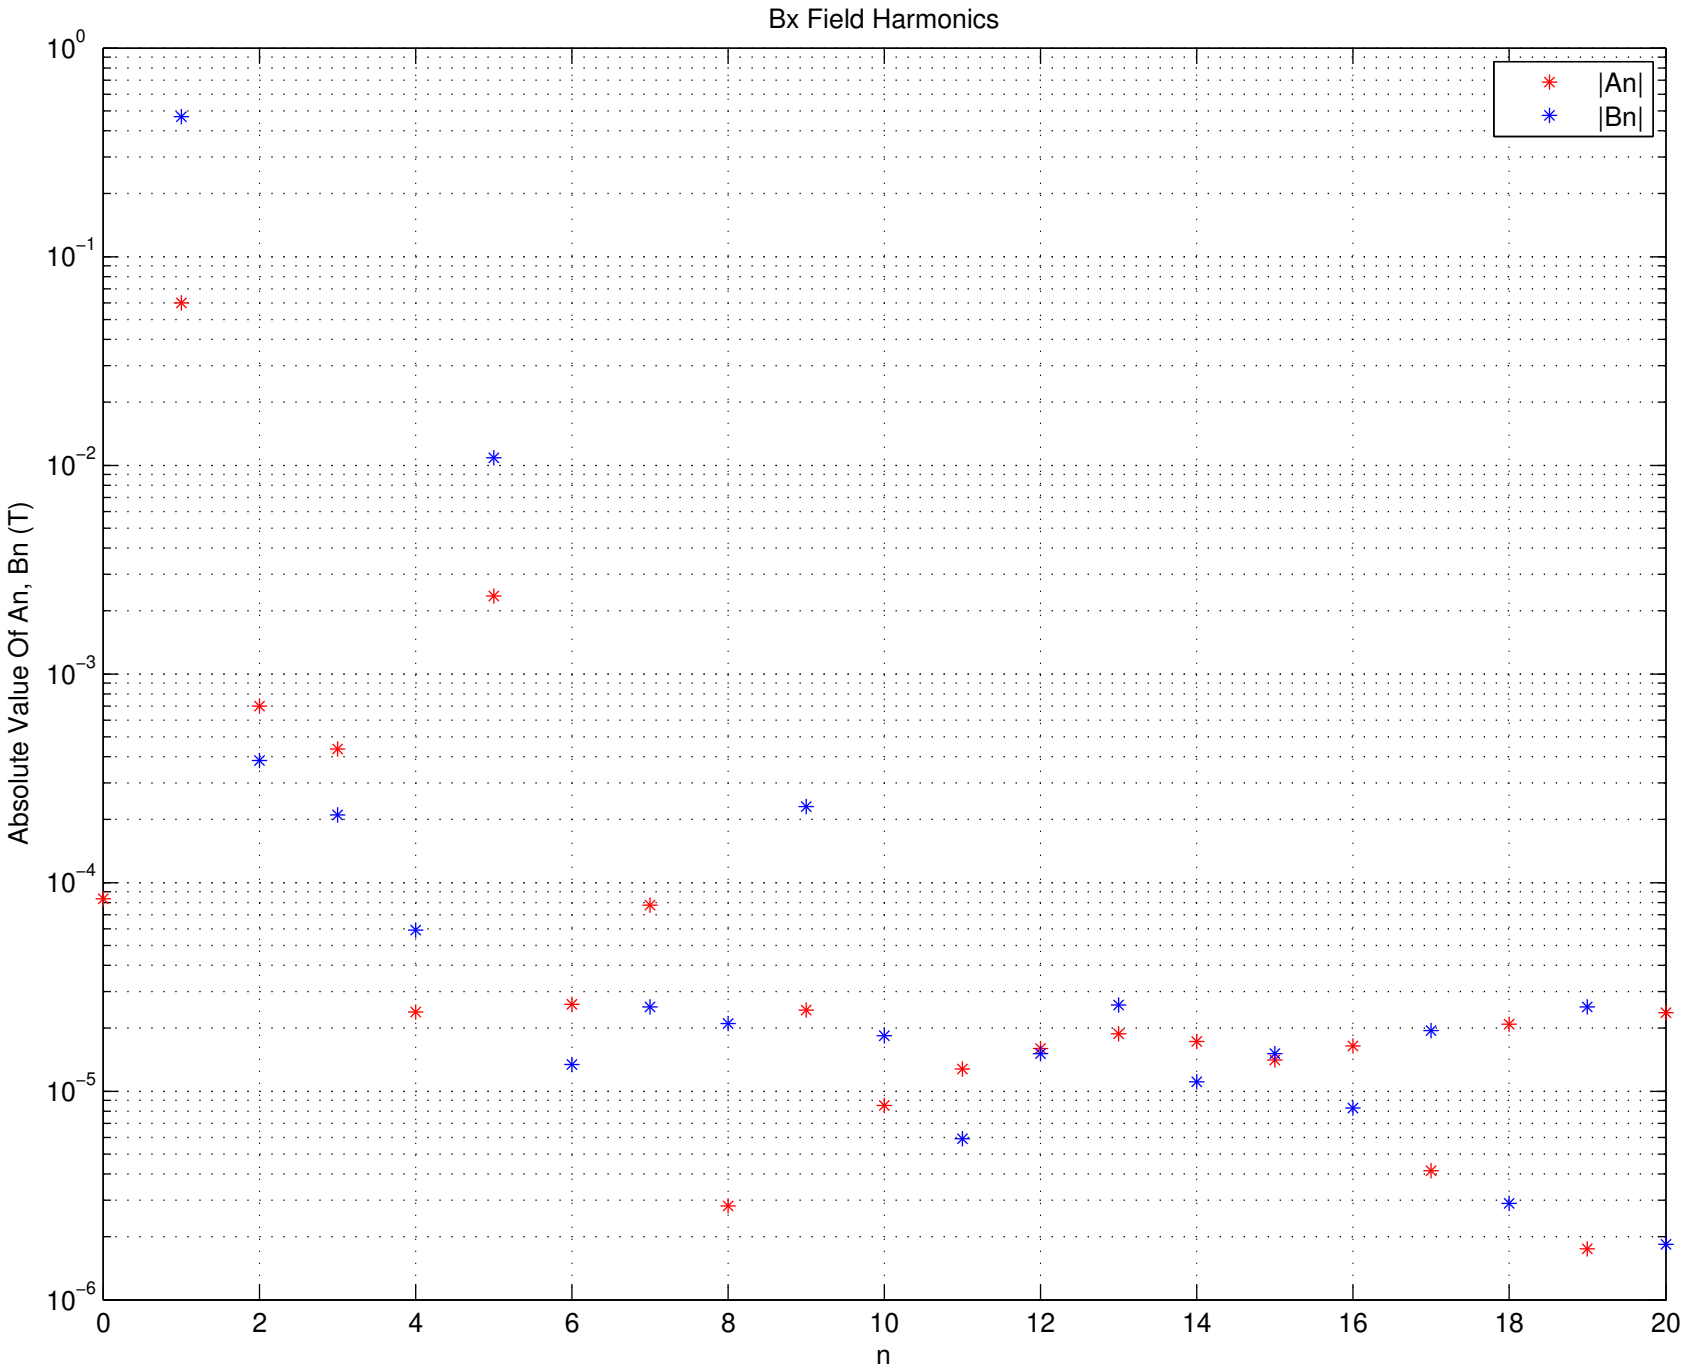
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
$10^{0}$
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
$10^{-5}$
$10^{-6}$
0
2
4
6
8
10
12
14
16
18
20

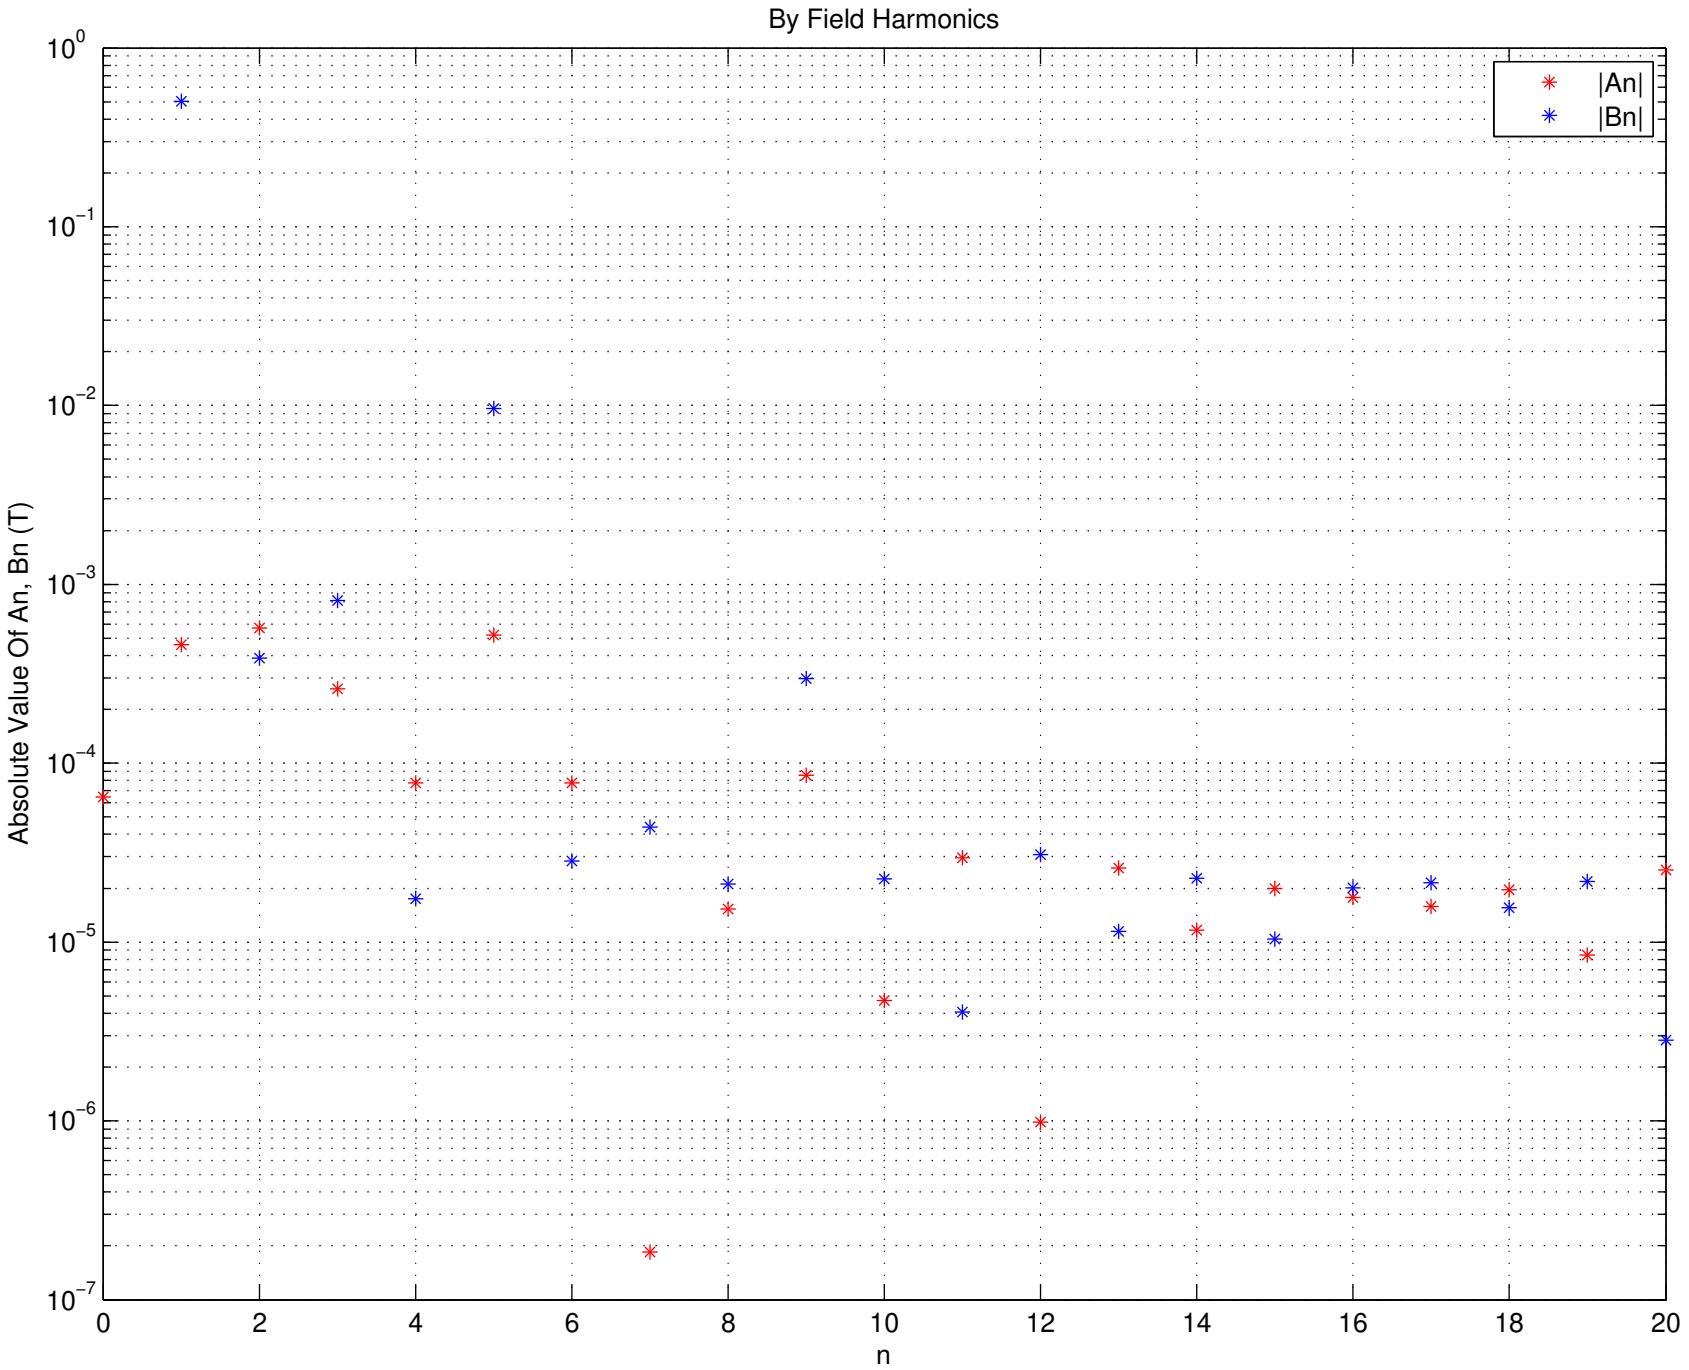
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
$10^{0}$
$10^{-1}$
$10^{-2}$
$10^{-3}$
$10^{-4}$
$10^{-5}$
$10^{-6}$
$10^{-7}$
0
2
4
6
8
10
12
14
16
18
20

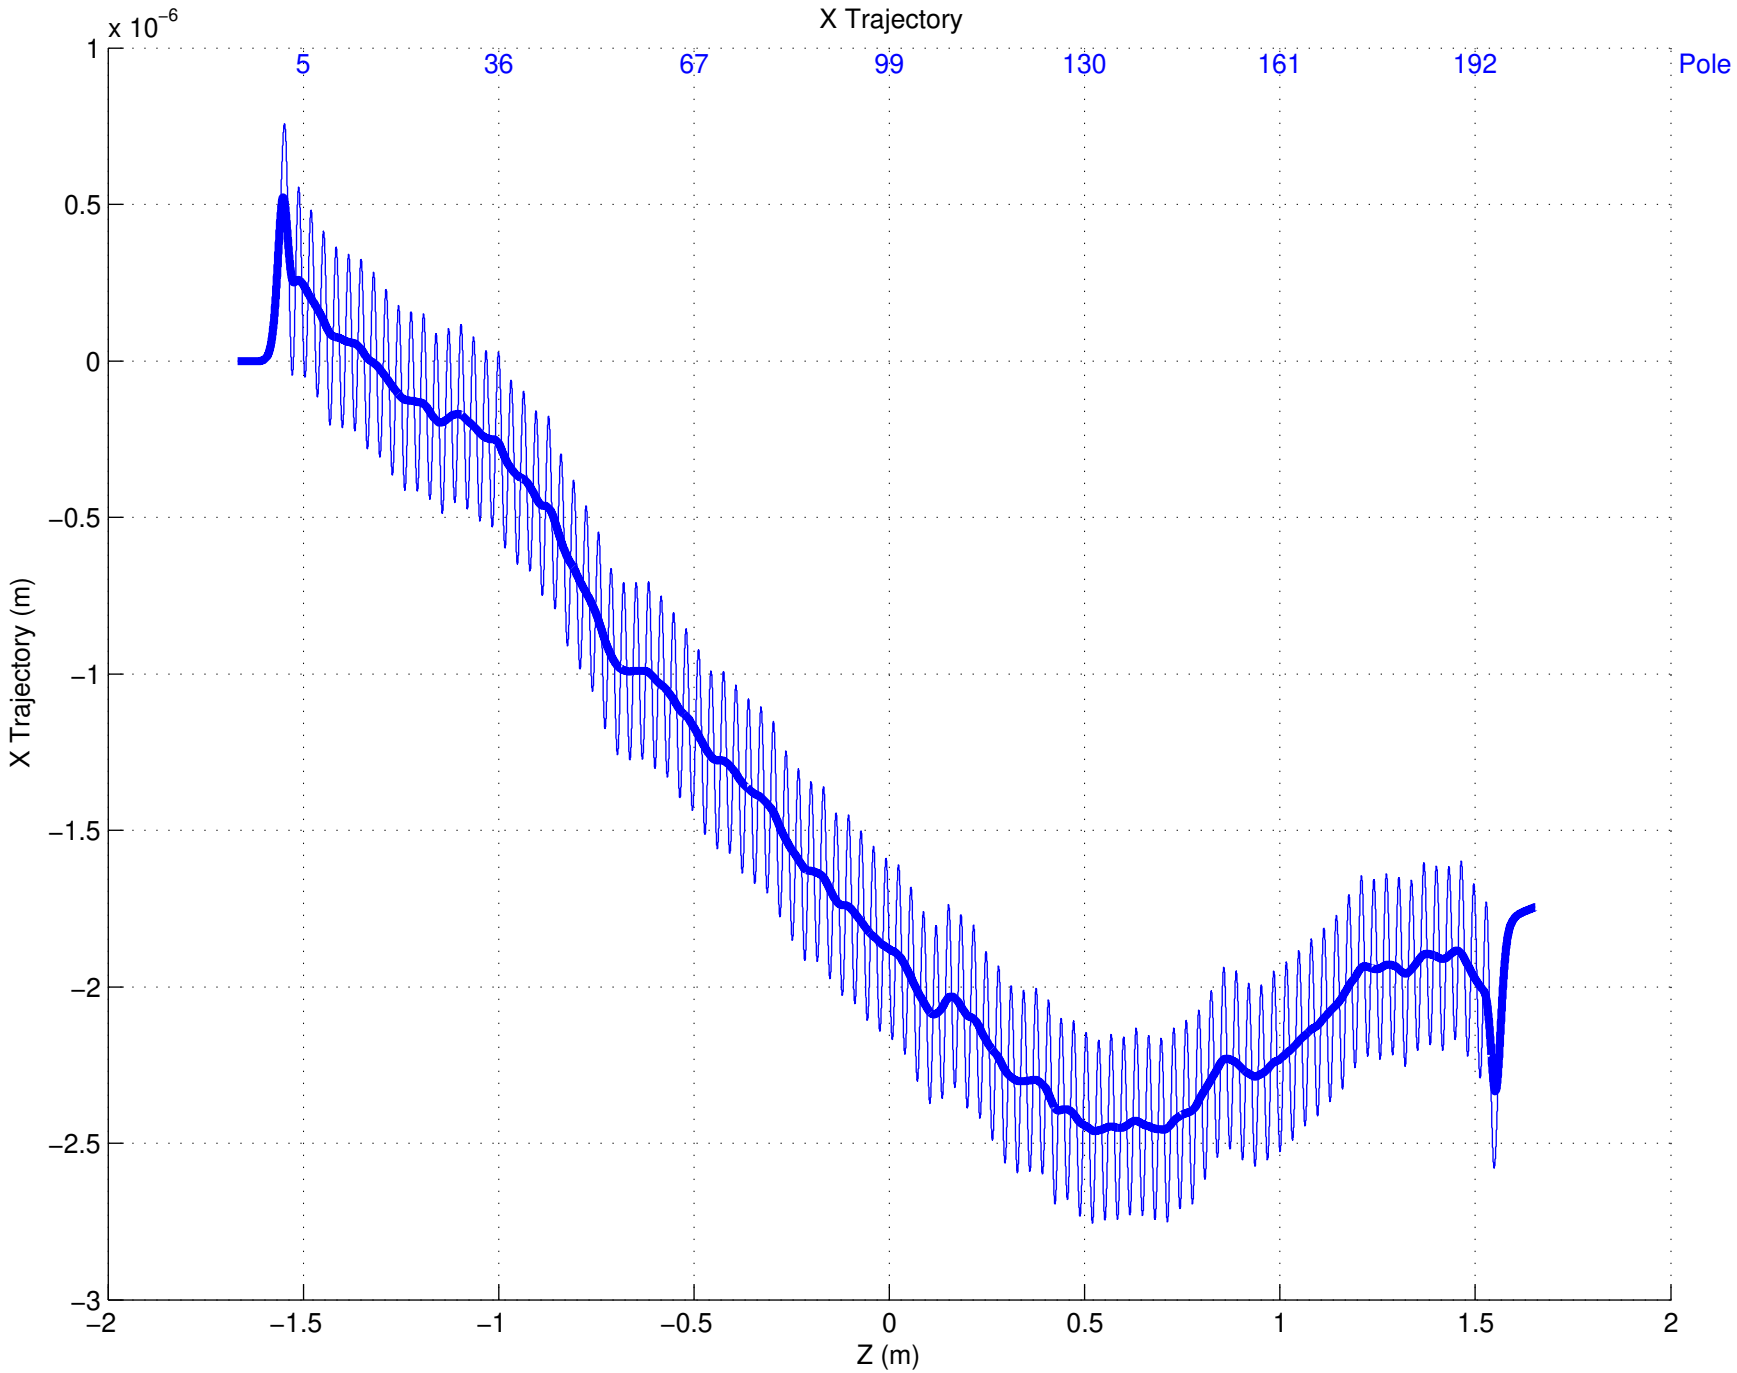
X Trajectory
x 10^-6
5
36
67
99
130
161
192
Pole
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
X Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

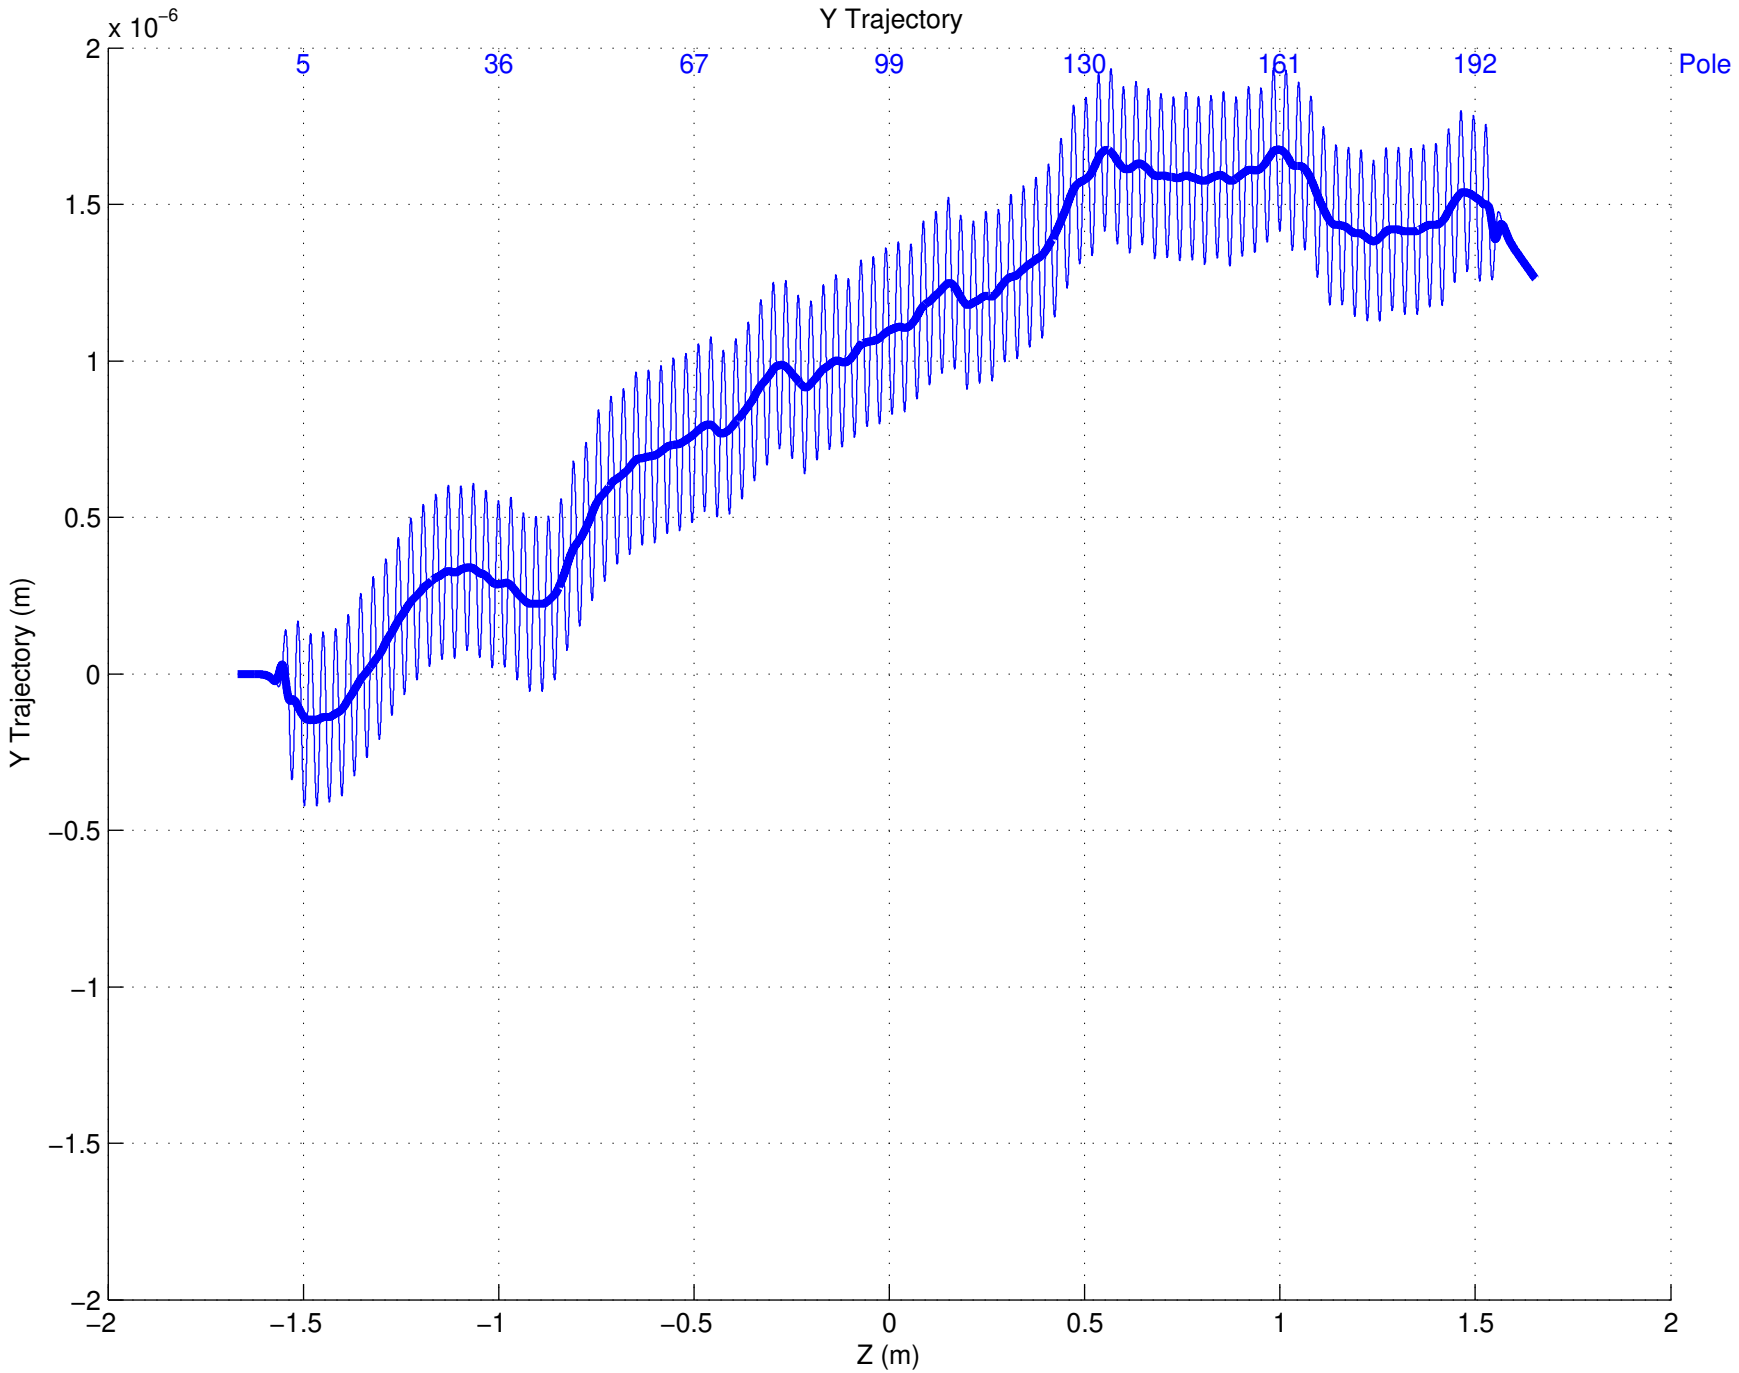
Y Trajectory
x 10^-6
5
36
67
99
130
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

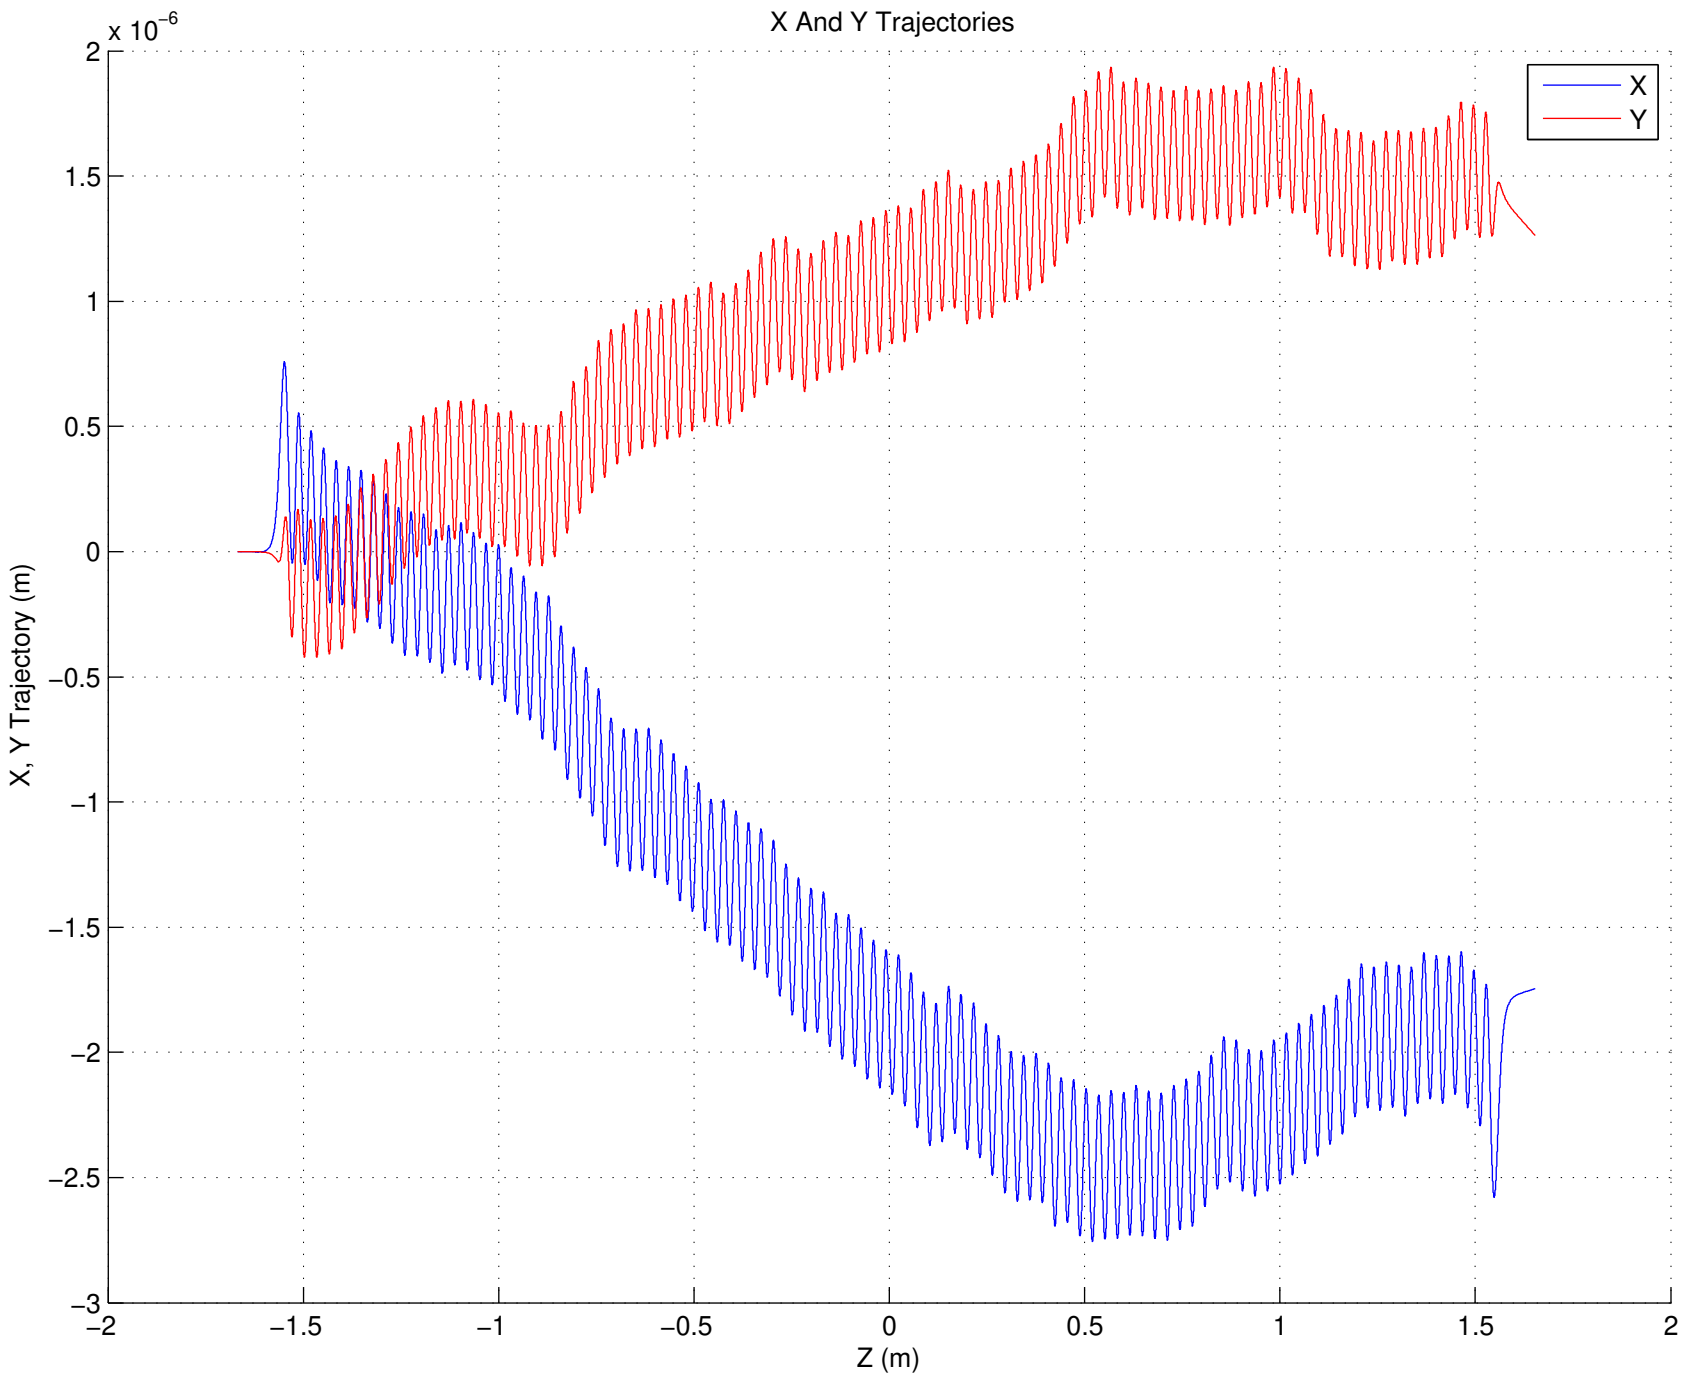
X And Y Trajectories
x 10^-6
X
Y
X, Y Trajectory (m)
Z (m)
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

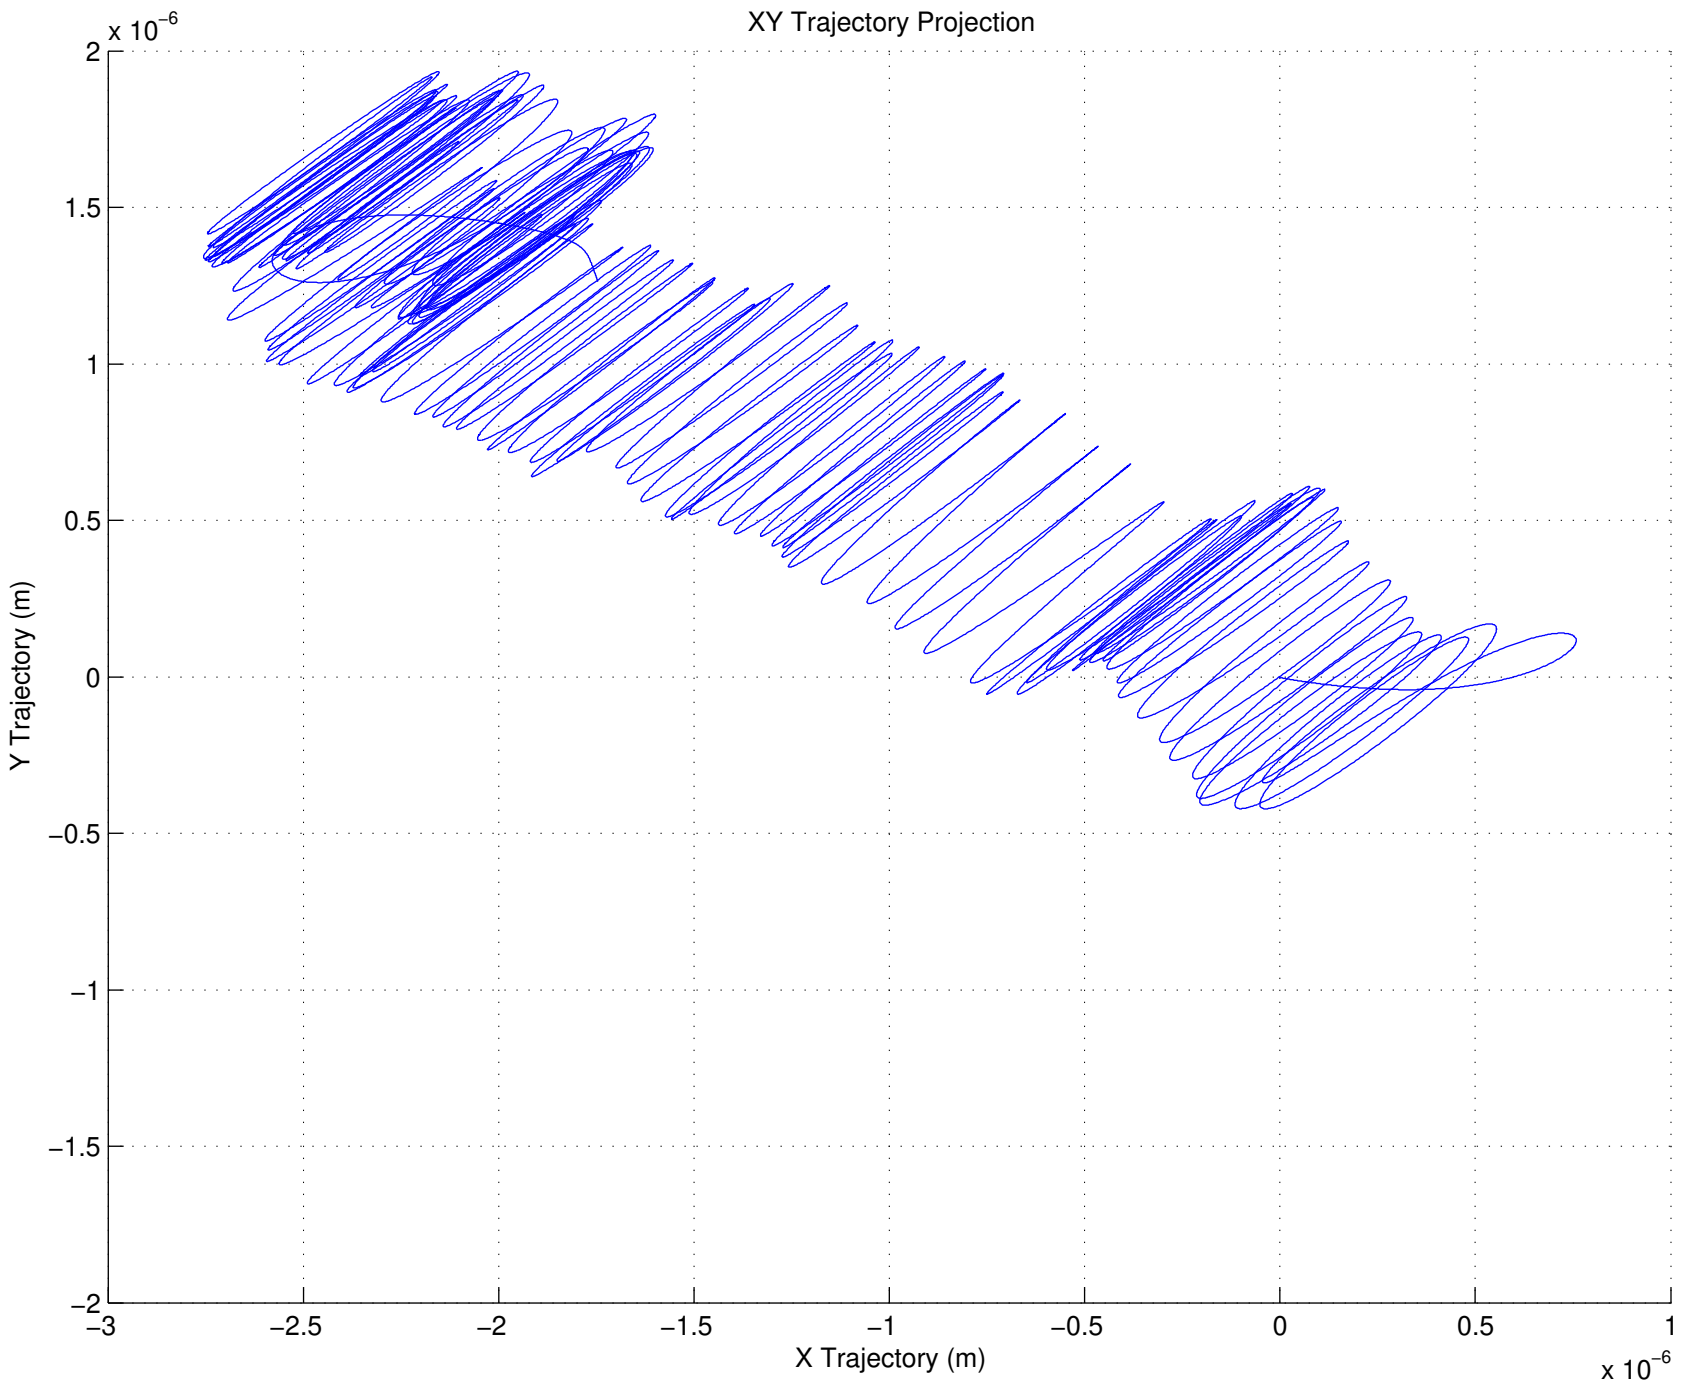
XY Trajectory Projection
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−3
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
X Trajectory (m)
x 10^-6

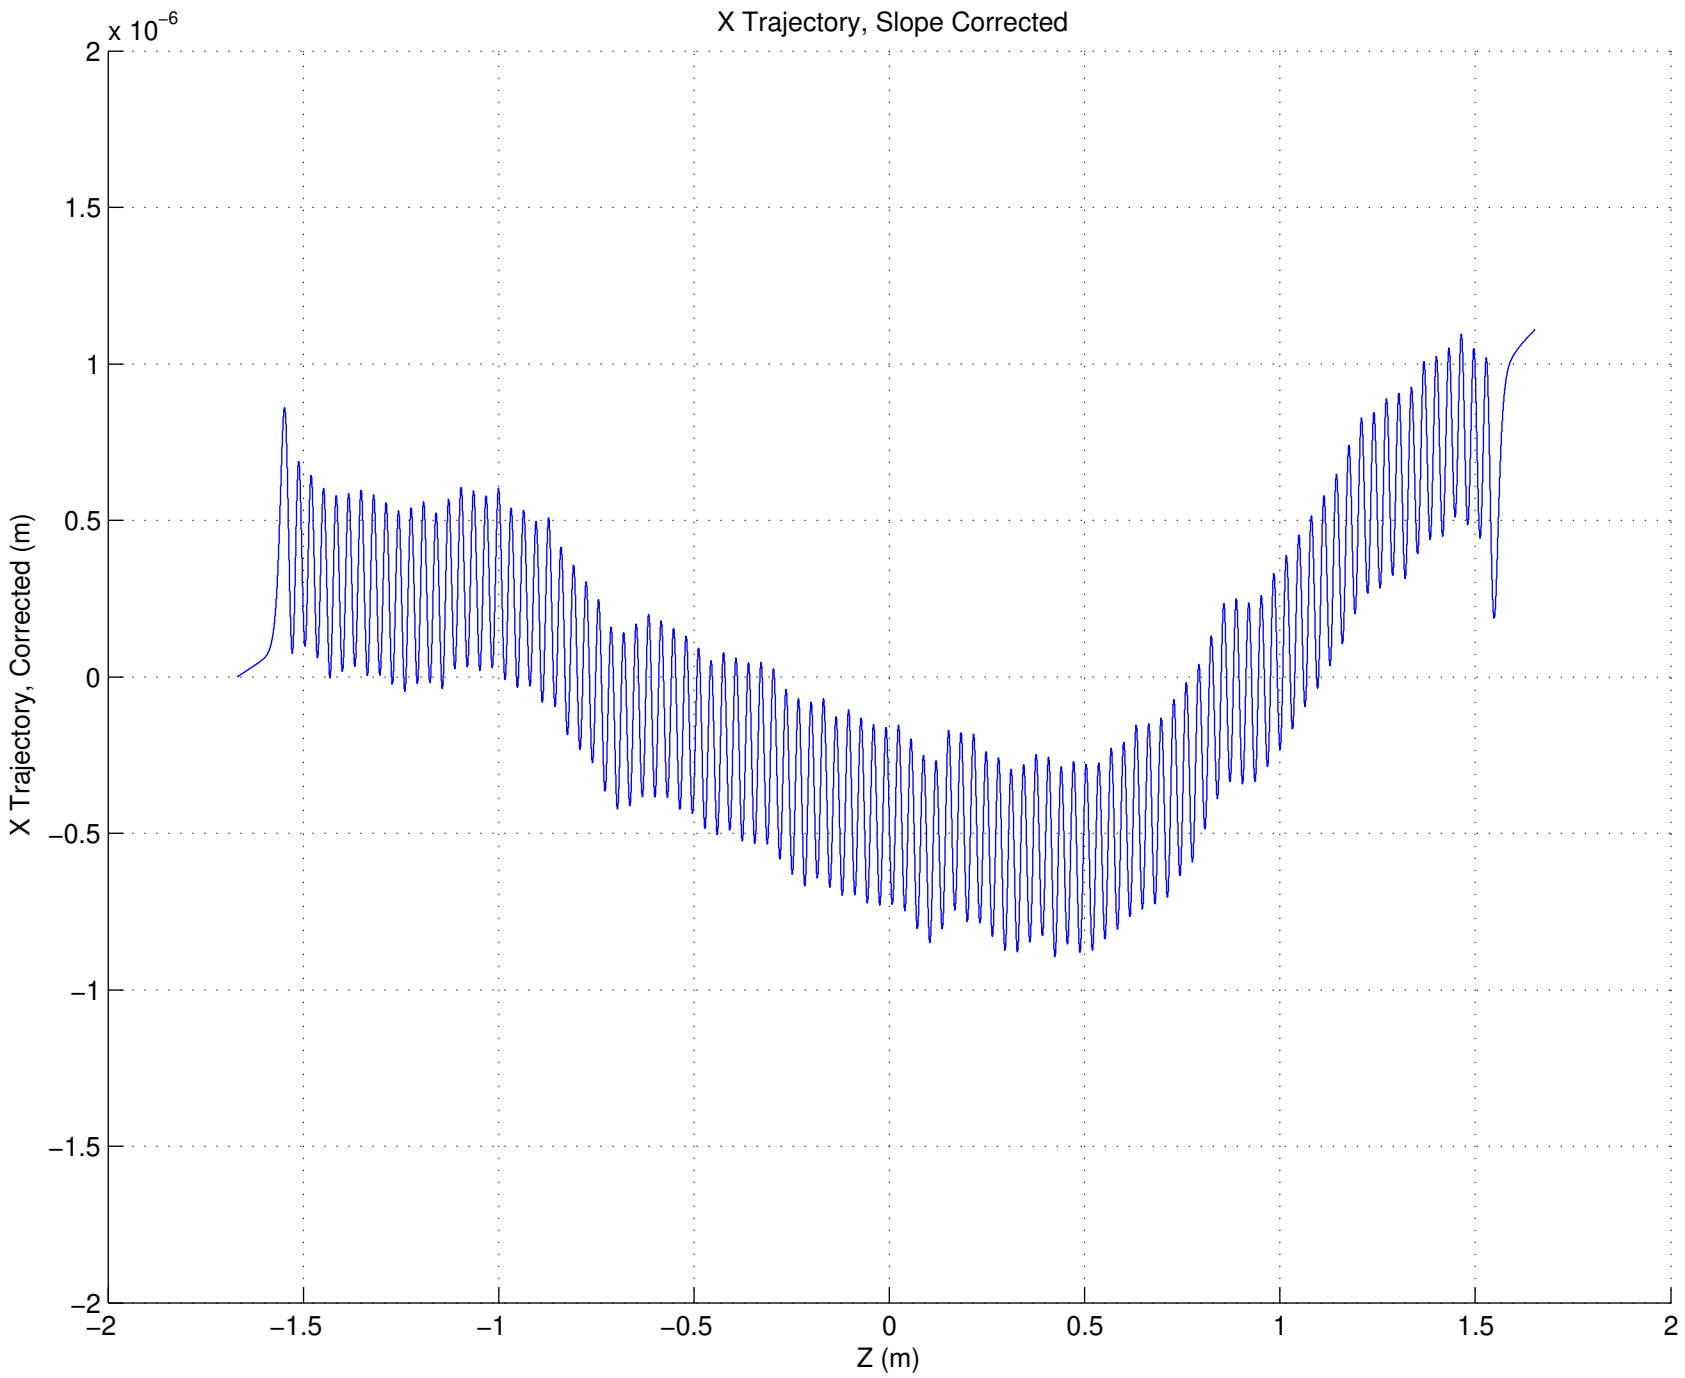
X Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

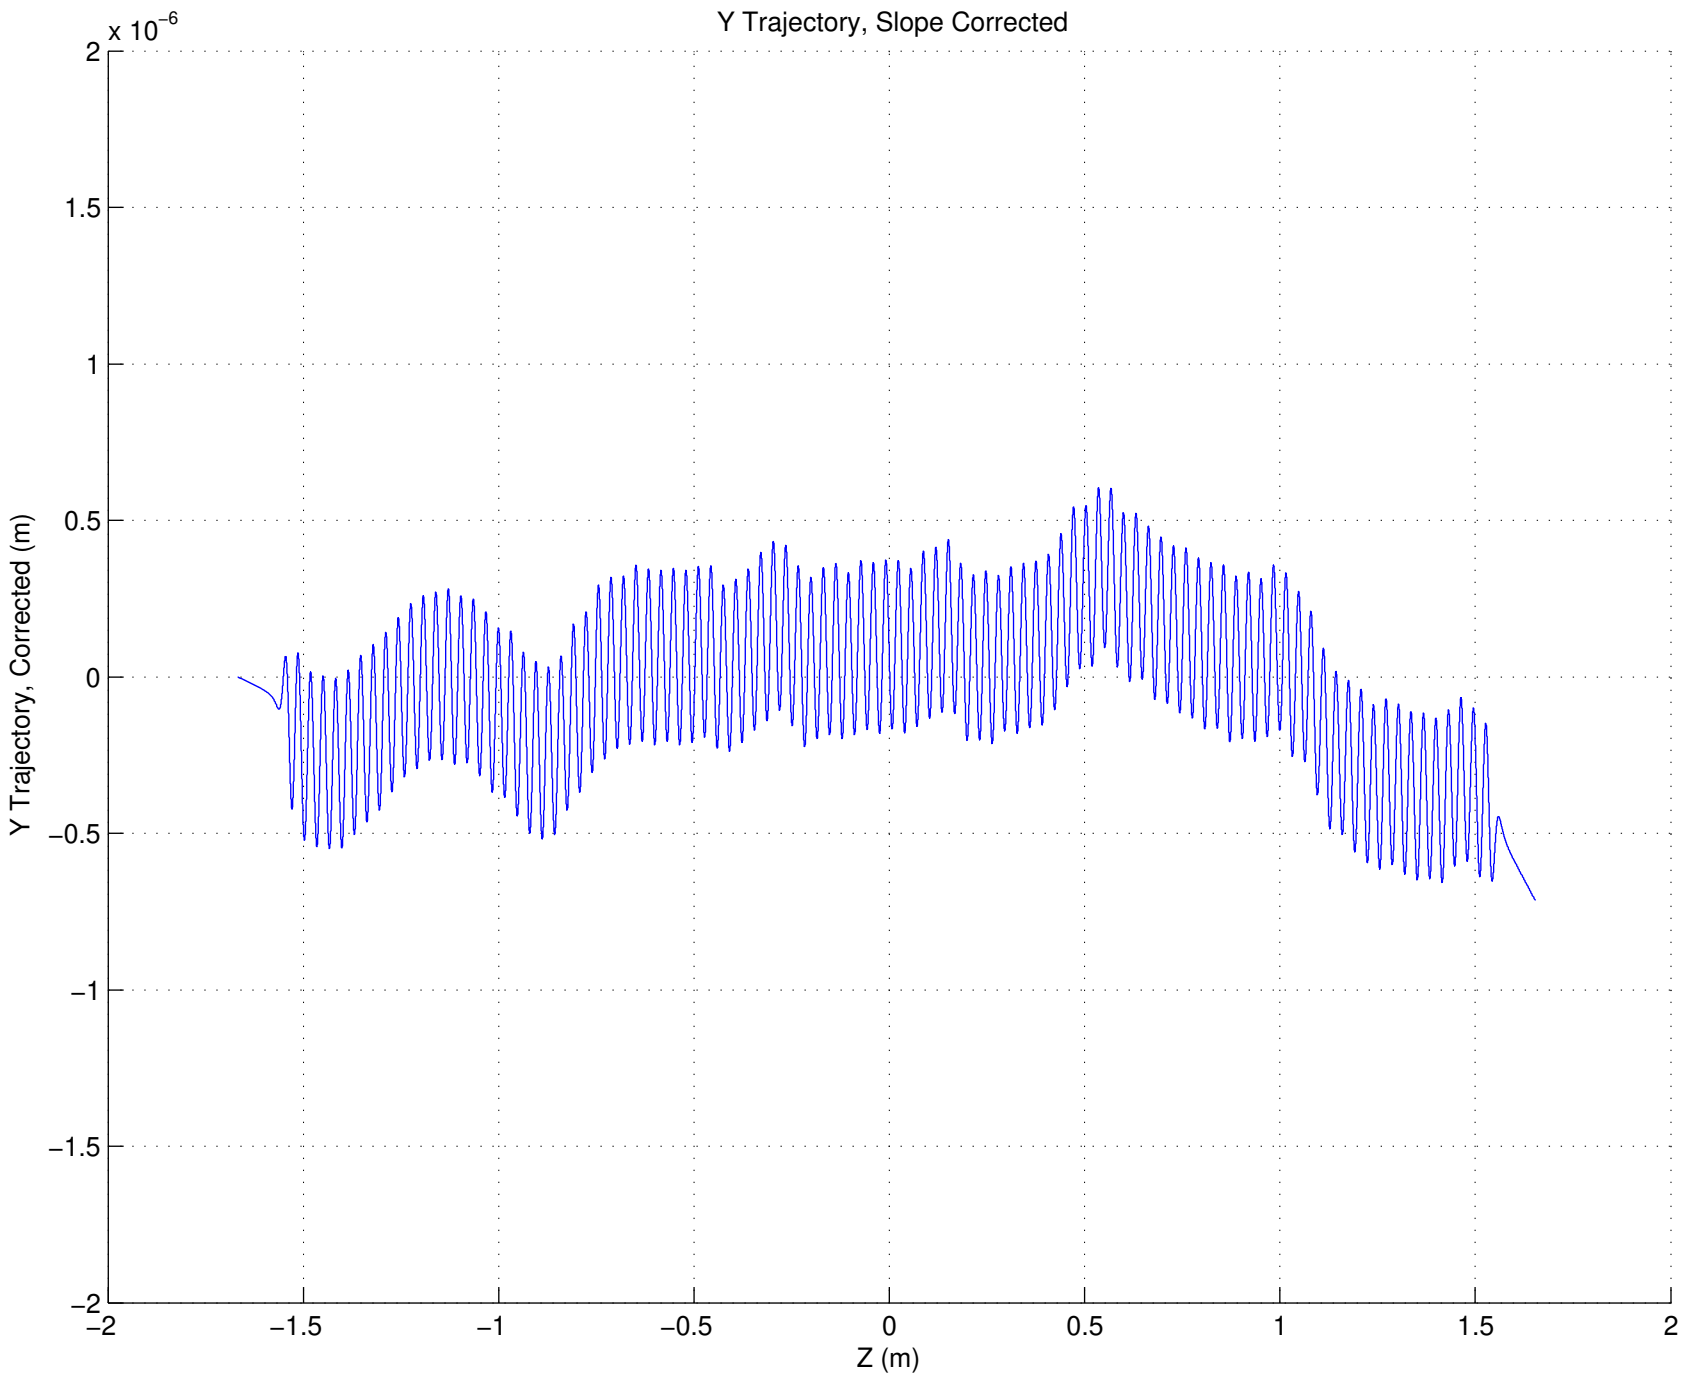
Y Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

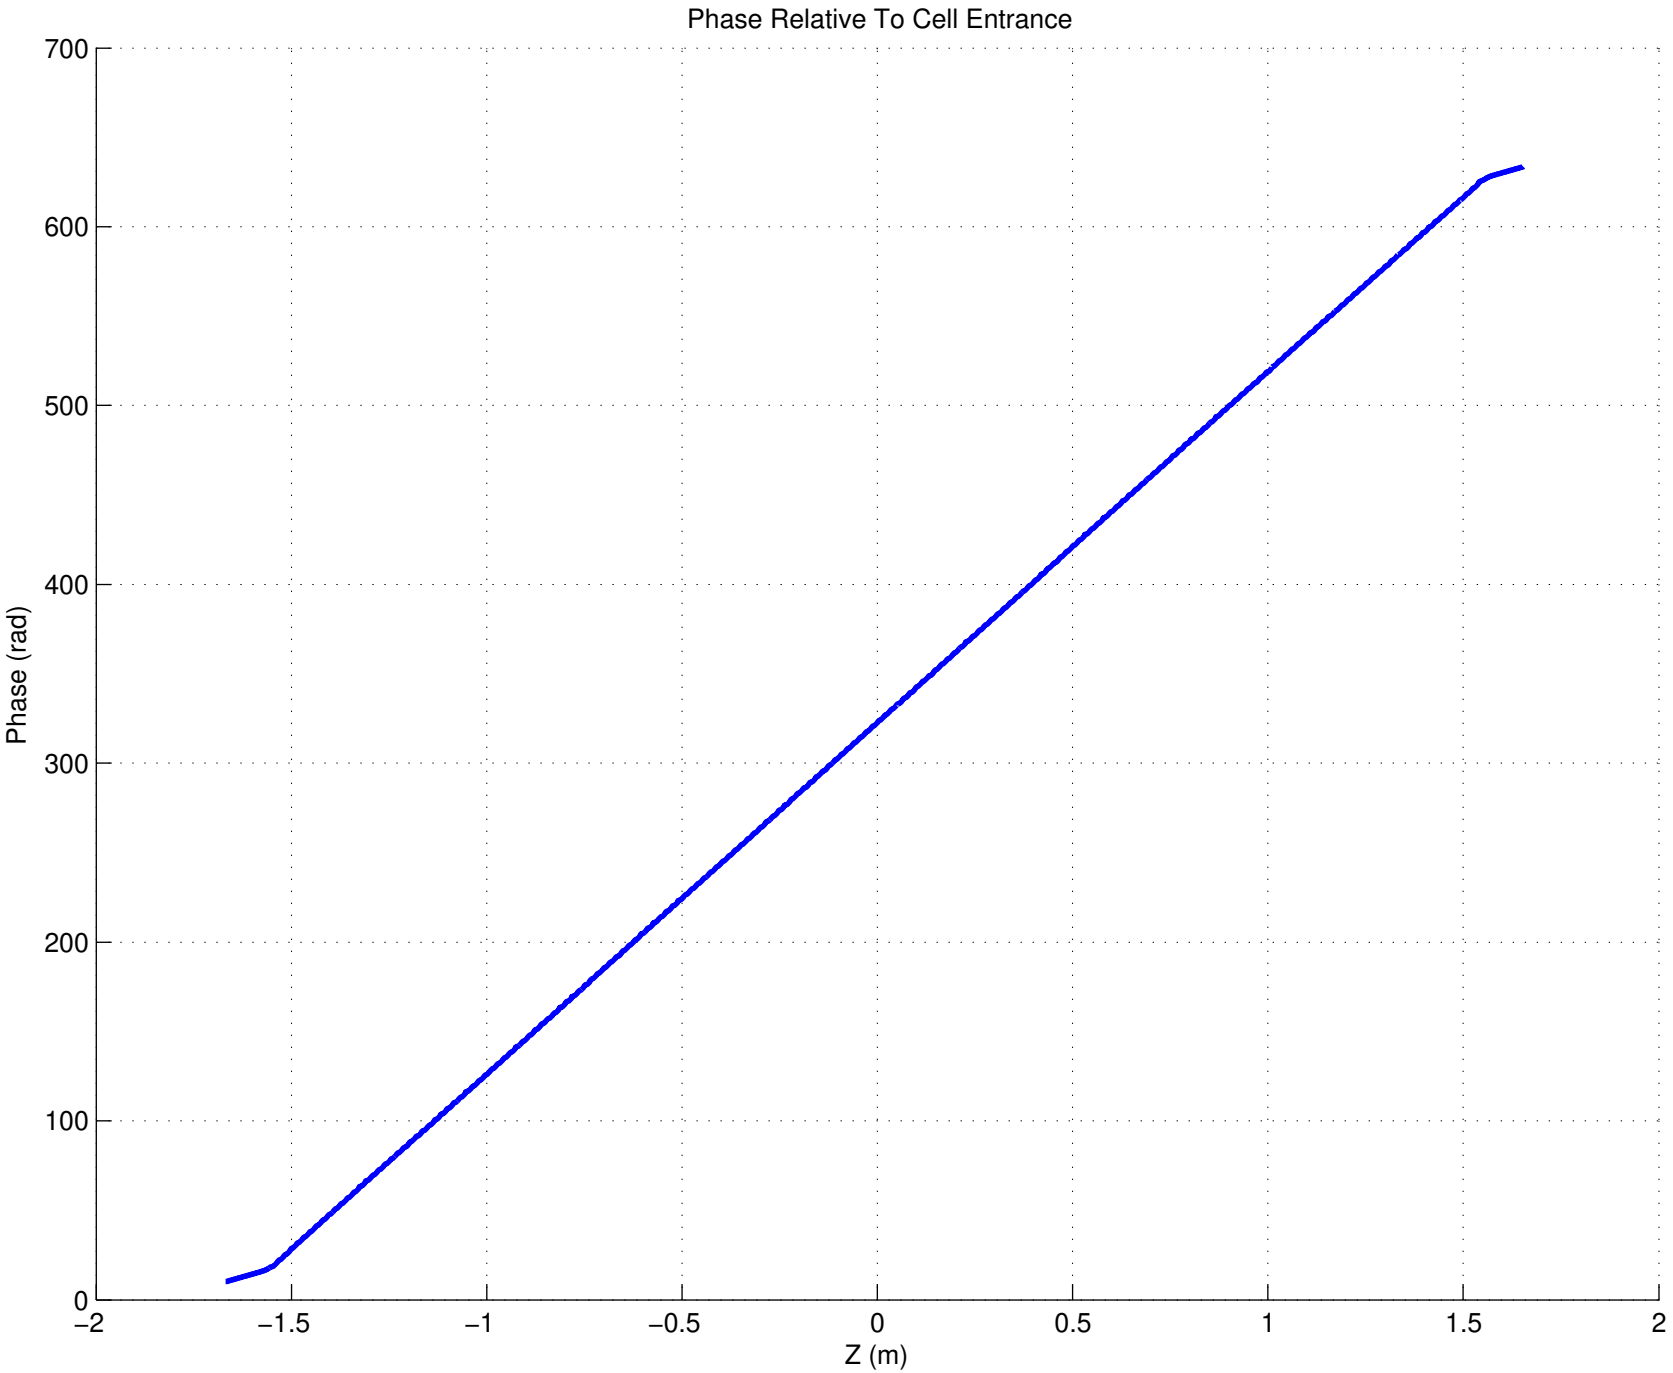
Phase Relative To Cell Entrance
Phase (rad)
Z (m)
700
600
500
400
300
200
100
0
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

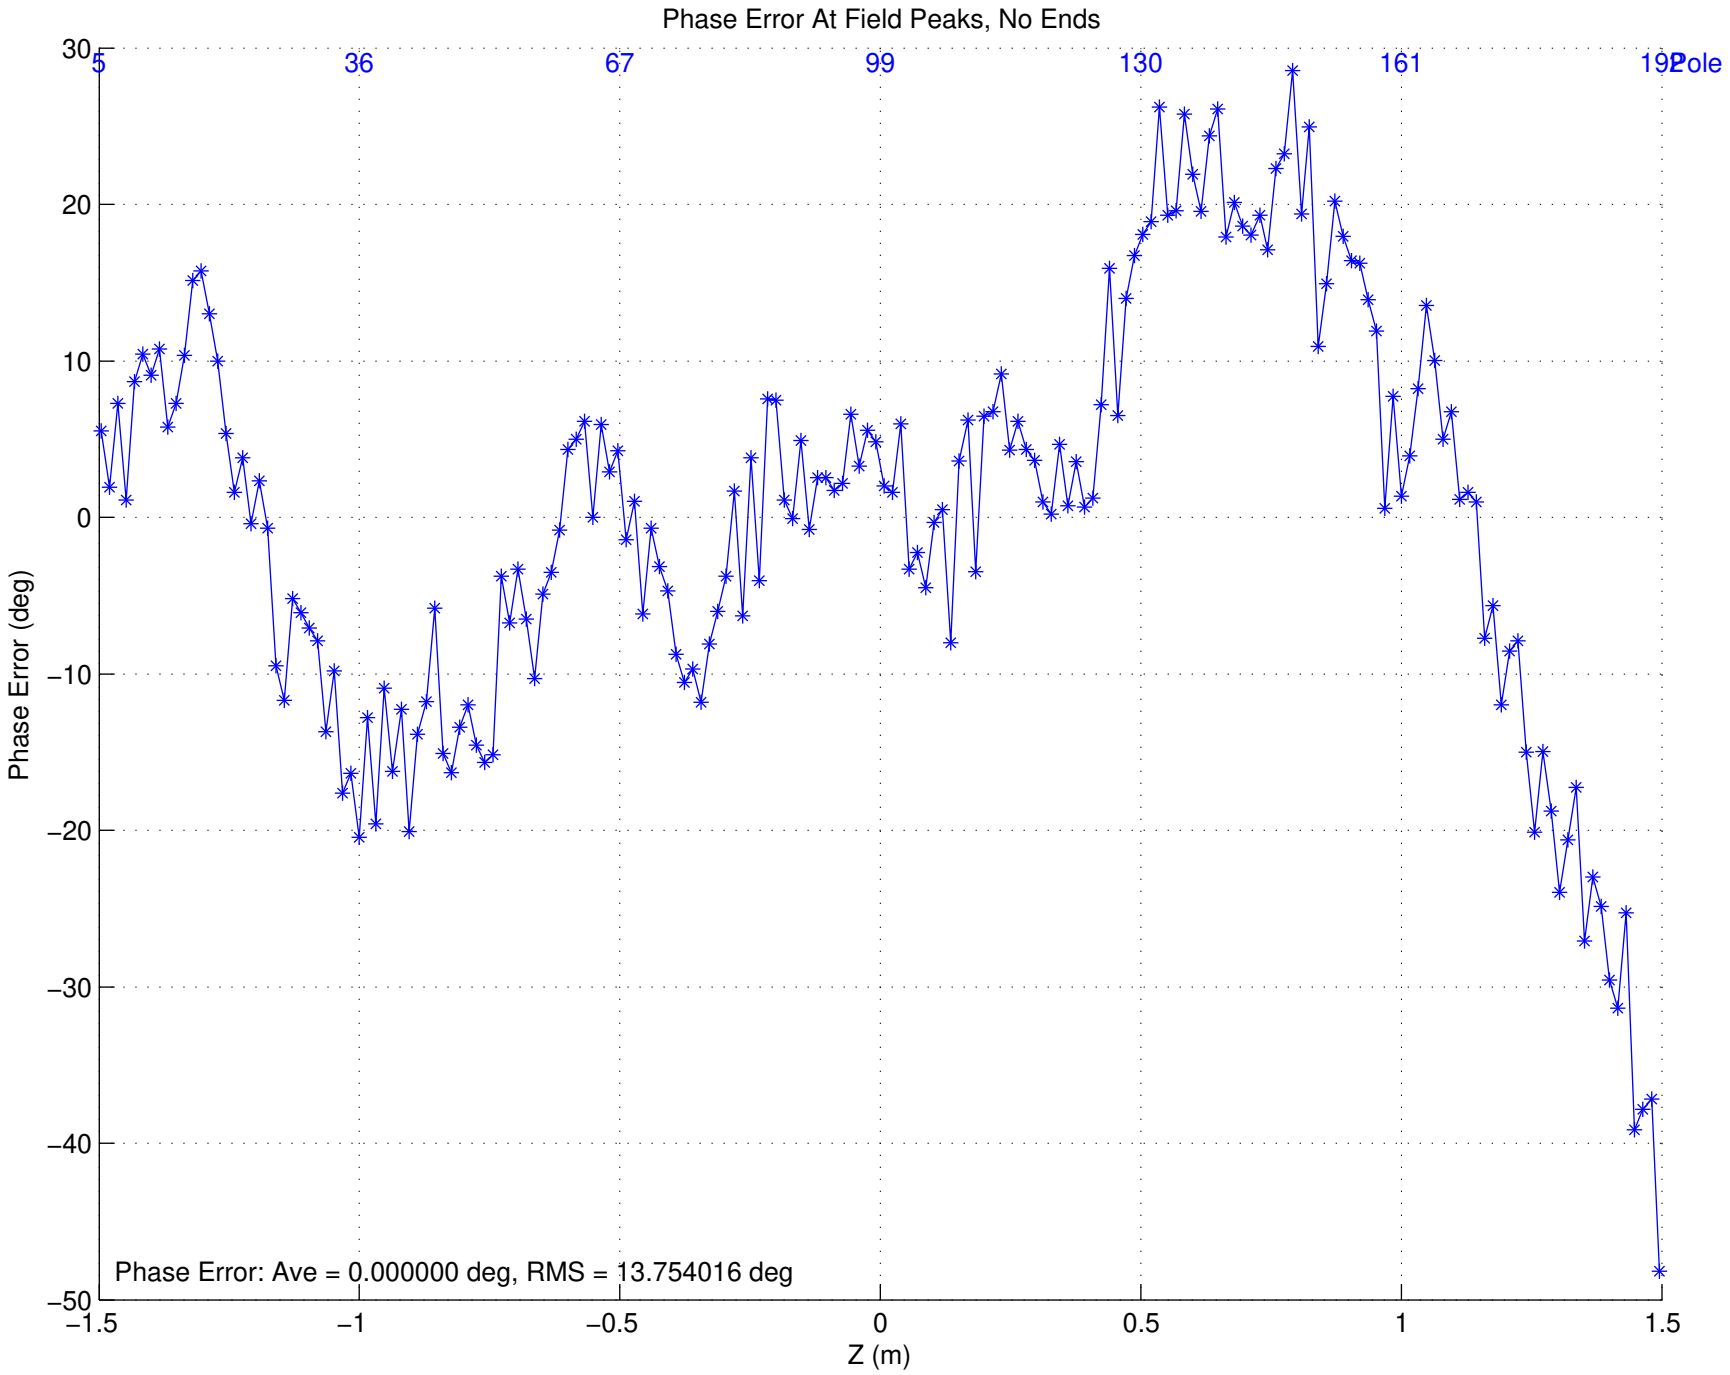
Phase Error At Field Peaks, No Ends
5
36
67
99
130
161
192
Pole
30
20
10
0
−10
−20
−30
−40
−50
Phase Error (deg)
Phase Error: Ave = 0.000000 deg, RMS = 13.754016 deg
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

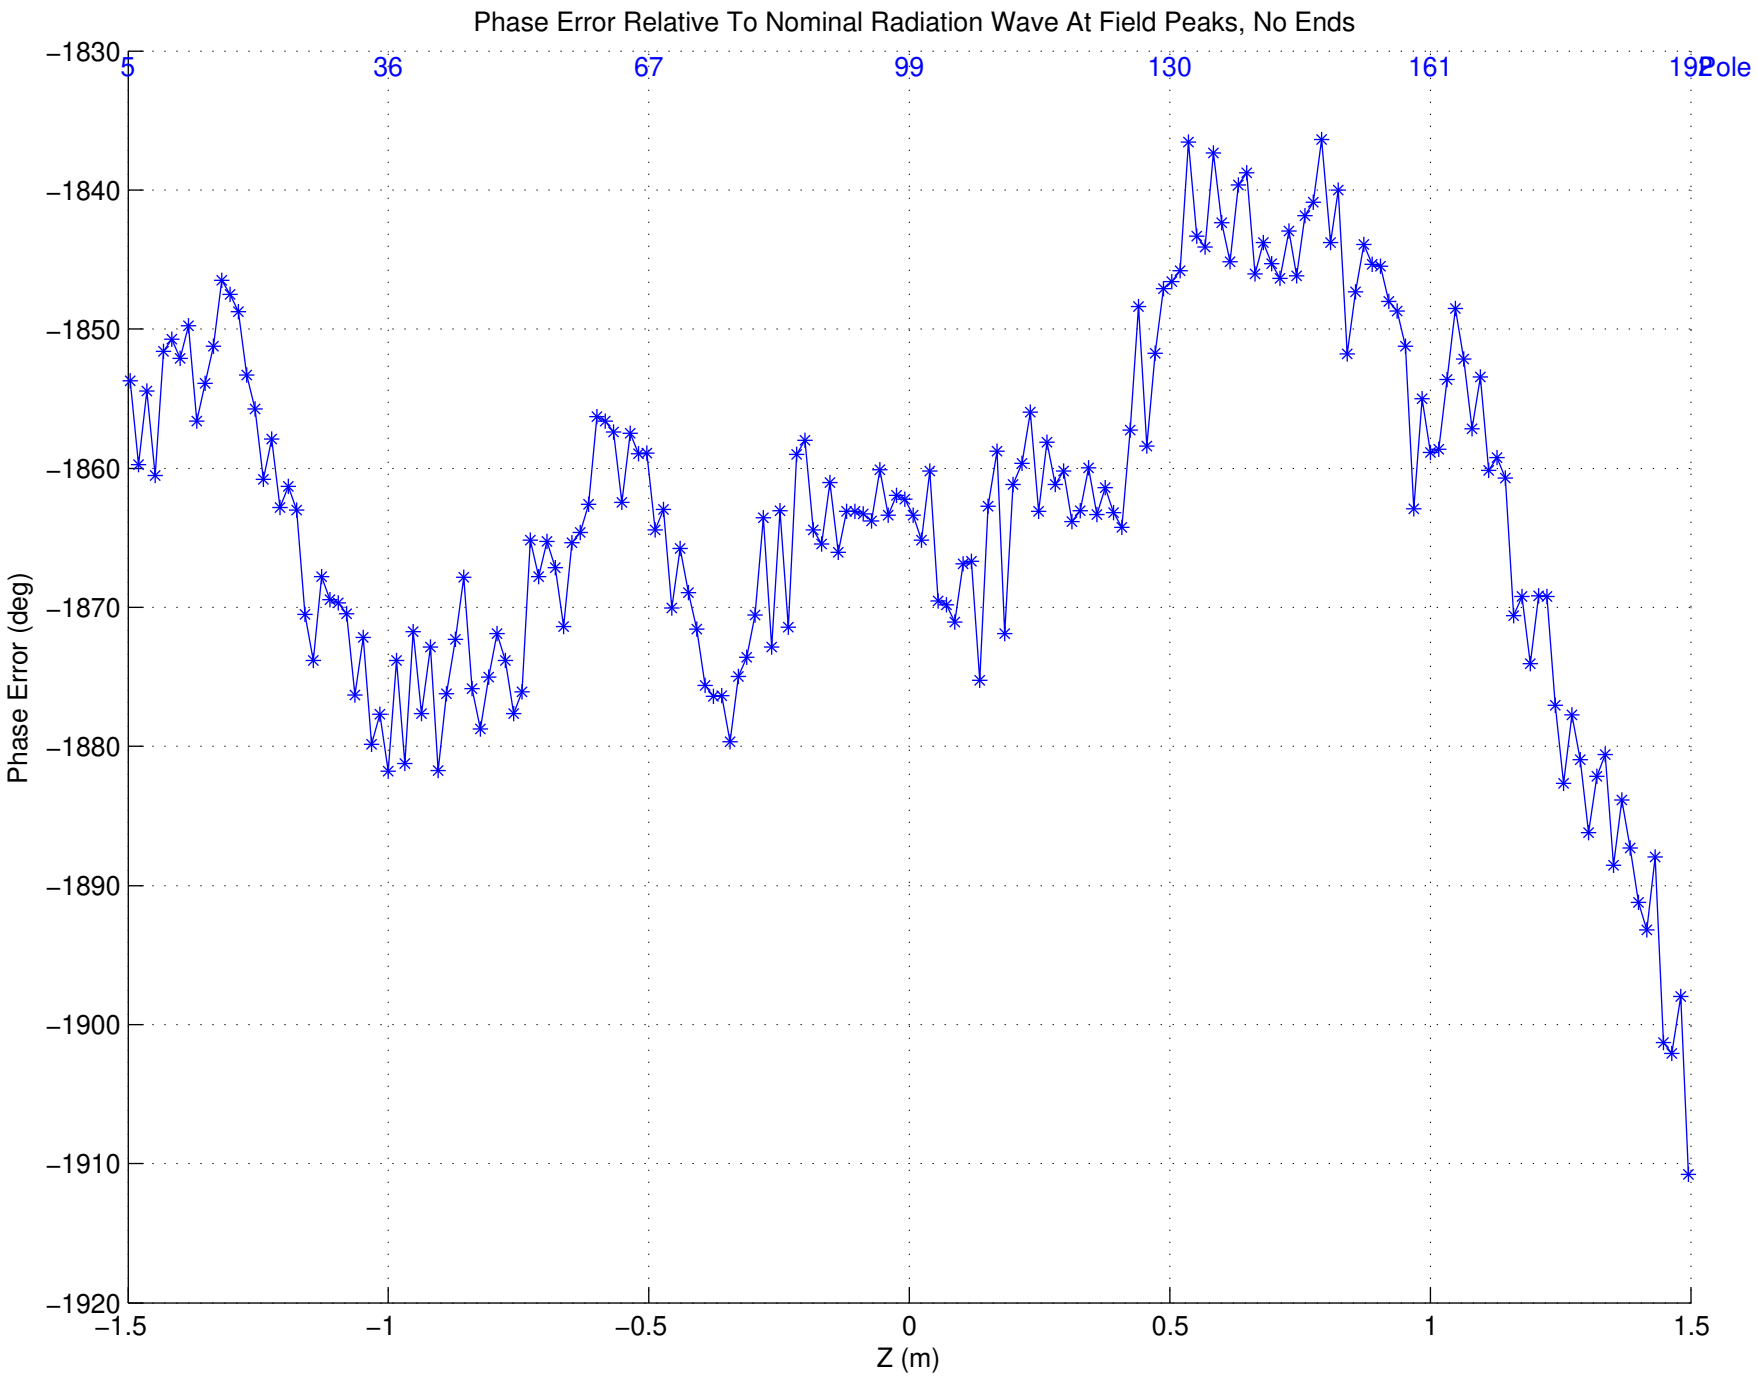
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
5
36
67
99
130
161
192
Pole
−1830
−1840
−1850
−1860
−1870
−1880
−1890
−1900
−1910
−1920
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

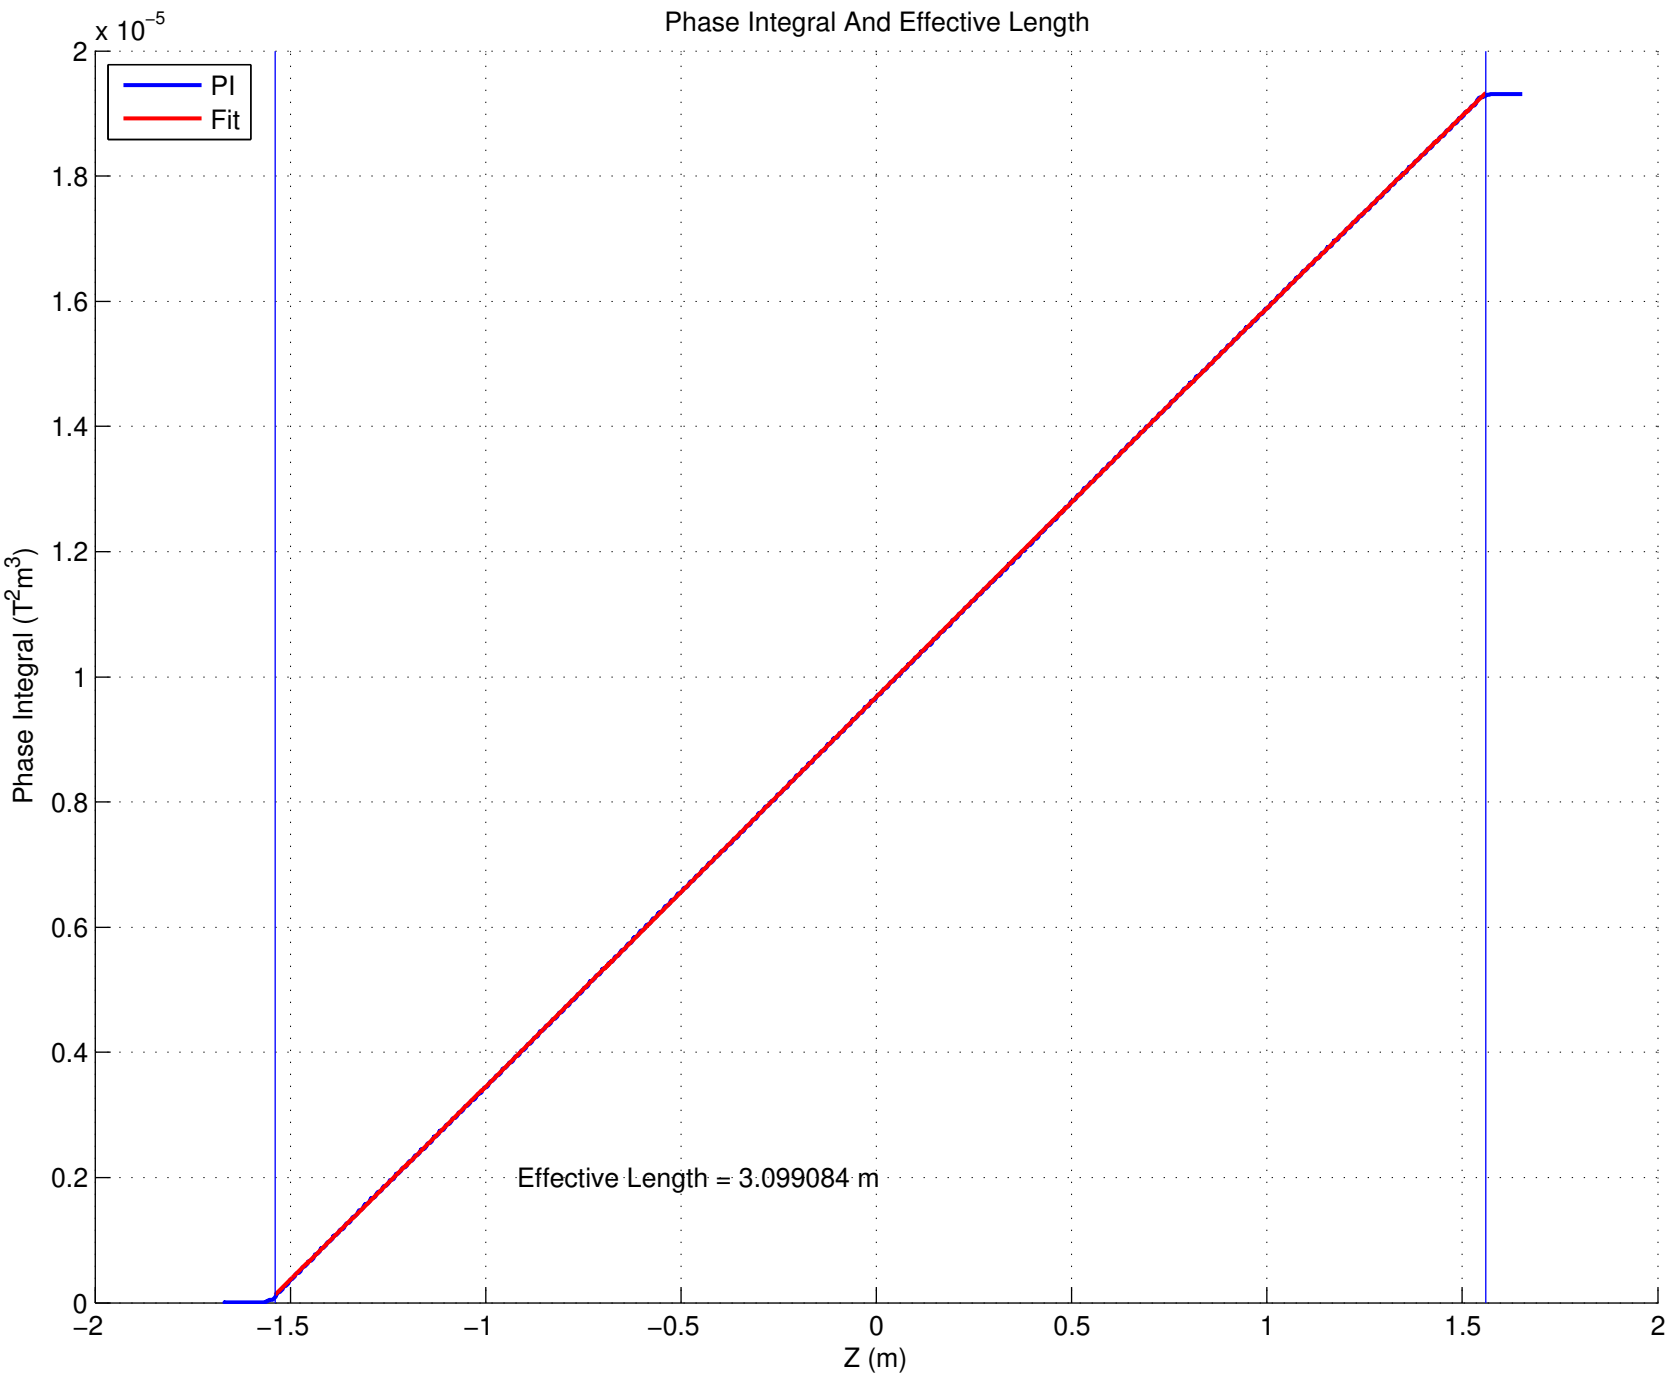
Phase Integral And Effective Length
x 10^-5
PI
Fit
Phase Integral (T^2m^3)
Z (m)
Effective Length = 3.099084 m
2
1.8
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

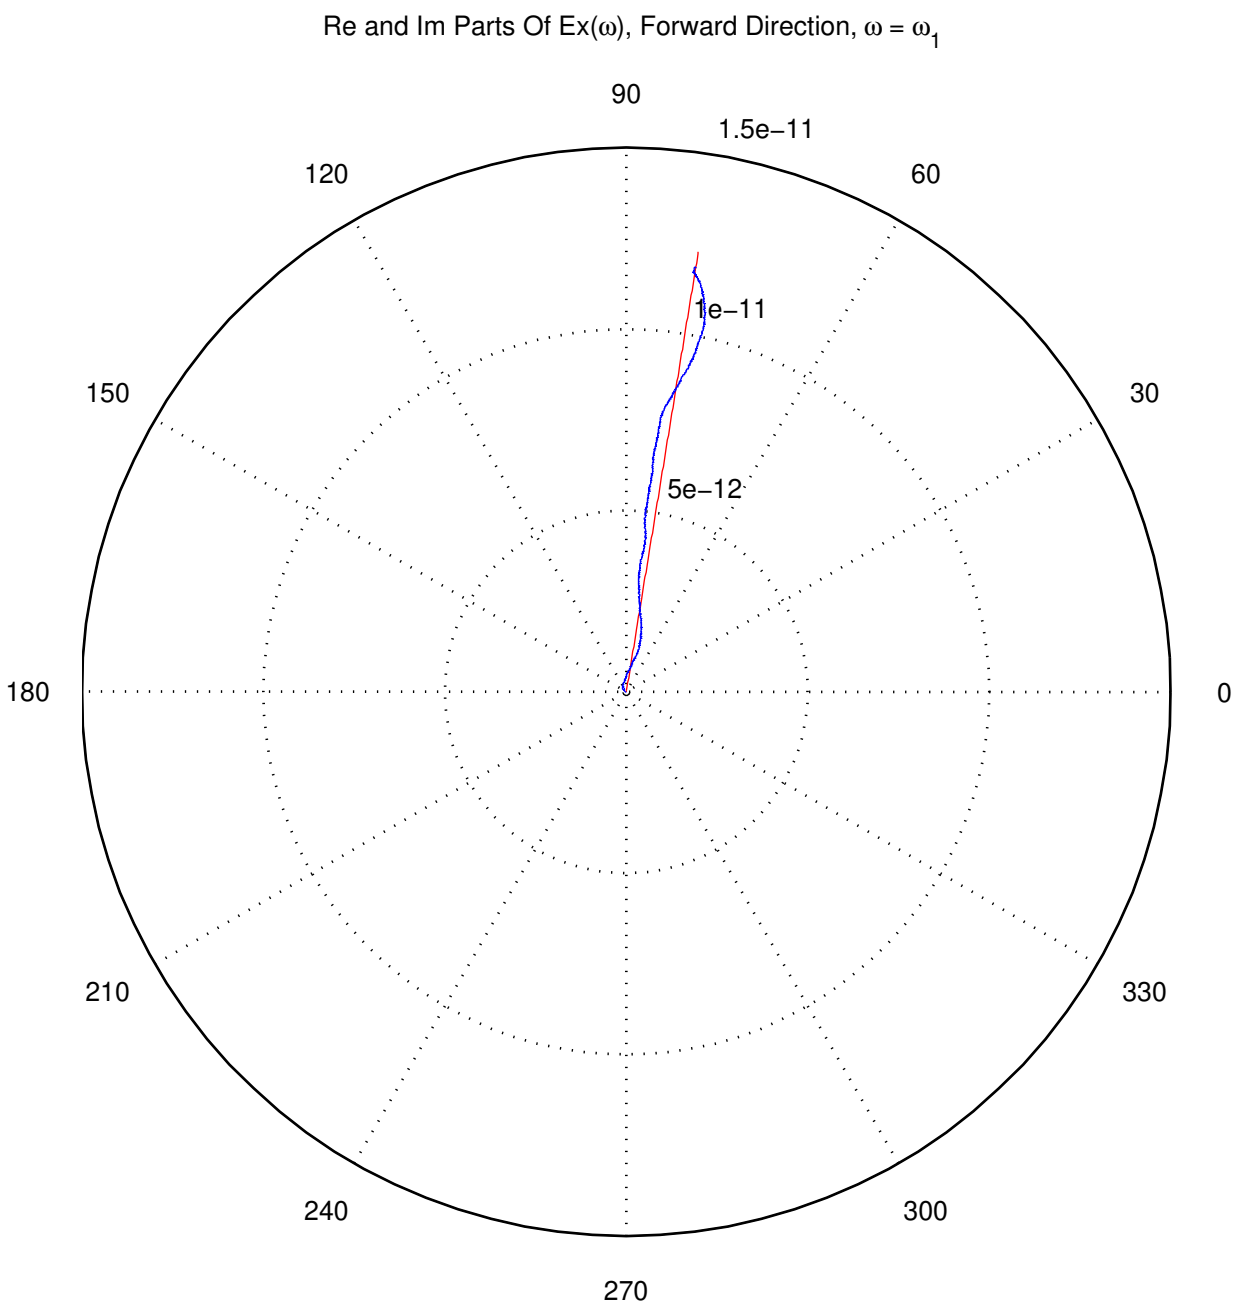
Re and Im Parts Of Ex(ω), Forward Direction, ω = ω1
90
1.5e−11
60
120
1e−11
30
150
5e−12
180
0
210
330
240
300
270

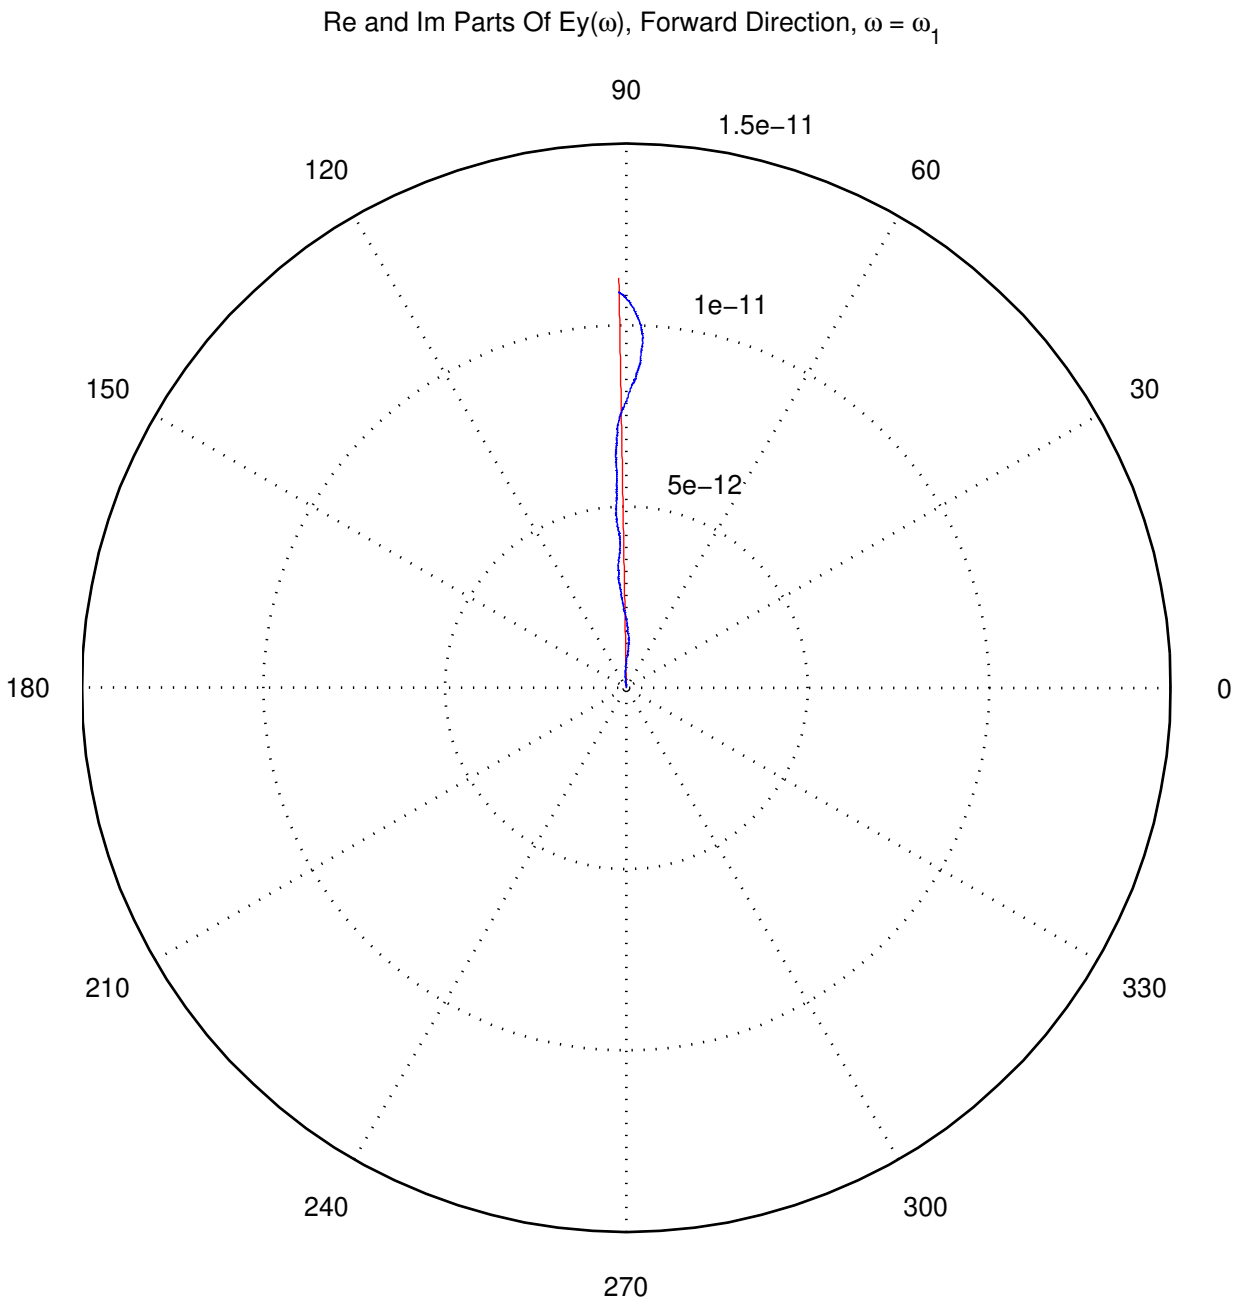
Re and Im Parts Of Ey(ω), Forward Direction, ω = ω1
90
1.5e−11
60
120
1e−11
30
150
5e−12
180
0
210
330
240
300
270

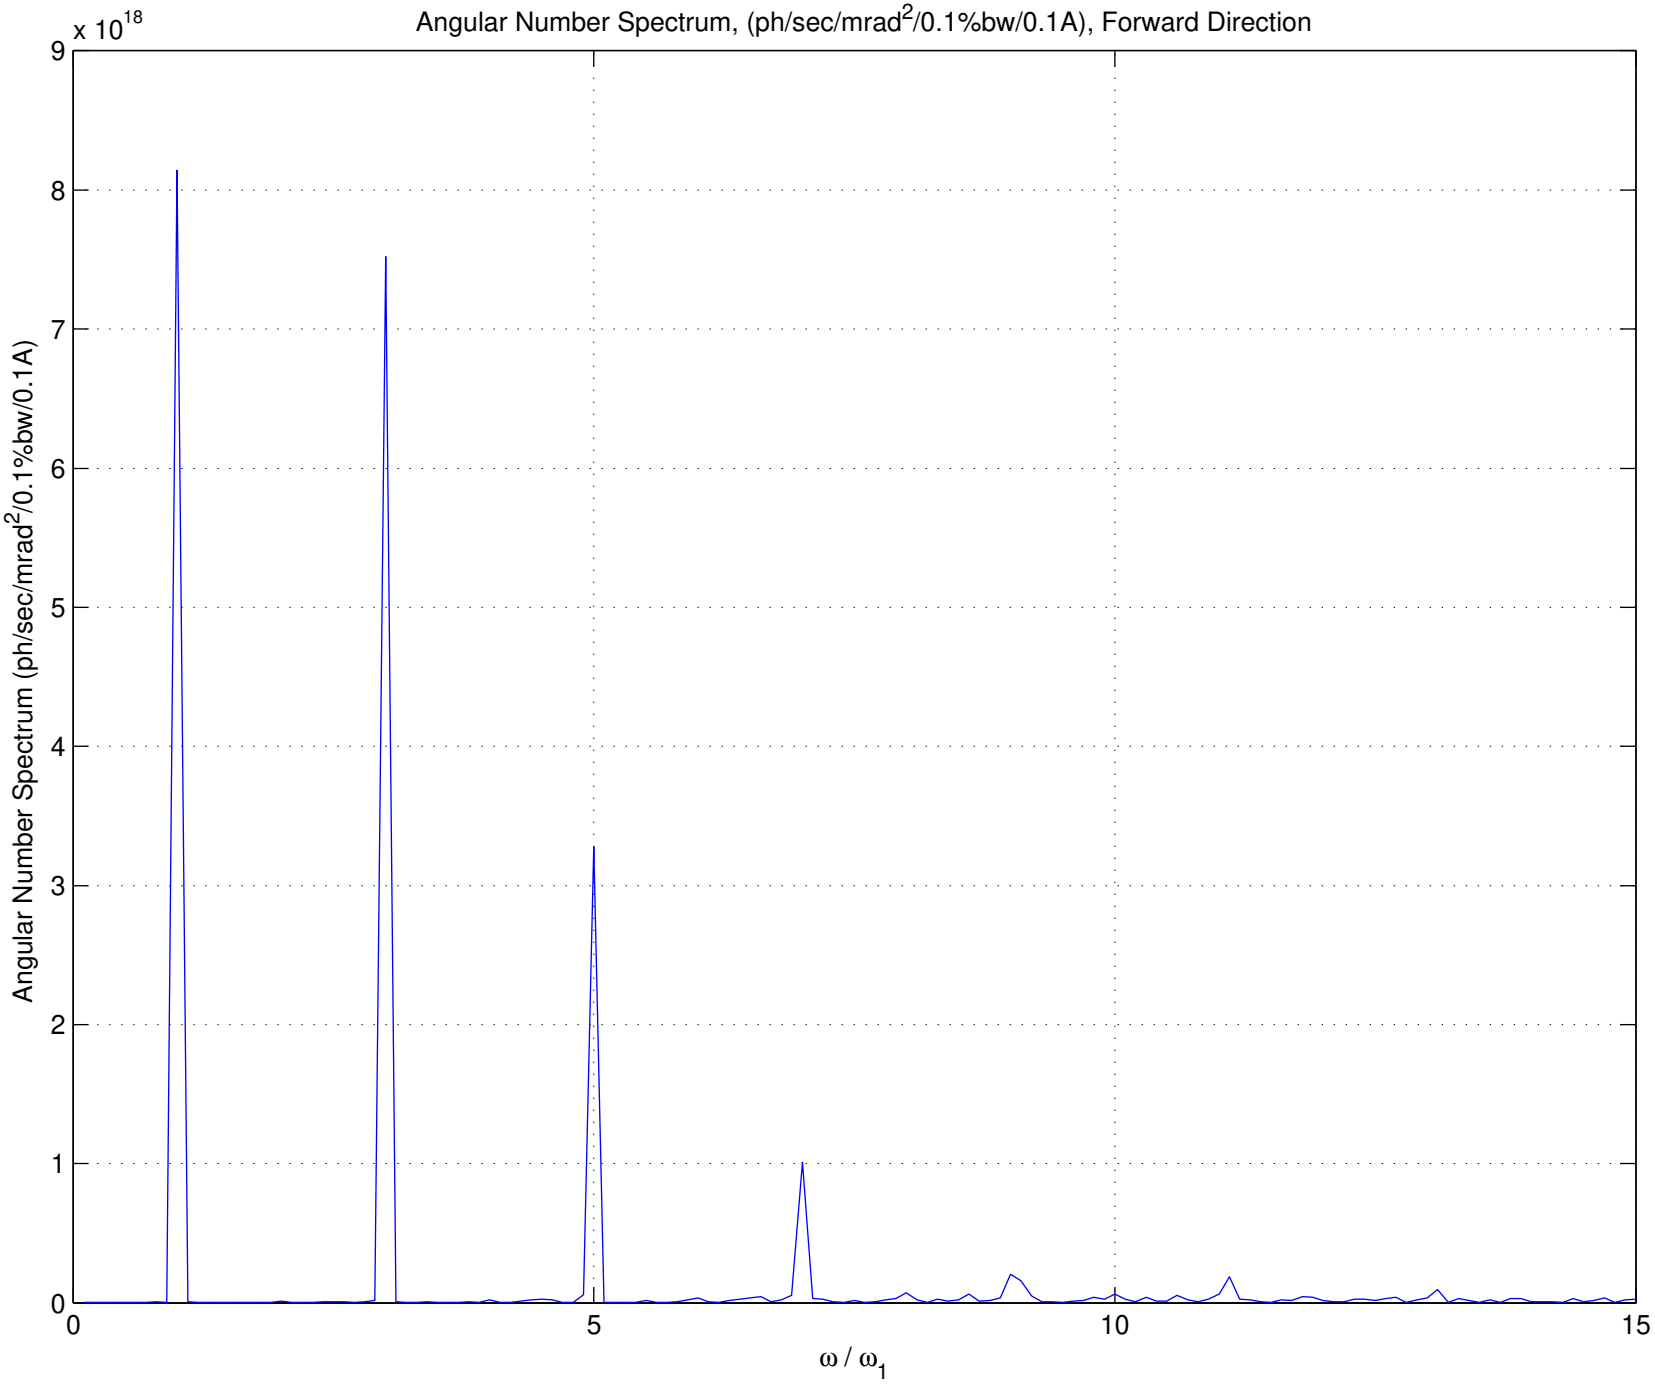
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
1
2
3
4
5
6
7
8
9
0
5
10
15

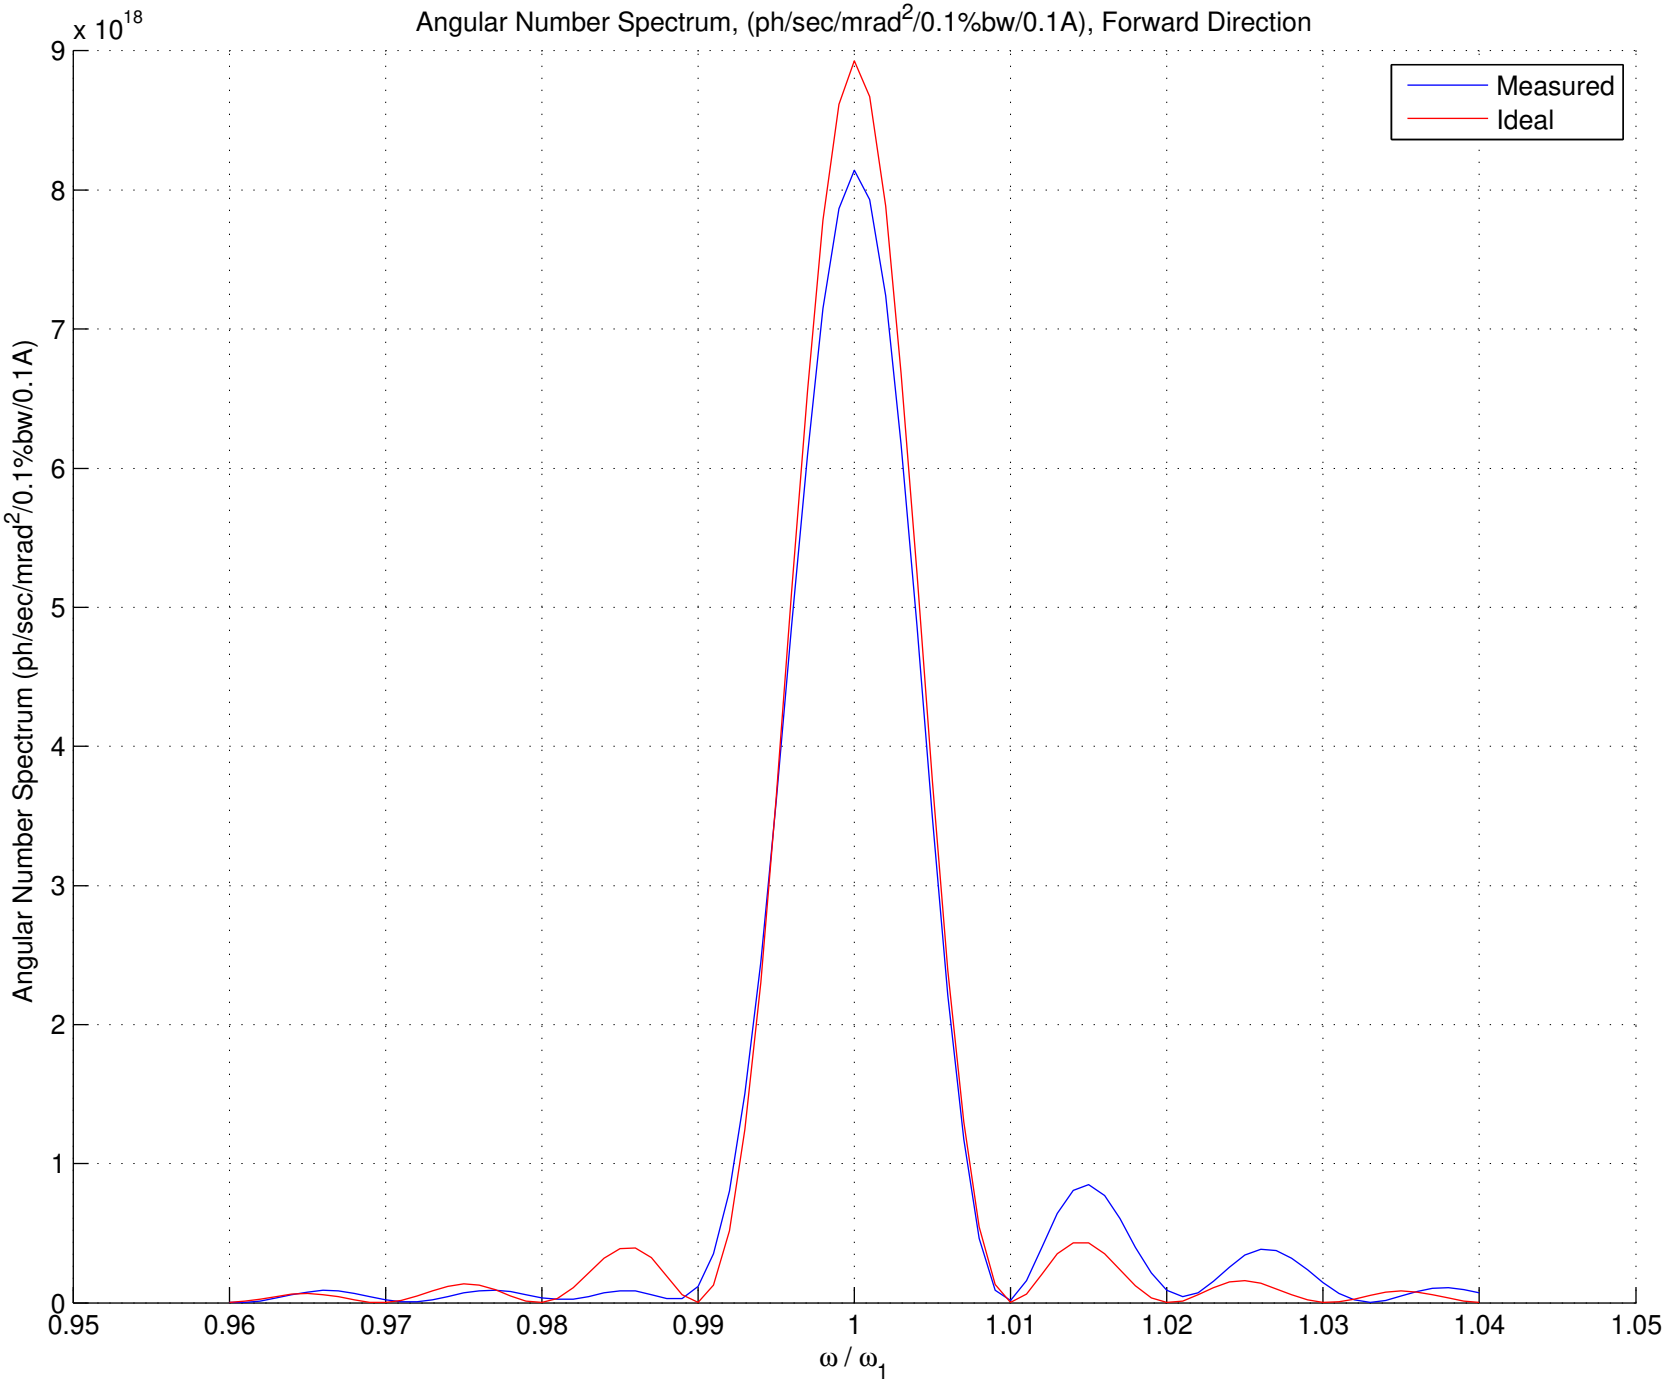
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
Measured
Ideal
0
1
2
3
4
5
6
7
8
9
0.95
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05

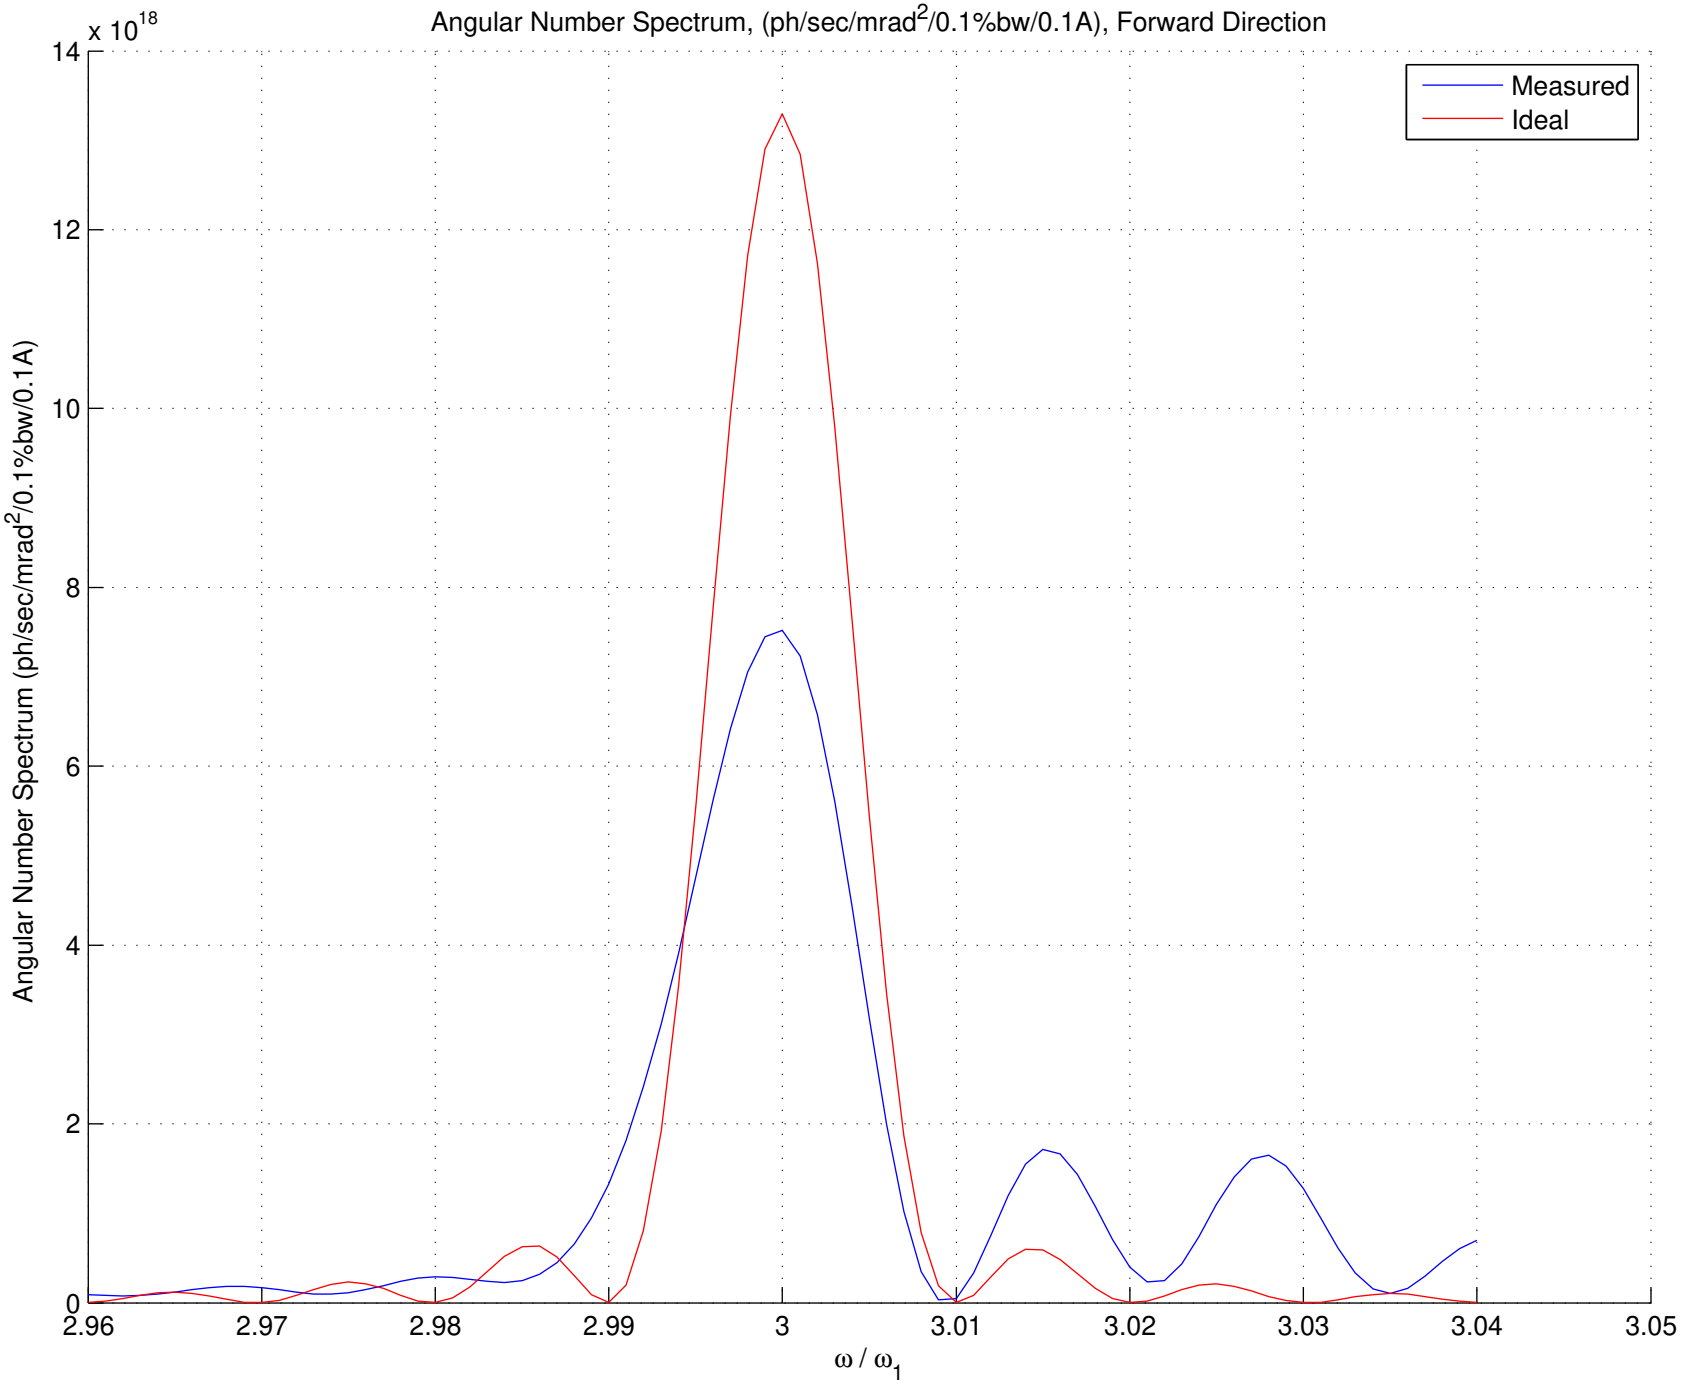
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
2
4
6
8
10
12
14
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05

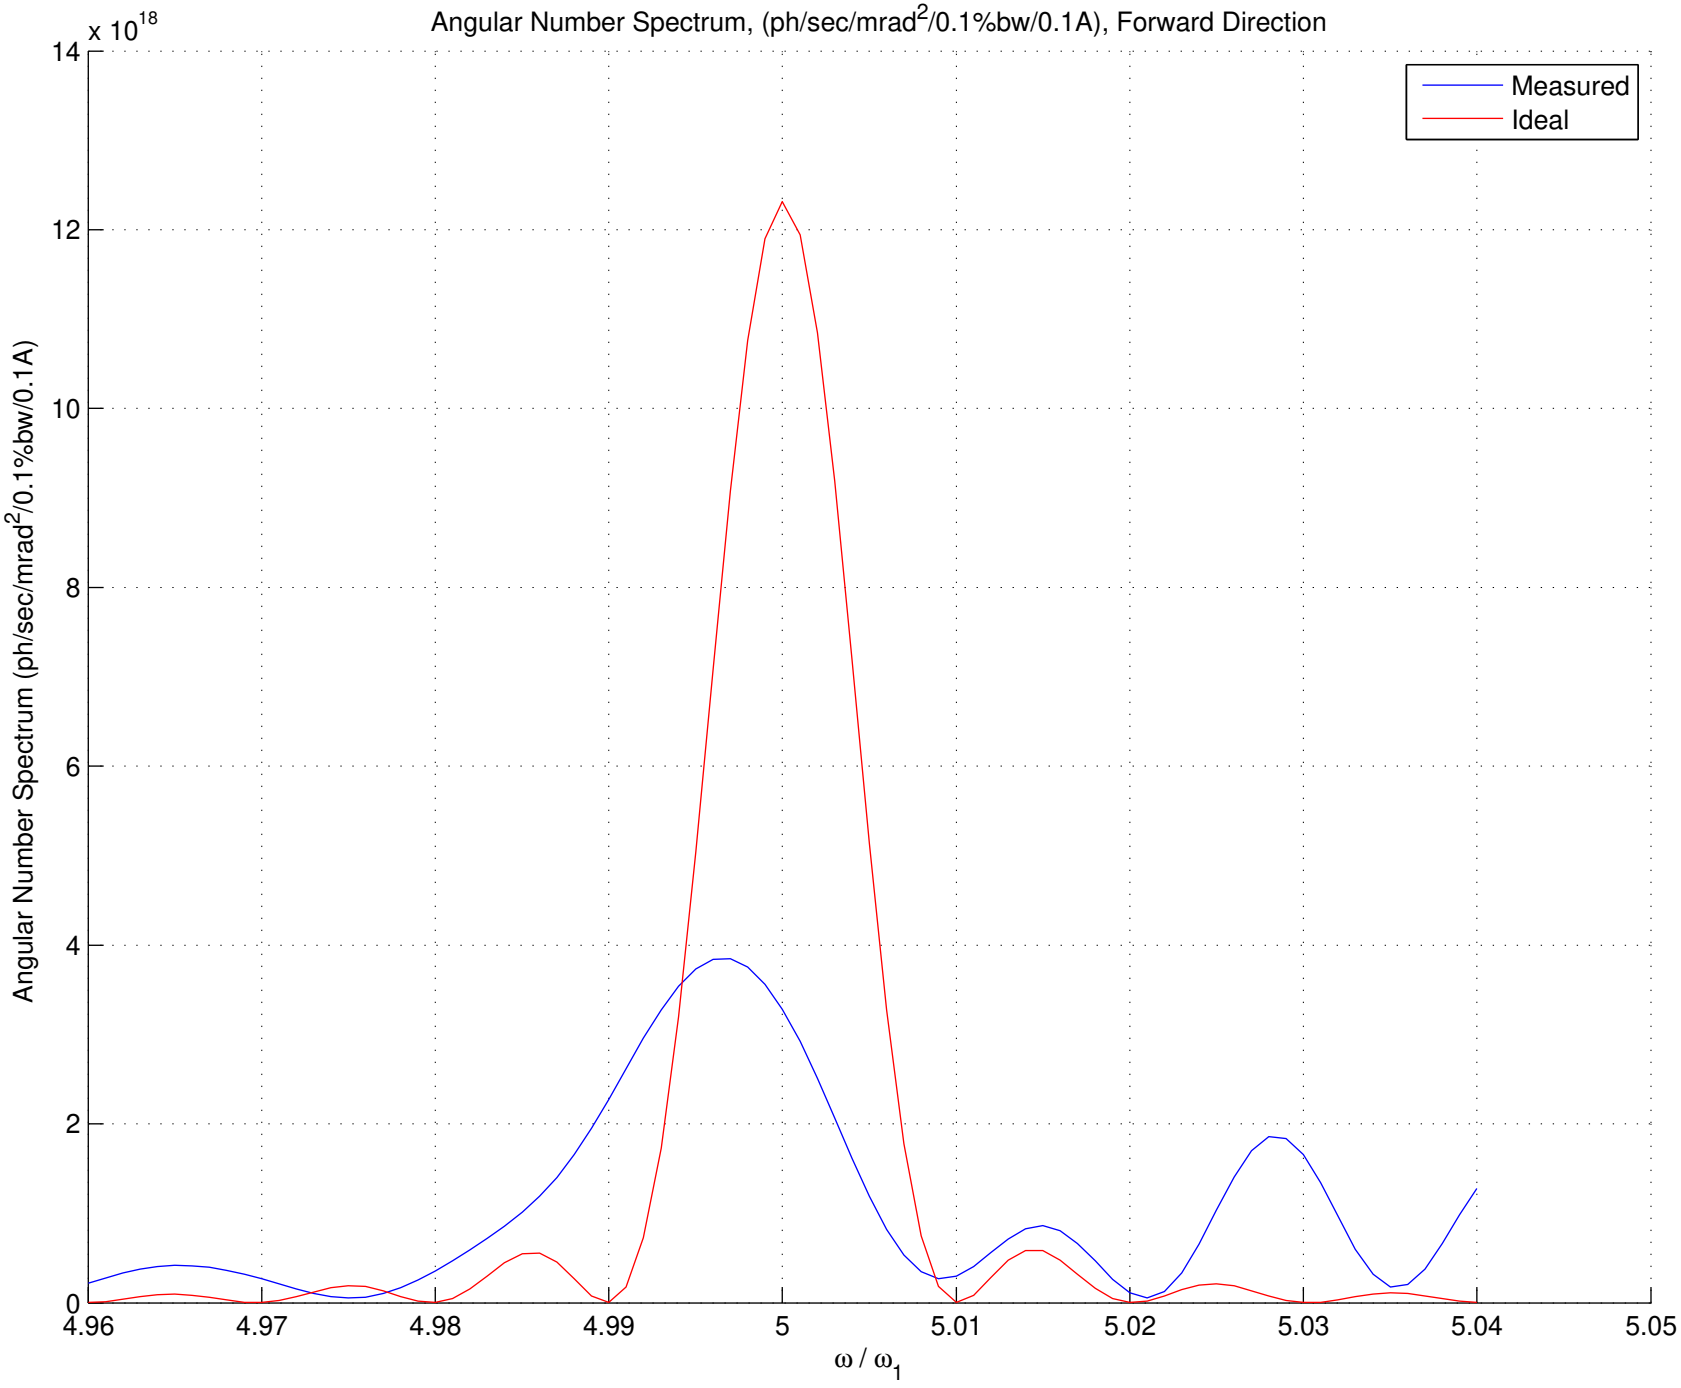
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^18
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
2
4
6
8
10
12
14
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05