SLAC Magnetic Measurements

EPU Analysis
––––––––––––

Parameters:
INPUT–FILE–DIR =V:\MET\MagServe\MagData\DELTA\Delta data\Assembled Measurements\Final Measurements\CPLMF\KR0
INPUT–FILE–NAME =hall2–anal–meas–field.dat
INPUT–FILE–TYPE =ZBXYZH
CORR–REQUIRED =0
GAMMA =26627.1
NOM–LAMBDA–U =0
NOM–K–VALUE =0
NOM–LAMBDA–R =0
NUM–POLES =196
NUM–END–POLES =4
CELL–LENGTH =3.126

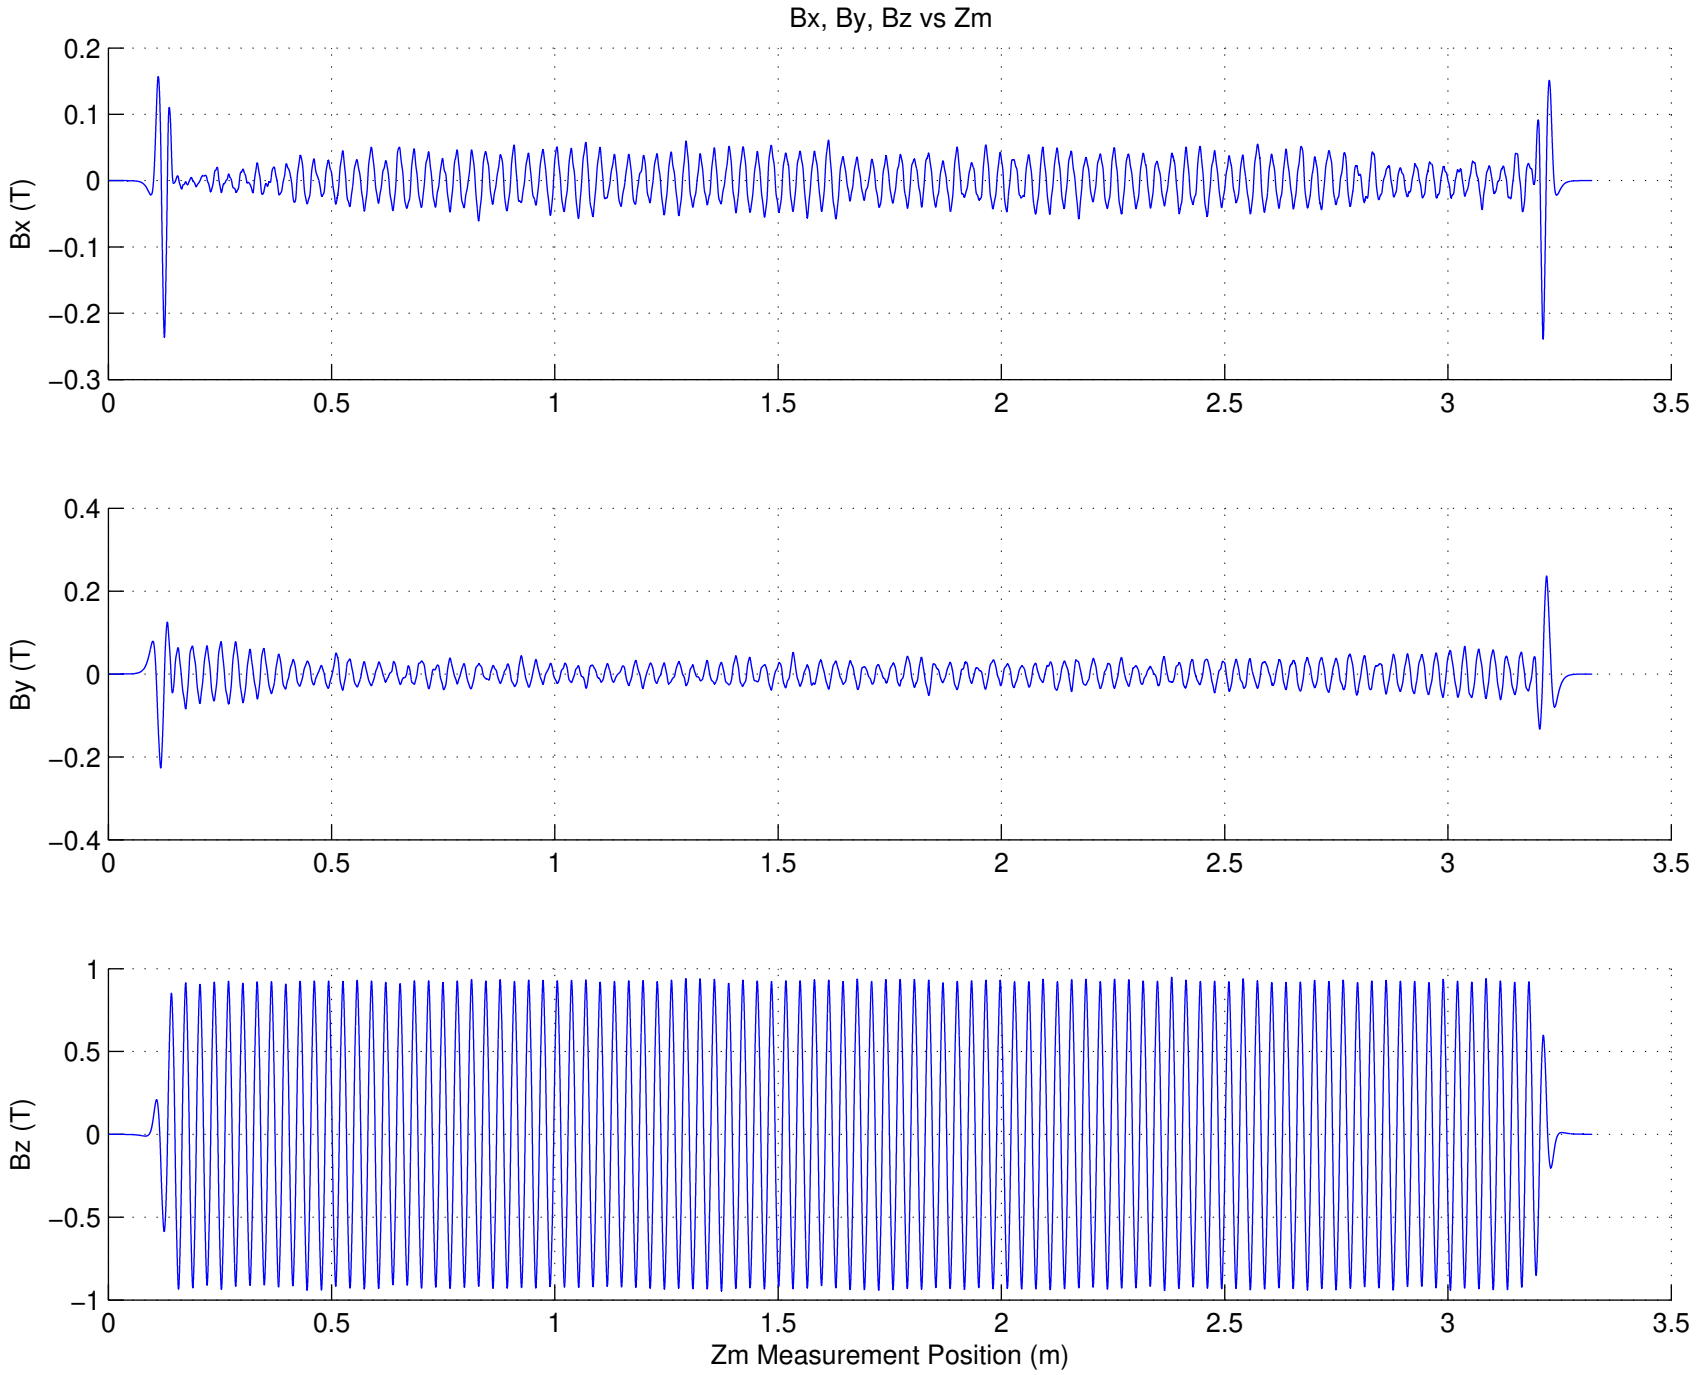
Bx, By, Bz vs Zm
Bx (T)
0.2
0.1
0
−0.1
−0.2
−0.3
By (T)
0.4
0.2
0
−0.2
−0.4
Bz (T)
1
0.5
0
−0.5
−1
0
0.5
1
1.5
2
2.5
3
3.5
Zm Measurement Position (m)

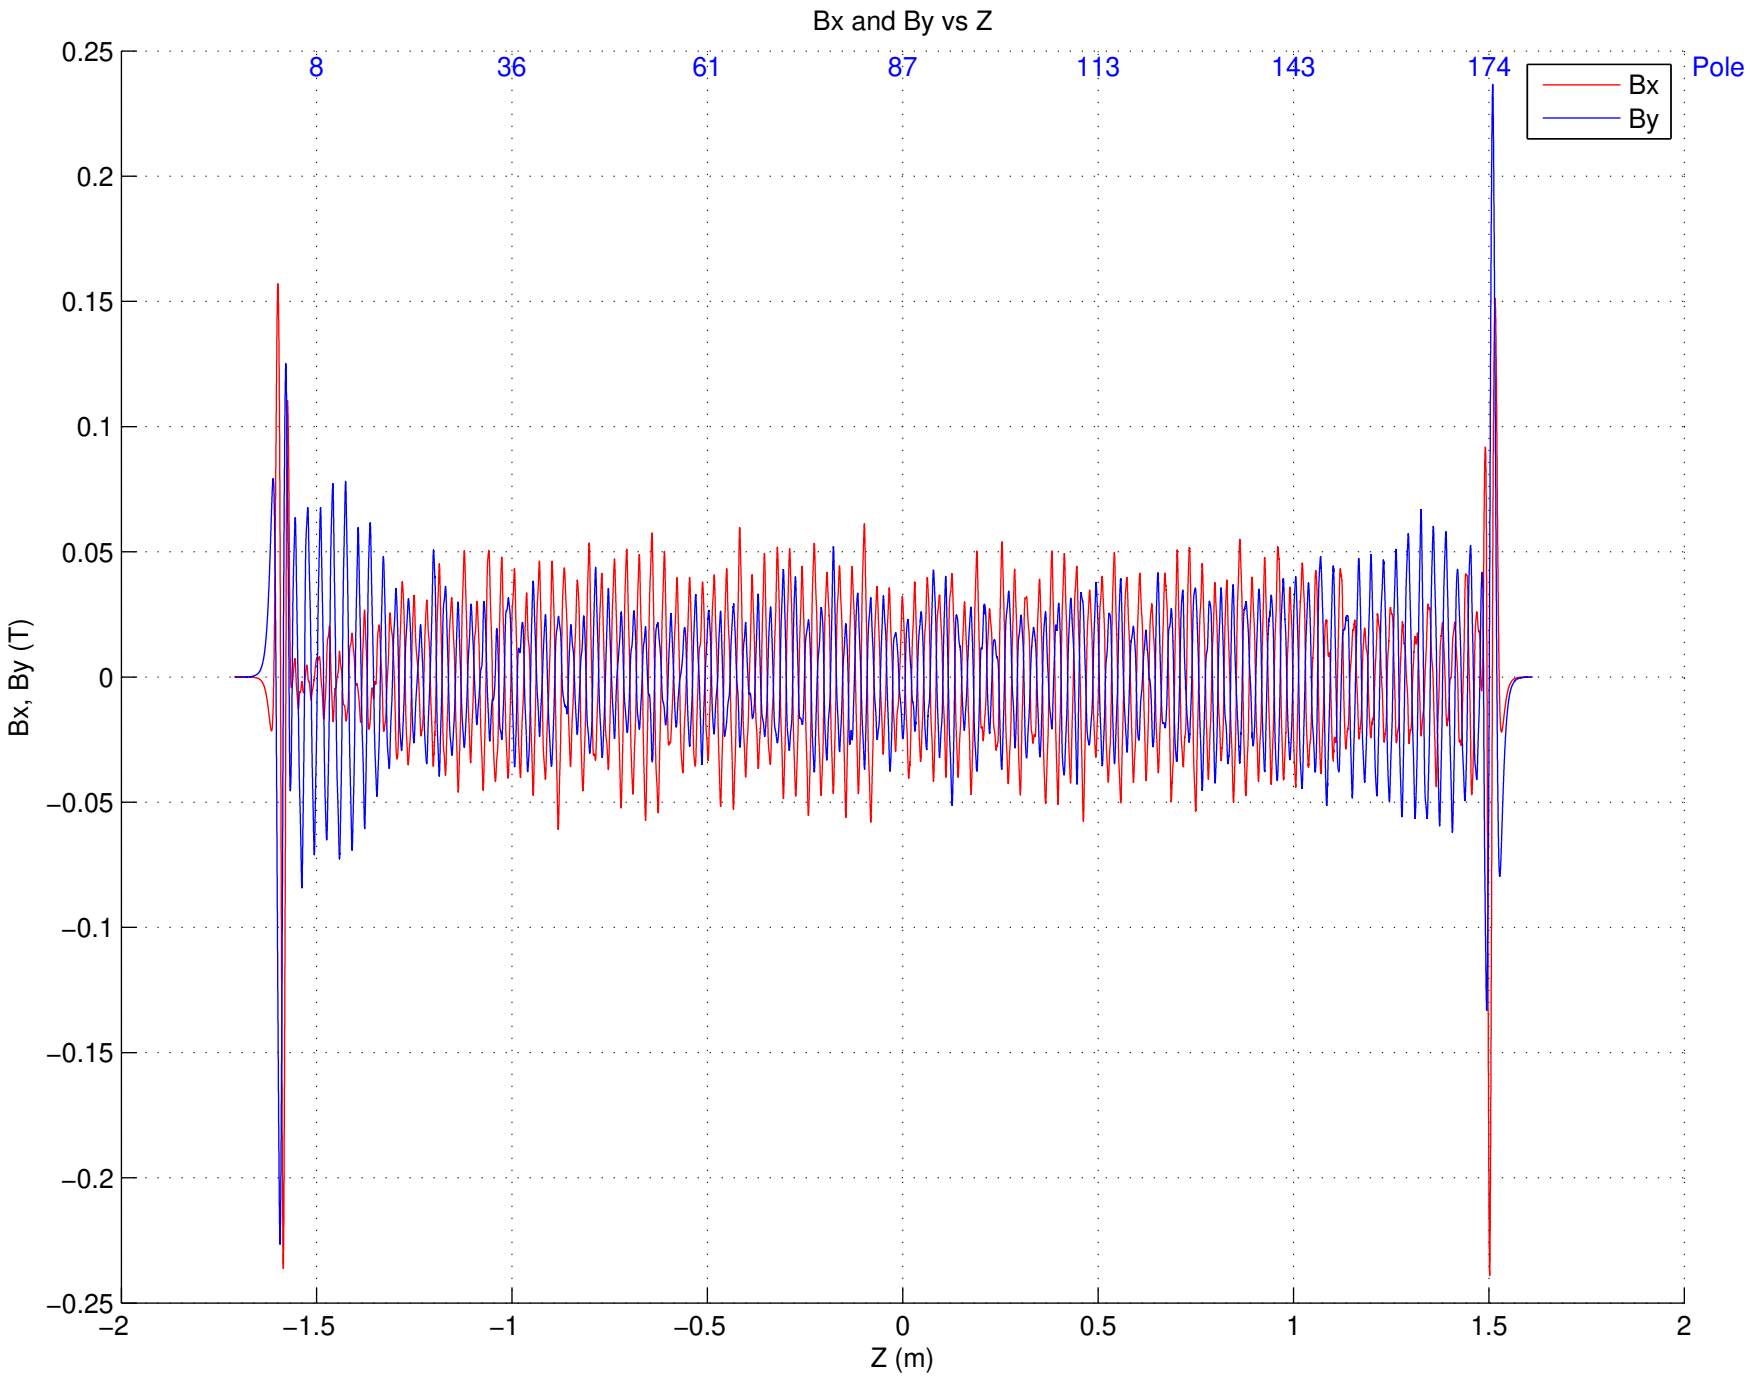
Bx and By vs Z
8
36
61
87
113
143
174
Pole
Bx
By
0.25
0.2
0.15
0.1
0.05
0
−0.05
−0.1
−0.15
−0.2
−0.25
Bx, By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

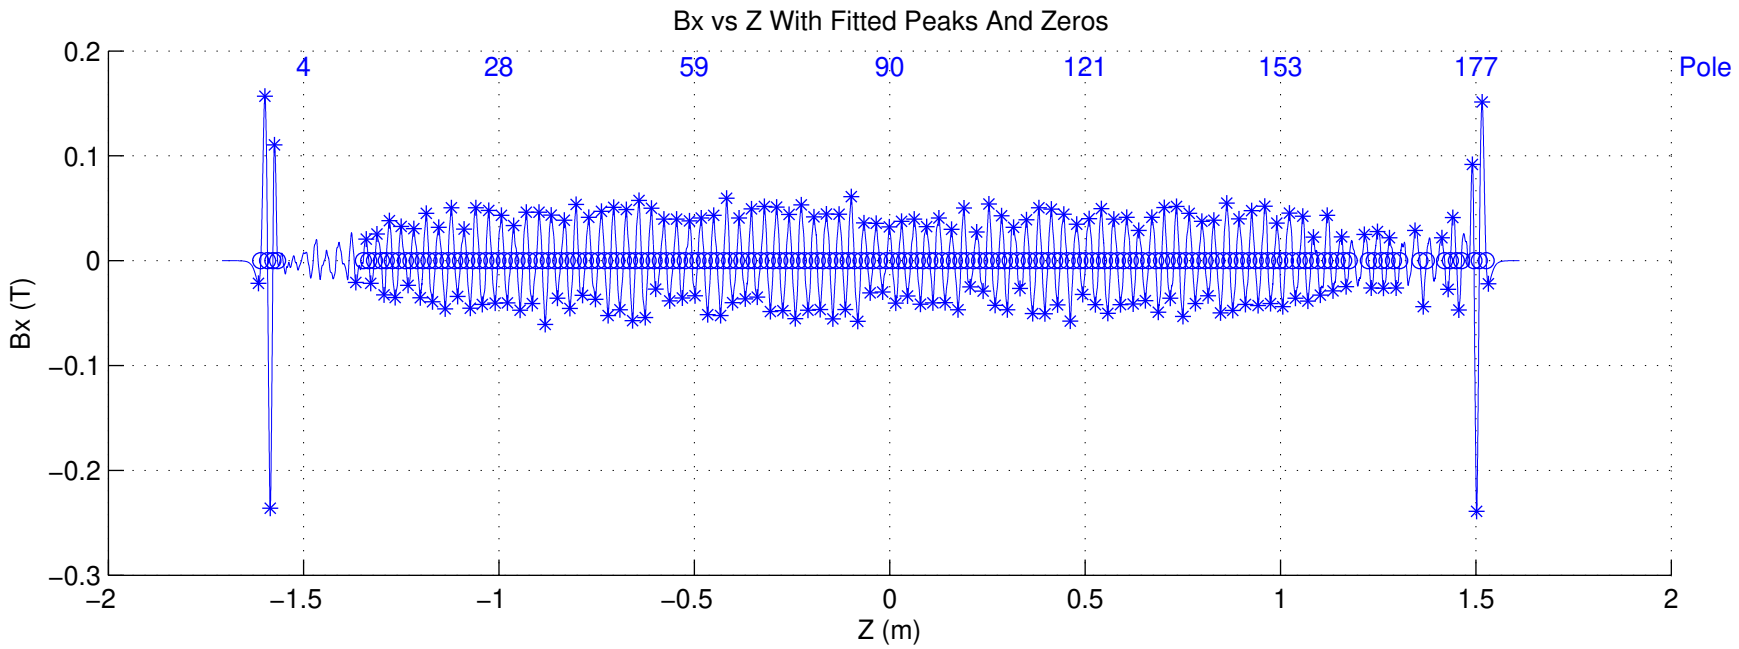
Bx vs Z With Fitted Peaks And Zeros
4
28
59
90
121
153
177
Pole
0.2
0.1
0
−0.1
−0.2
−0.3
Bx (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

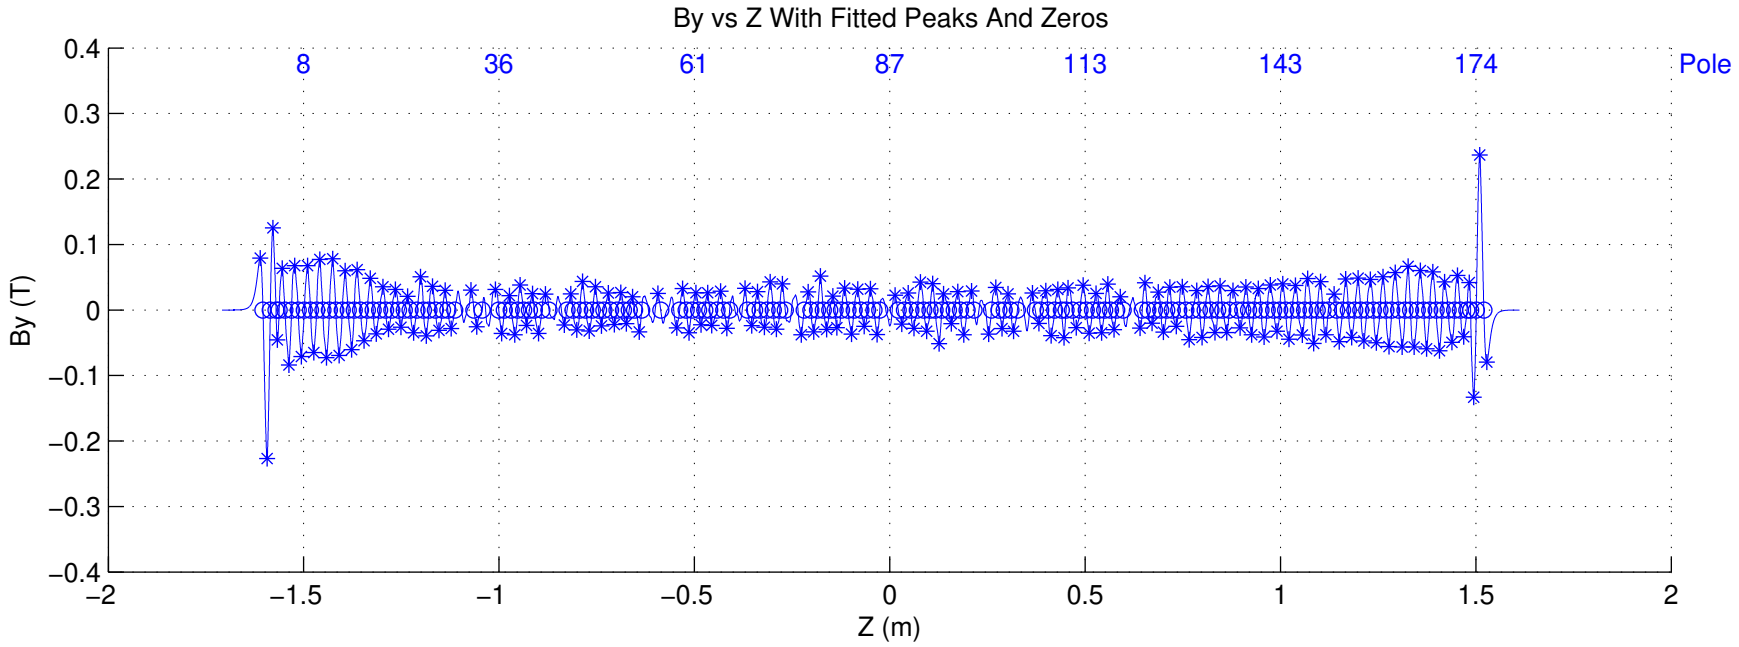
By vs Z With Fitted Peaks And Zeros
8
36
61
87
113
143
174
Pole
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
By (T)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

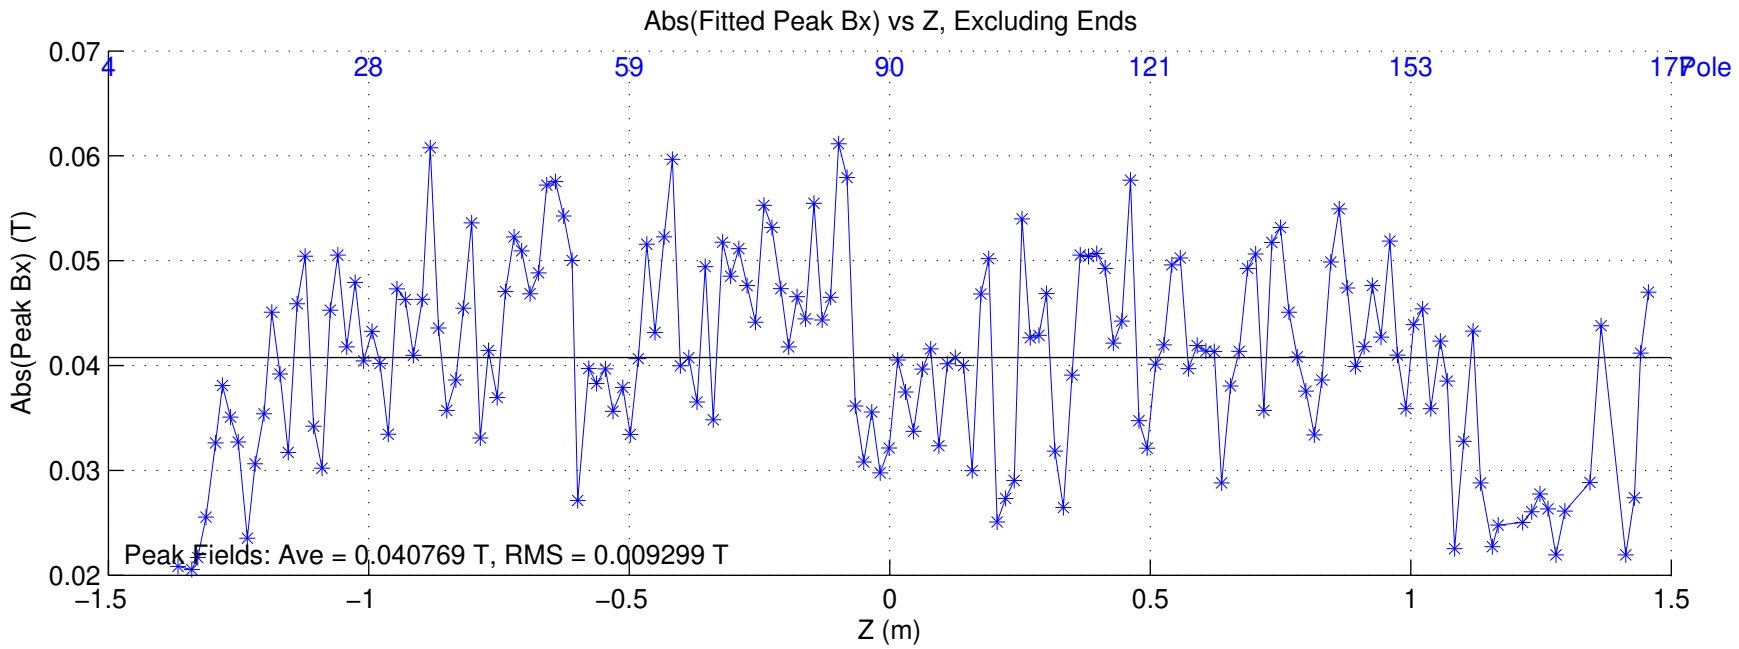
Abs(Fitted Peak Bx) vs Z, Excluding Ends
Abs(Peak Bx) (T)
Z (m)
Pole
4
28
59
90
121
153
177
Peak Fields: Ave = 0.040769 T, RMS = 0.009299 T

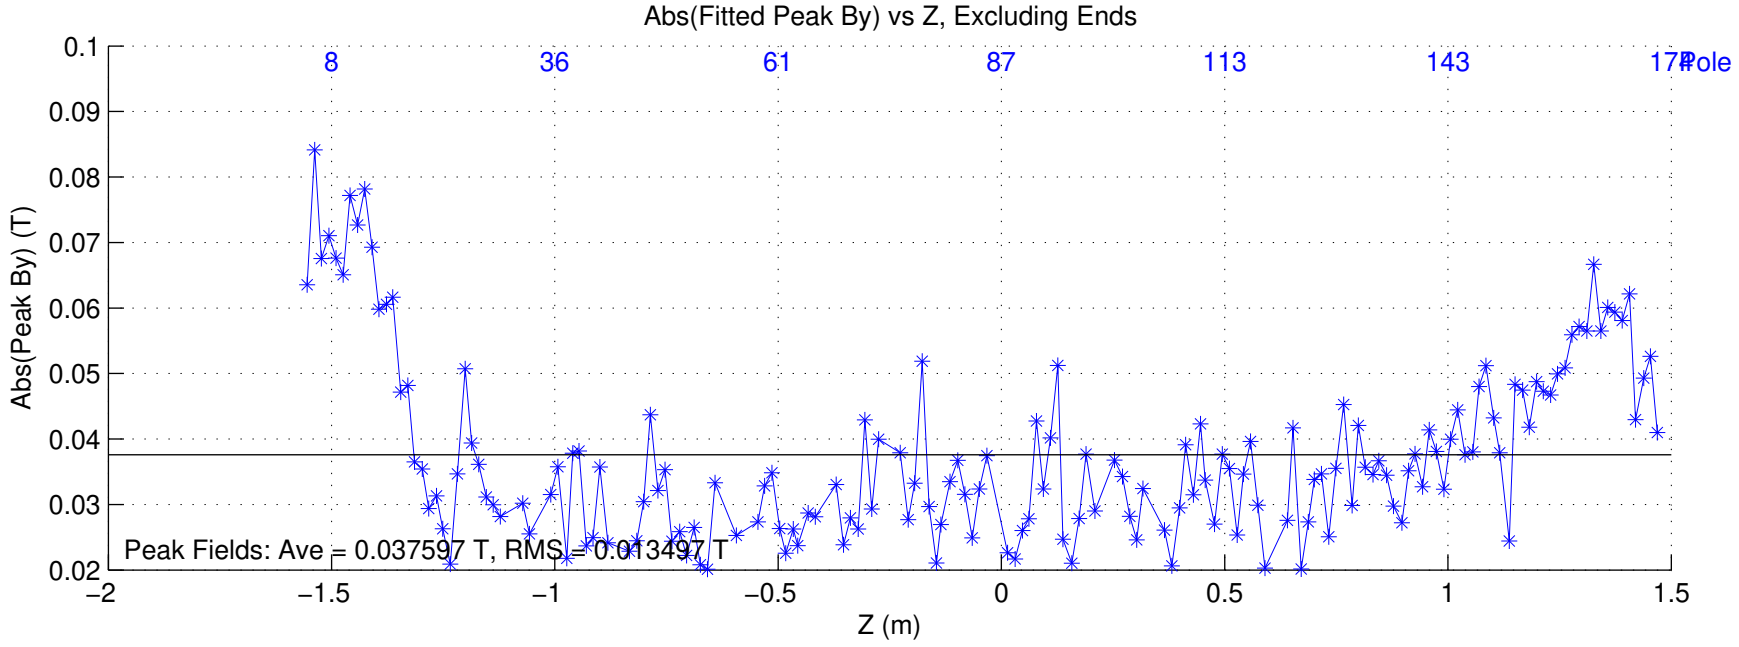
Abs(Fitted Peak By) vs Z, Excluding Ends
Abs(Peak By) (T)
Z (m)
Pole
8
36
61
87
113
143
174
Peak Fields: Ave = 0.037597 T, RMS = 0.013497 T

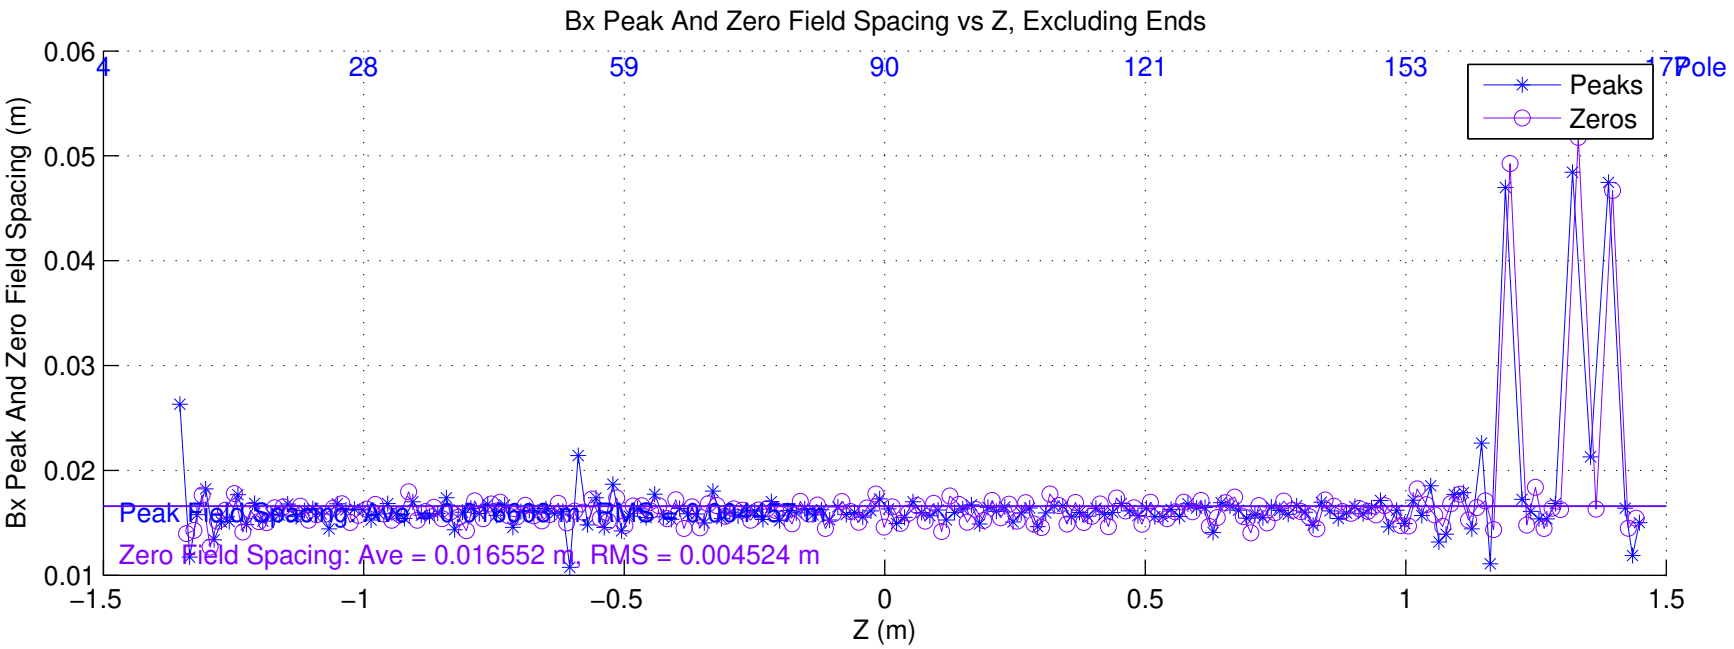
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Zero Field Spacing: Ave = 0.016552 m, RMS = 0.004524 m

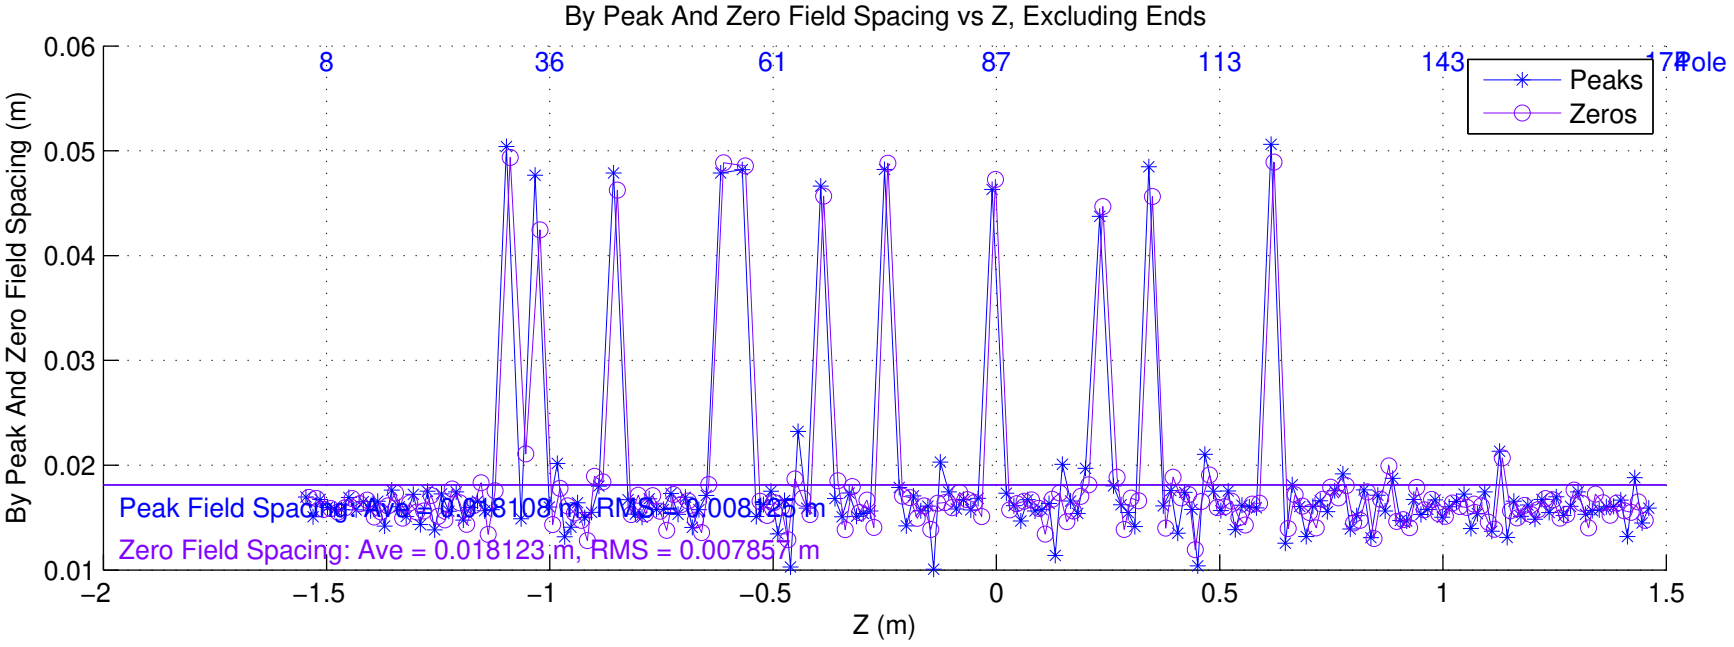
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
Pole
Peaks
Zeros
Zero Field Spacing: Ave = 0.018123 m, RMS = 0.007857 m

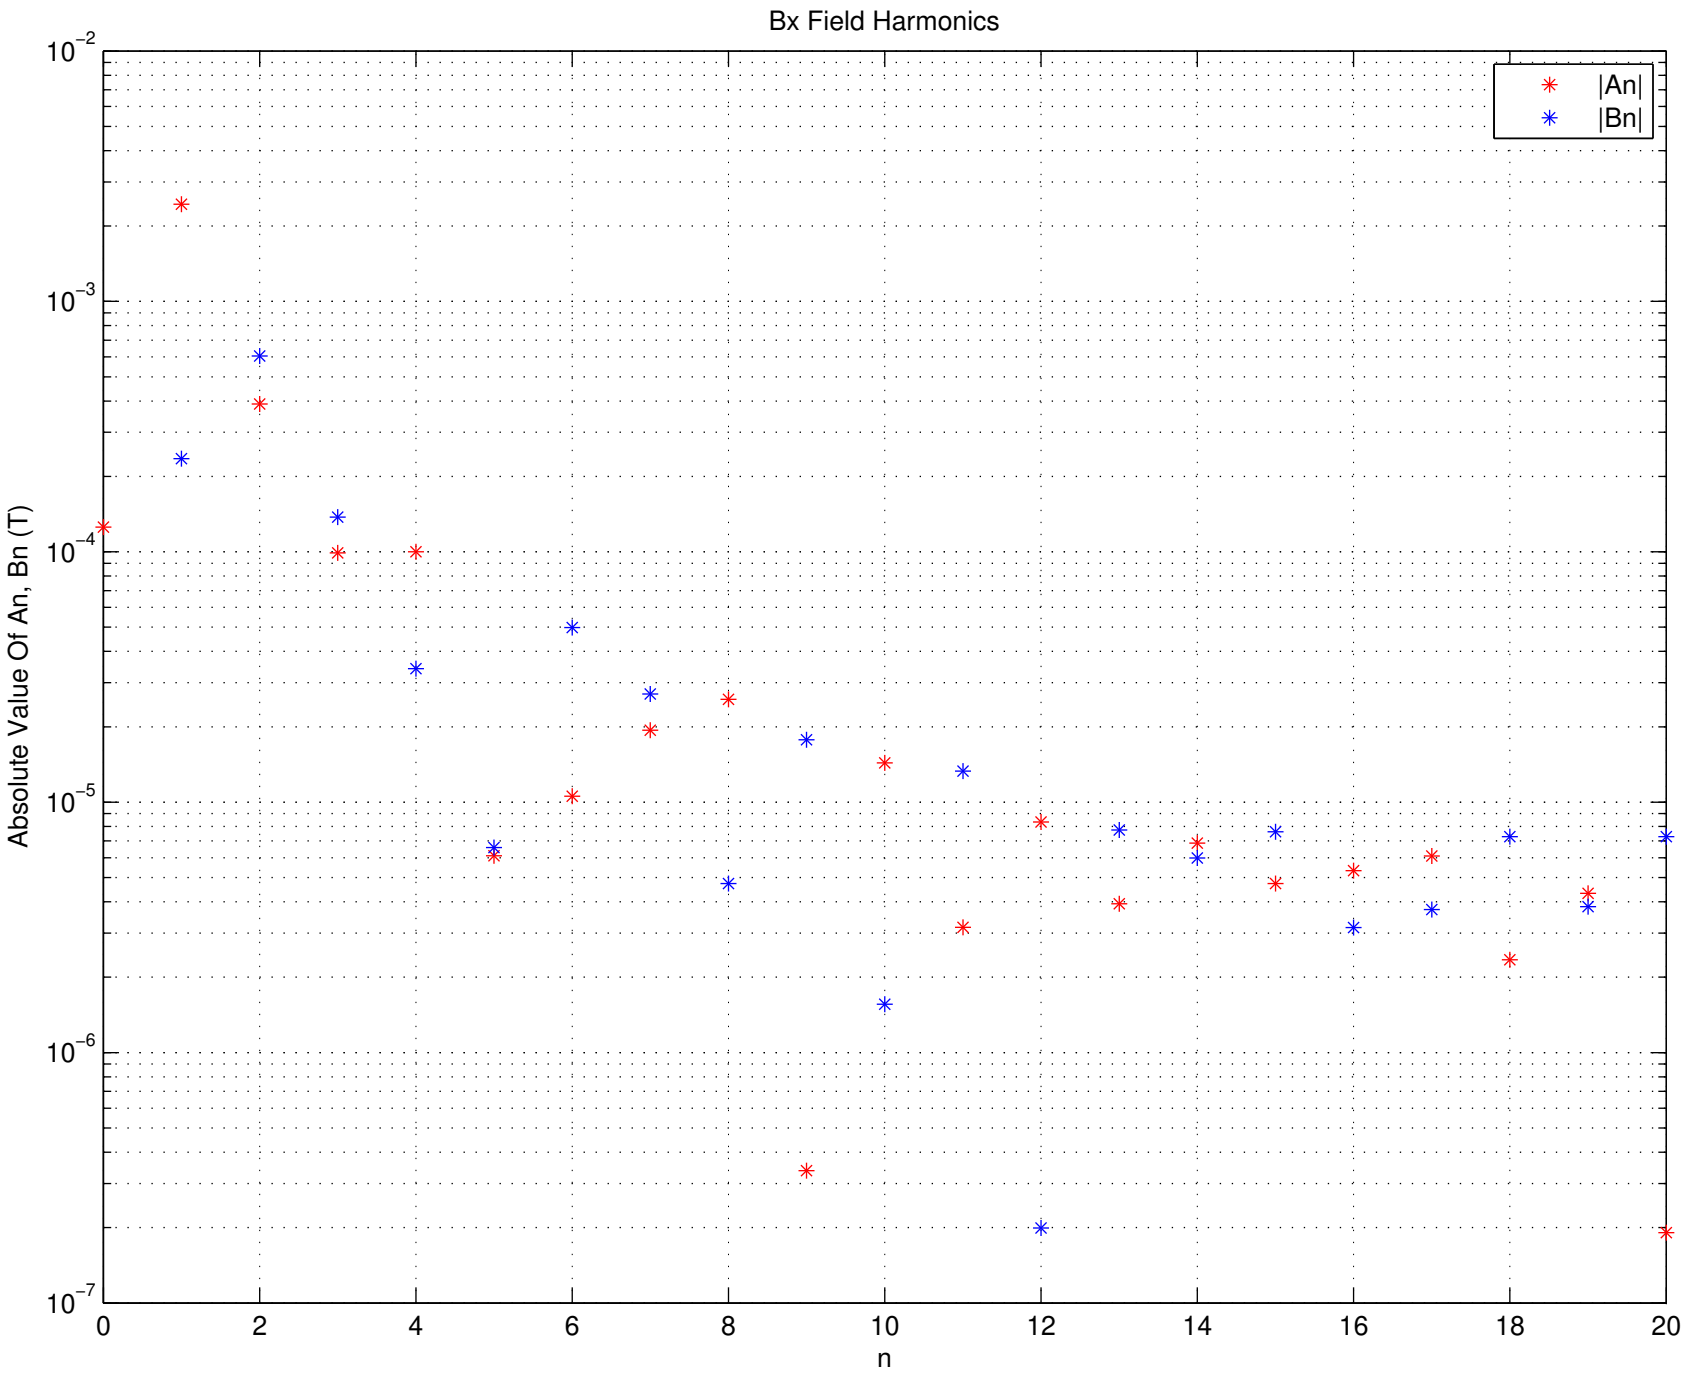
Bx Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
0
2
4
6
8
10
12
14
16
18
20

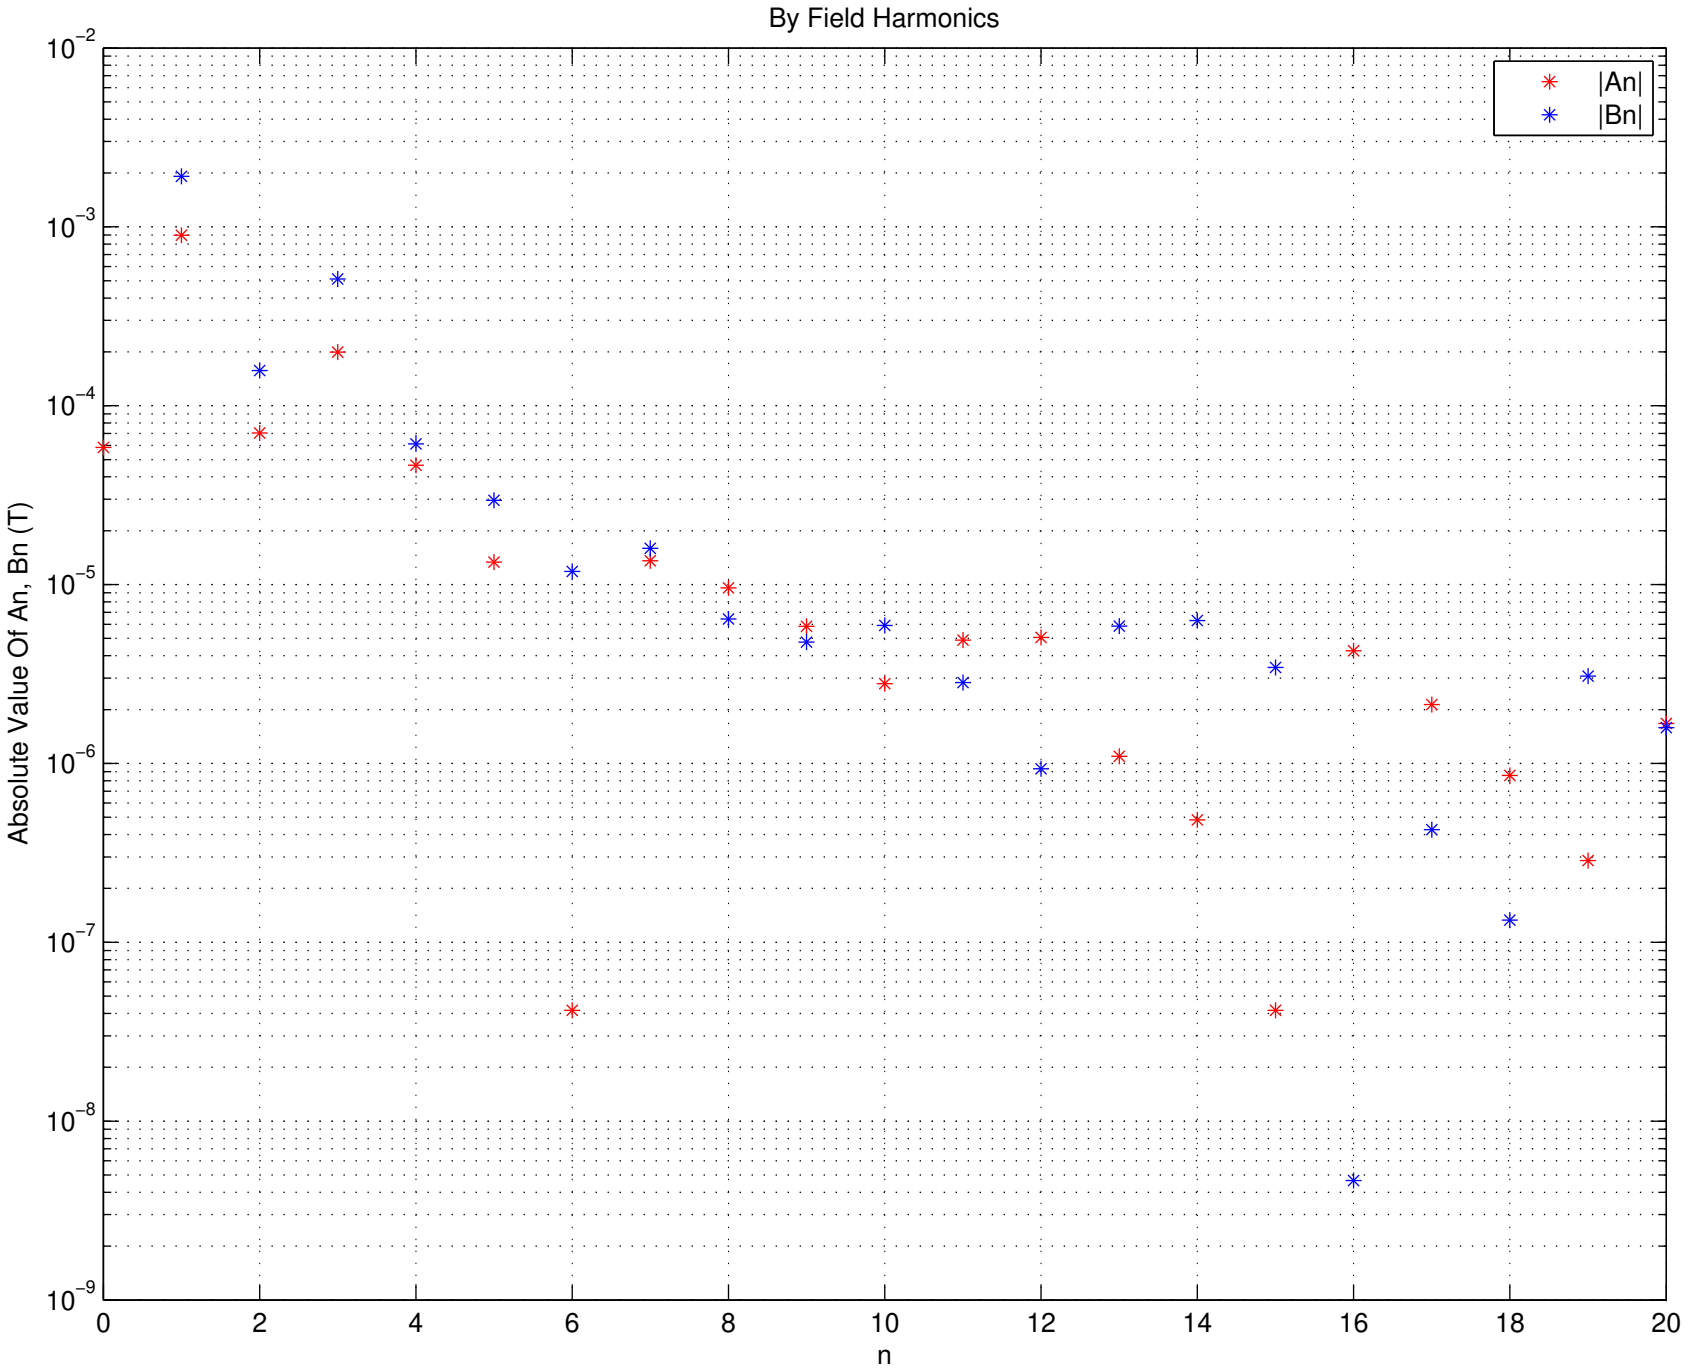
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-7}
10^{-8}
10^{-9}
0
2
4
6
8
10
12
14
16
18
20

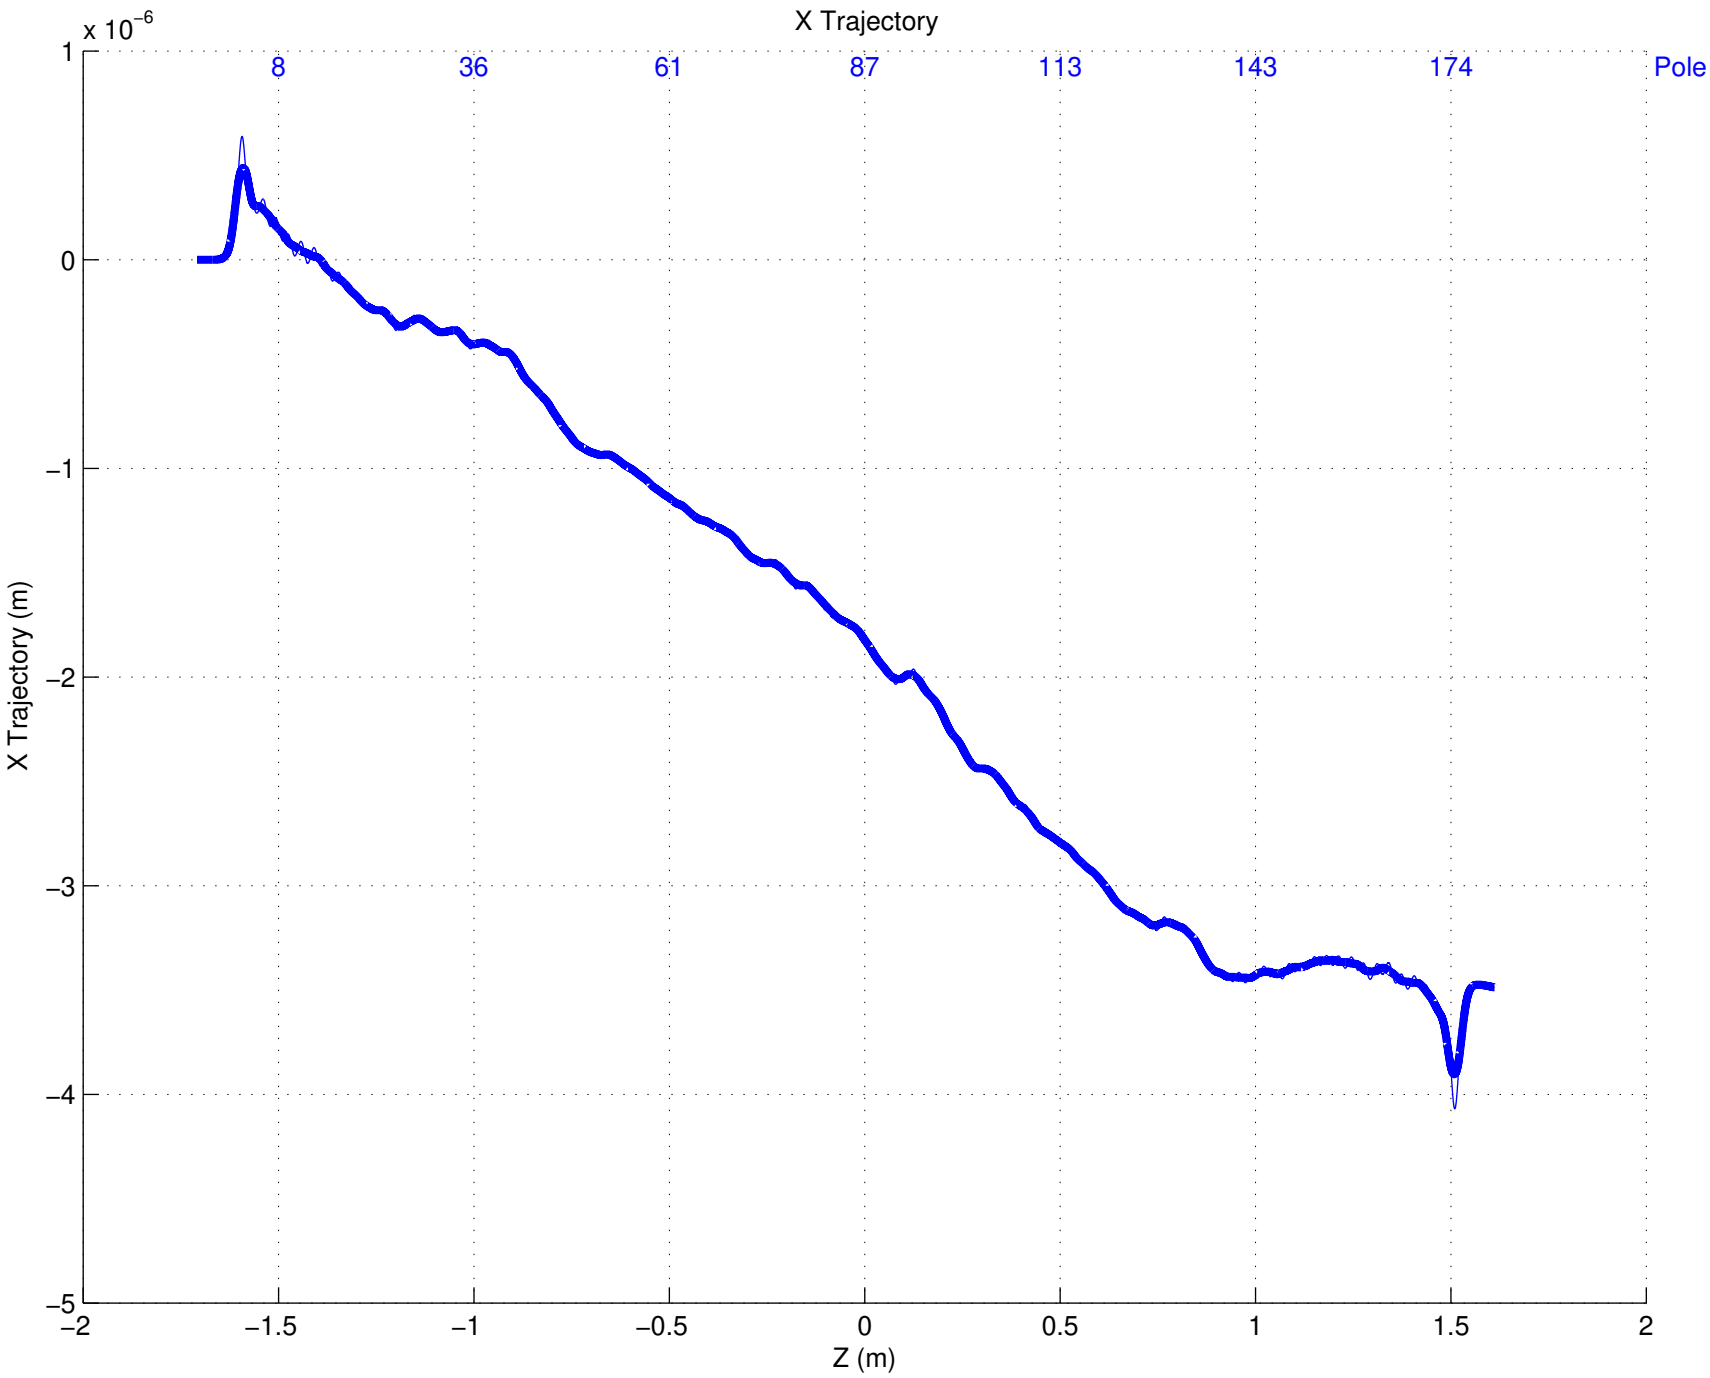
X Trajectory
x 10^-6
8
36
61
87
113
143
174
Pole
1
0
−1
−2
−3
−4
−5
X Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

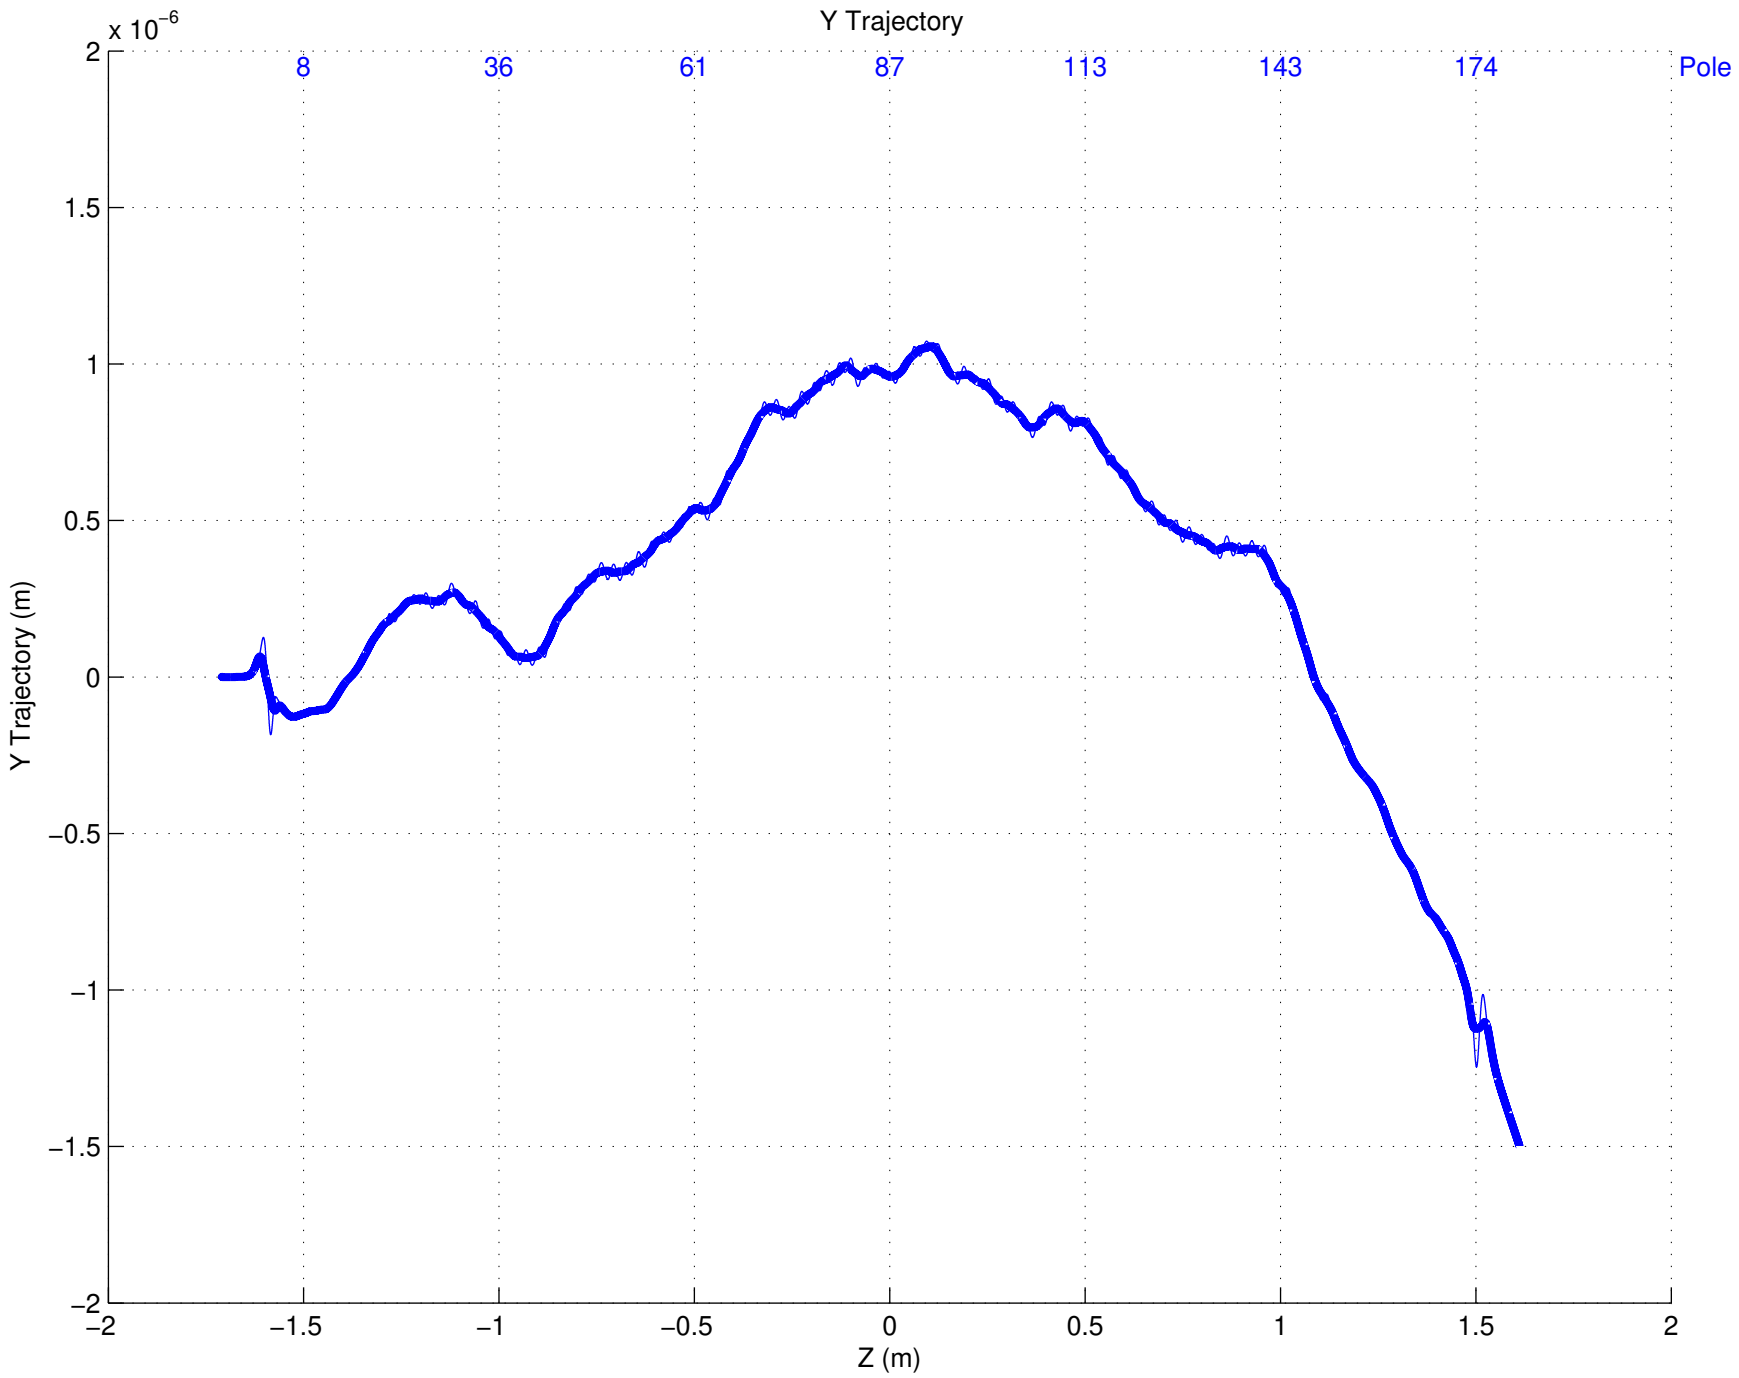
Y Trajectory
x 10^-6
8
36
61
87
113
143
174
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

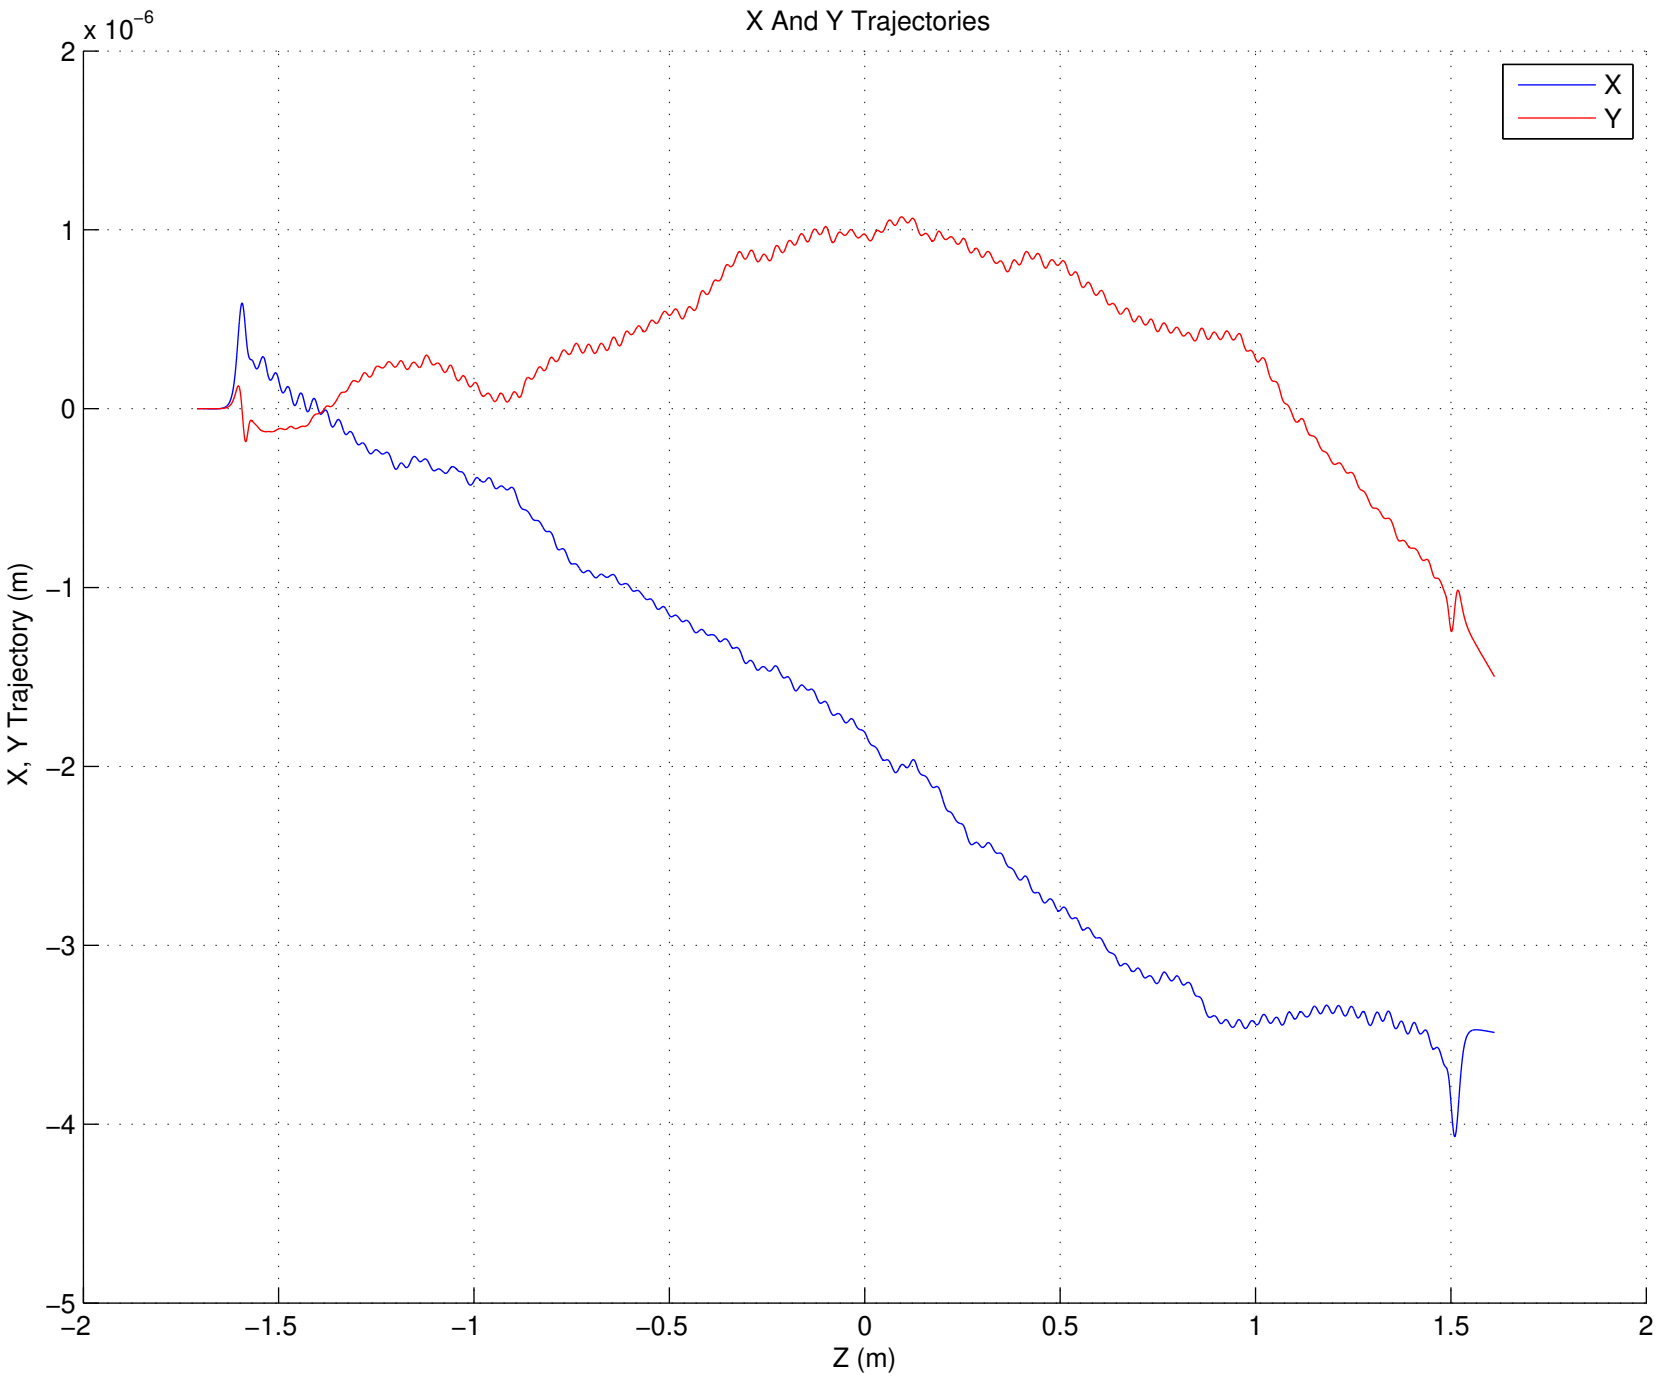
X And Y Trajectories
x 10^-6
2
1
0
−1
−2
−3
−4
−5
X, Y Trajectory (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)
X
Y

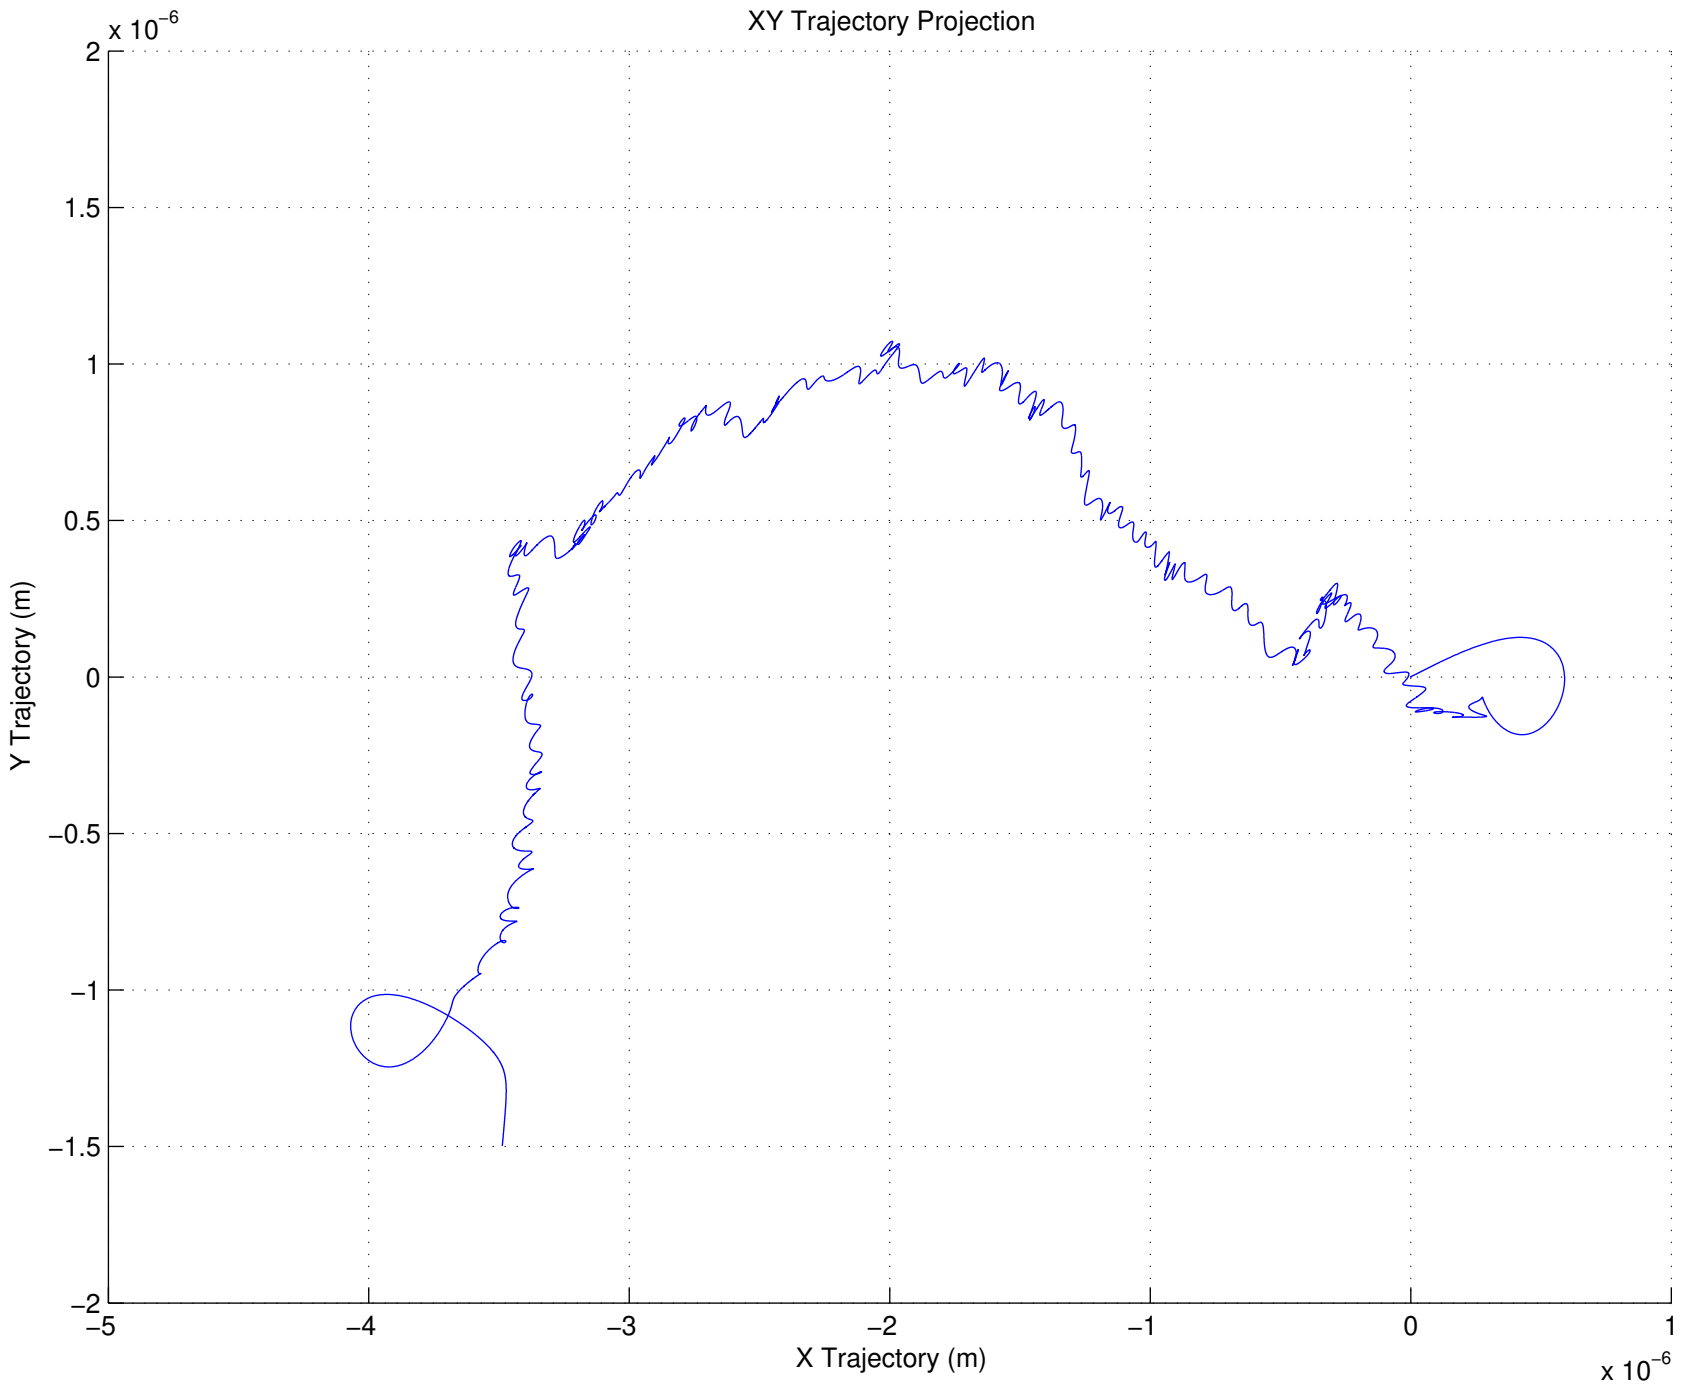
XY Trajectory Projection
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−5
−4
−3
−2
−1
0
1
X Trajectory (m)
x 10^-6

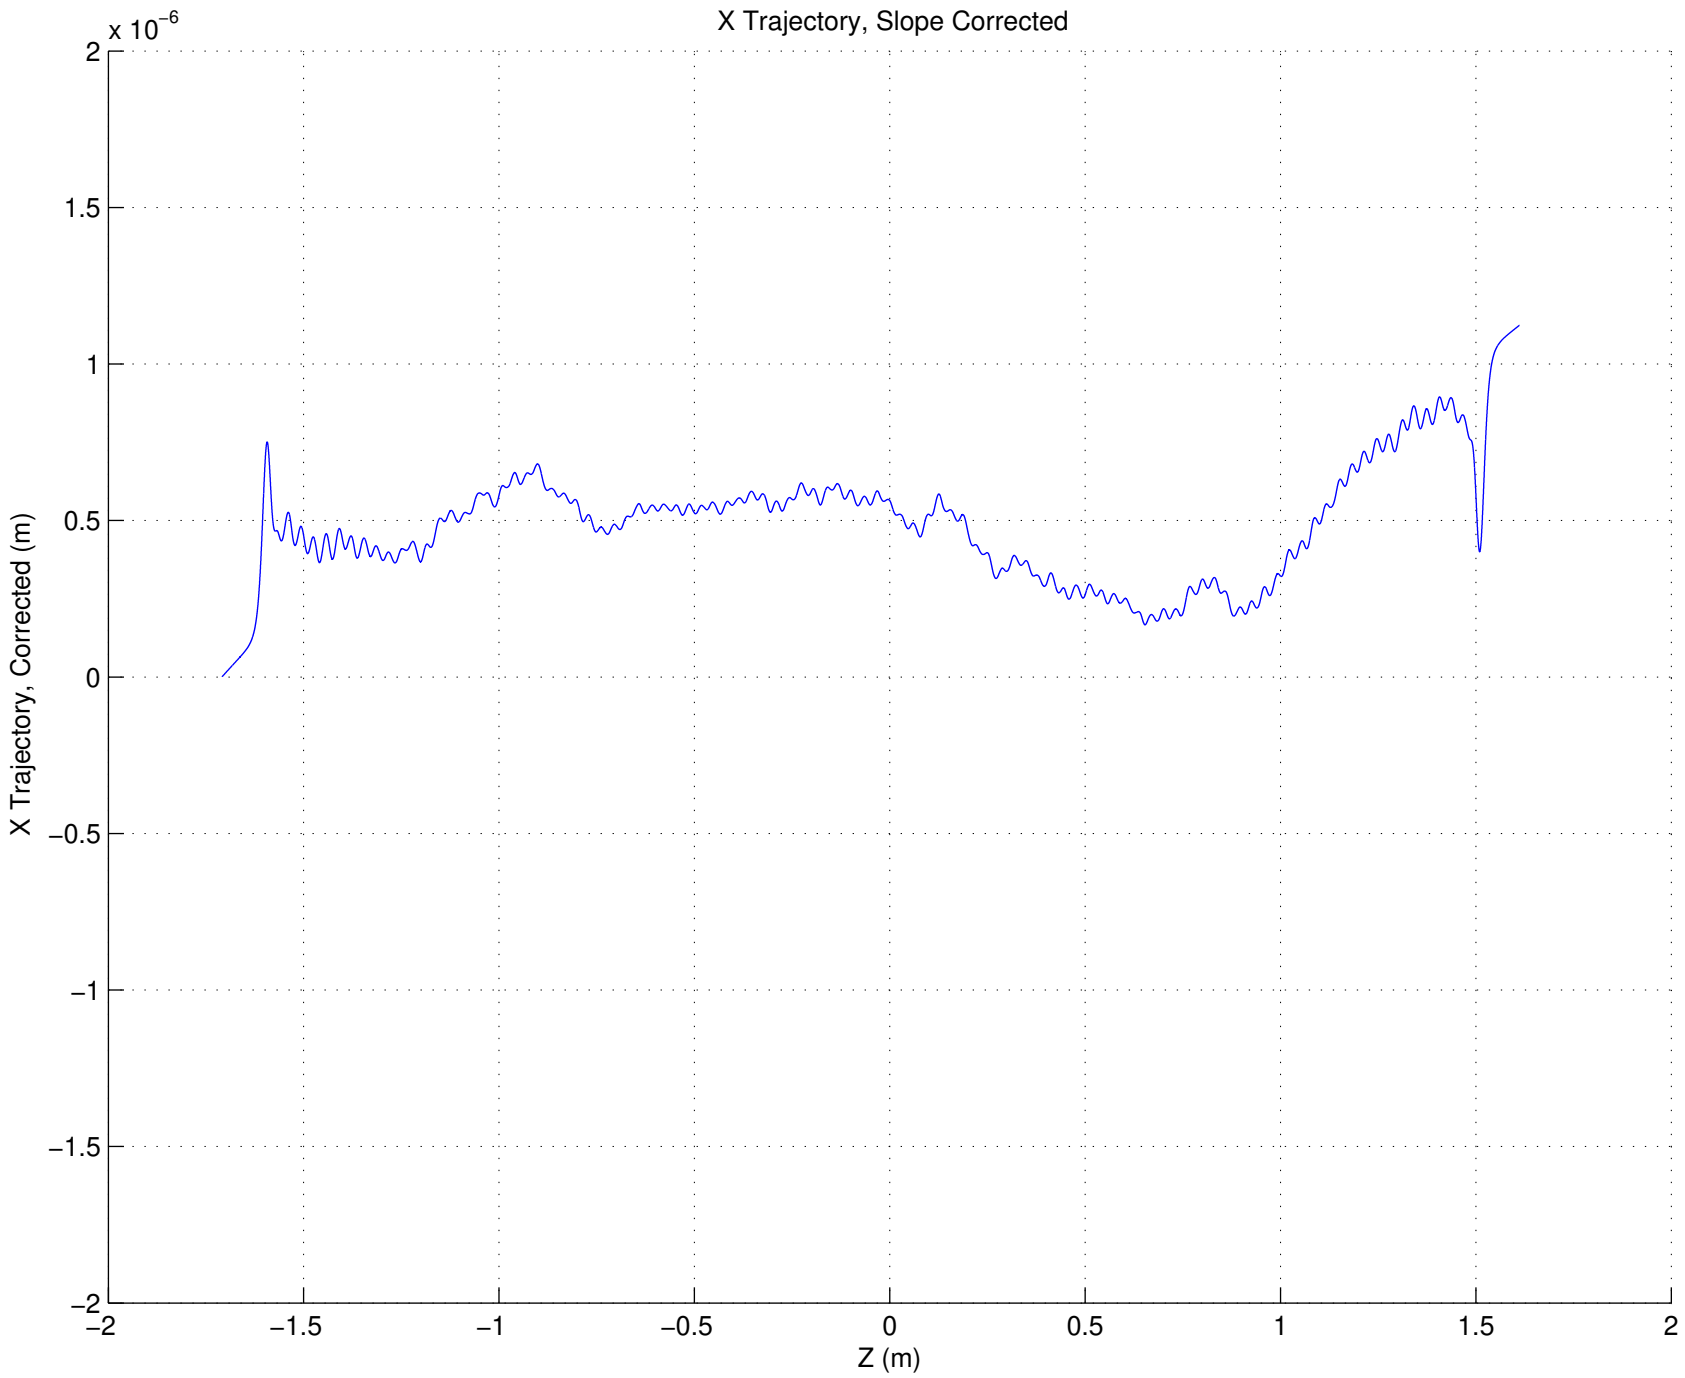
X Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

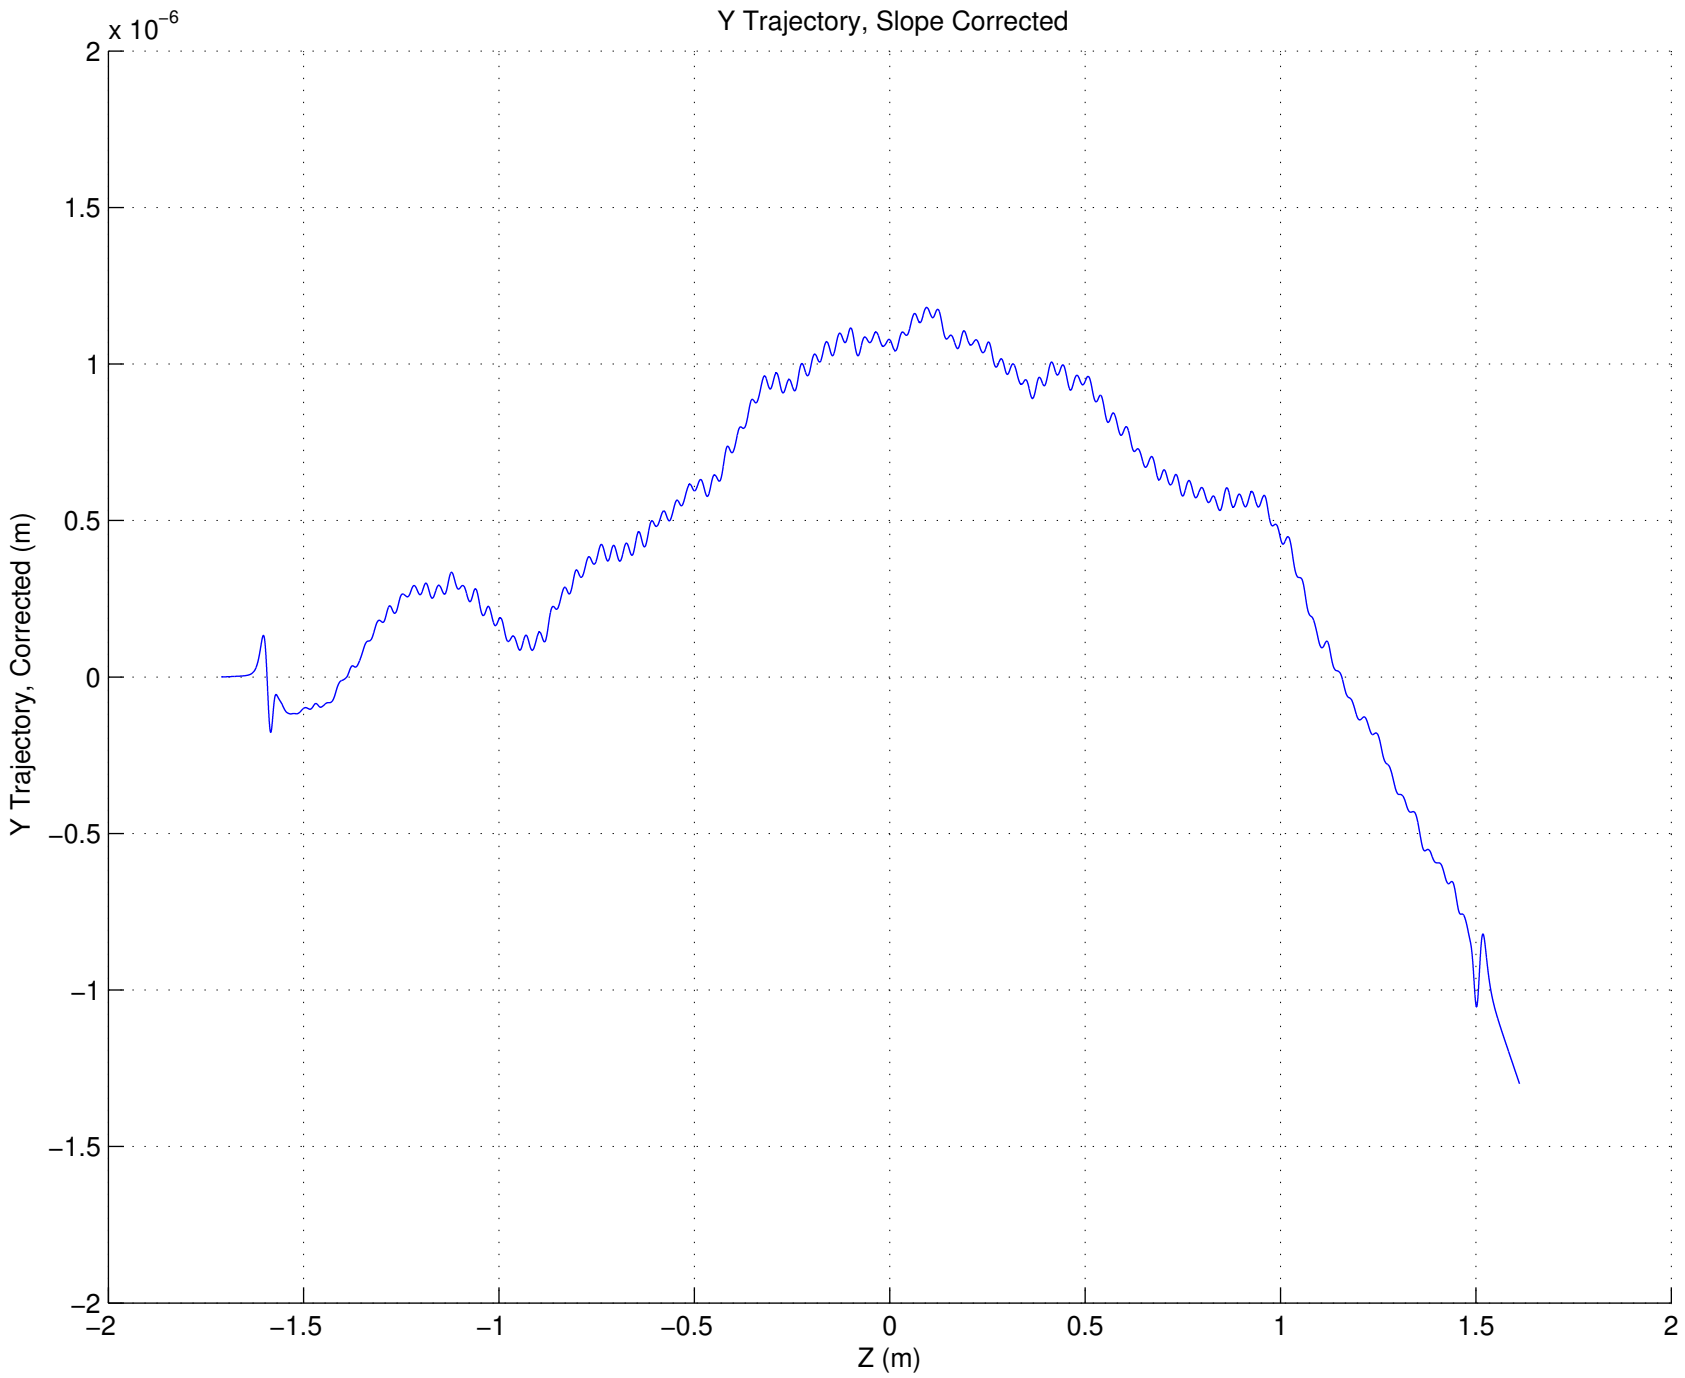
Y Trajectory, Slope Corrected
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory, Corrected (m)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

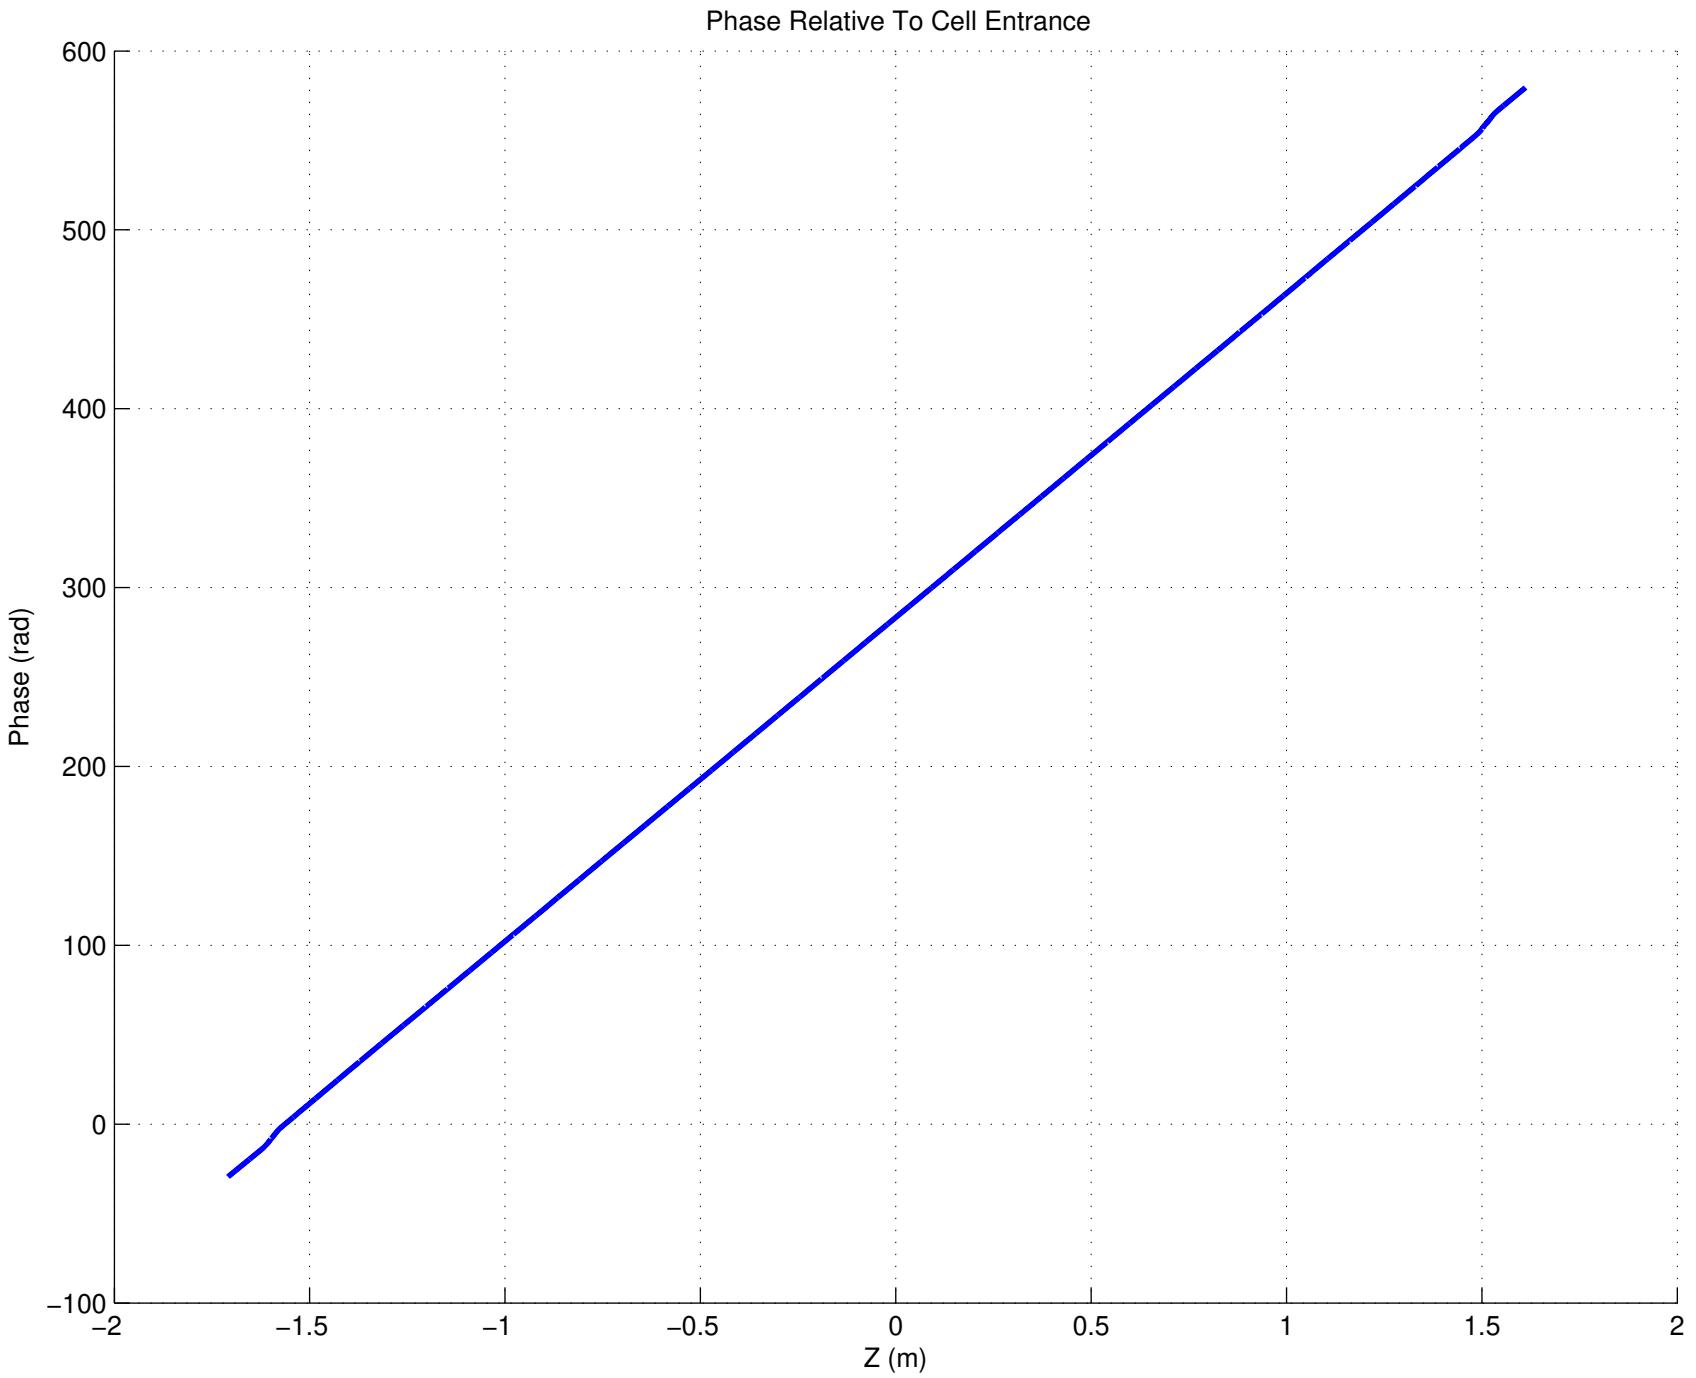
Phase Relative To Cell Entrance
600
500
400
300
200
100
0
−100
Phase (rad)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

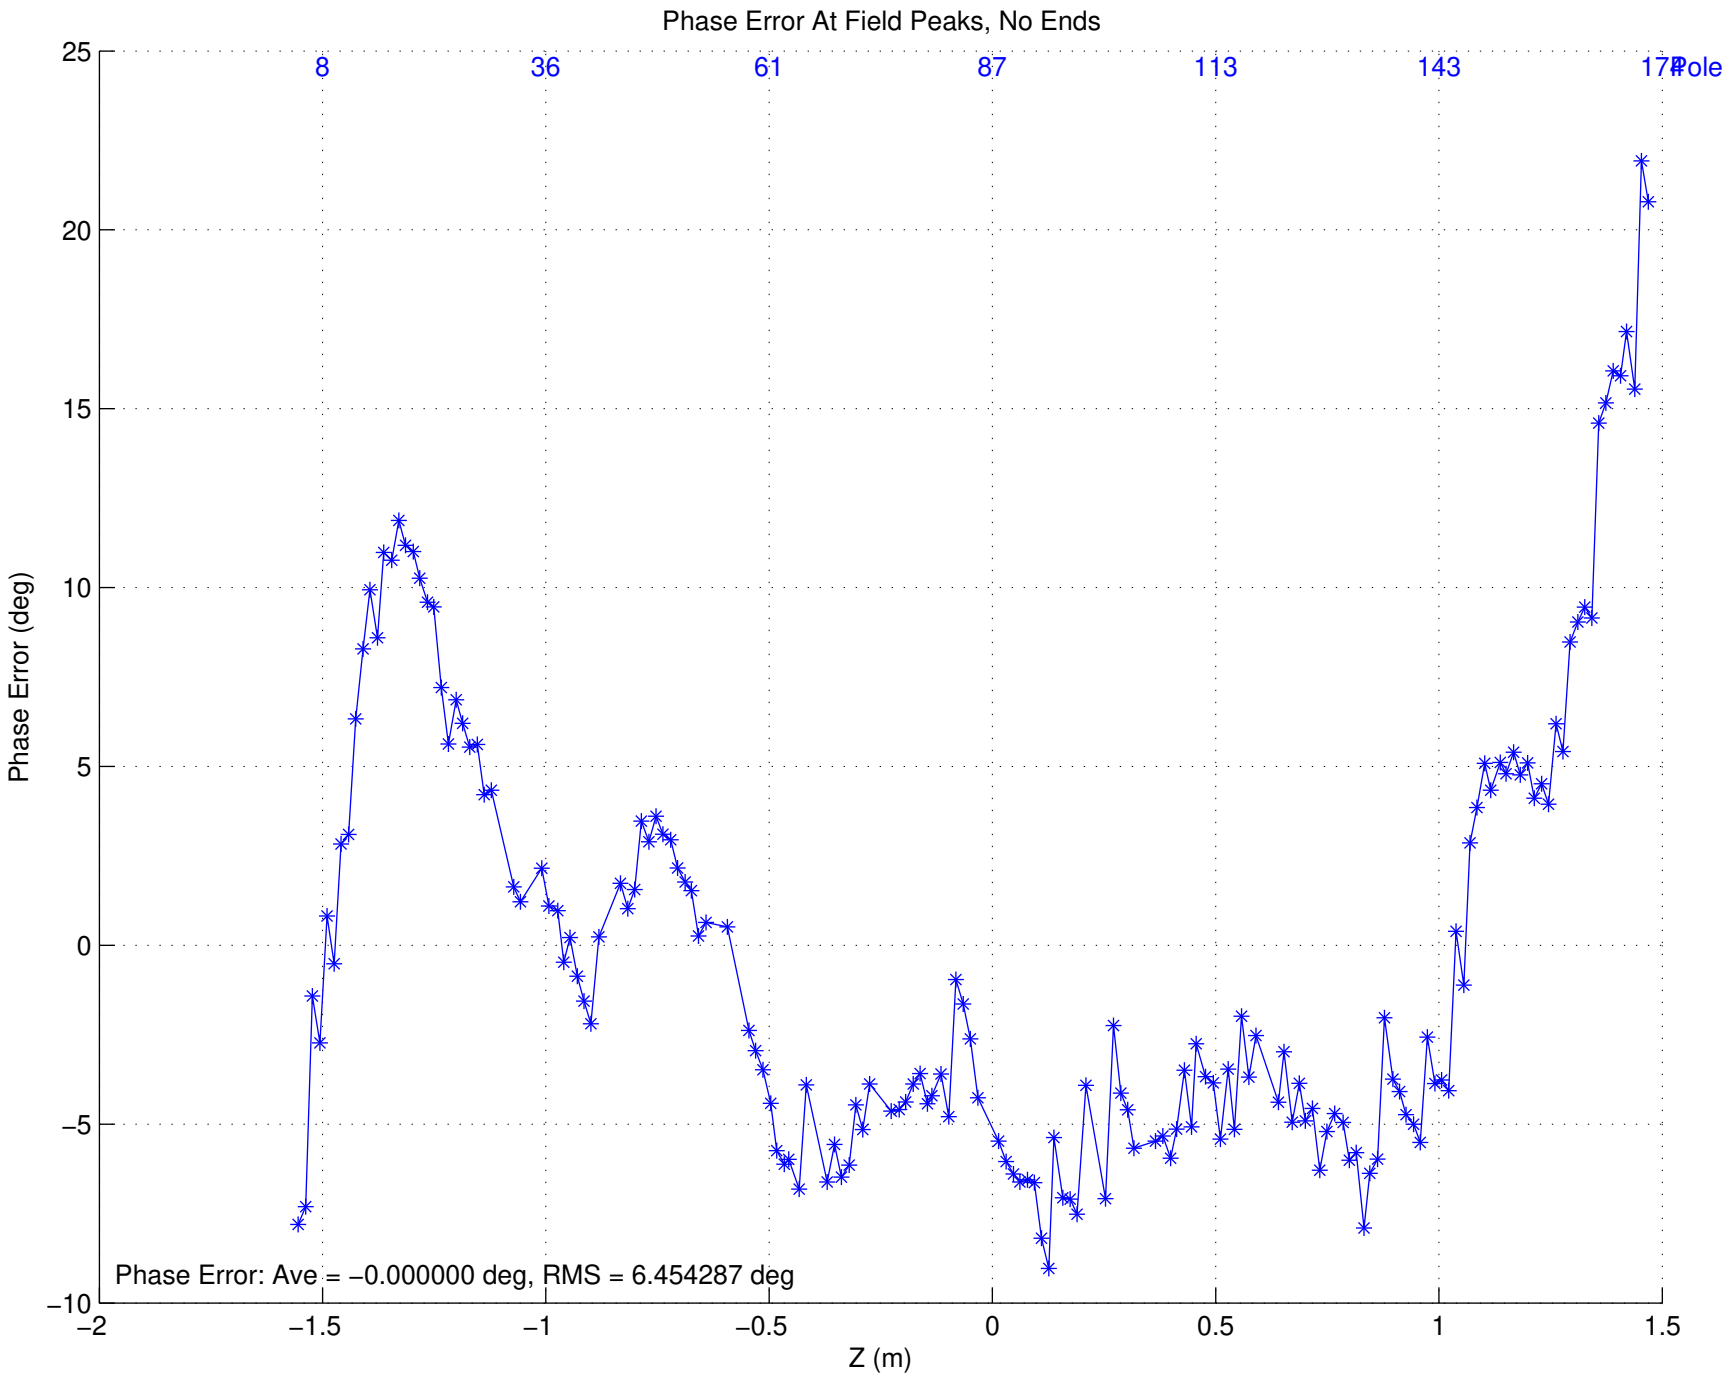
Phase Error At Field Peaks, No Ends
8
36
61
87
113
143
174
Pole
25
20
15
10
5
0
−5
−10
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)
Phase Error: Ave = −0.000000 deg, RMS = 6.454287 deg

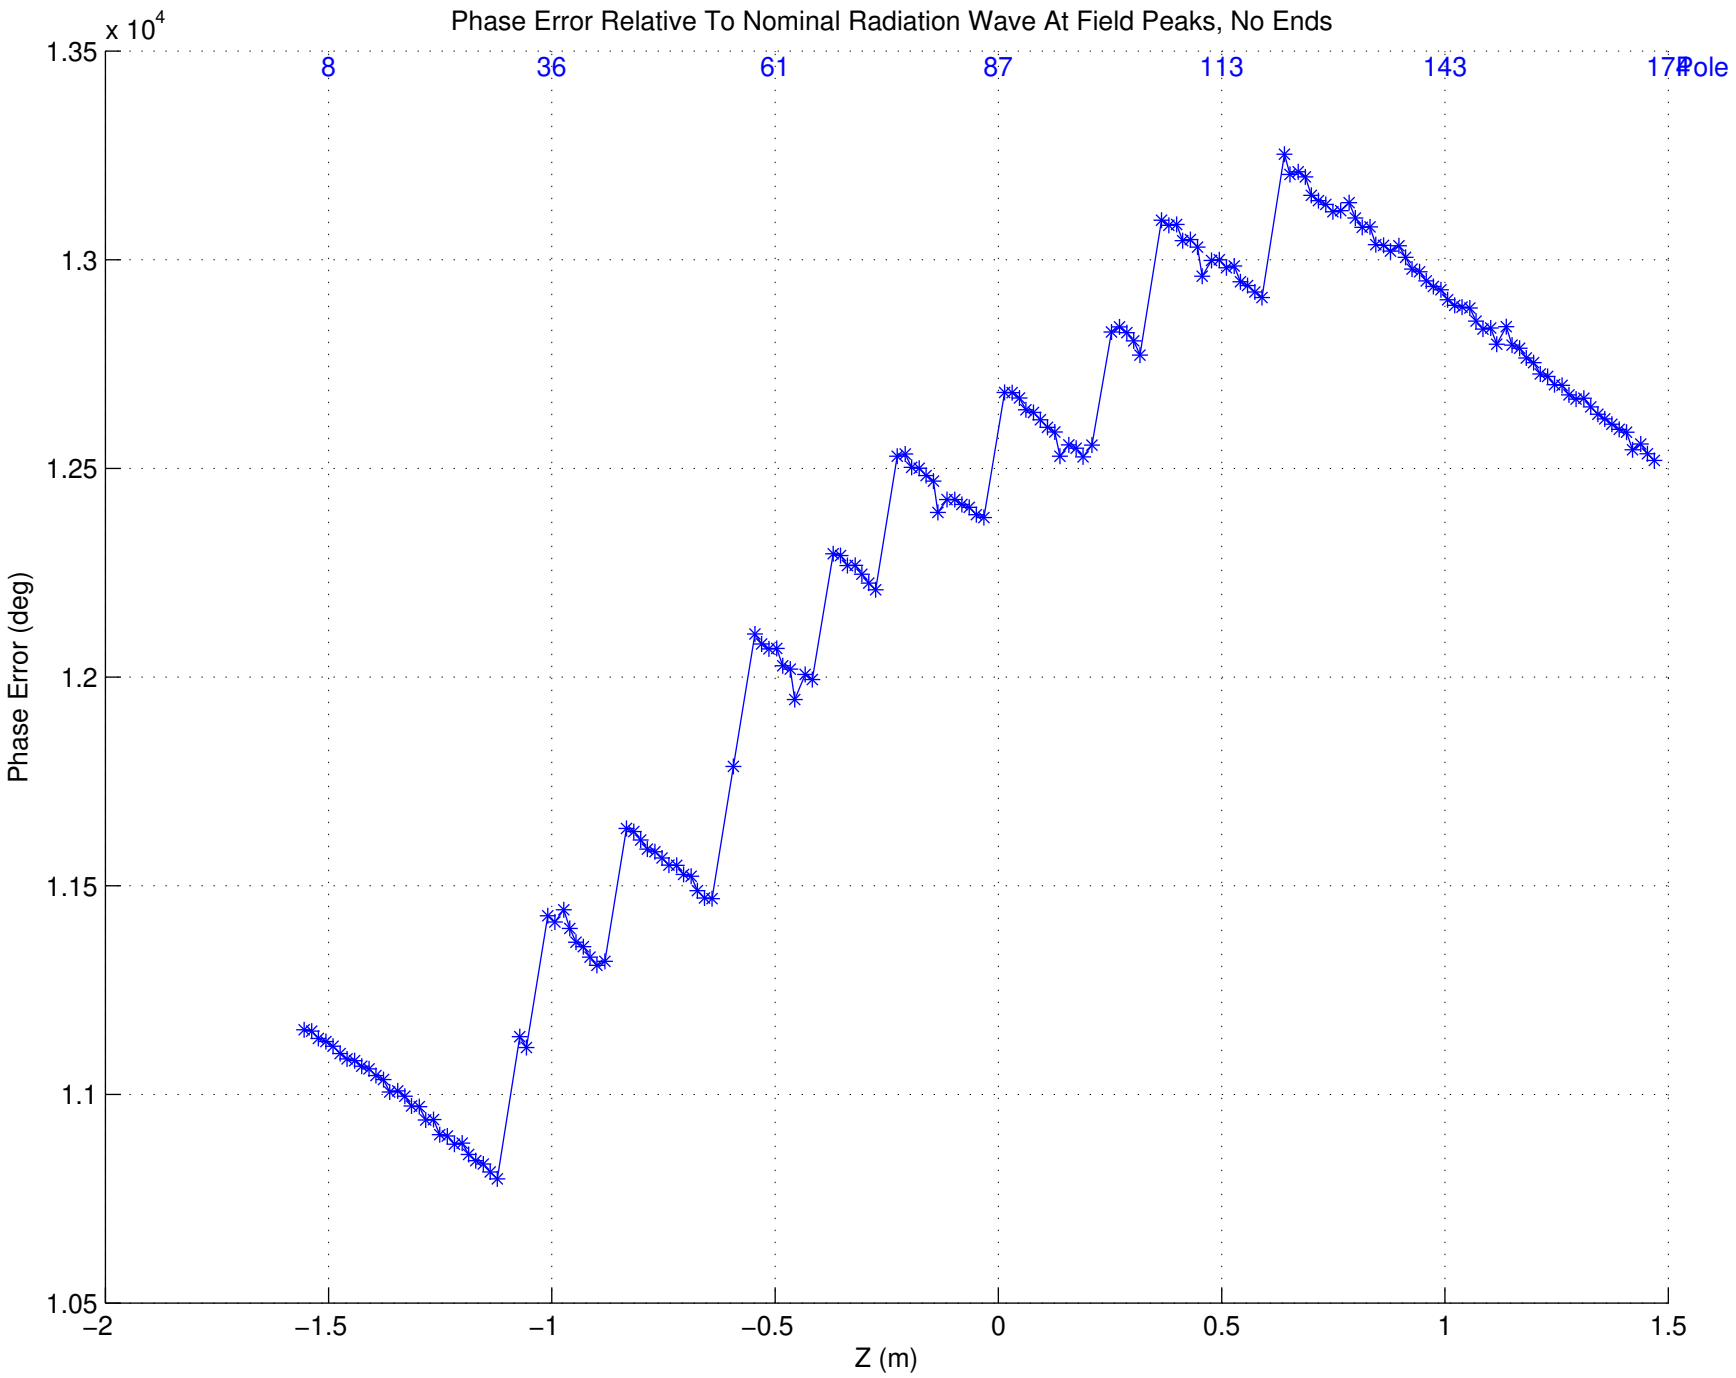
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
x 10^4
1.35
1.3
1.25
1.2
1.15
1.1
1.05
Phase Error (deg)
8
36
61
87
113
143
174
Pole
−2
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

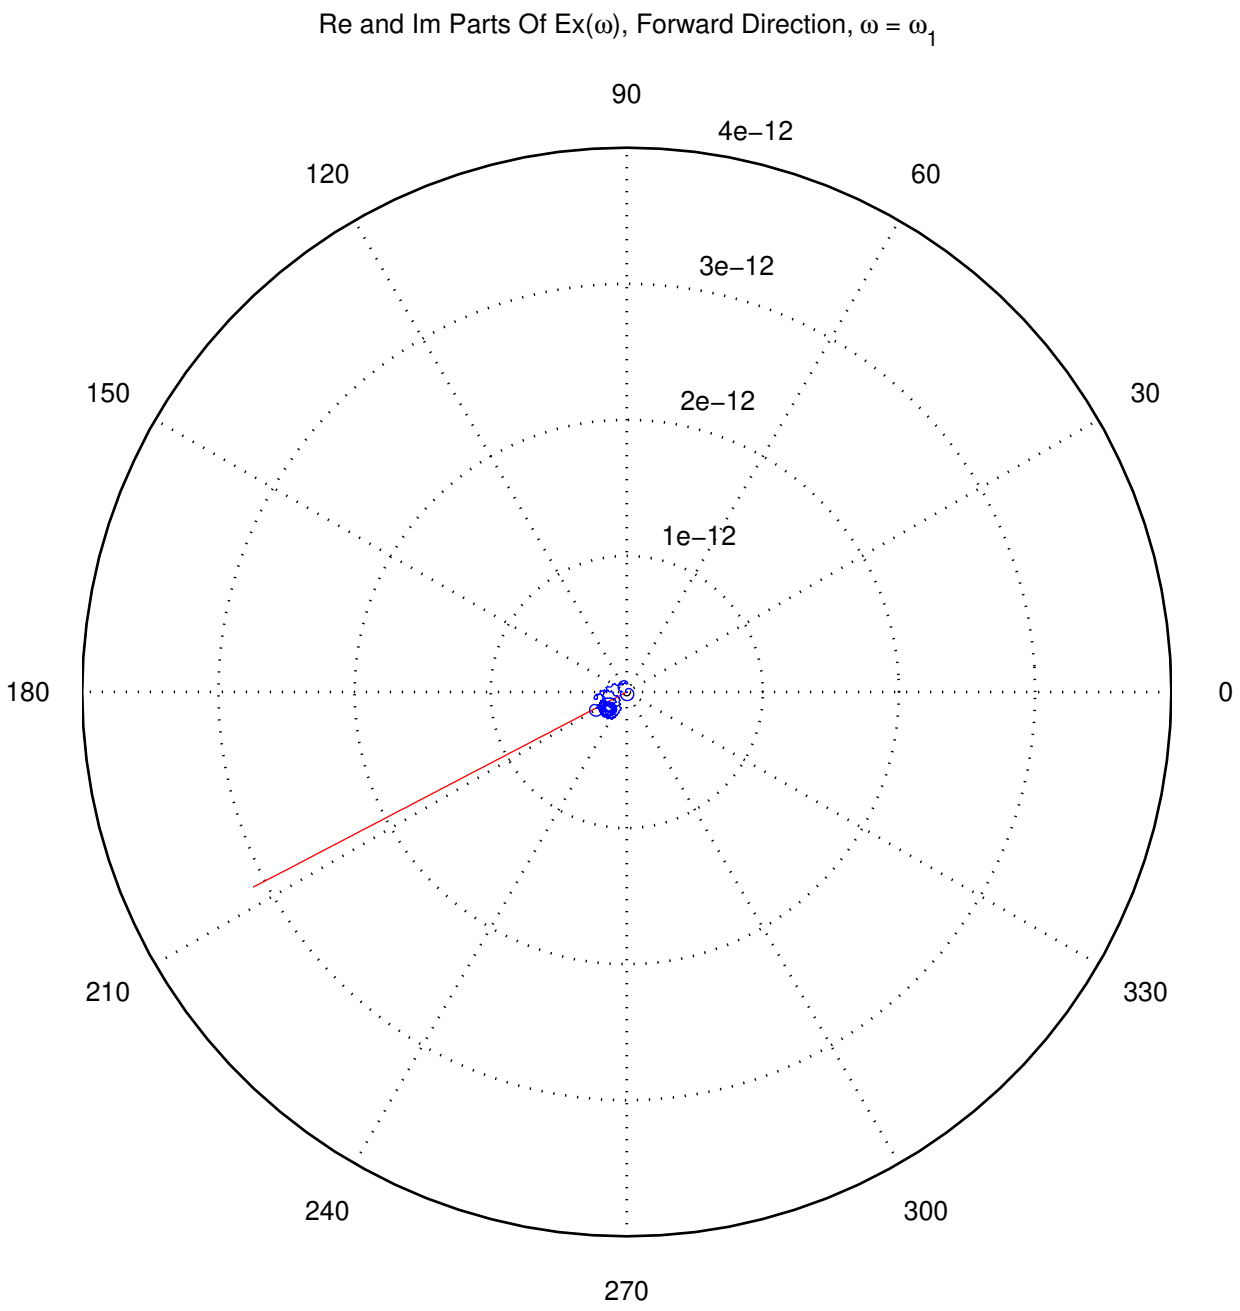
Re and Im Parts Of Ex(ω), Forward Direction, ω = ω1
90
4e−12
120
60
3e−12
150
30
2e−12
1e−12
180
0
210
330
240
300
270

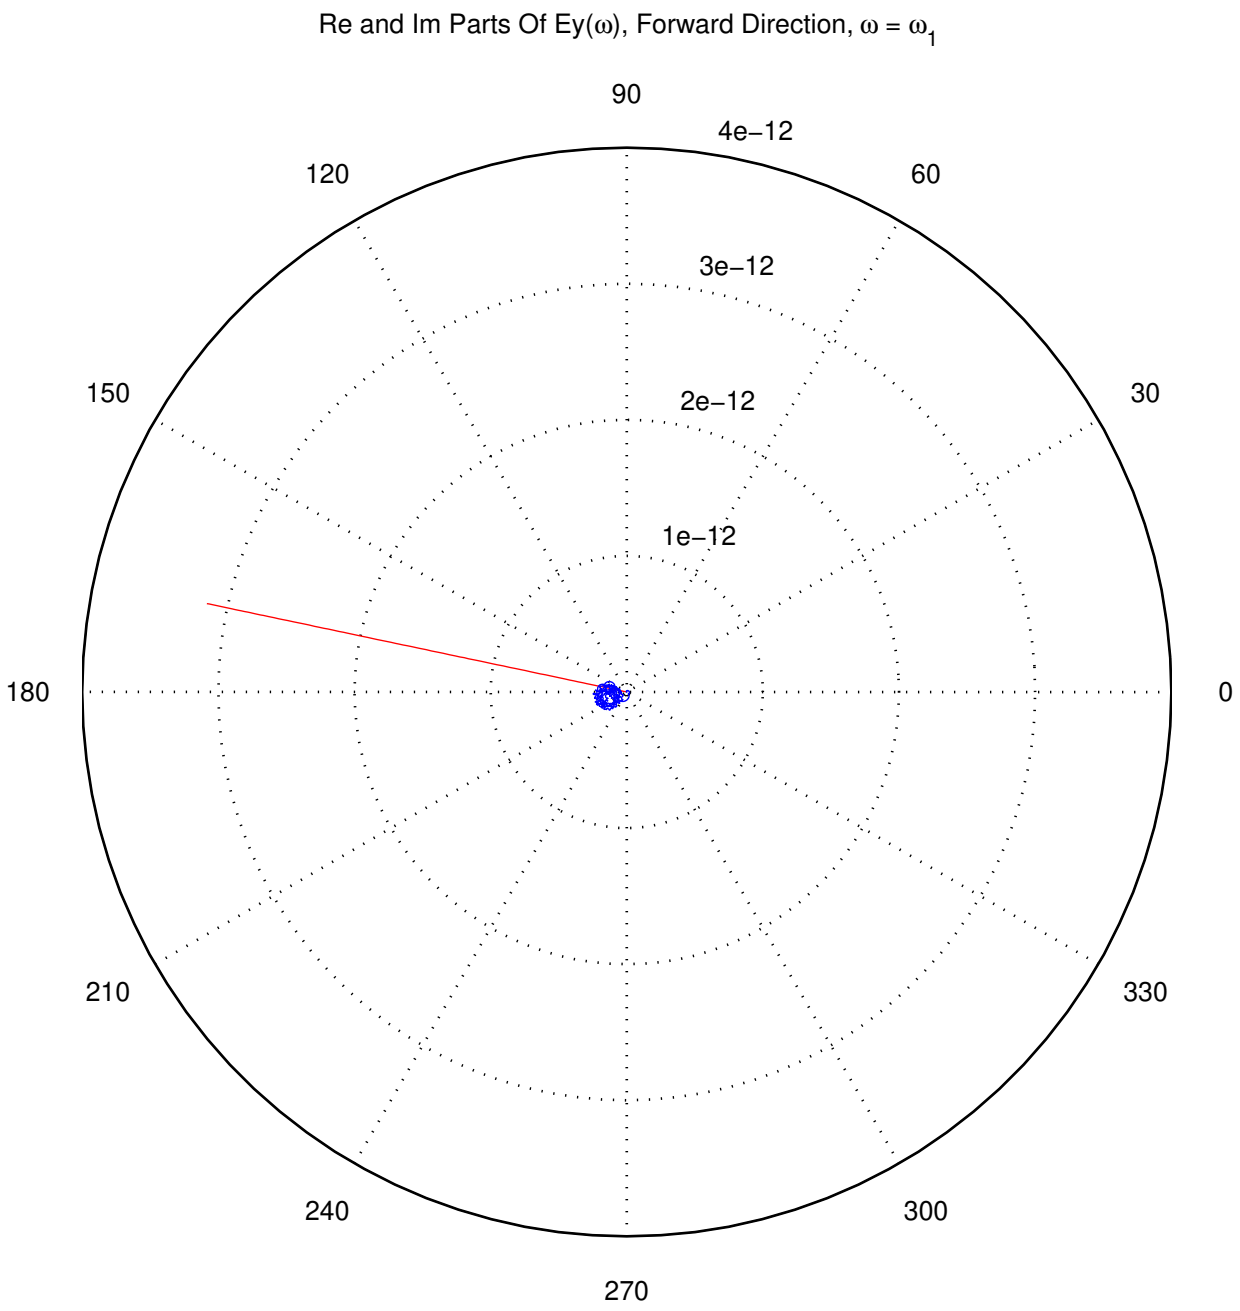
Re and Im Parts Of Ey(ω), Forward Direction, ω = ω1
90
4e−12
120
60
3e−12
150
30
2e−12
1e−12
180
0
210
330
240
300
270

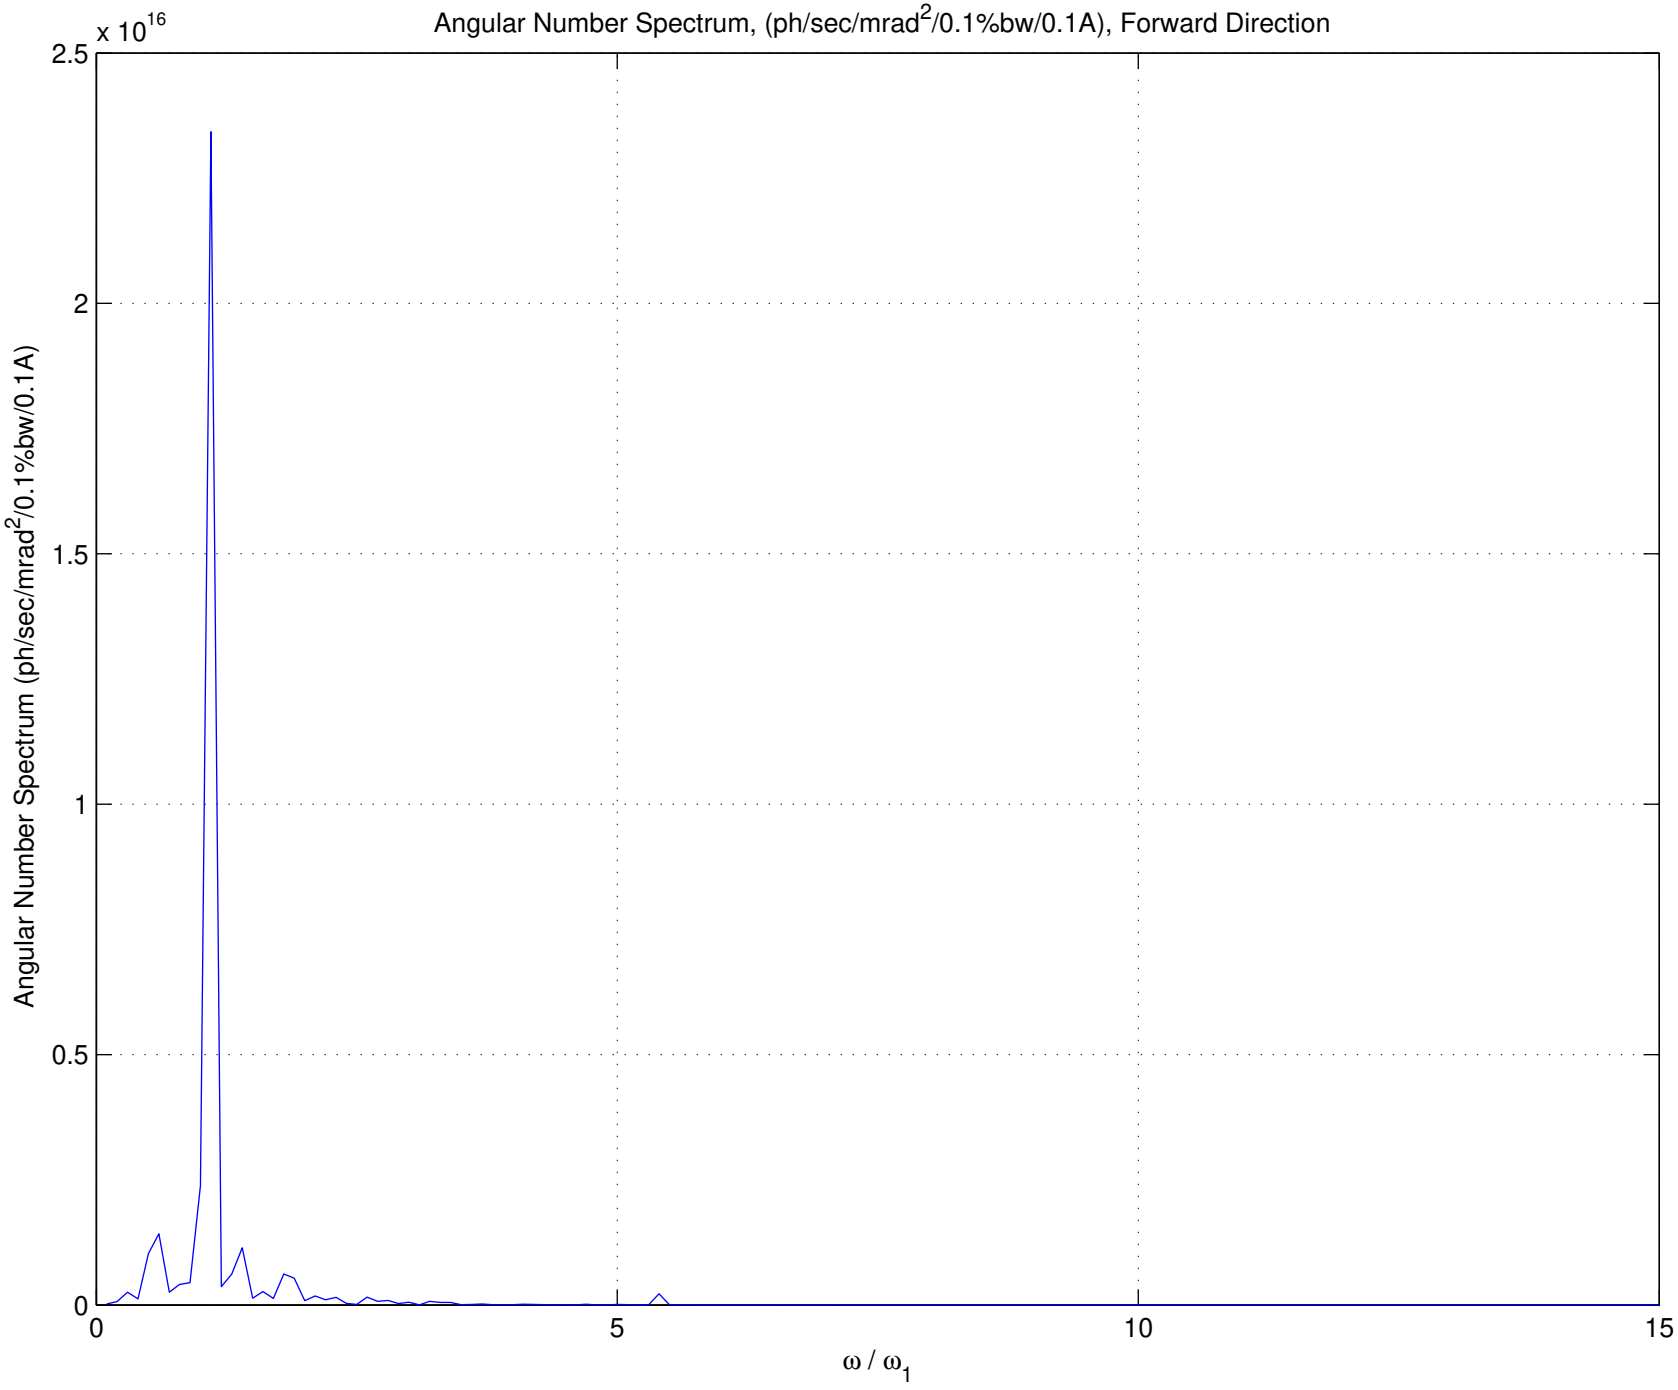
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^16
2.5
2
1.5
1
0.5
0
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
0
5
10
15
ω / ω1

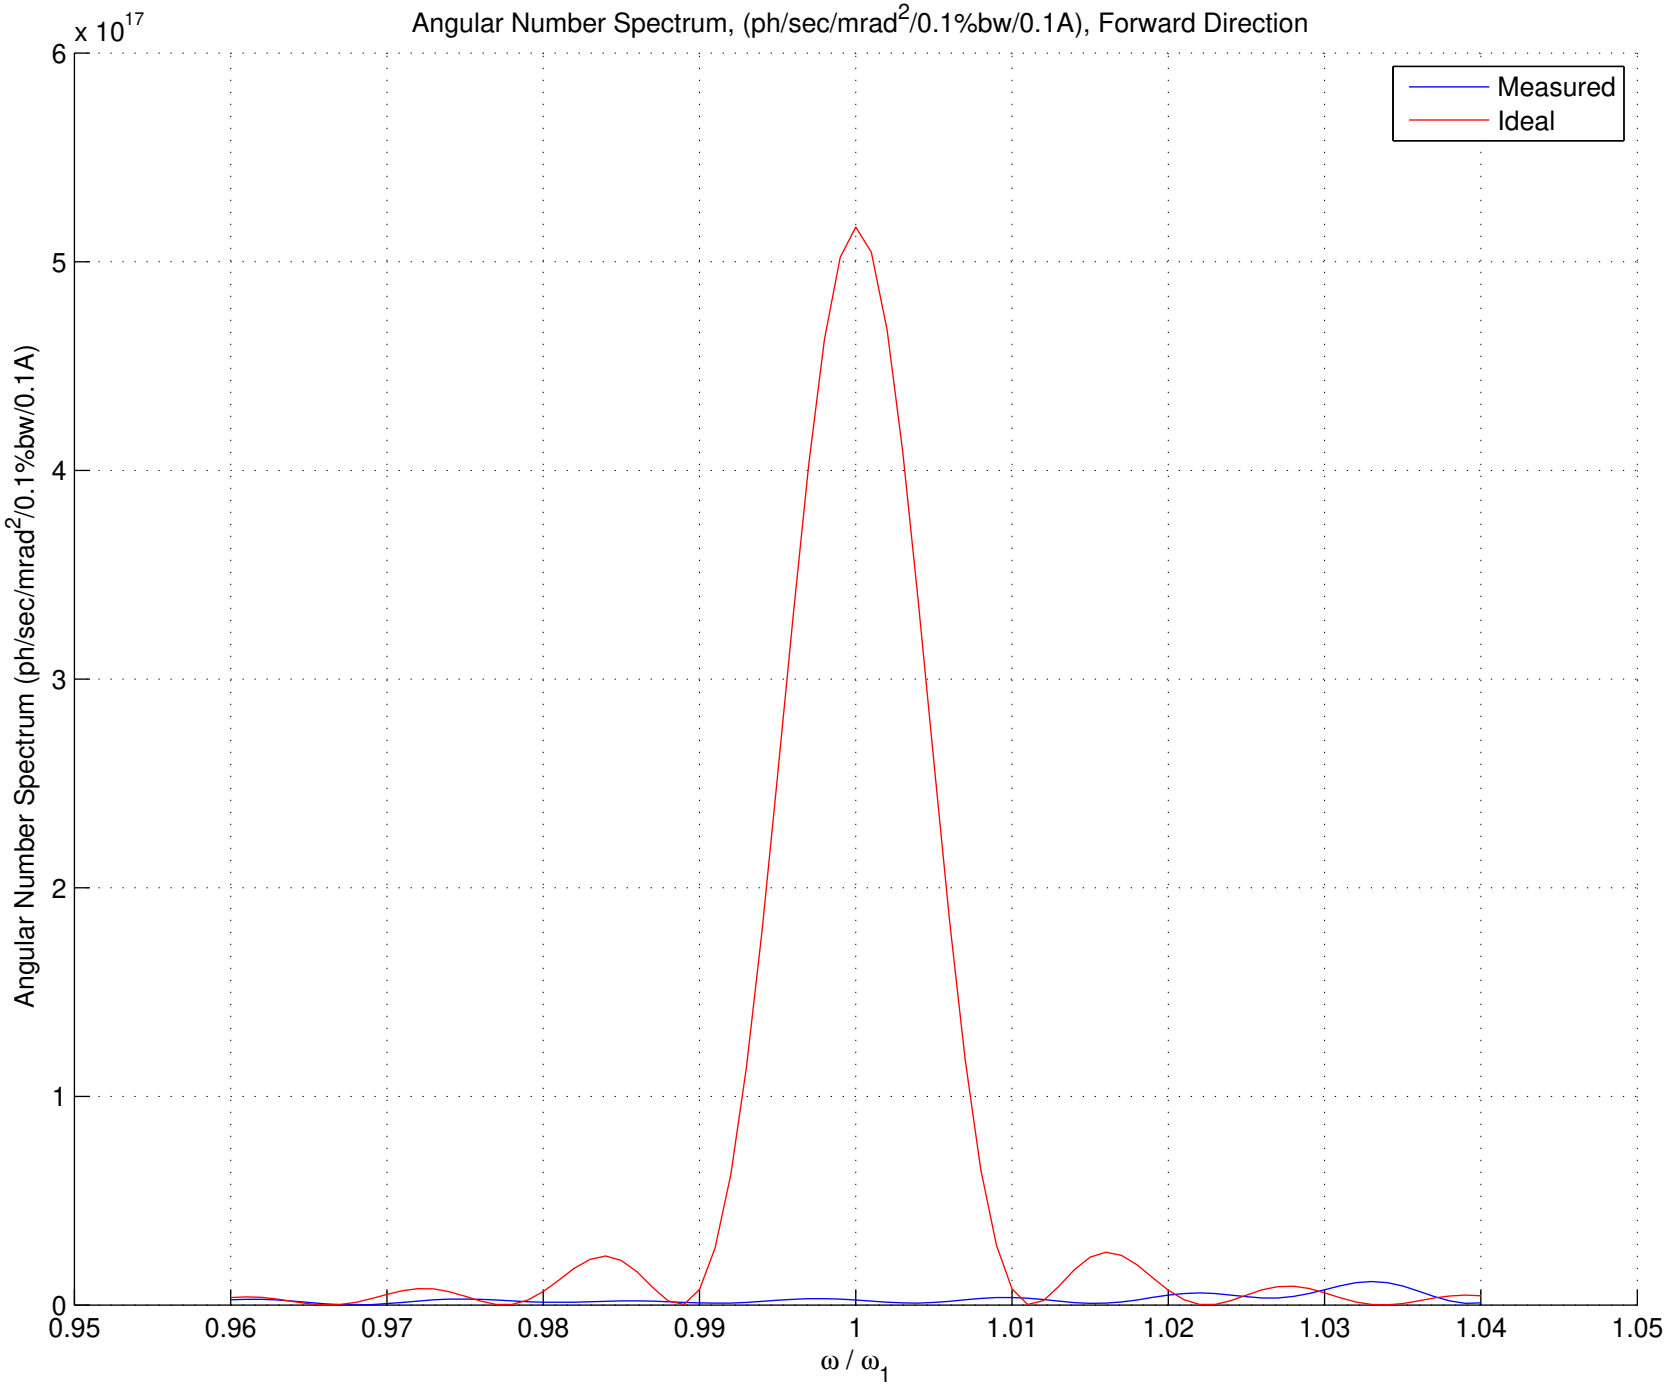
Angular Number Spectrum, (ph/sec/mrad2/0.1%bw/0.1A), Forward Direction
x 10^17
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad2/0.1%bw/0.1A)
ω / ω1
0
1
2
3
4
5
6
0.95
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05

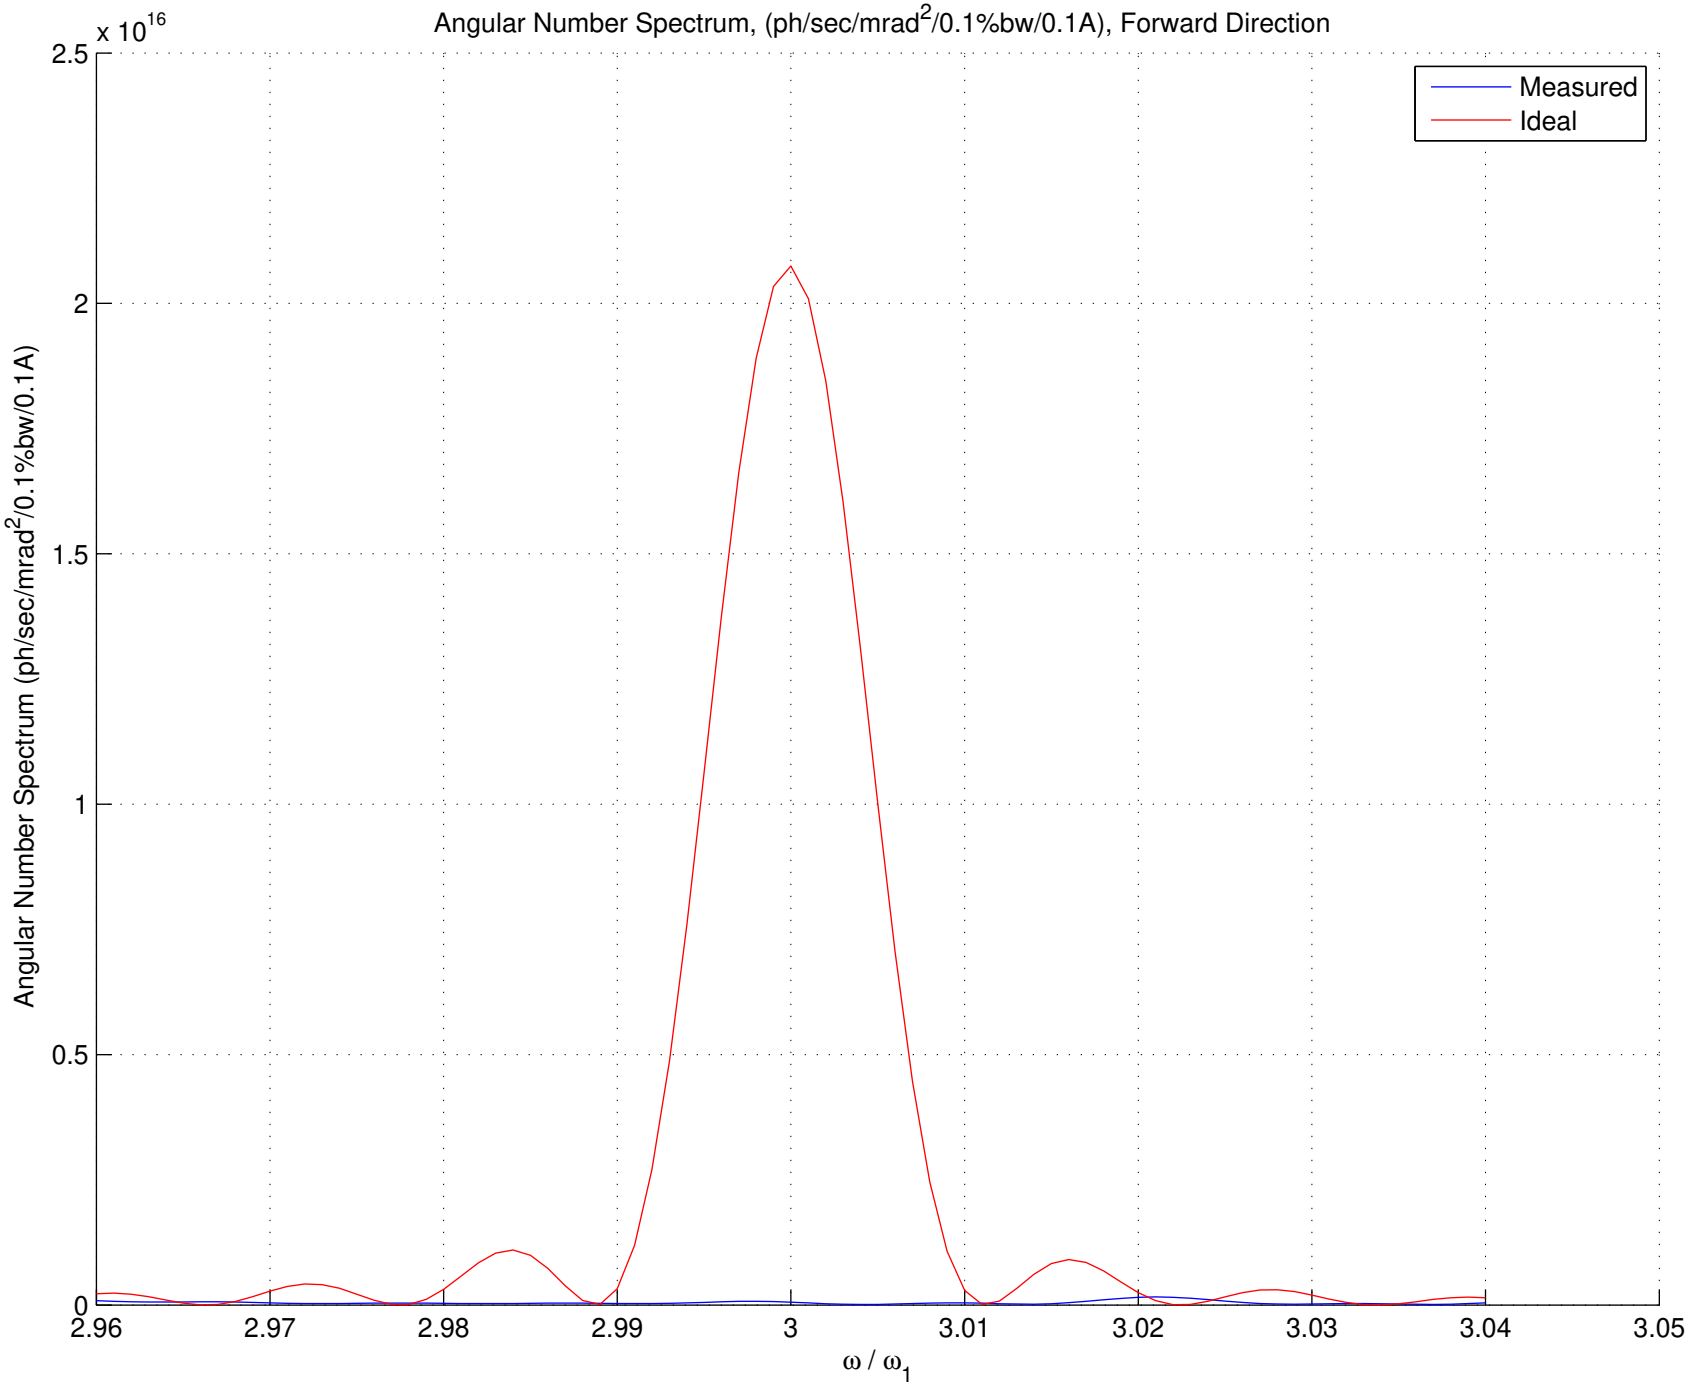
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{16}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
2.5
2
1.5
1
0.5
0
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05
ω / $ω_1$

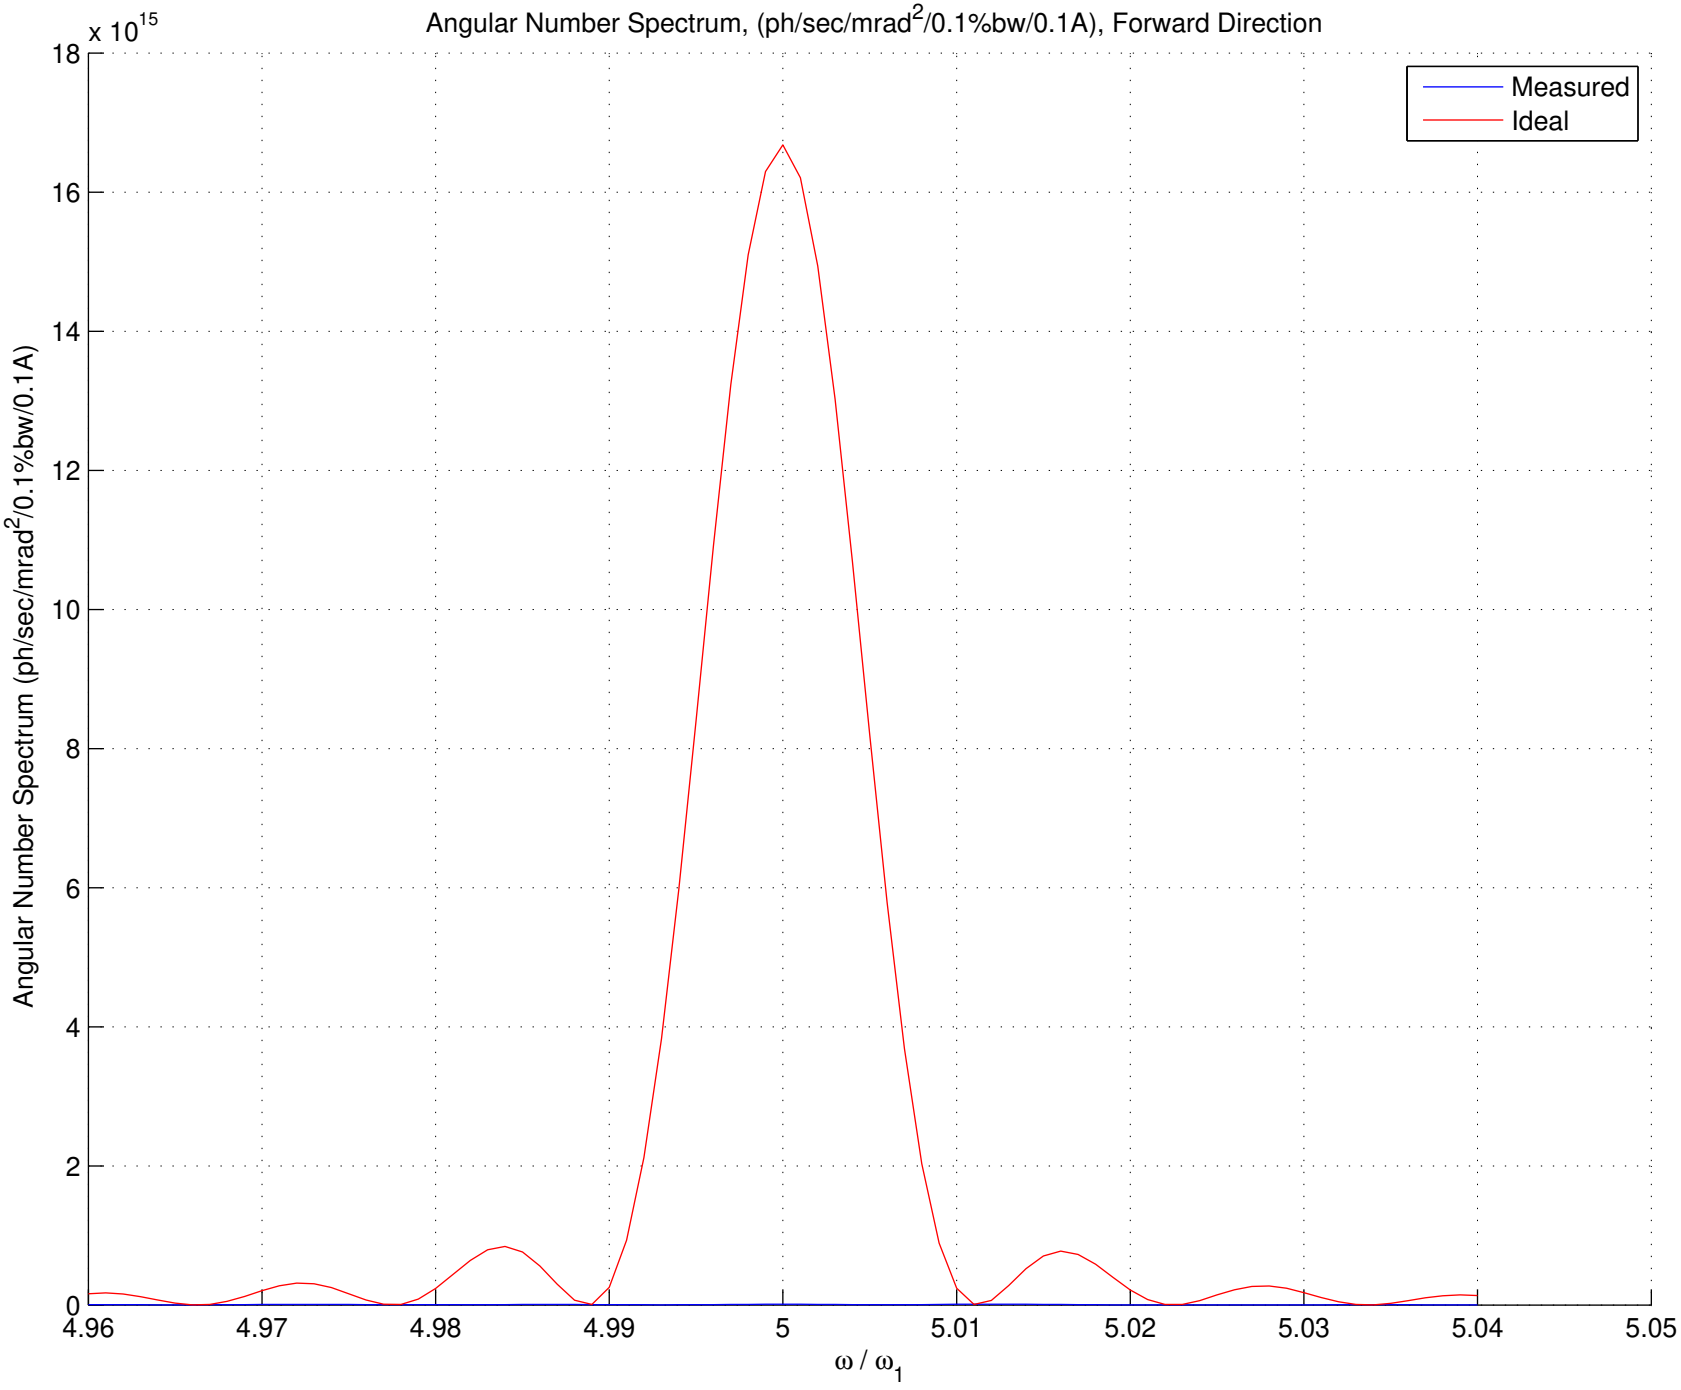
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{15}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
ω / $ω_1$
Measured
Ideal
0
2
4
6
8
10
12
14
16
18
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05