SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 10−12−2012
Time: 14:51:41

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: ECKO7−55
DATASET Number: 2
Tuning Stage: Fine Tuning
Run Number: 8
Measurement Type: Z Scans
Operator: YL
Comment: check K; re−tuning, gap=20.9mm
Session first run: 8
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\ECKO7−55\DATASET0002\Fine Tuning\Z Scans\Run 008\bscanz.dat

Temperature (C)
ECKO7−55:−−> T1 20.12 −−> T2 20.10 −−> T5 20.11 −−> T3 20.05 −−> Air 20.16 −−> T4 20.04

Axes position (m) X:0.029963 Y:0.000405
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001090 V
Vy_0i = −0.003271 V

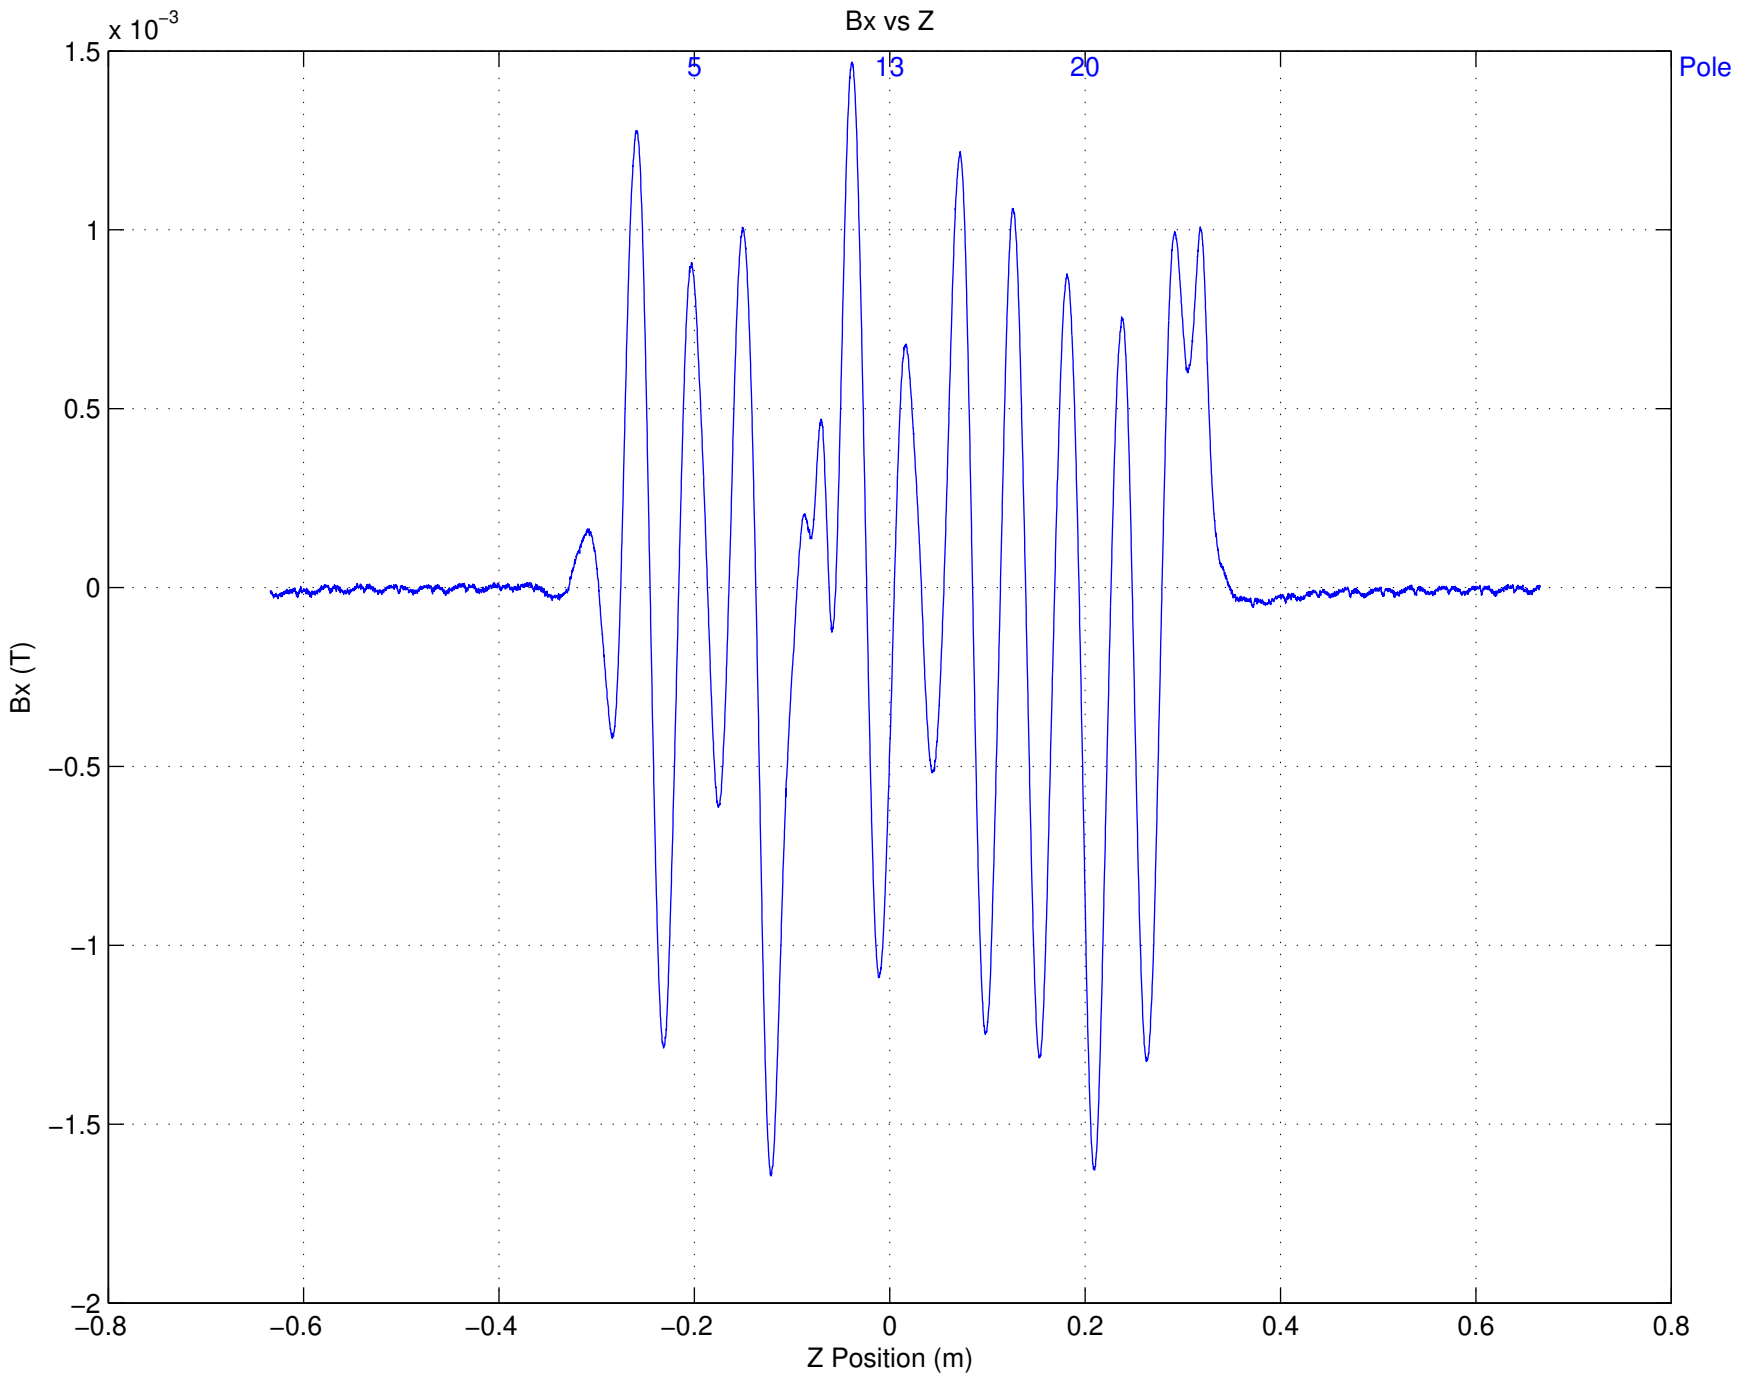
Bx vs Z
x 10^-3
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Bx (T)
5
13
20
Pole
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
Z Position (m)

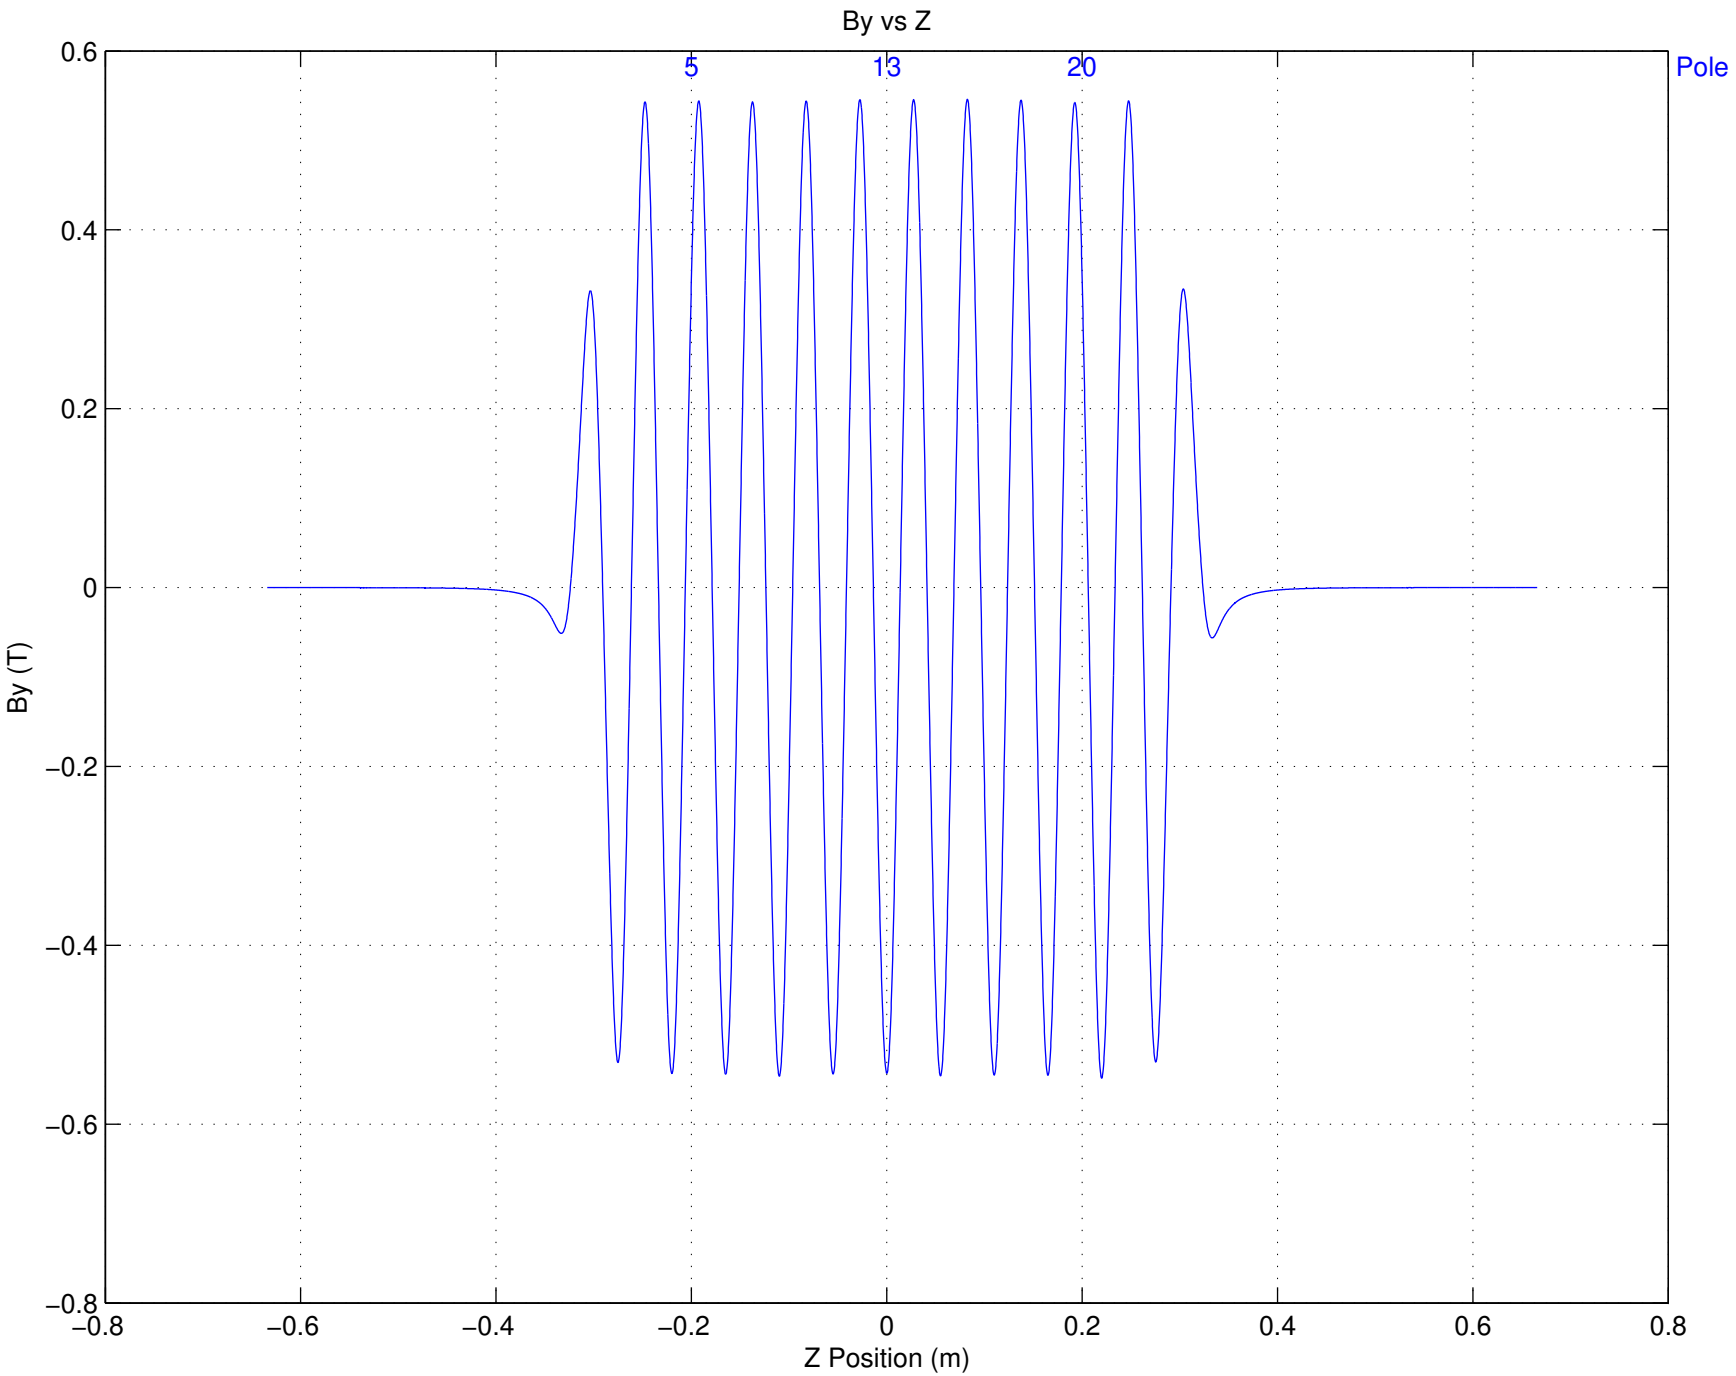
By vs Z
5
13
20
Pole
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
By (T)
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
Z Position (m)

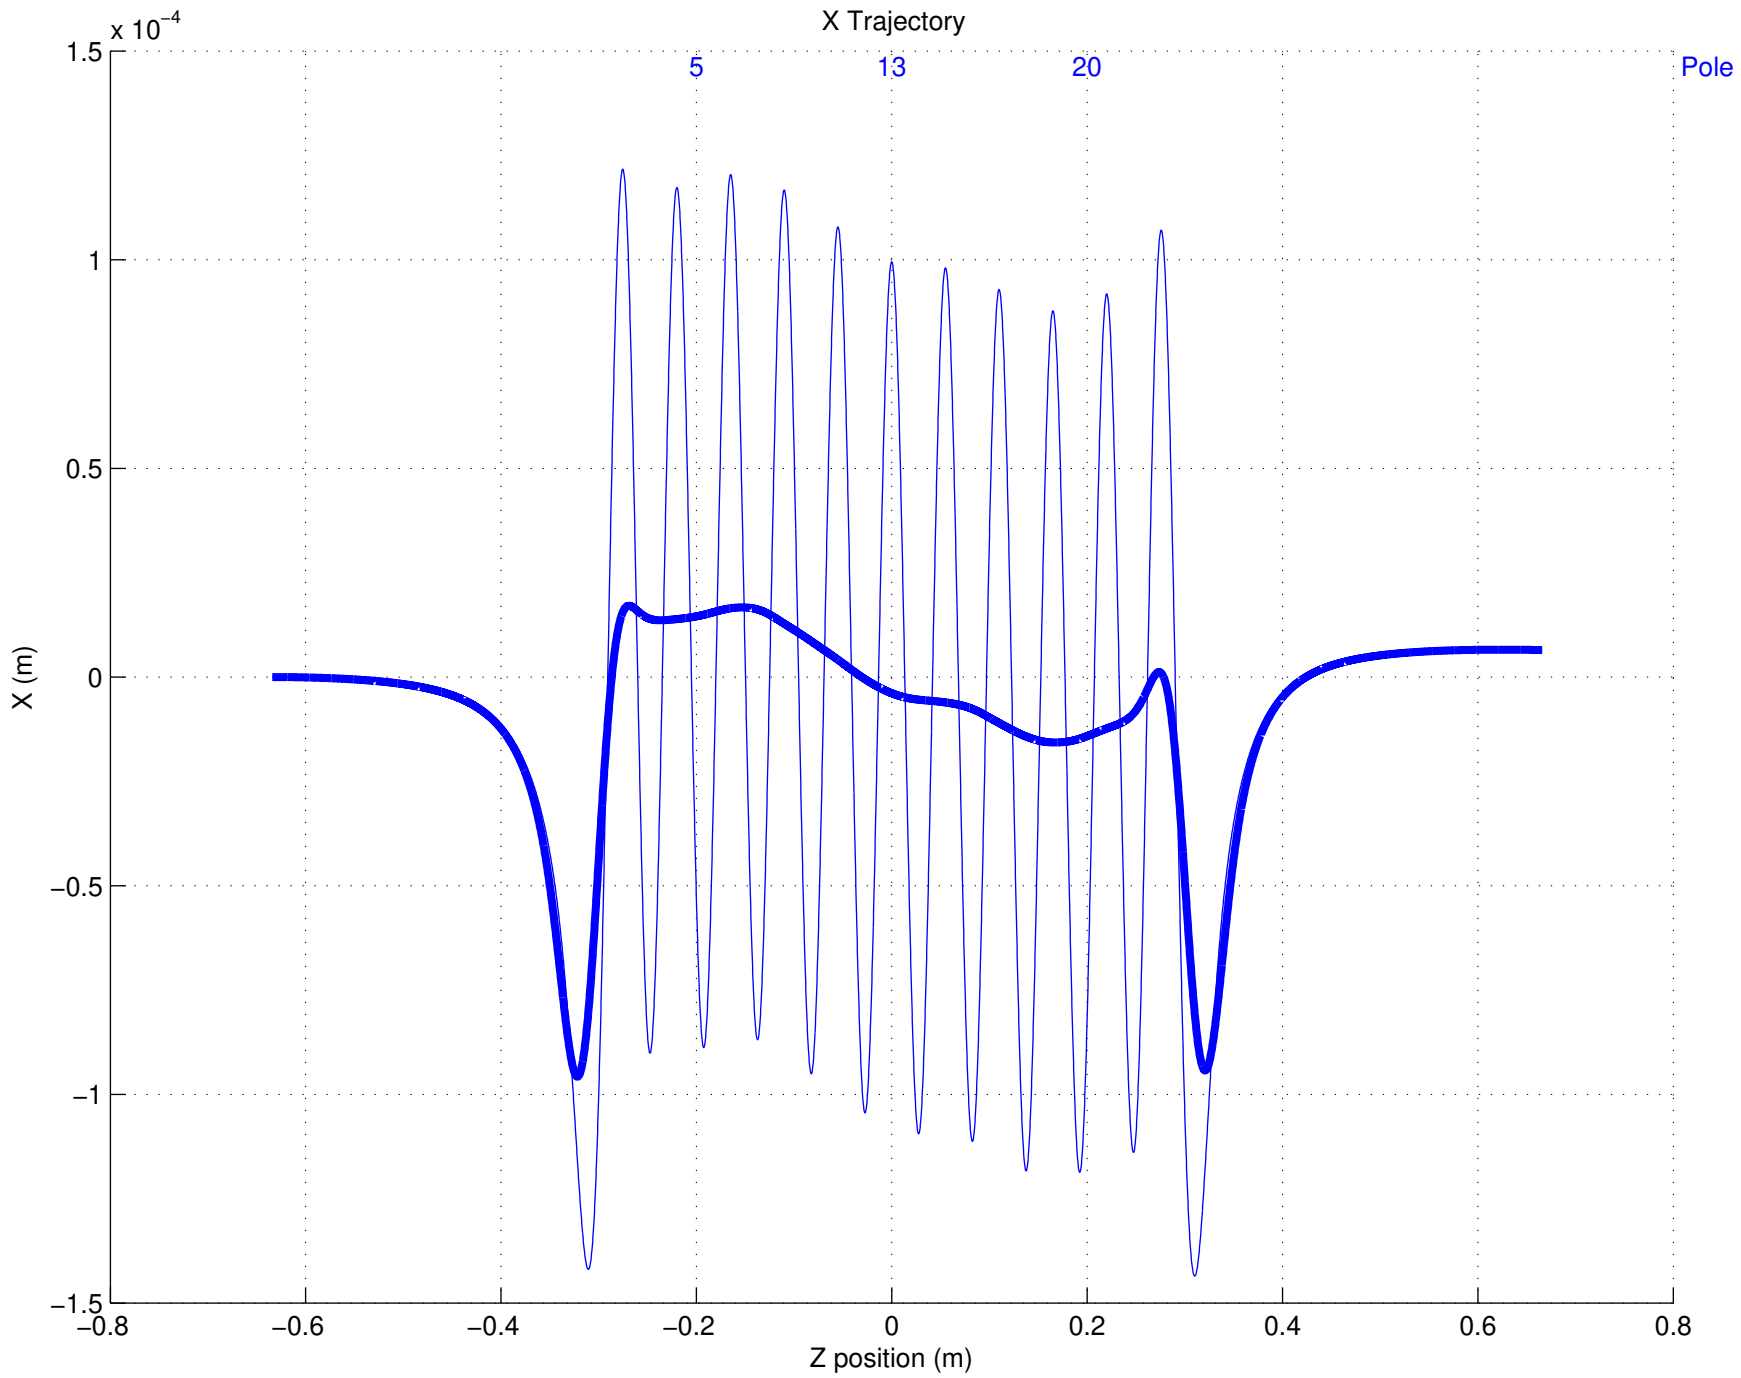
X Trajectory
x 10^-4
1.5
1
0.5
0
−0.5
−1
−1.5
X (m)
5
13
20
Pole
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
Z position (m)

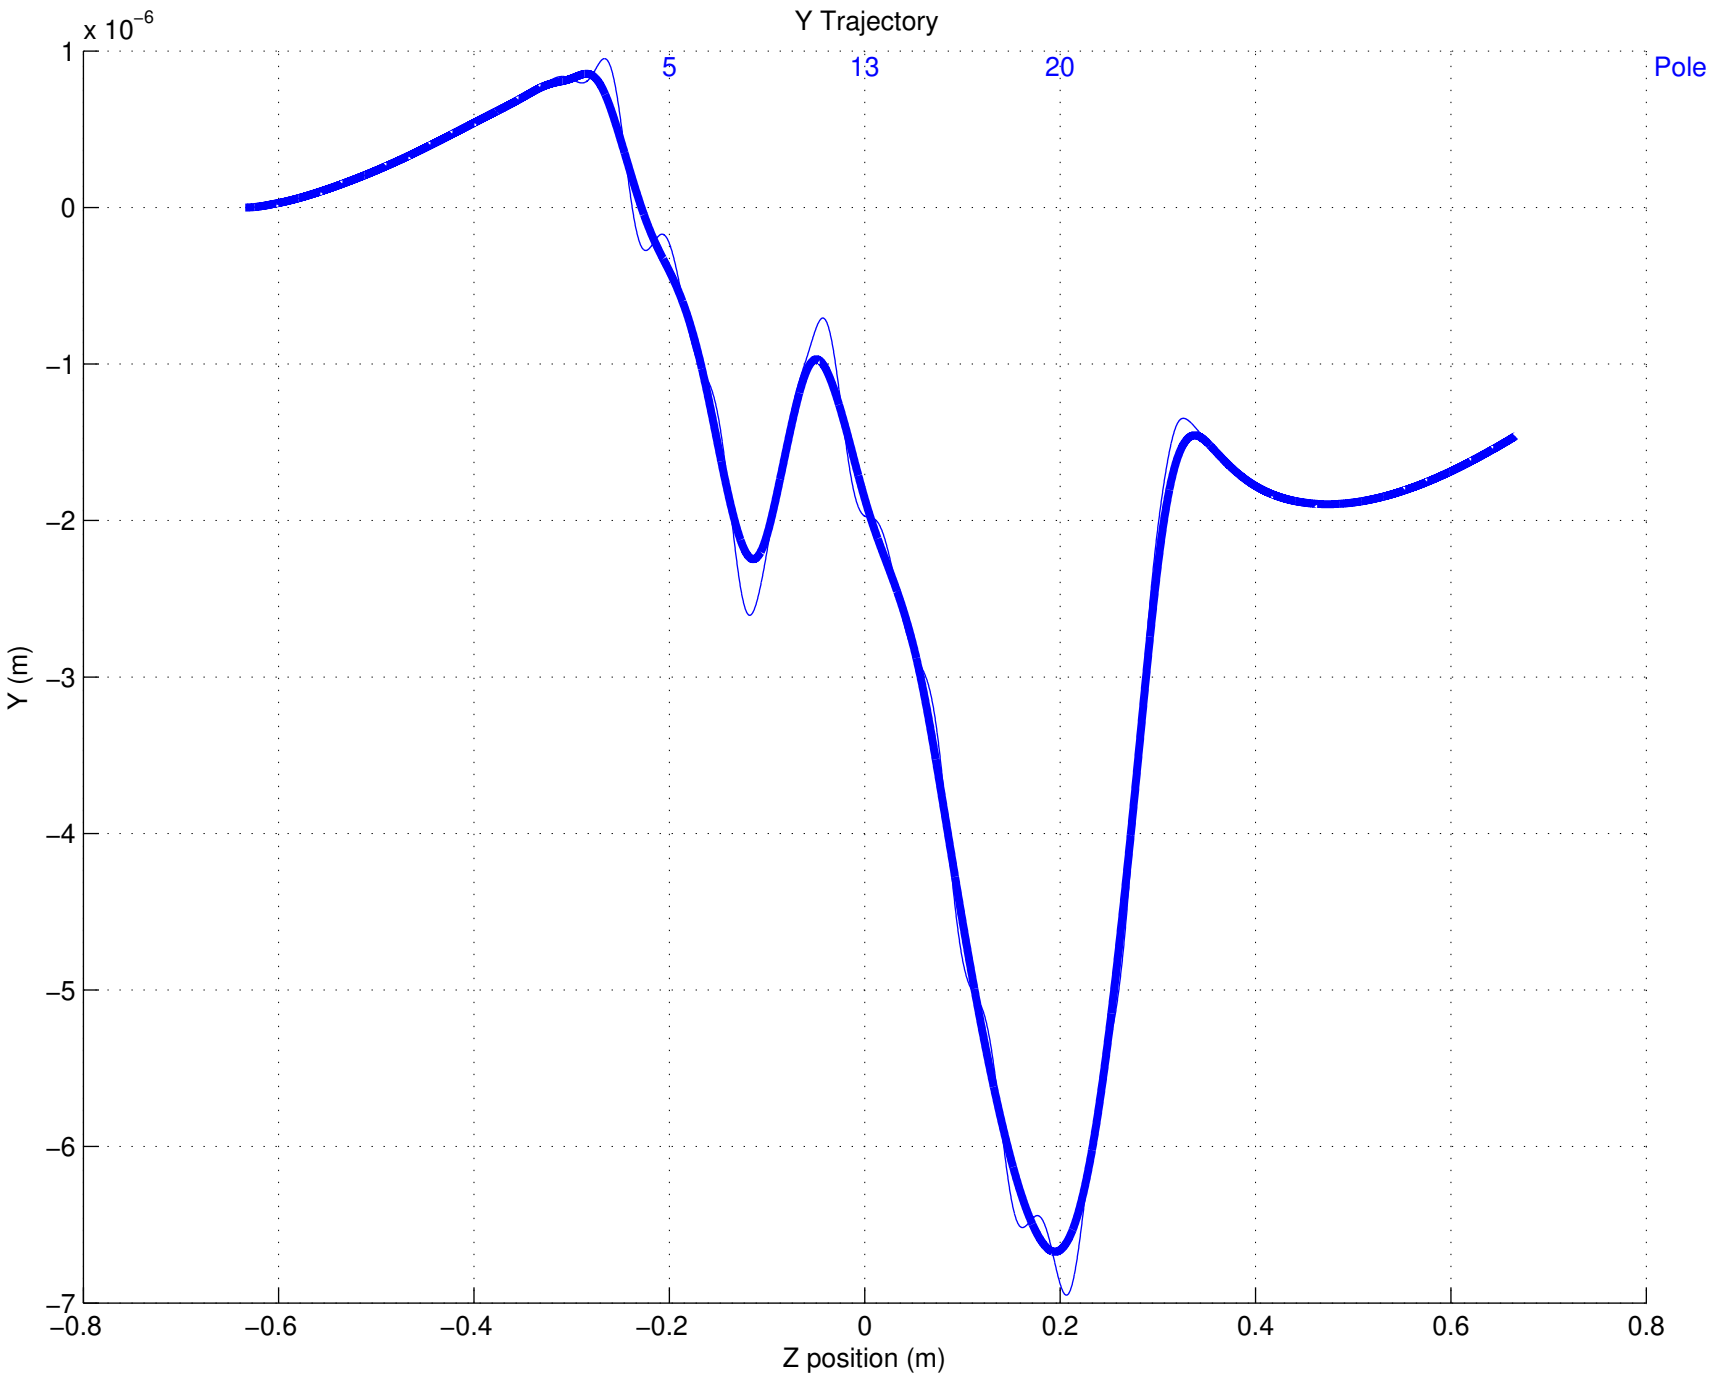
Y Trajectory
x 10^-6
1
0
−1
−2
−3
−4
−5
−6
−7
Y (m)
5
13
20
Pole
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
Z position (m)

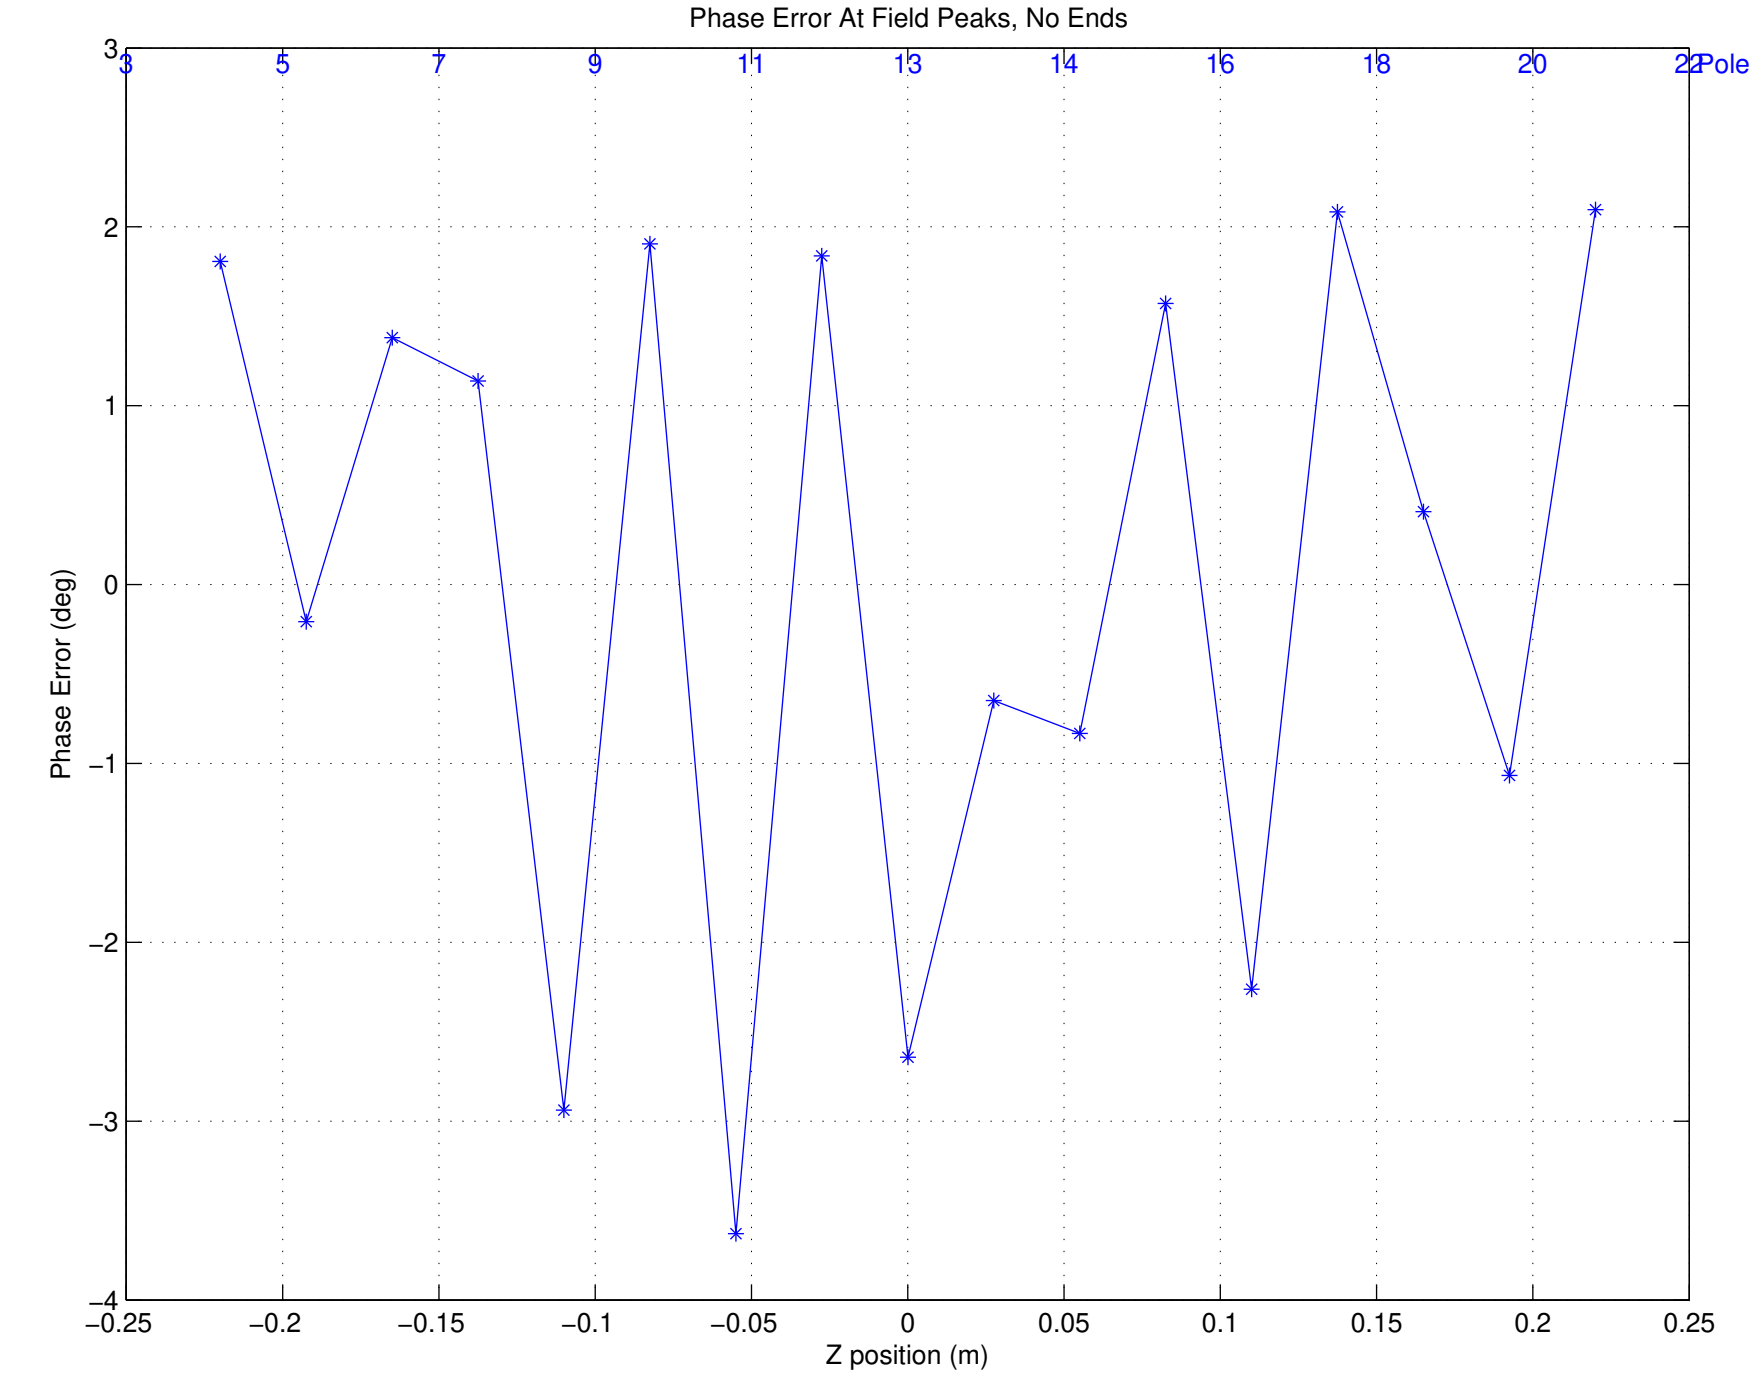

Phase Error: Ave = 0.000000 deg, RMS = 1.953151 deg

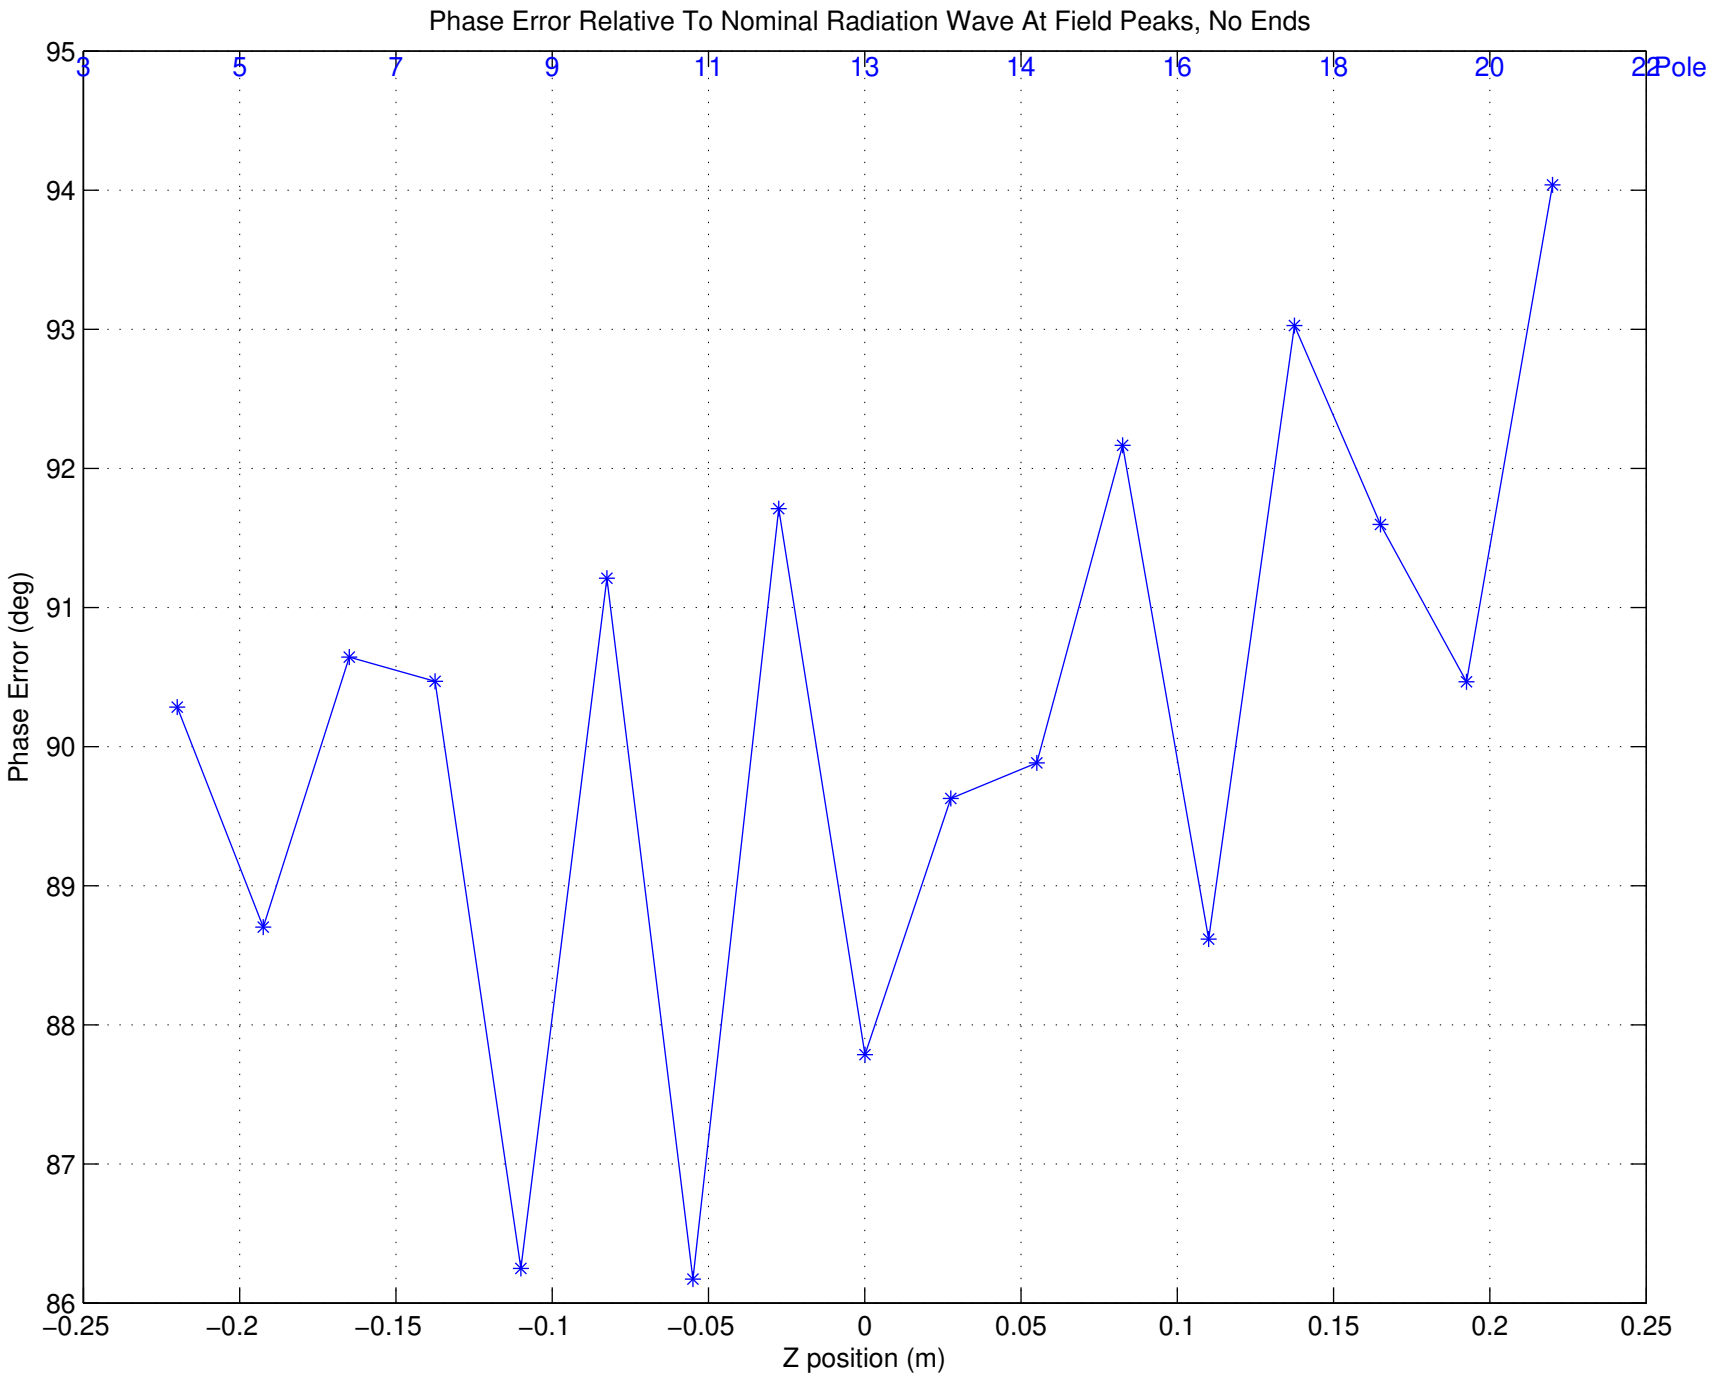
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
Pole
3
5
7
9
11
13
14
16
18
20
22
95
94
93
92
91
90
89
88
87
86
Phase Error (deg)
−0.25
−0.2
−0.15
−0.1
−0.05
0
0.05
0.1
0.15
0.2
0.25
Z position (m)