SLAC Magnetic Measurements
Hall Probe Calibration

Header:
SLAC Magnetic Measurements
Date: 10-11-2021
Time: 09:53:26
SLAC Magnetic Measurements
Hall Probe Calibration History
Project: LCLS-II
Device Type: Hall probe
Data Type: Y
Serial Number: SENTRON-463
Run Number: 32
Hall Probe: SENIS-27-14
Measurement Type: HPCS
Operator: YL
Comment: 1.9T; gap 35mm

Current(A)	T(C)	Case T(C)	Est.Field(T)	Voltage	Field

Parameters:
INPUT-FILE-DIR =T:\MagData\LCLS-II\Hall probe\SENTRON-463\HPCS-032\
INPUT-FILE-NAME =hpcs-dat.001
POLY-FIT-ORDER =15
NUM-SIG-OUTLIER =2
NOM-CALIB-CONST =0.2
MAX-B-NMR-FIT =1.9

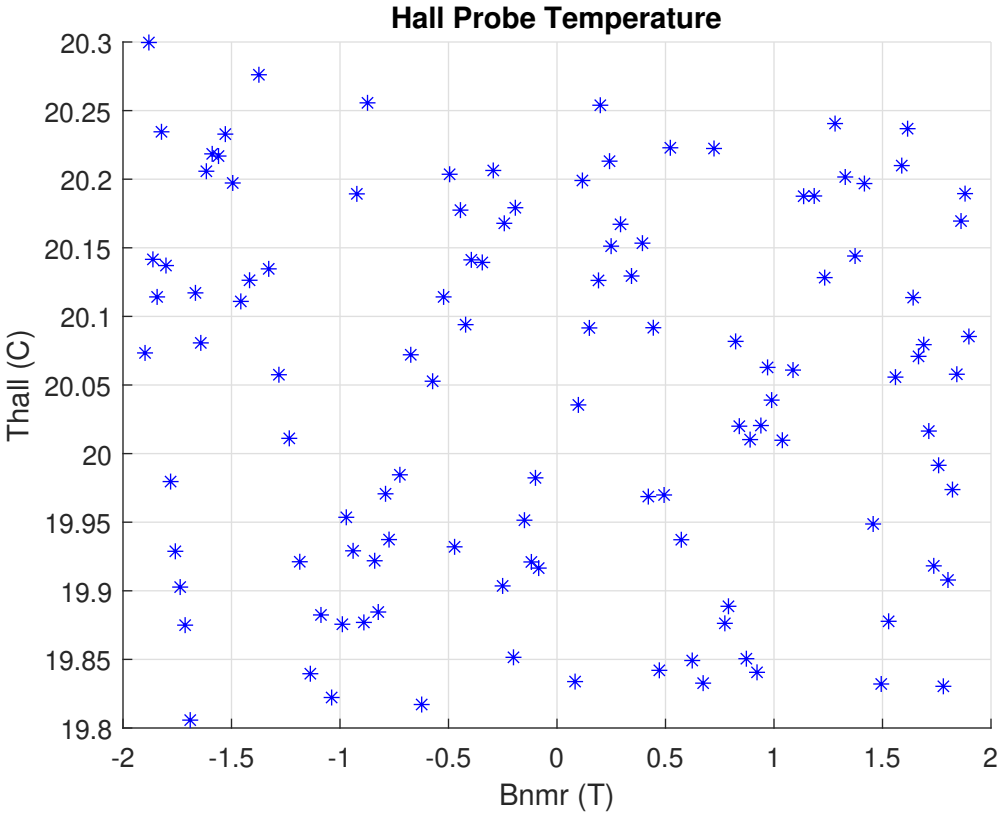
Hall Probe Temperature
Thall (C)
Bnmr (T)
20.3
20.25
20.2
20.15
20.1
20.05
20
19.95
19.9
19.85
19.8
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

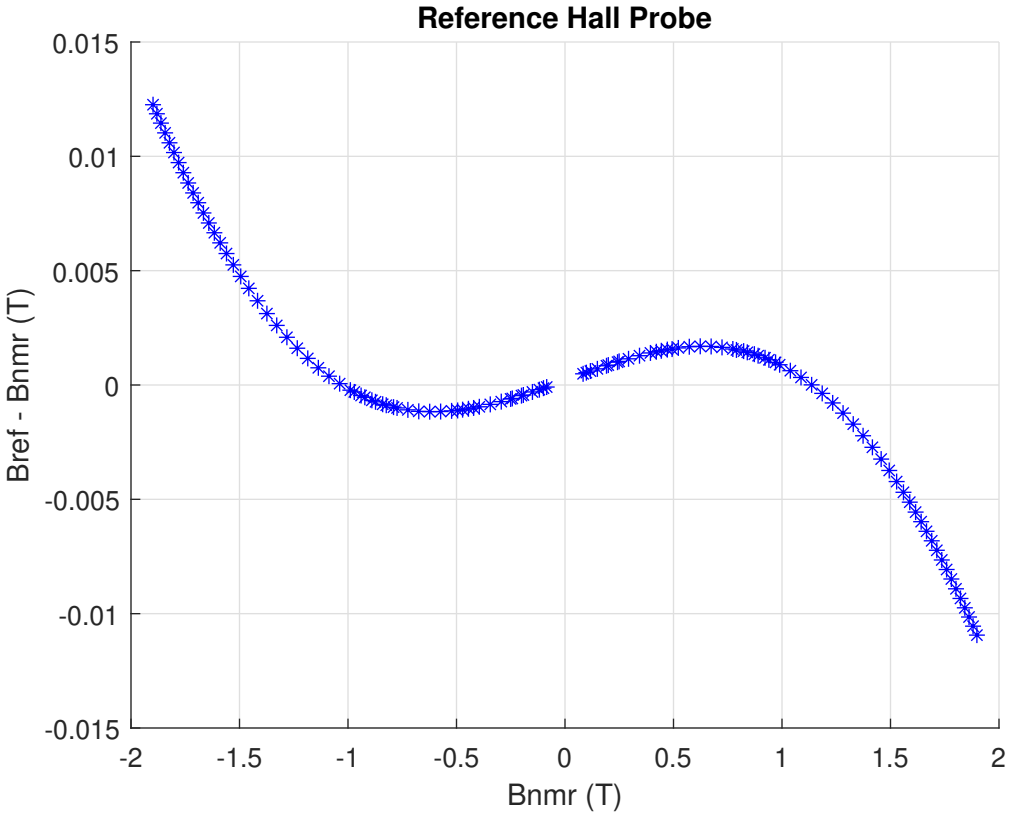
Reference Hall Probe
0.015
0.01
0.005
0
-0.005
-0.01
-0.015
Bref - Bnmr (T)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Bnmr (T)

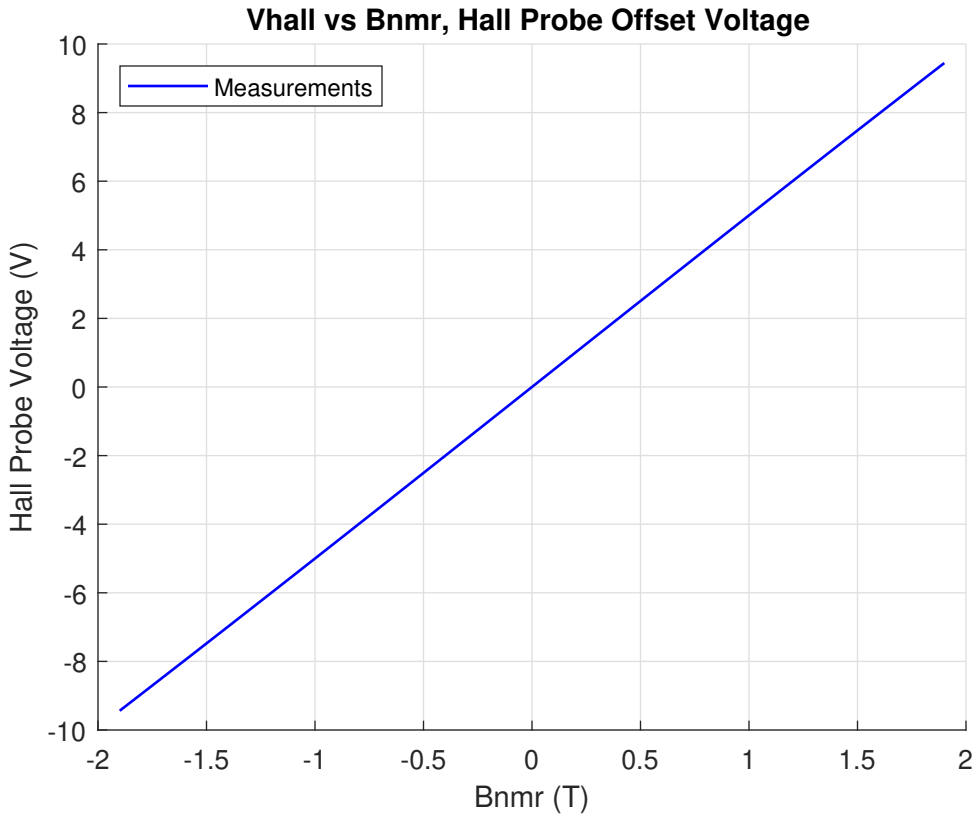
Vhall vs Bnmr, Hall Probe Offset Voltage
Measurements
Hall Probe Voltage (V)
Bnmr (T)
10
8
6
4
2
0
-2
-4
-6
-8
-10
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

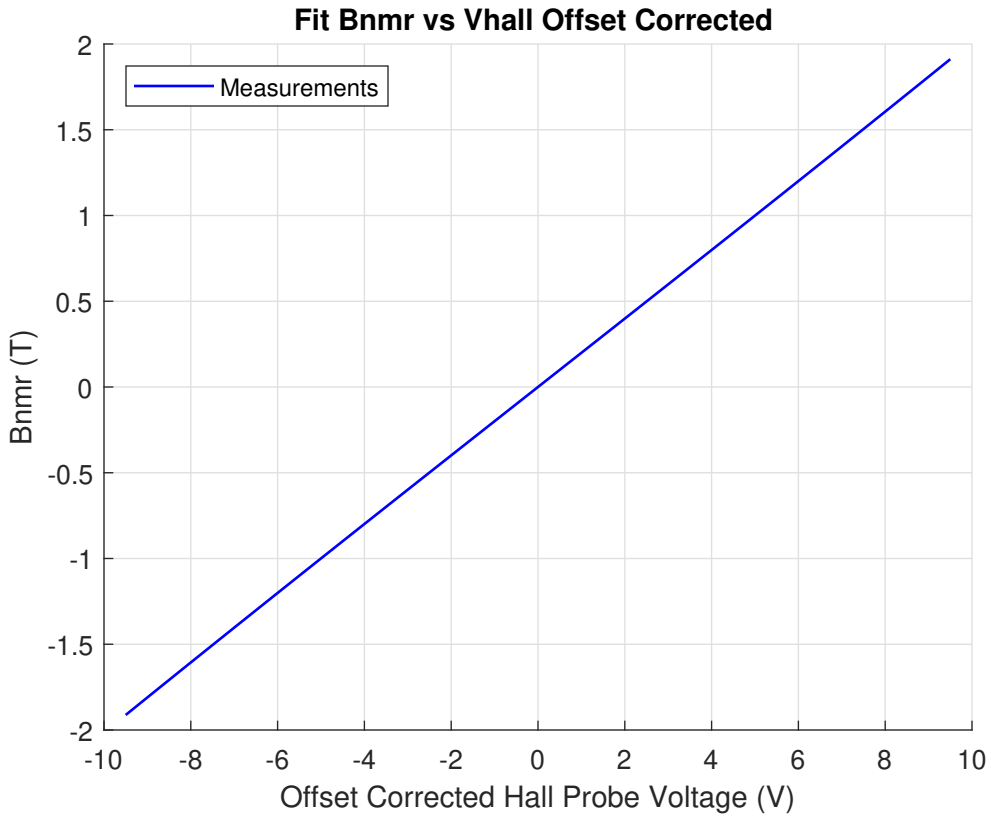
Fit Bnmr vs Vhall Offset Corrected
Measurements
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
-10
-8
-6
-4
-2
0
2
4
6
8
10

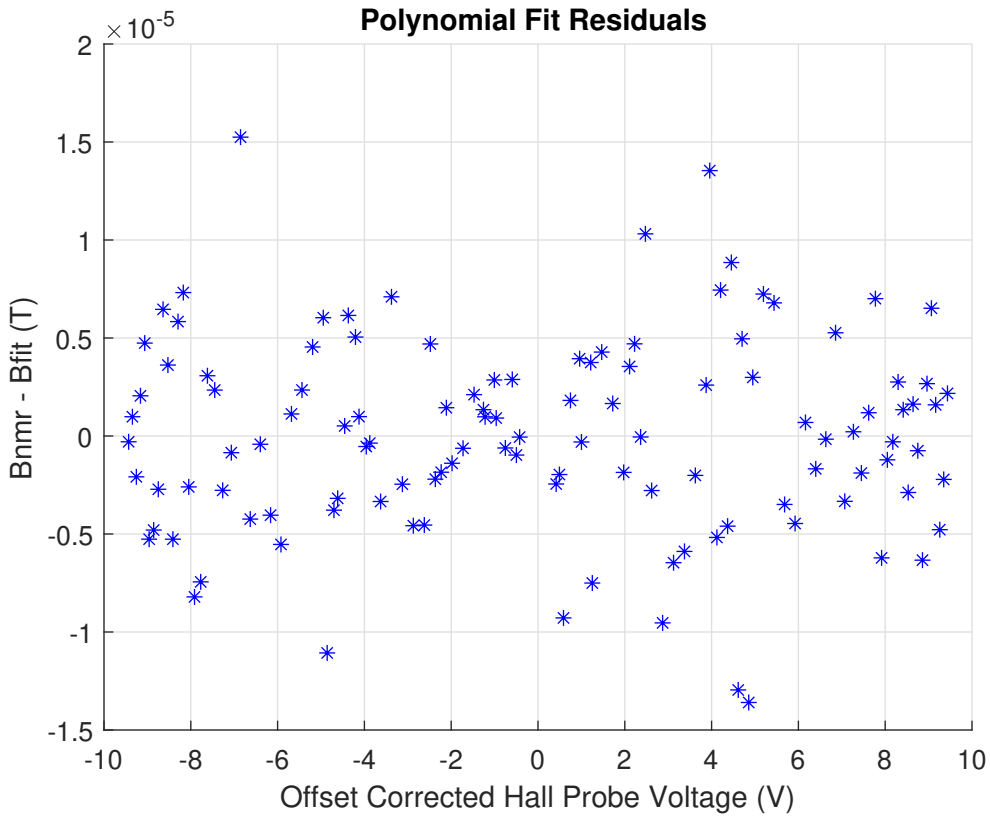
Polynomial Fit Residuals
×10^-5
2
1.5
1
0.5
0
-0.5
-1
-1.5
Bnmr - Bfit (T)
-10
-8
-6
-4
-2
0
2
4
6
8
10
Offset Corrected Hall Probe Voltage (V)

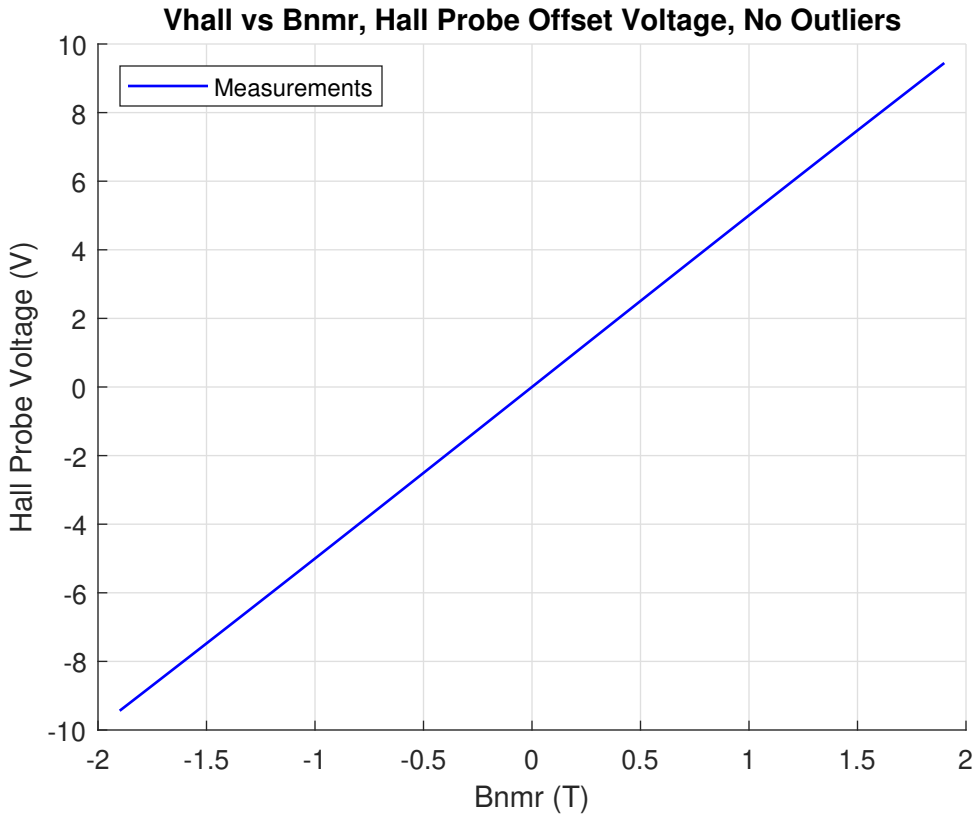
Vhall vs Bnmr, Hall Probe Offset Voltage, No Outliers
Measurements
Hall Probe Voltage (V)
Bnmr (T)
10
8
6
4
2
0
-2
-4
-6
-8
-10
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

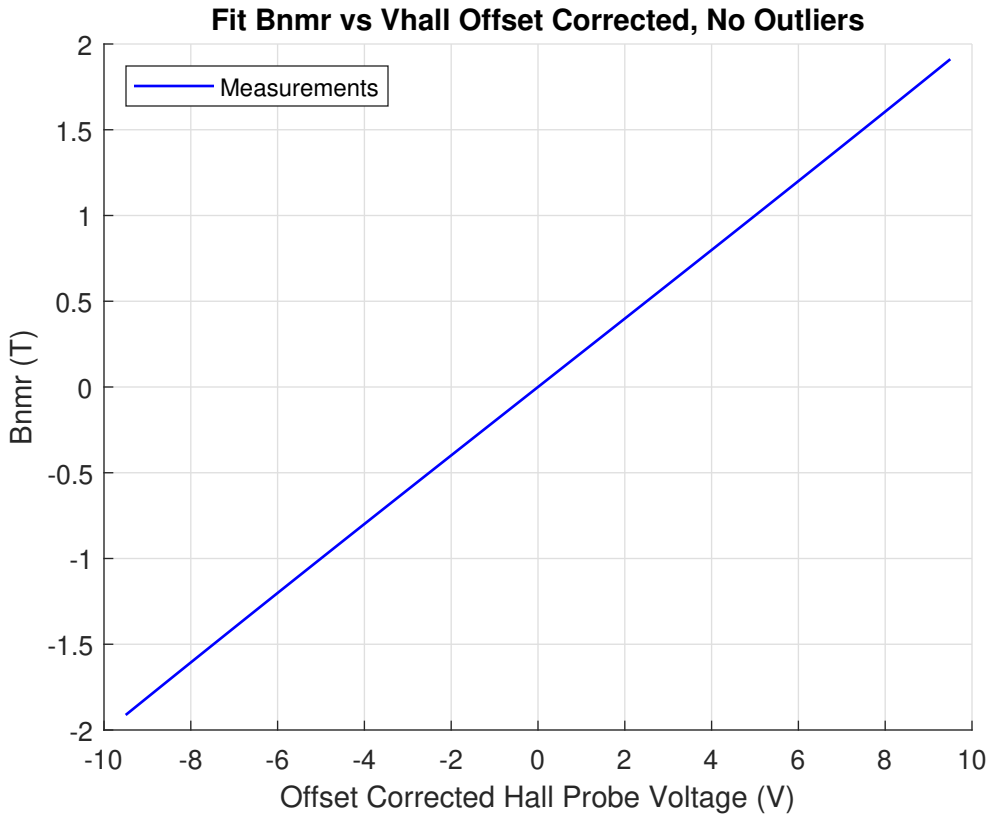
Fit Bnmr vs Vhall Offset Corrected, No Outliers
Measurements
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
-10
-8
-6
-4
-2
0
2
4
6
8
10

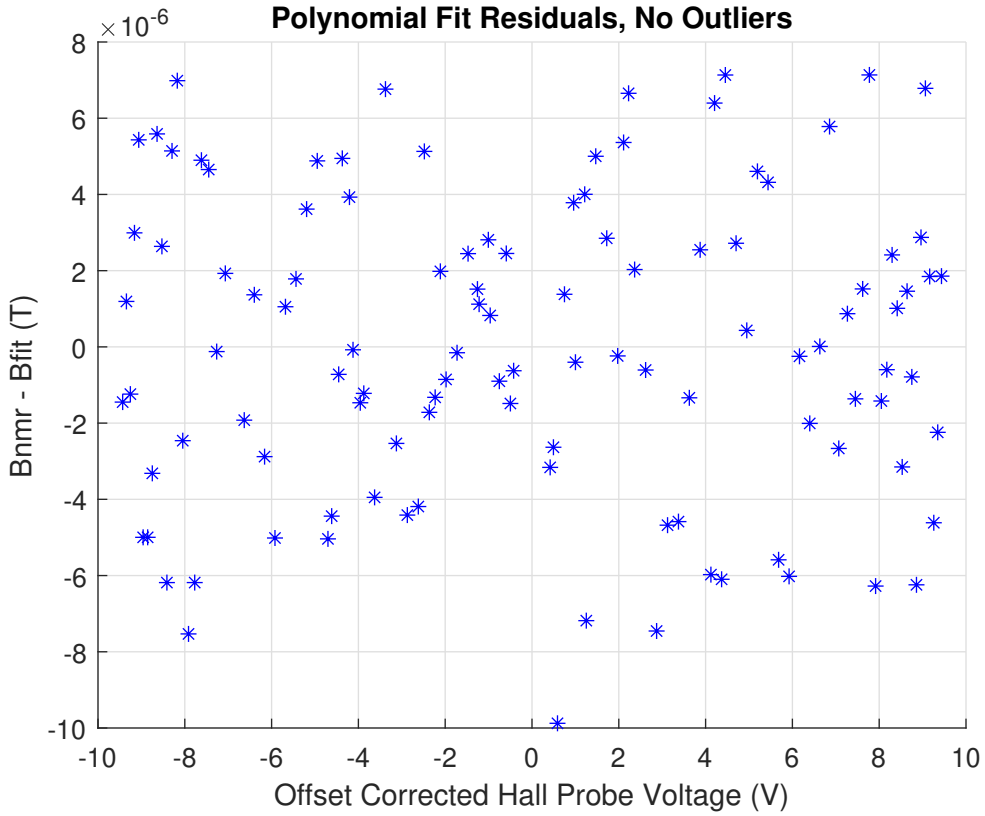
Polynomial Fit Residuals, No Outliers
×10^-6
8
6
4
2
0
-2
-4
-6
-8
-10
Bnmr - Bfit (T)
-10
-8
-6
-4
-2
0
2
4
6
8
10
Offset Corrected Hall Probe Voltage (V)

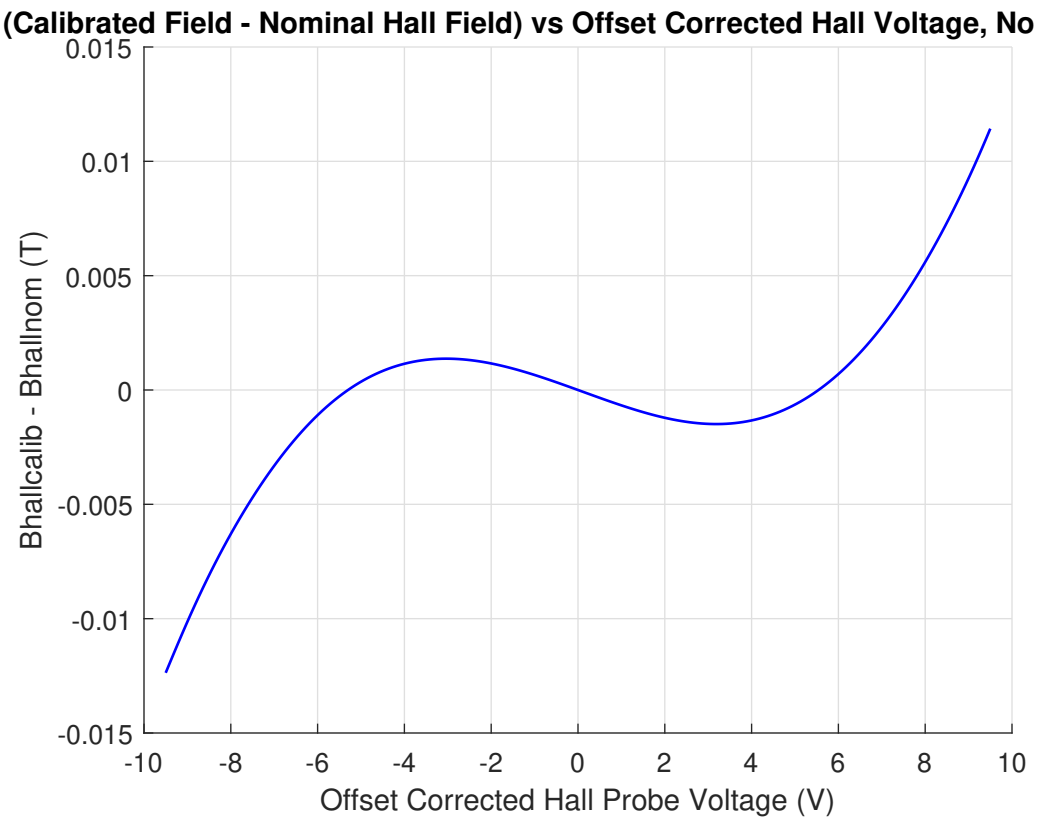
(Calibrated Field - Nominal Hall Field) vs Offset Corrected Hall Voltage, No Outliers
0.015
0.01
0.005
0
-0.005
-0.01
-0.015
Bhallcalib - Bhallnom (T)
-10
-8
-6
-4
-2
0
2
4
6
8
10
Offset Corrected Hall Probe Voltage (V)