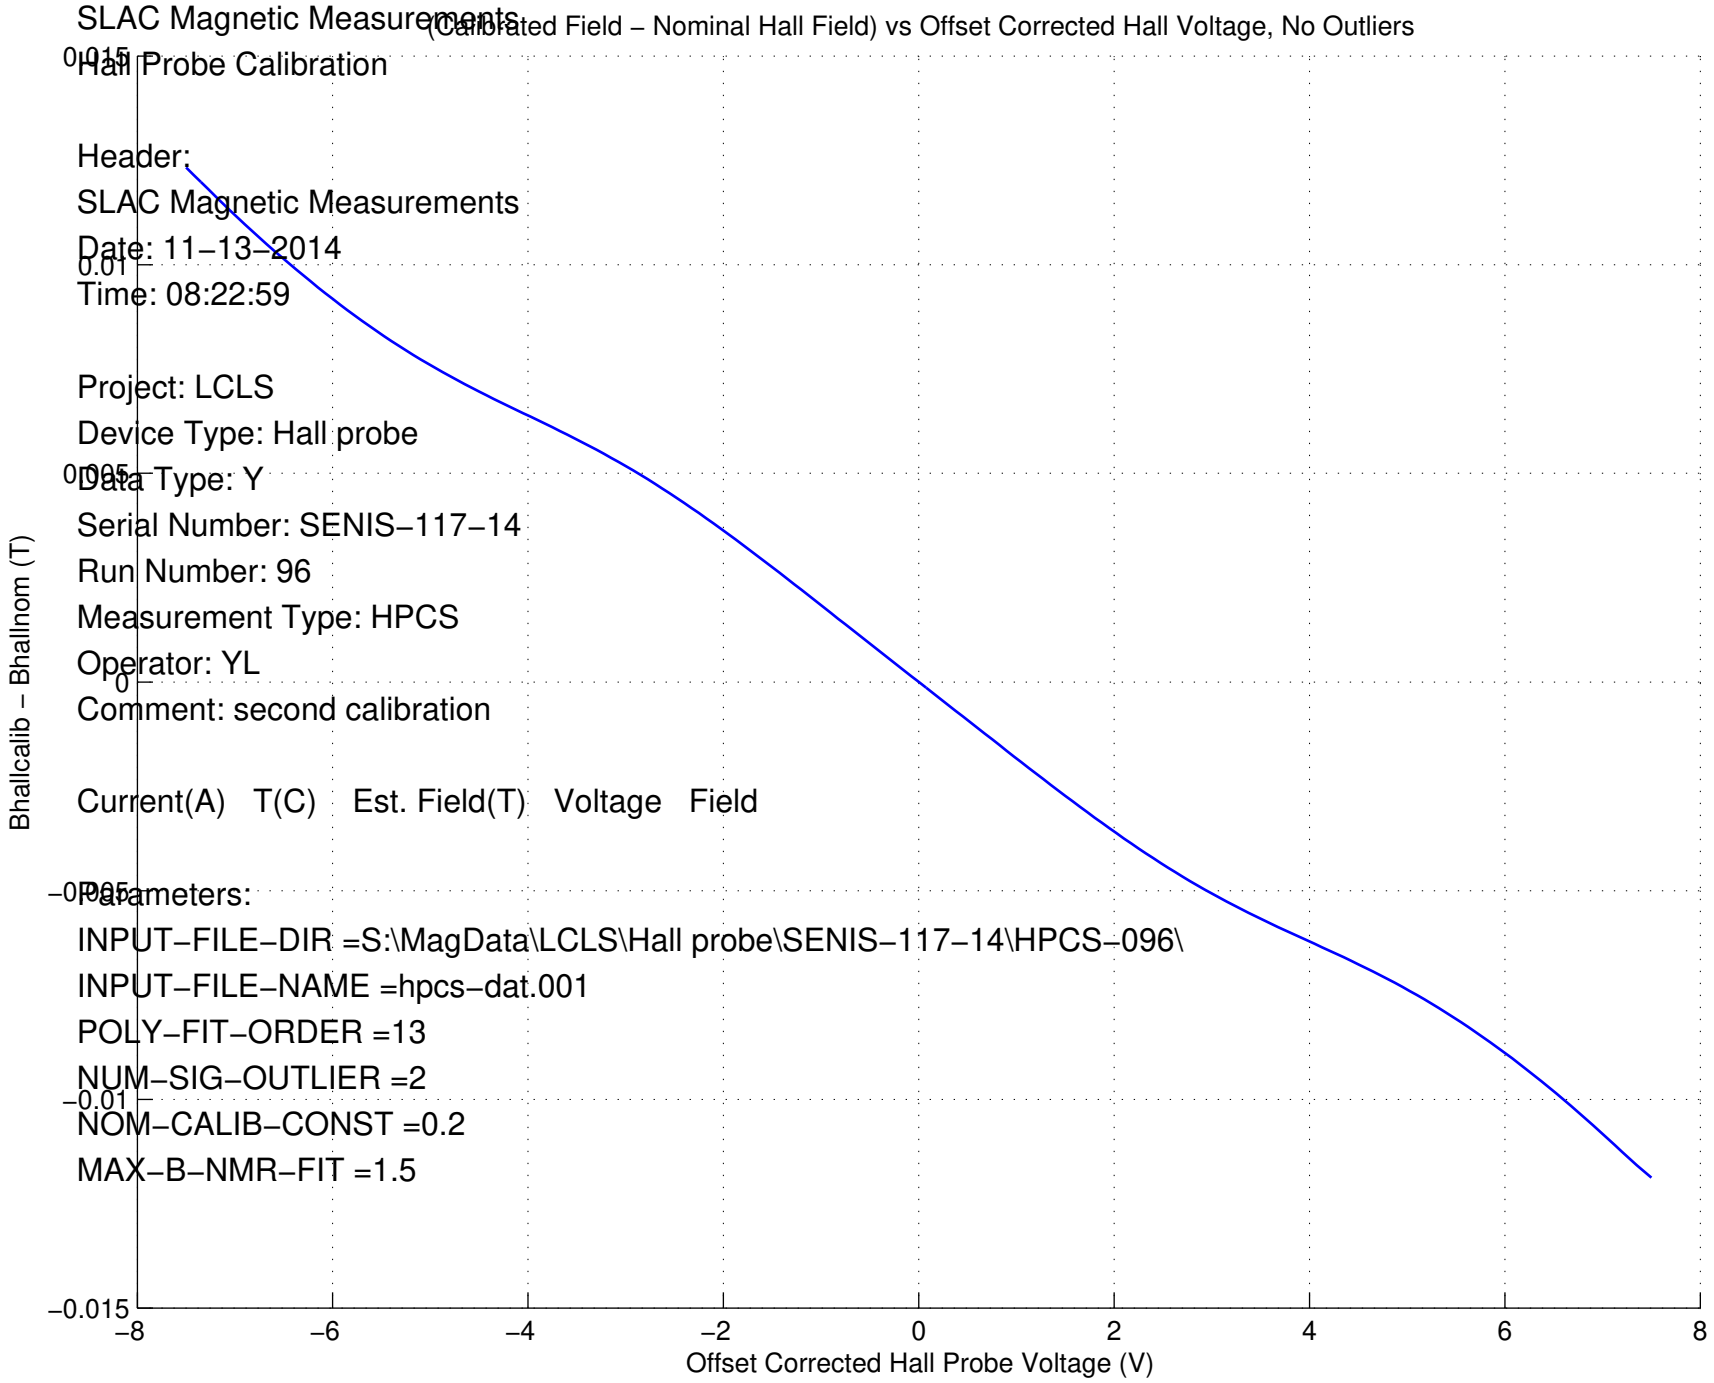
SLAC Magnetic Measurements
Hall Probe Calibration
Header:
SLAC Magnetic Measurements
Date: 11−13−2014
Time: 08:22:59
Project: LCLS
Device Type: Hall probe
Data Type: Y
Serial Number: SENIS−117−14
Run Number: 96
Measurement Type: HPCS
Operator: YL
Comment: second calibration
Current(A) T(C) Est. Field(T) Voltage Field
Parameters:
INPUT−FILE−DIR =S:\MagData\LCLS\Hall probe\SENIS−117−14\HPCS−096\
INPUT−FILE−NAME =hpcs−dat.001
POLY−FIT−ORDER =13
NUM−SIG−OUTLIER =2
NOM−CALIB−CONST =0.2
MAX−B−NMR−FIT =1.5
(Calibrated Field − Nominal Hall Field) vs Offset Corrected Hall Voltage, No Outliers
Bhallcalib − Bhallnom (T)
Offset Corrected Hall Probe Voltage (V)
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
−8
−6
−4
−2
0
2
4
6
8

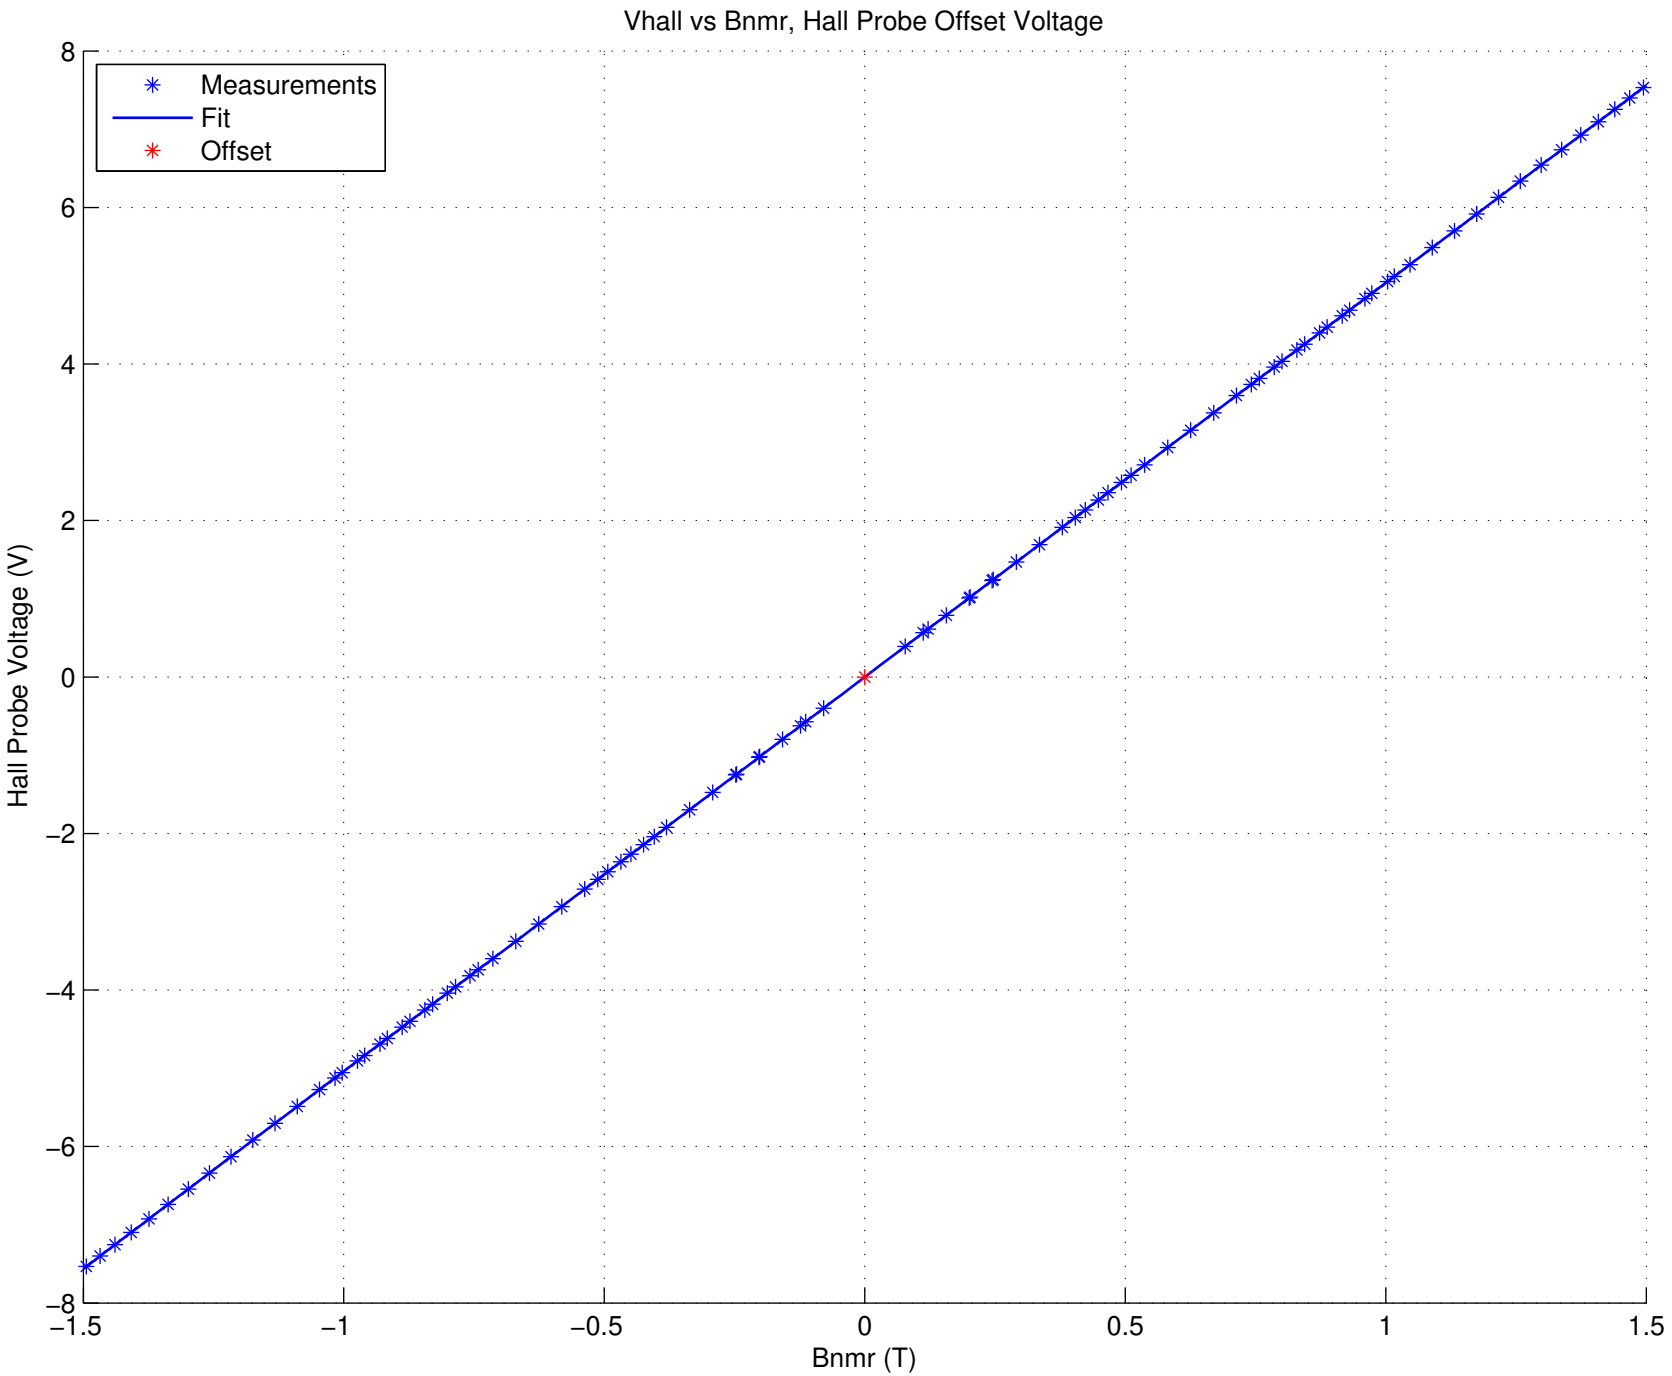
Vhall vs Bnmr, Hall Probe Offset Voltage
Measurements
Fit
Offset
Hall Probe Voltage (V)
Bnmr (T)
8
6
4
2
0
−2
−4
−6
−8
−1.5
−1
−0.5
0
0.5
1
1.5

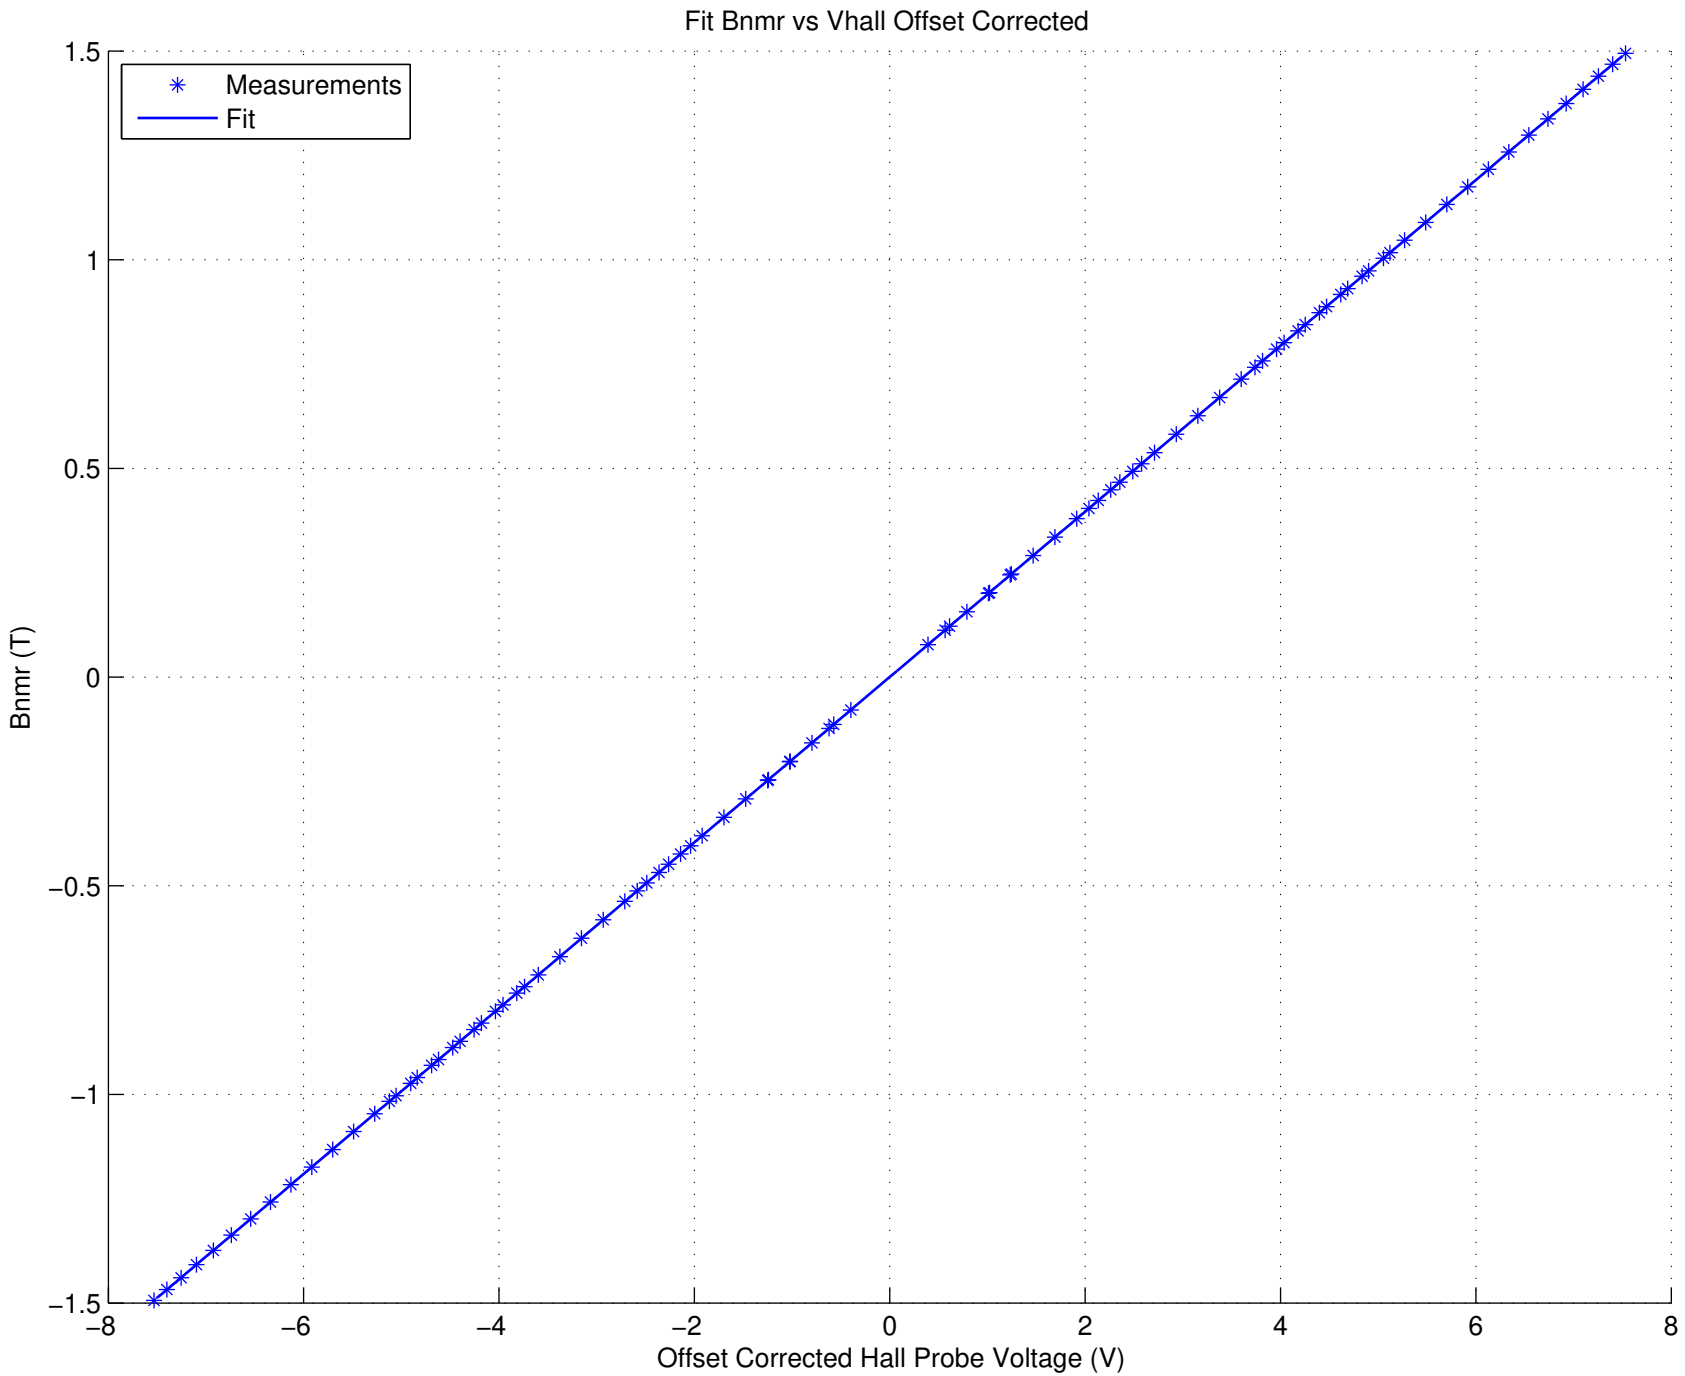
Fit Bnmr vs Vhall Offset Corrected
Measurements
Fit
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
1.5
1
0.5
0
−0.5
−1
−1.5
−8
−6
−4
−2
0
2
4
6
8

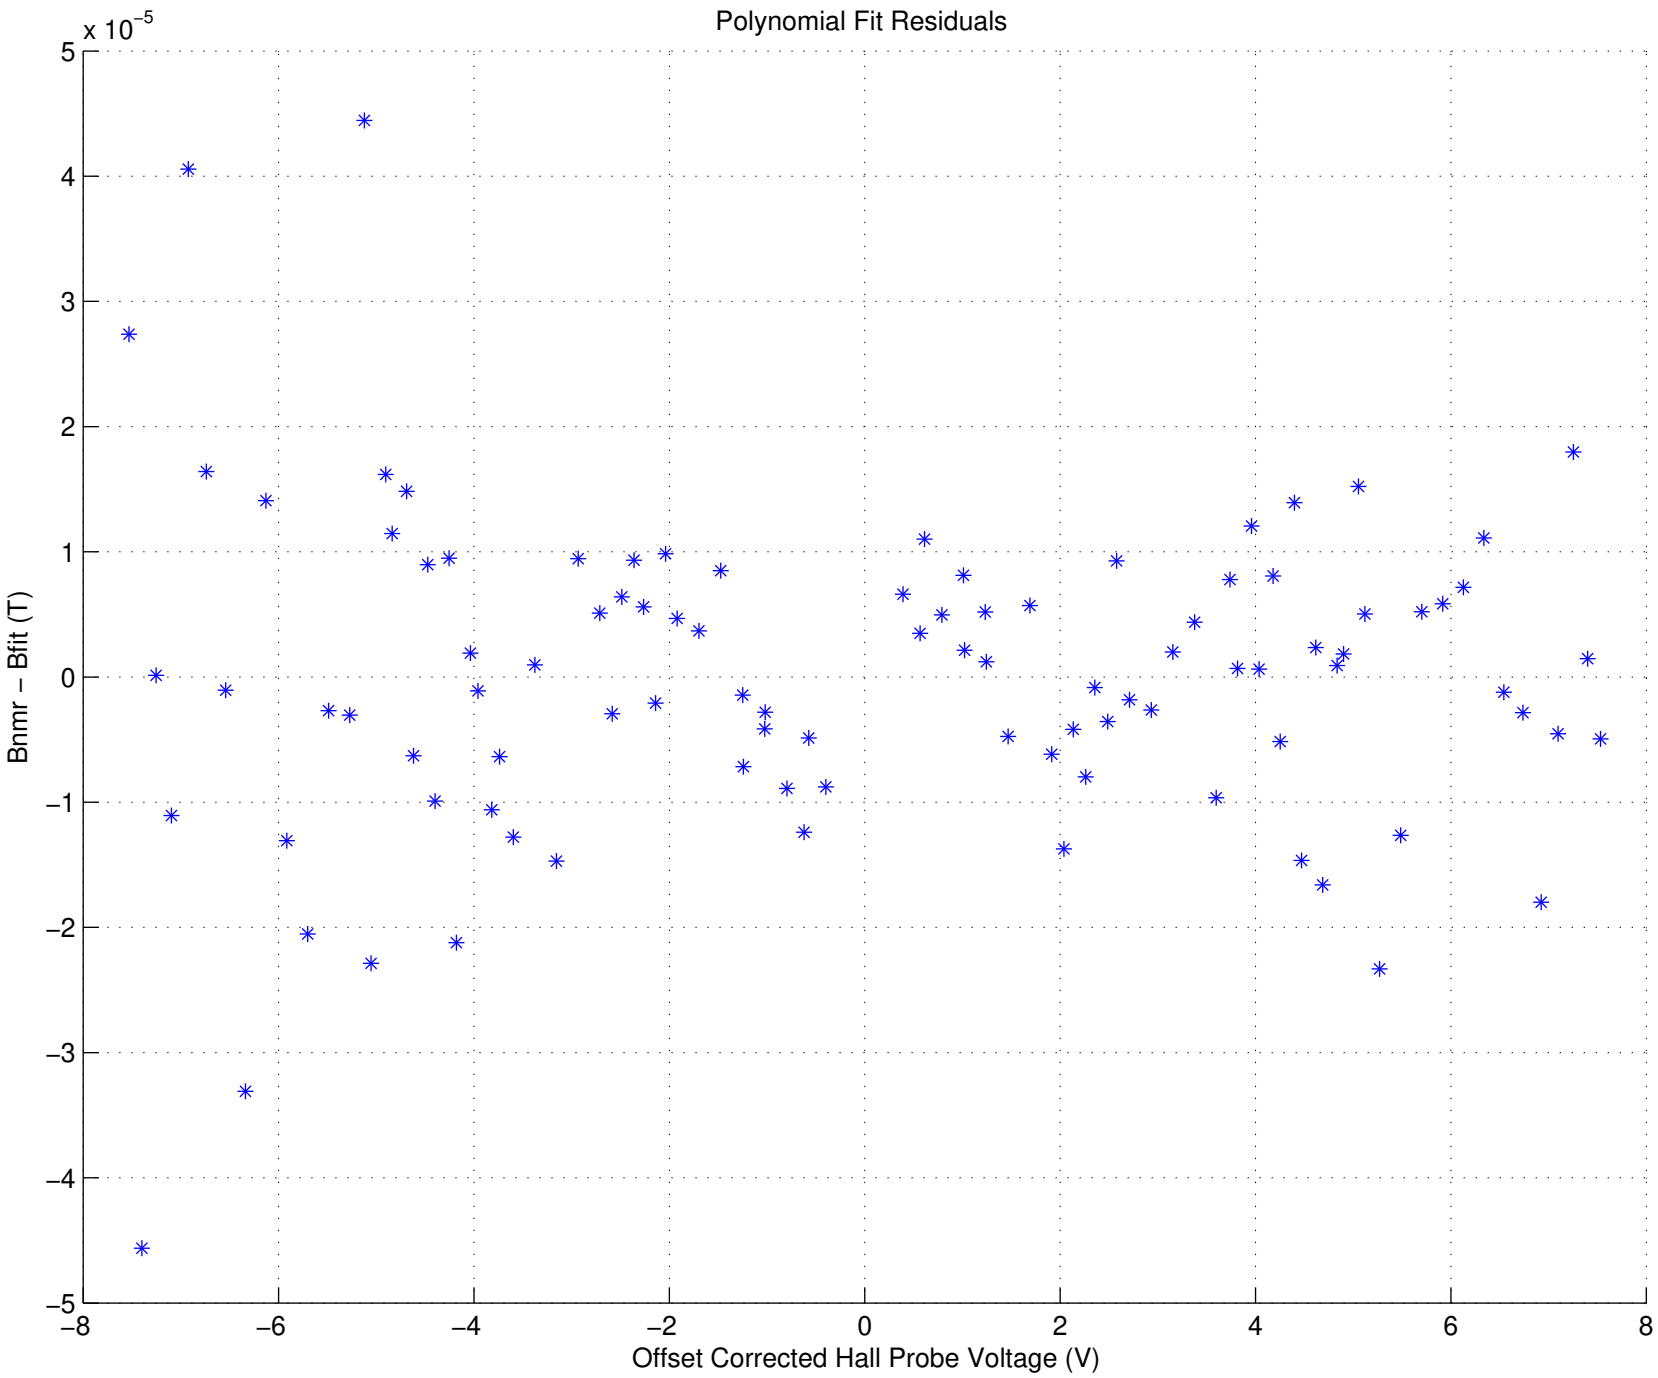
Polynomial Fit Residuals
x 10^-5
5
4
3
2
1
0
−1
−2
−3
−4
−5
−8
−6
−4
−2
0
2
4
6
8
Bnmr − Bfit (T)
Offset Corrected Hall Probe Voltage (V)

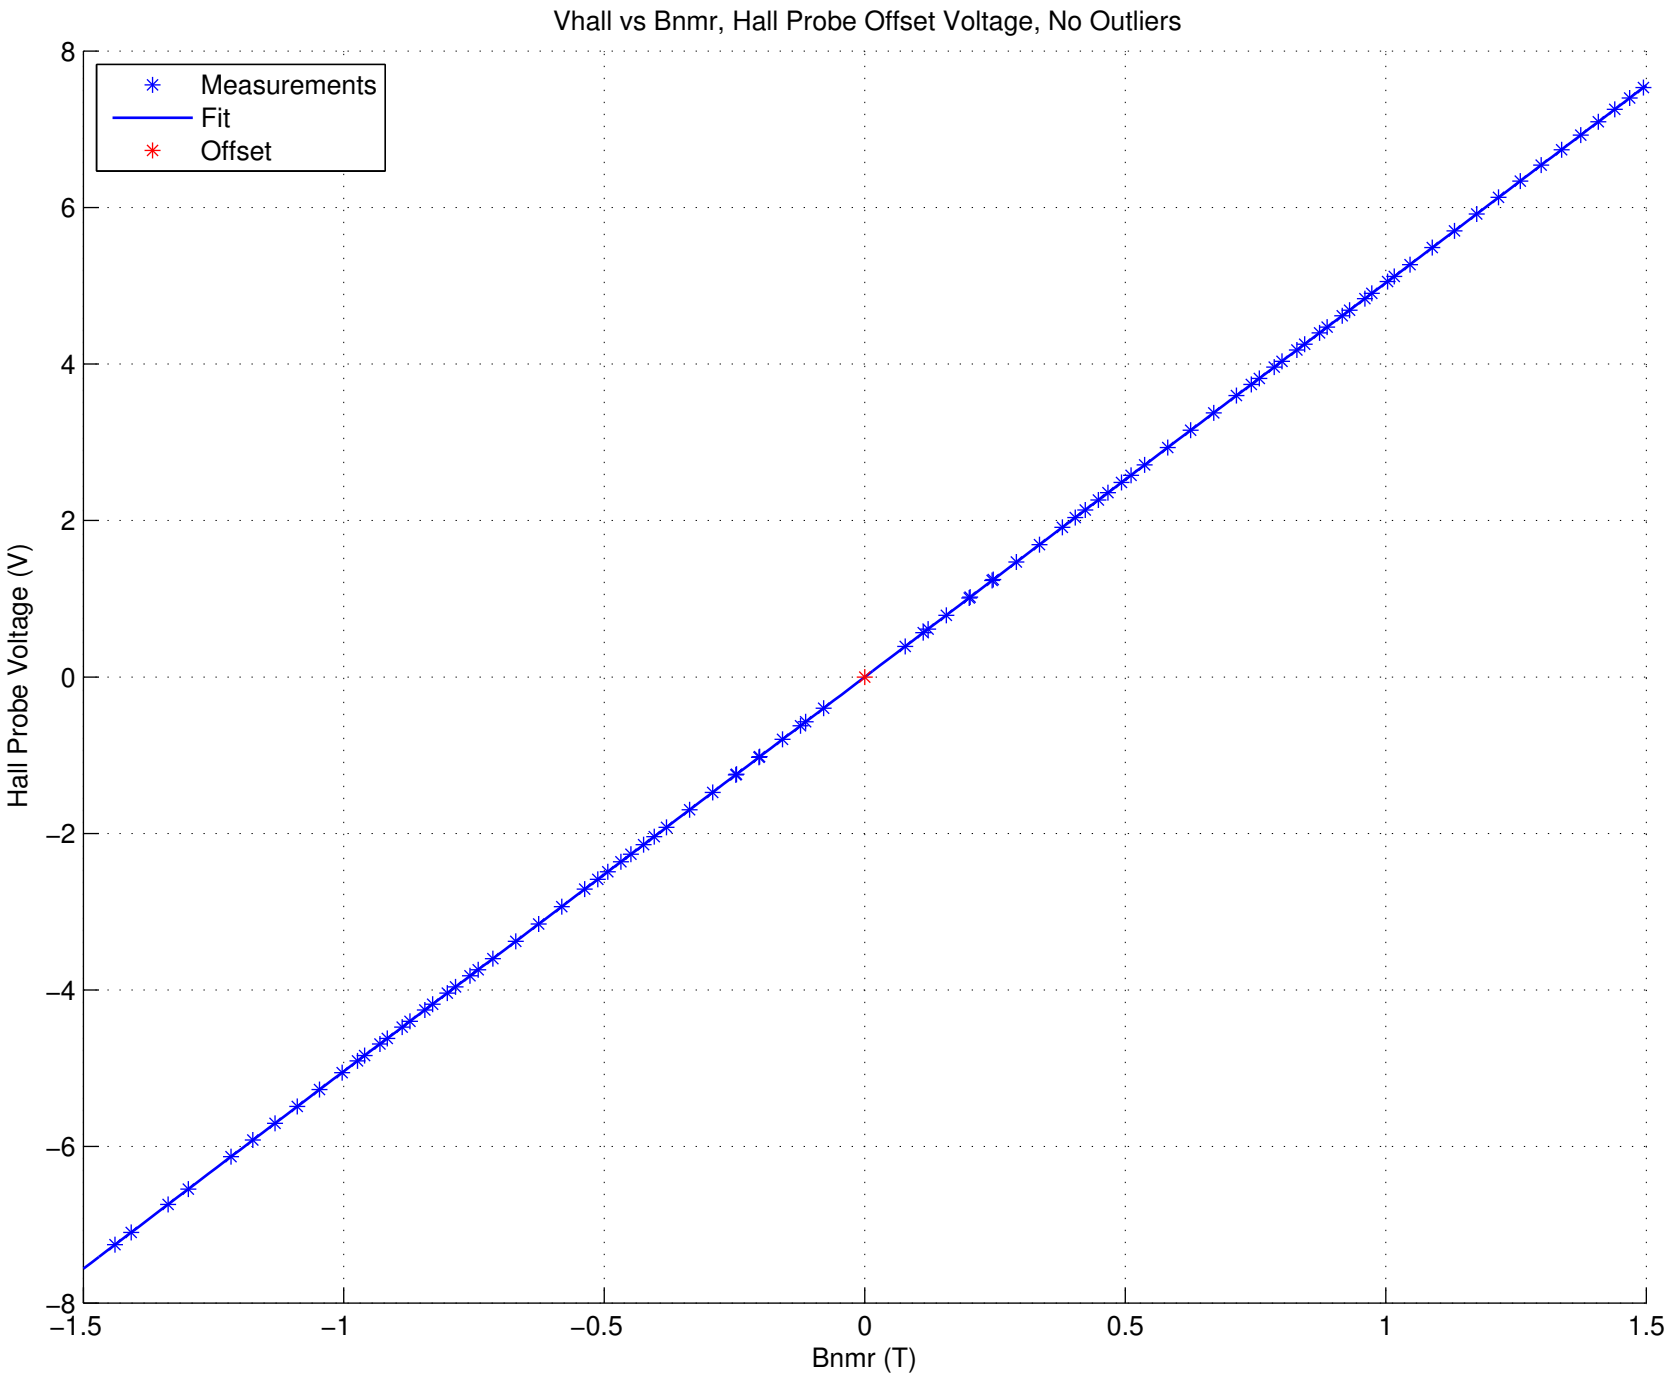
Vhall vs Bnmr, Hall Probe Offset Voltage, No Outliers
Measurements
Fit
Offset
Hall Probe Voltage (V)
Bnmr (T)
8
6
4
2
0
−2
−4
−6
−8
−1.5
−1
−0.5
0
0.5
1
1.5

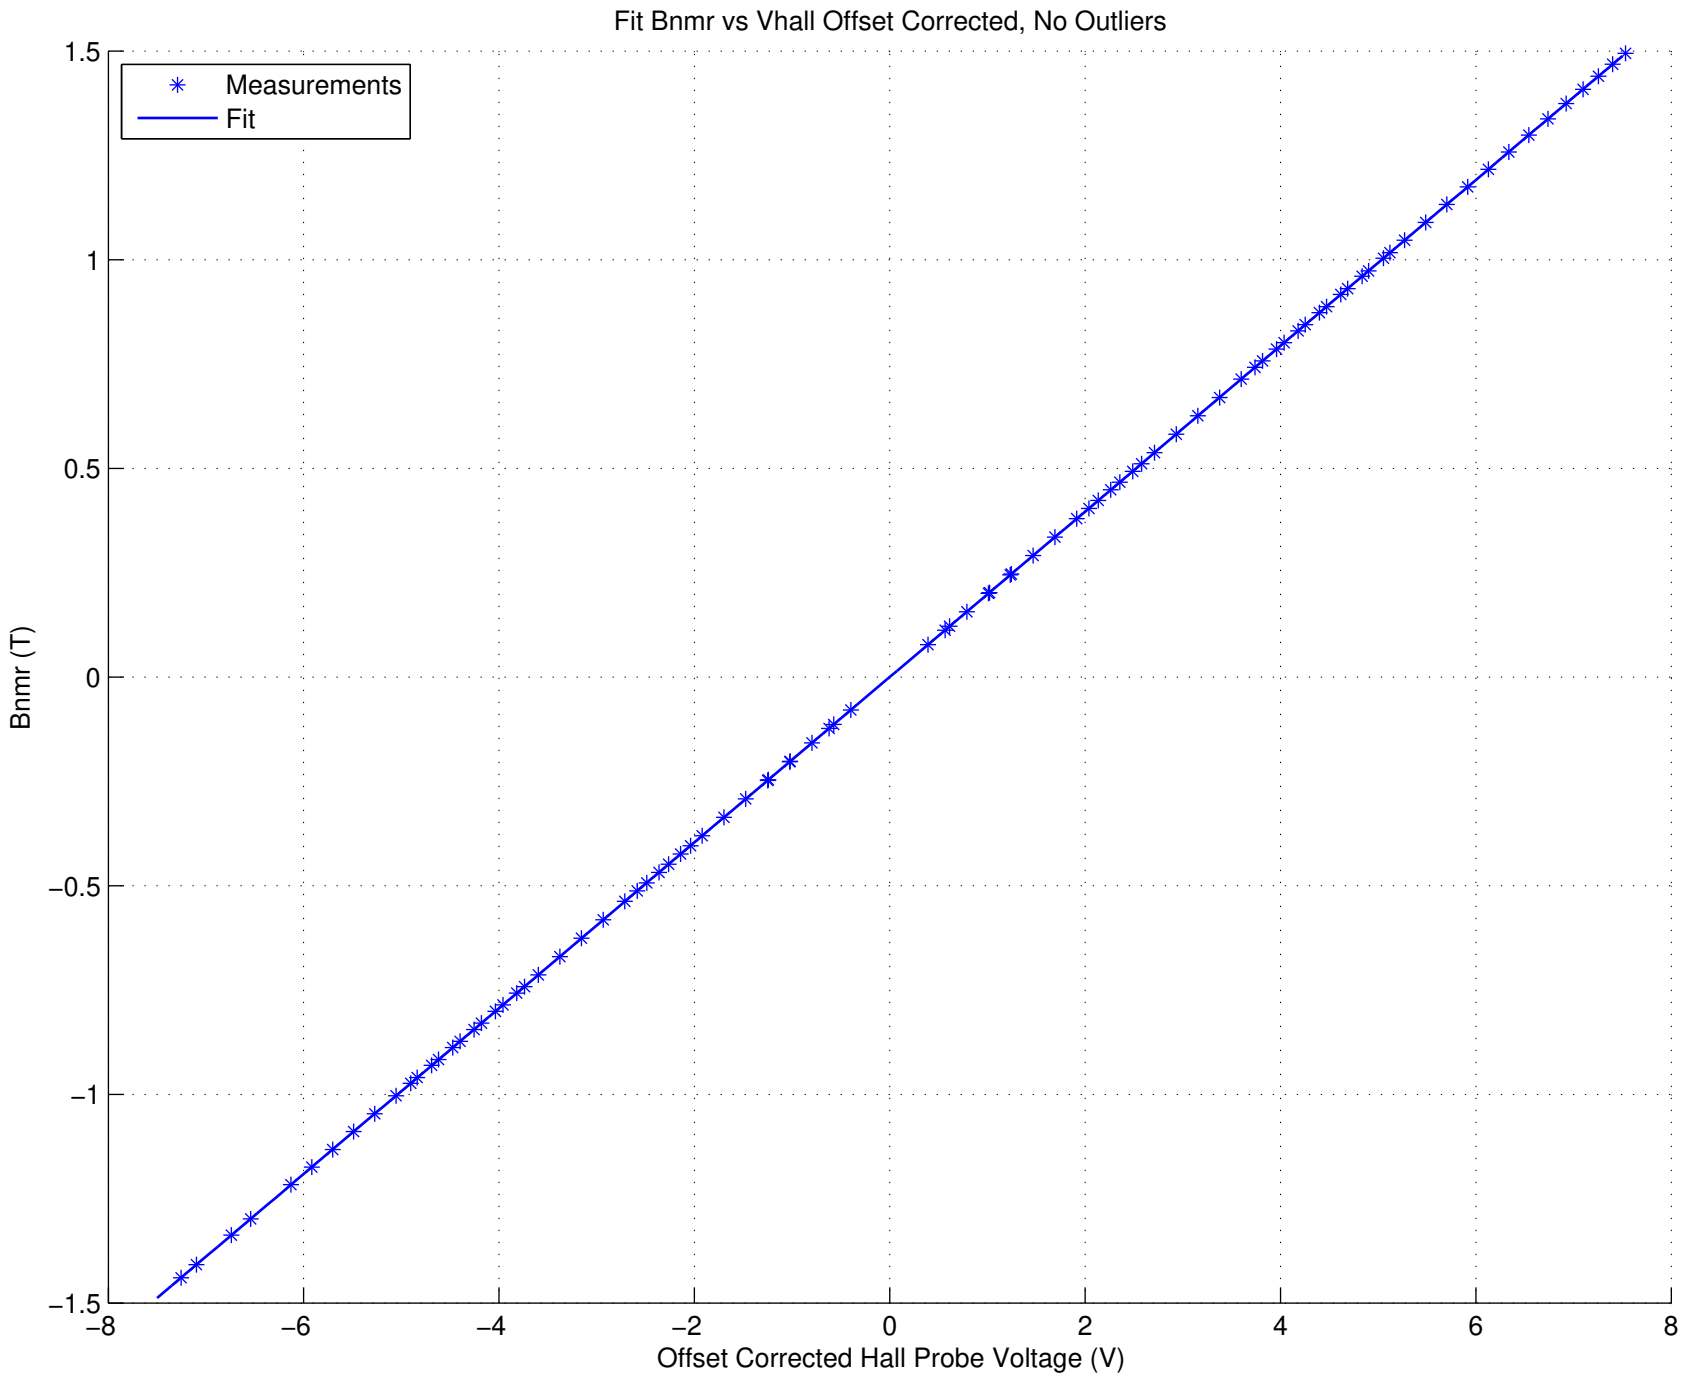
Fit Bnmr vs Vhall Offset Corrected, No Outliers
Measurements
Fit
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
1.5
1
0.5
0
−0.5
−1
−1.5
−8
−6
−4
−2
0
2
4
6
8

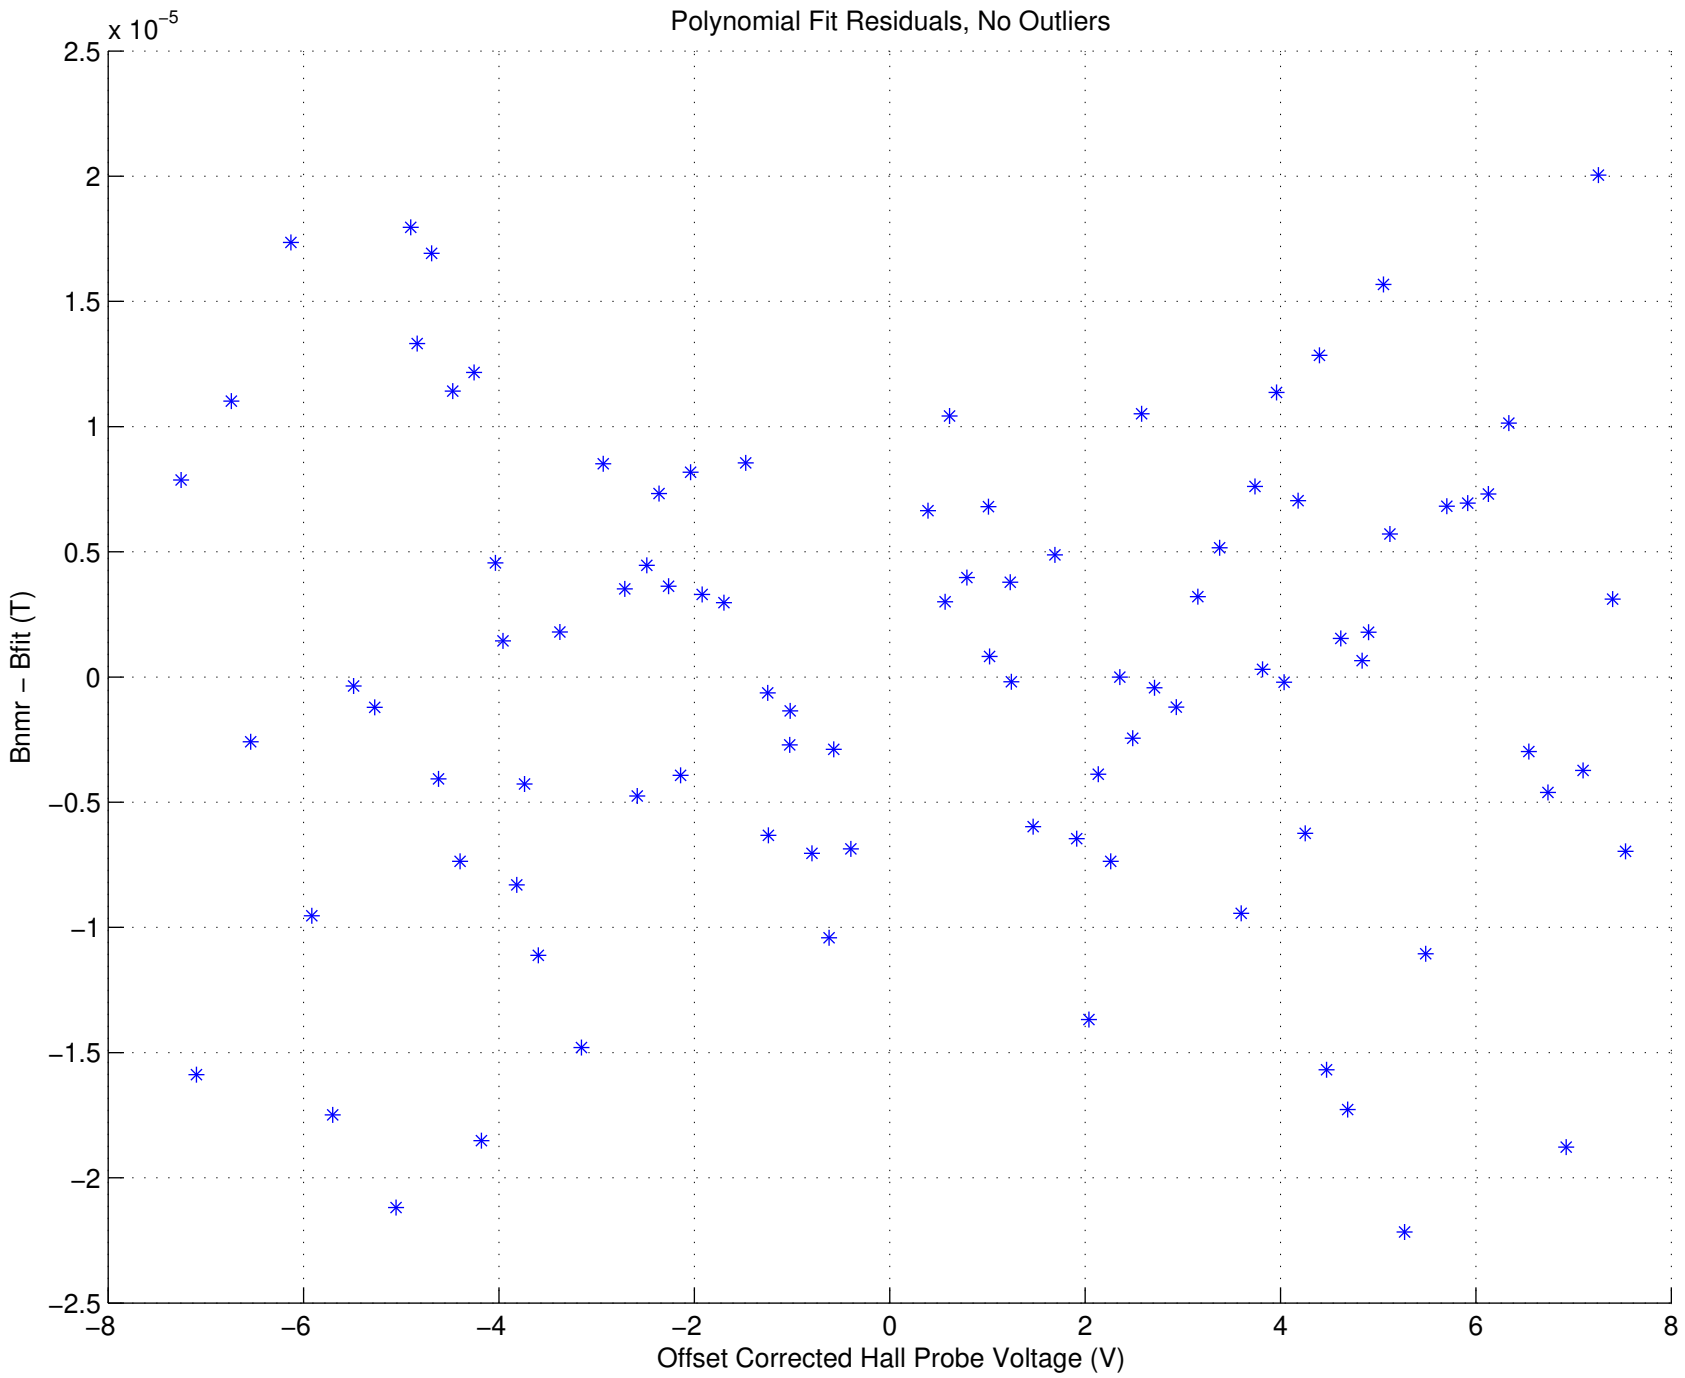
Polynomial Fit Residuals, No Outliers
x 10^-5
2.5
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
Bnmr − Bfit (T)
−8
−6
−4
−2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)

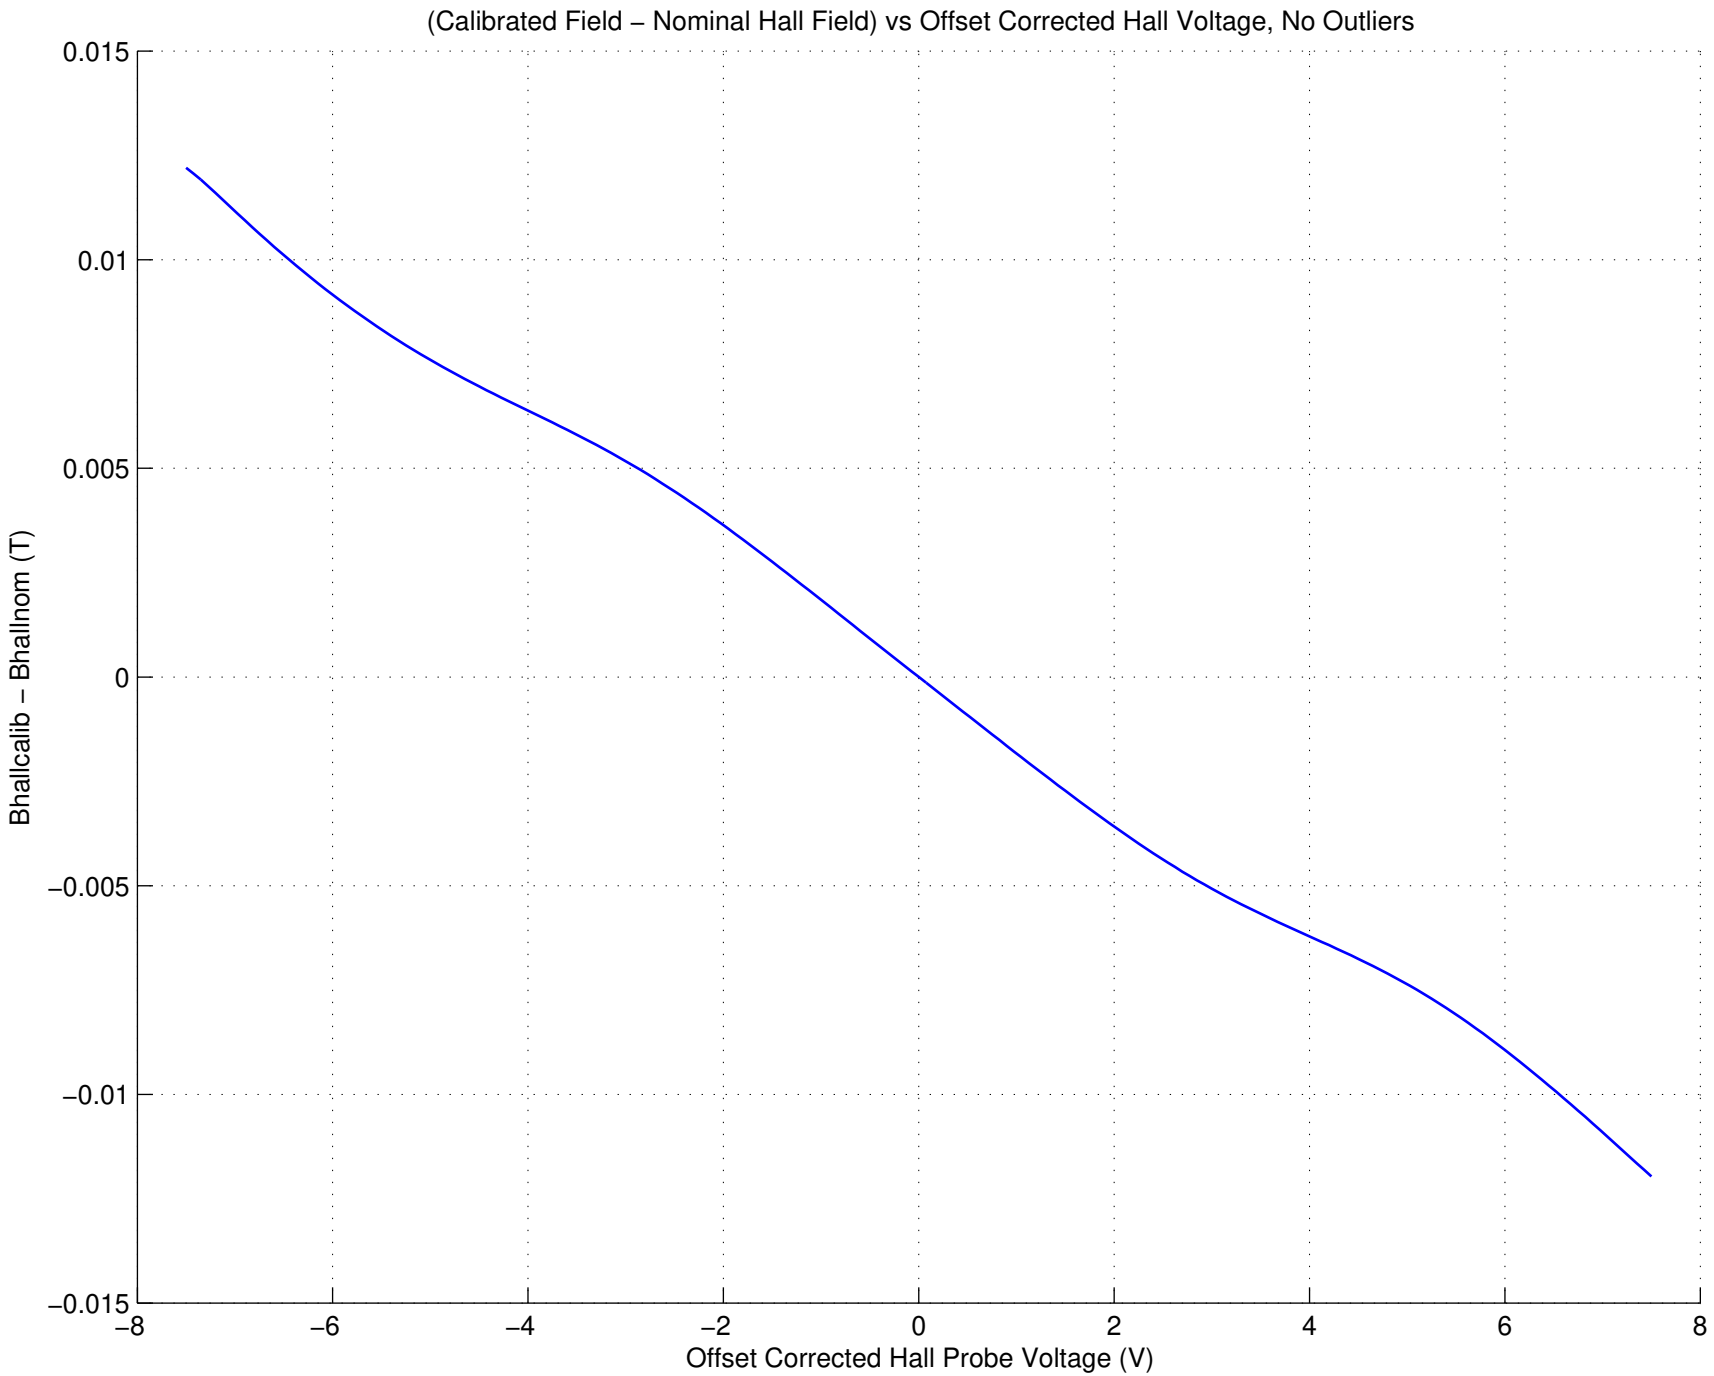
(Calibrated Field – Nominal Hall Field) vs Offset Corrected Hall Voltage, No Outliers
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
Bhallcalib – Bhallnom (T)
−8
−6
−4
−2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)

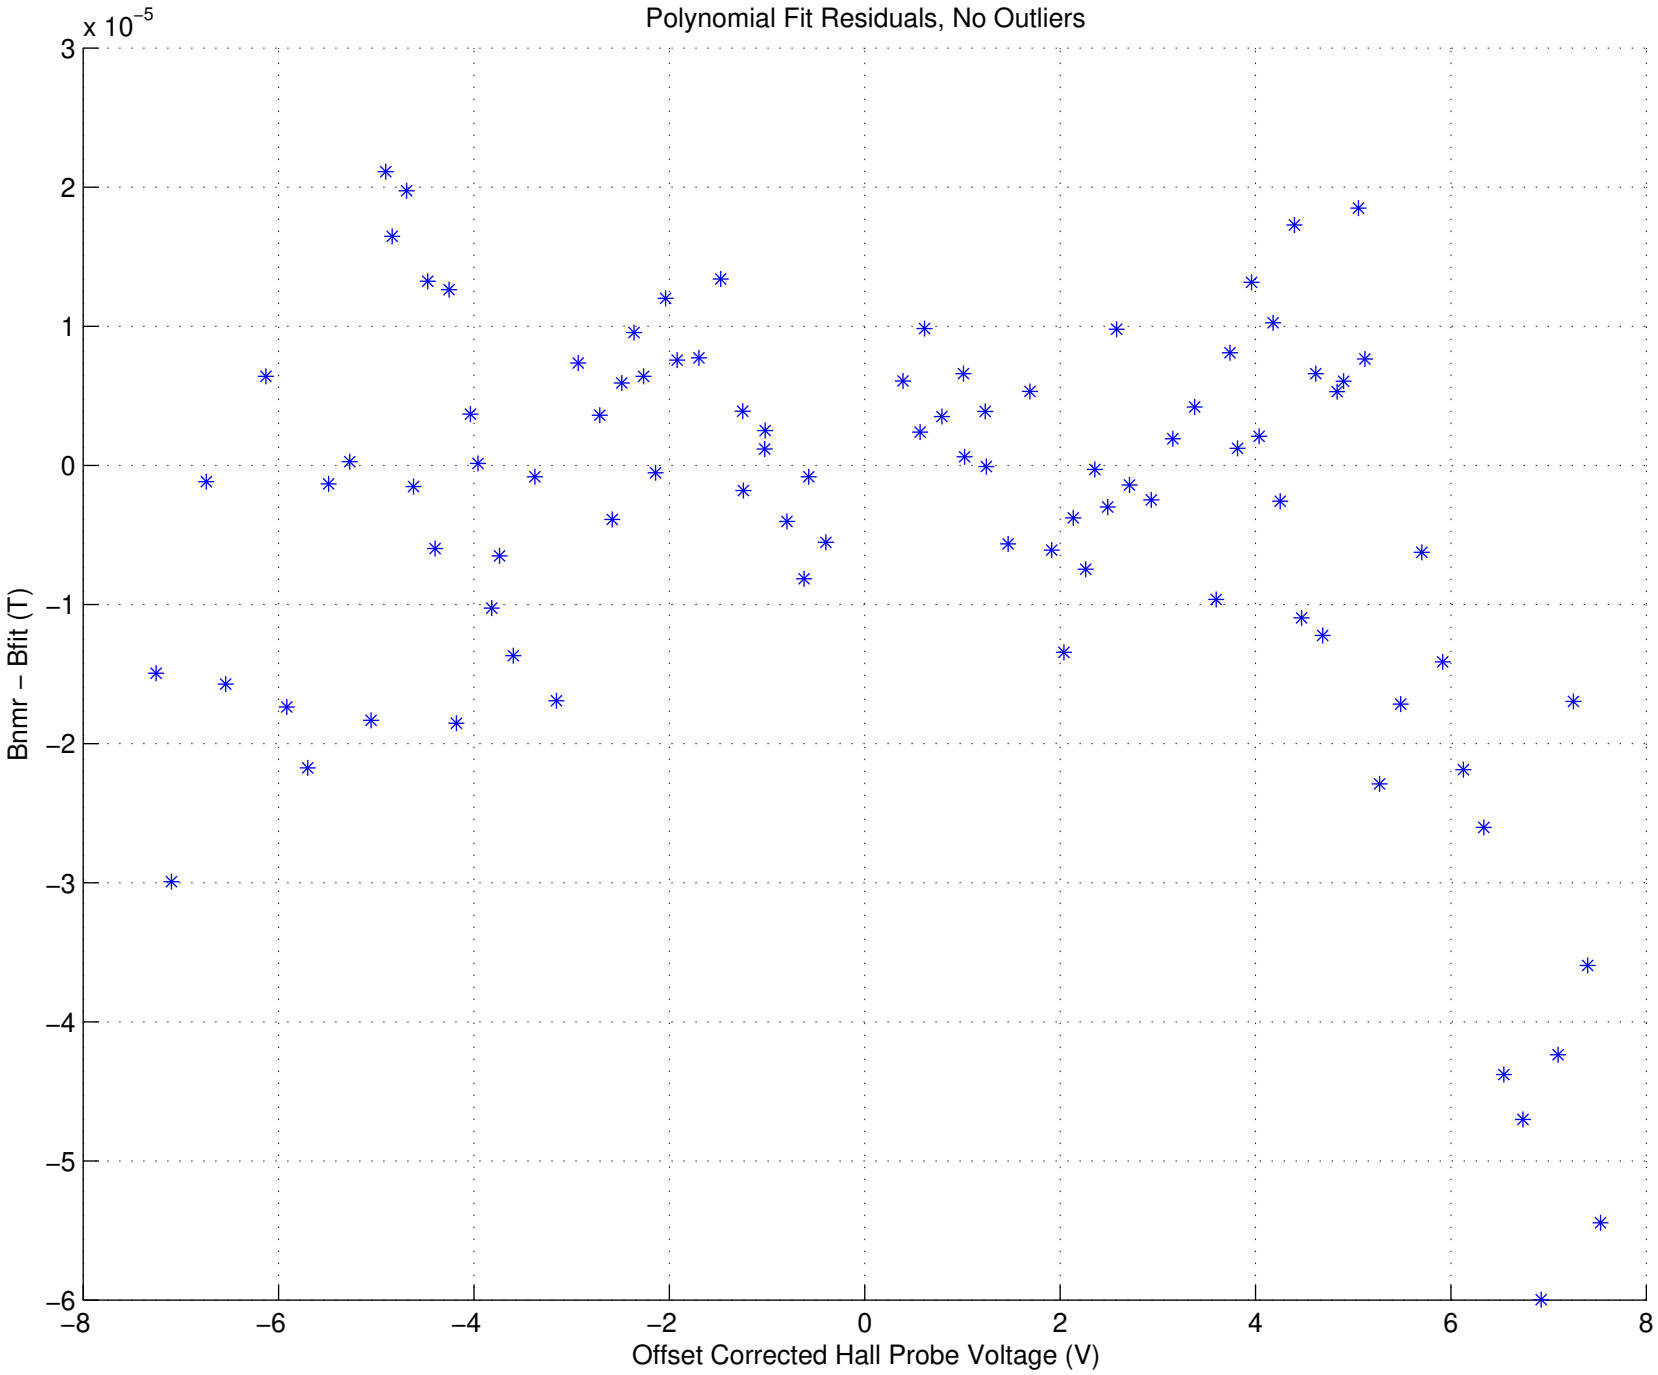
Polynomial Fit Residuals, No Outliers
x 10^-5
3
2
1
0
−1
−2
−3
−4
−5
−6
Bnmr − Bfit (T)
−8
−6
−4
−2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)