SLAC Magnetic Measurements
Hall Probe Calibration

Header:
SLAC Magnetic Measurements
Date: 11-23-2015
Time: 08:04:41

Project: LCLS
Device Type: Hall probe
Data Type: Y
Serial Number: SENIS-118-14
Run Number: 23
Measurement Type: HPCS
Operator: YL
Comment: second calibration, voltmeter PC 71024

Current(A)  T(C)  Case T-V  Est. Field(T)  Voltage  Voltage-T-Corr  Field

Parameters:
INPUT-FILE-DIR =S:\MagData\LCLS\Hall probe\SENIS-118-14\HPCS-023\
INPUT-FILE-NAME =hpcs-dat.001
POLY-FIT-ORDER =13
NUM-SIG-OUTLIER =2
NOM-CALIB-CONST =0.2
MAX-B-NMR-FIT =1.5

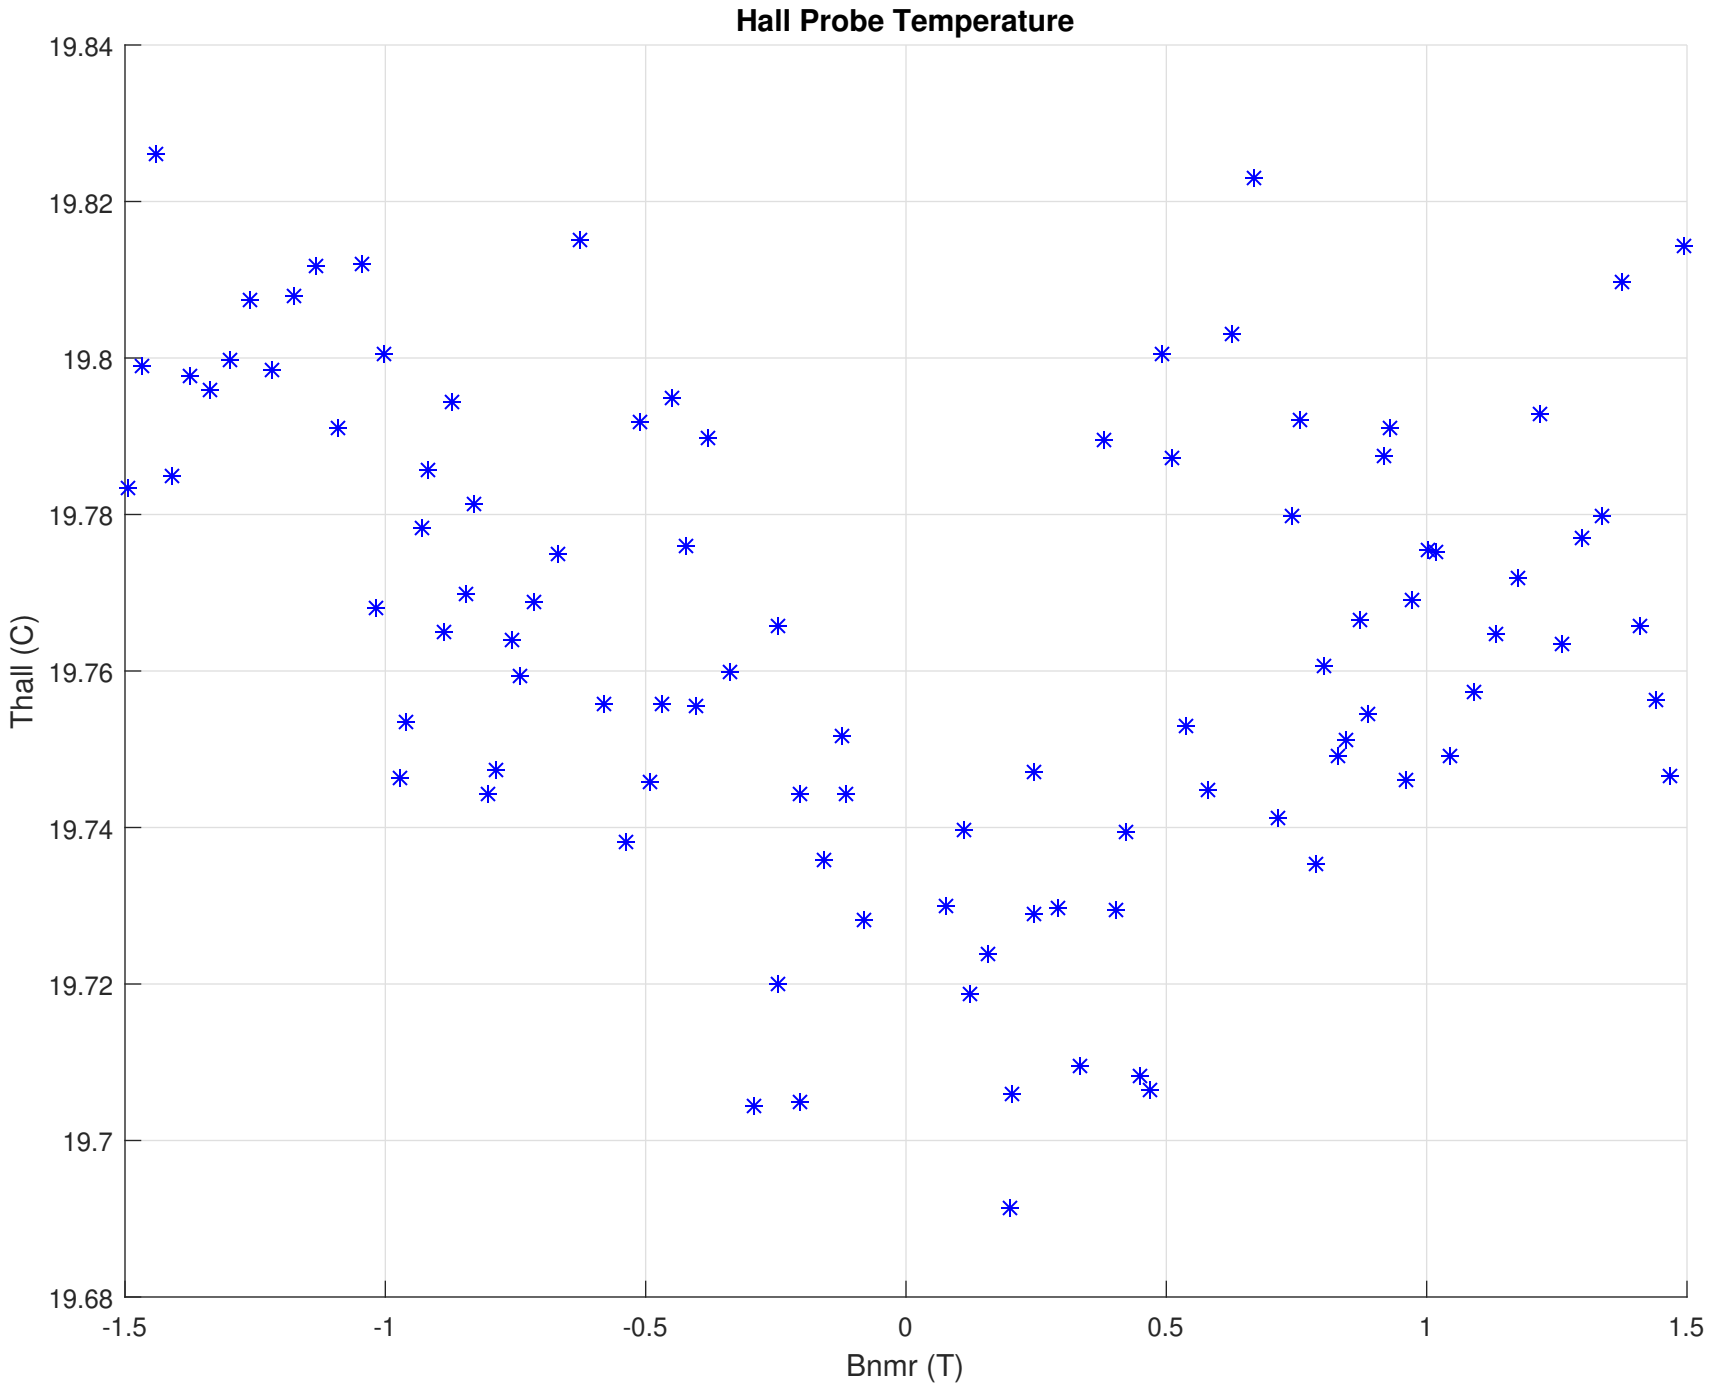
Hall Probe Temperature
19.84
19.82
19.8
19.78
19.76
19.74
19.72
19.7
19.68
Thall (C)
-1.5
-1
-0.5
0
0.5
1
1.5
Bnmr (T)

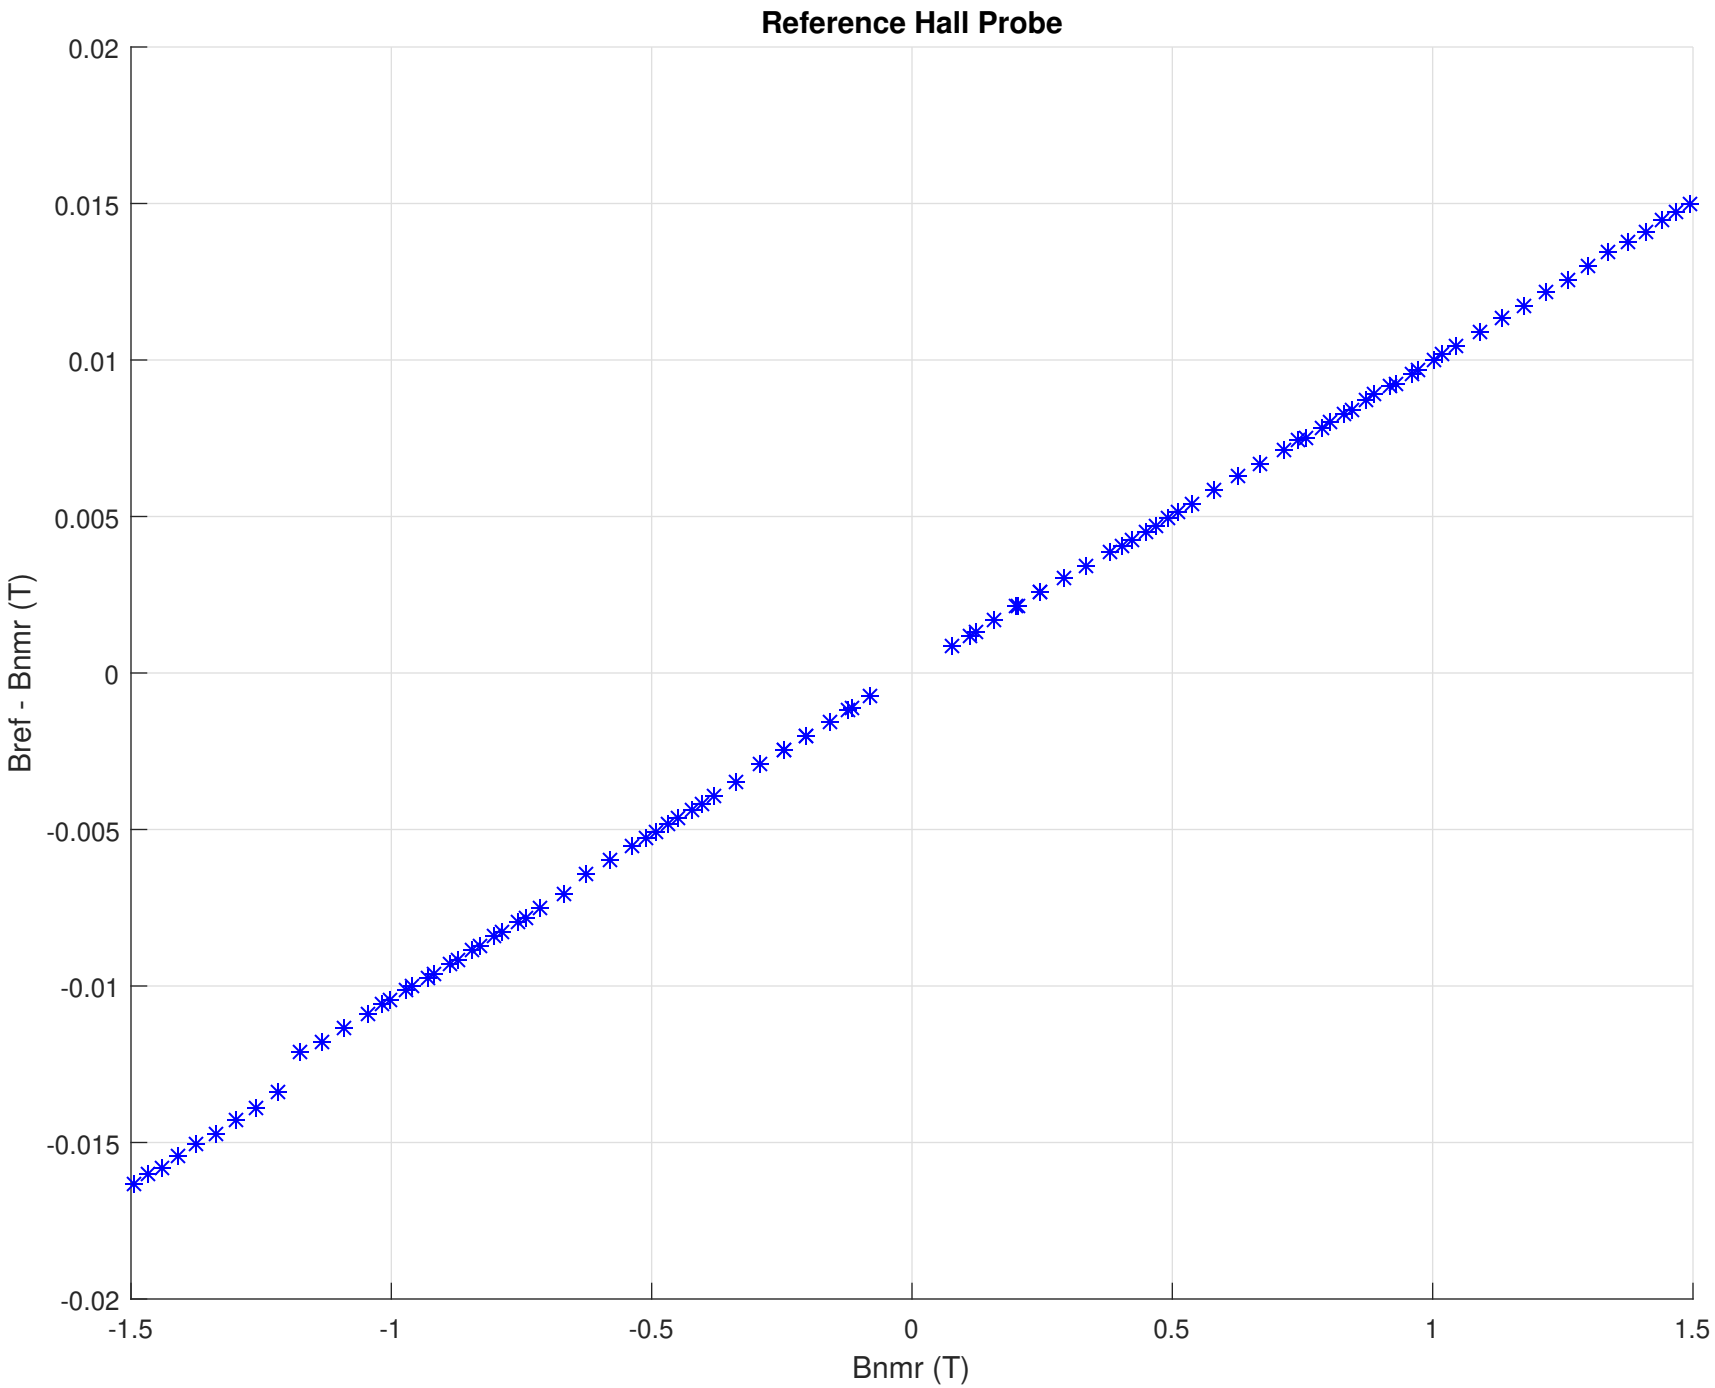
Reference Hall Probe
0.02
0.015
0.01
0.005
0
-0.005
-0.01
-0.015
-0.02
Bref - Bnmr (T)
-1.5
-1
-0.5
0
0.5
1
1.5
Bnmr (T)

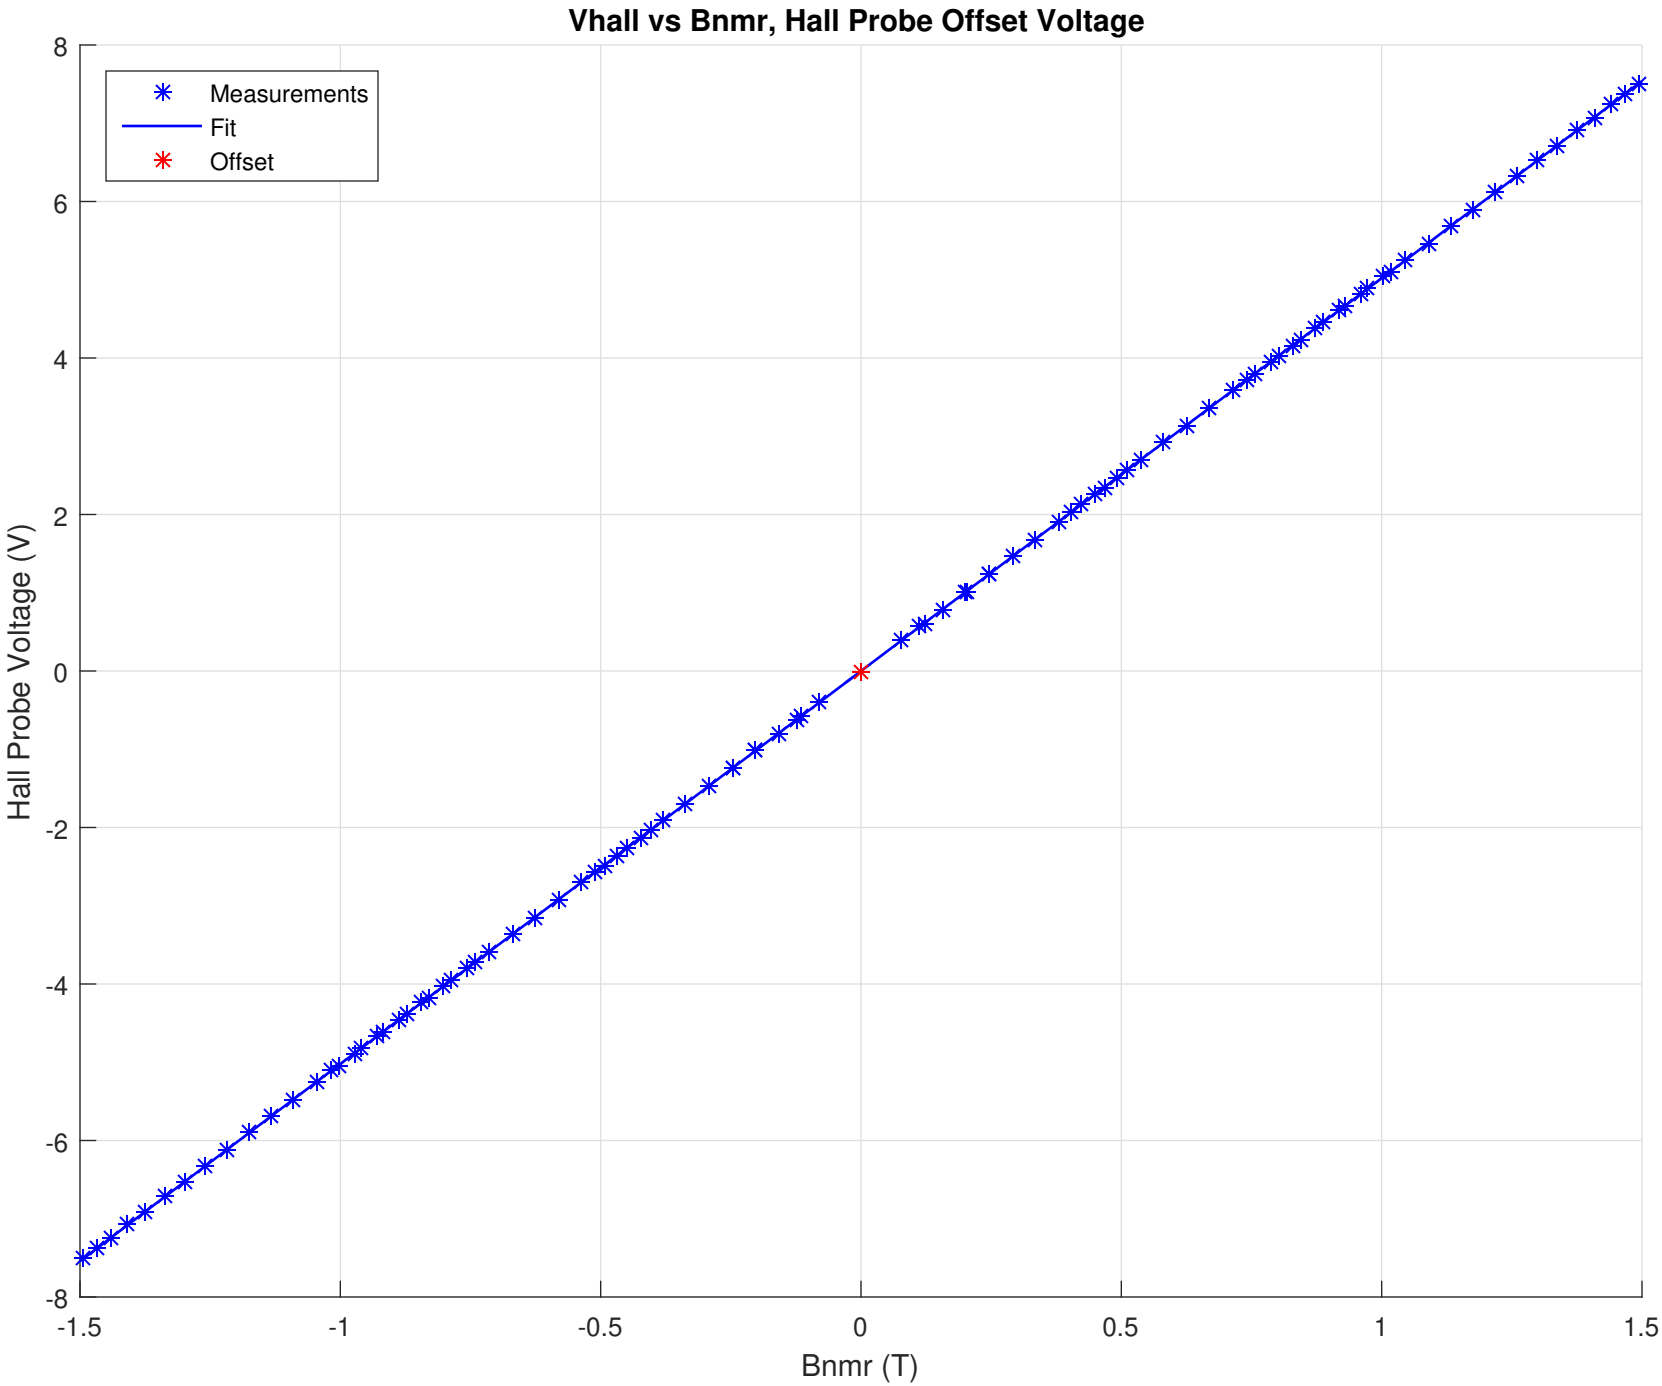
Vhall vs Bnmr, Hall Probe Offset Voltage
Measurements
Fit
Offset
Hall Probe Voltage (V)
Bnmr (T)
8
6
4
2
0
-2
-4
-6
-8
-1.5
-1
-0.5
0
0.5
1
1.5

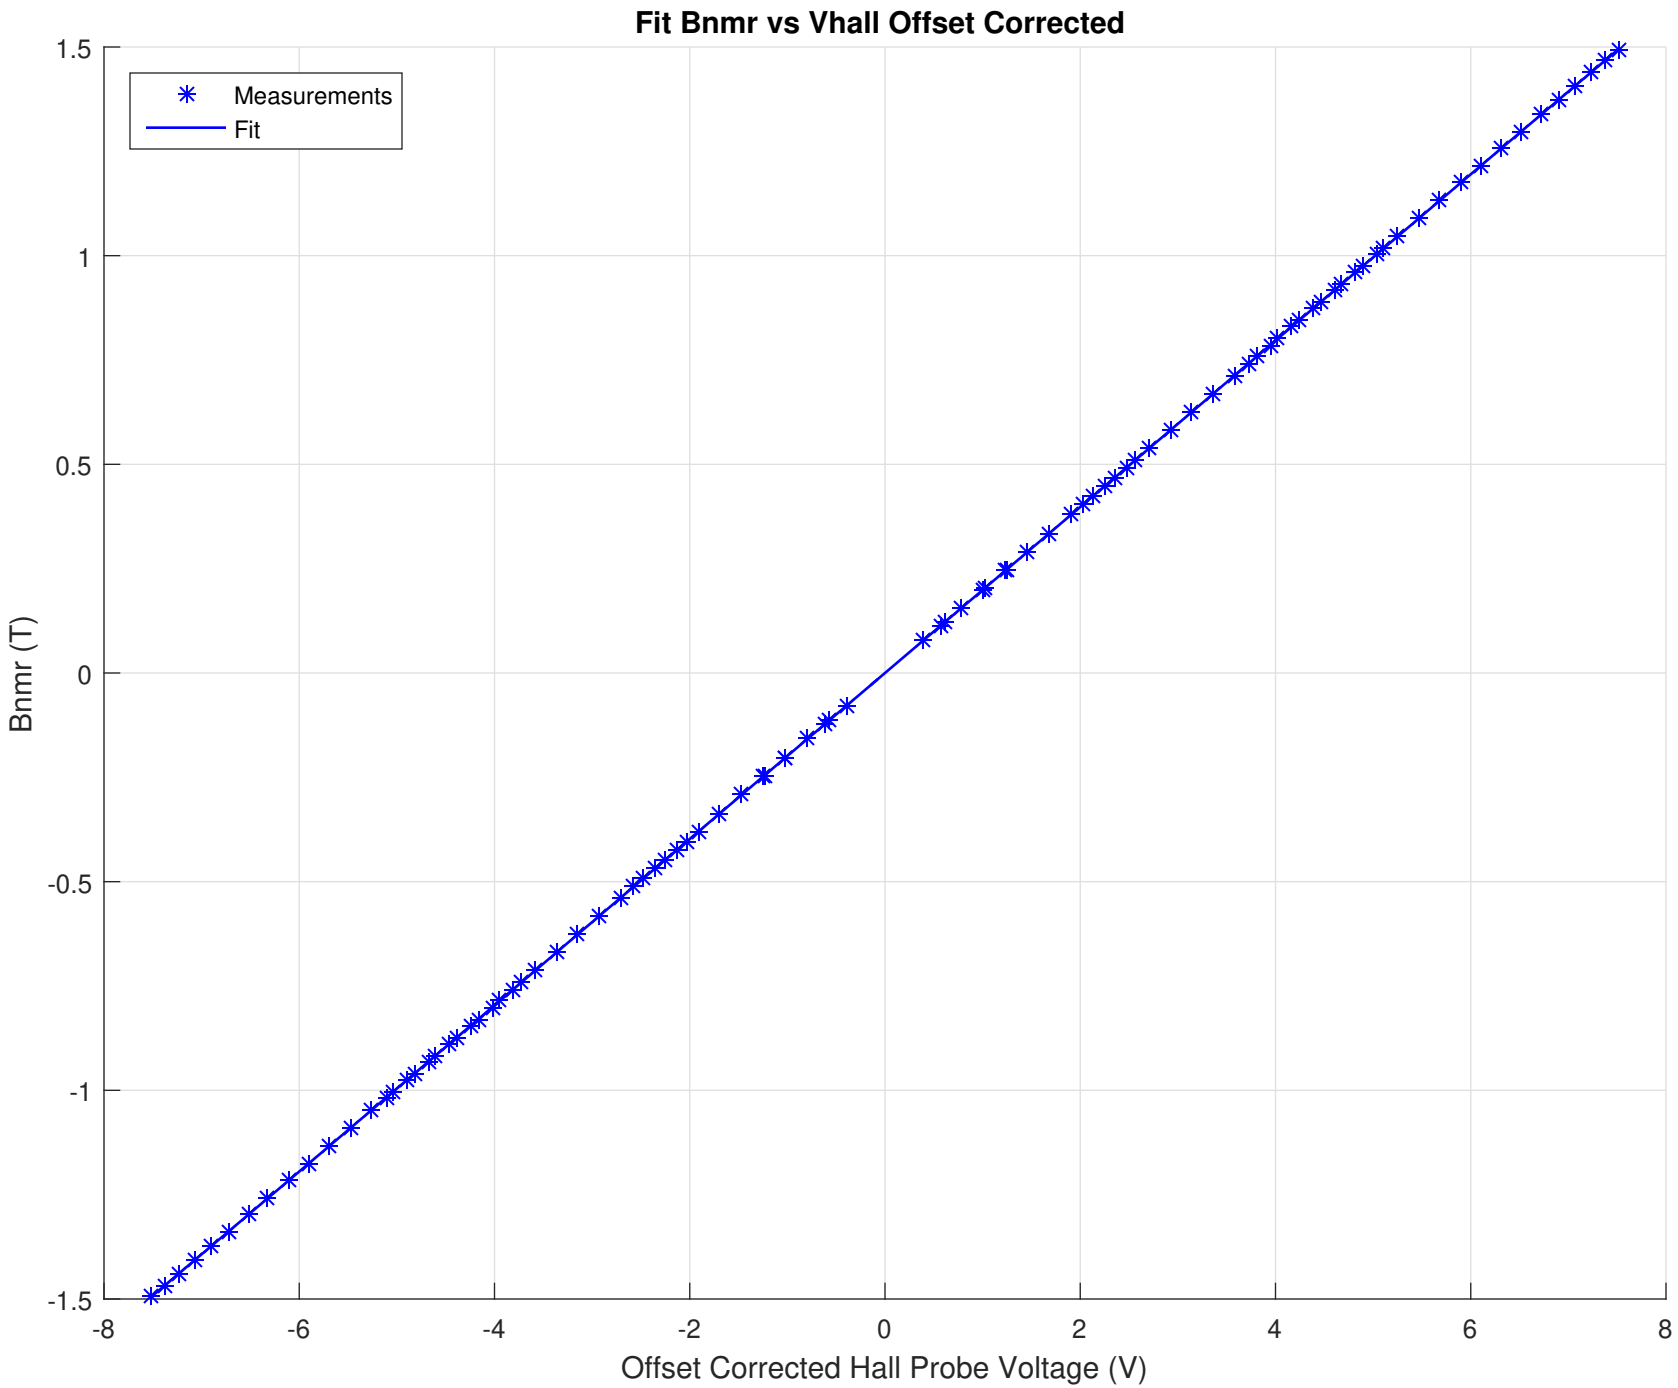
Fit Bnmr vs Vhall Offset Corrected
Measurements
Fit
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
1.5
1
0.5
0
-0.5
-1
-1.5
-8
-6
-4
-2
0
2
4
6
8

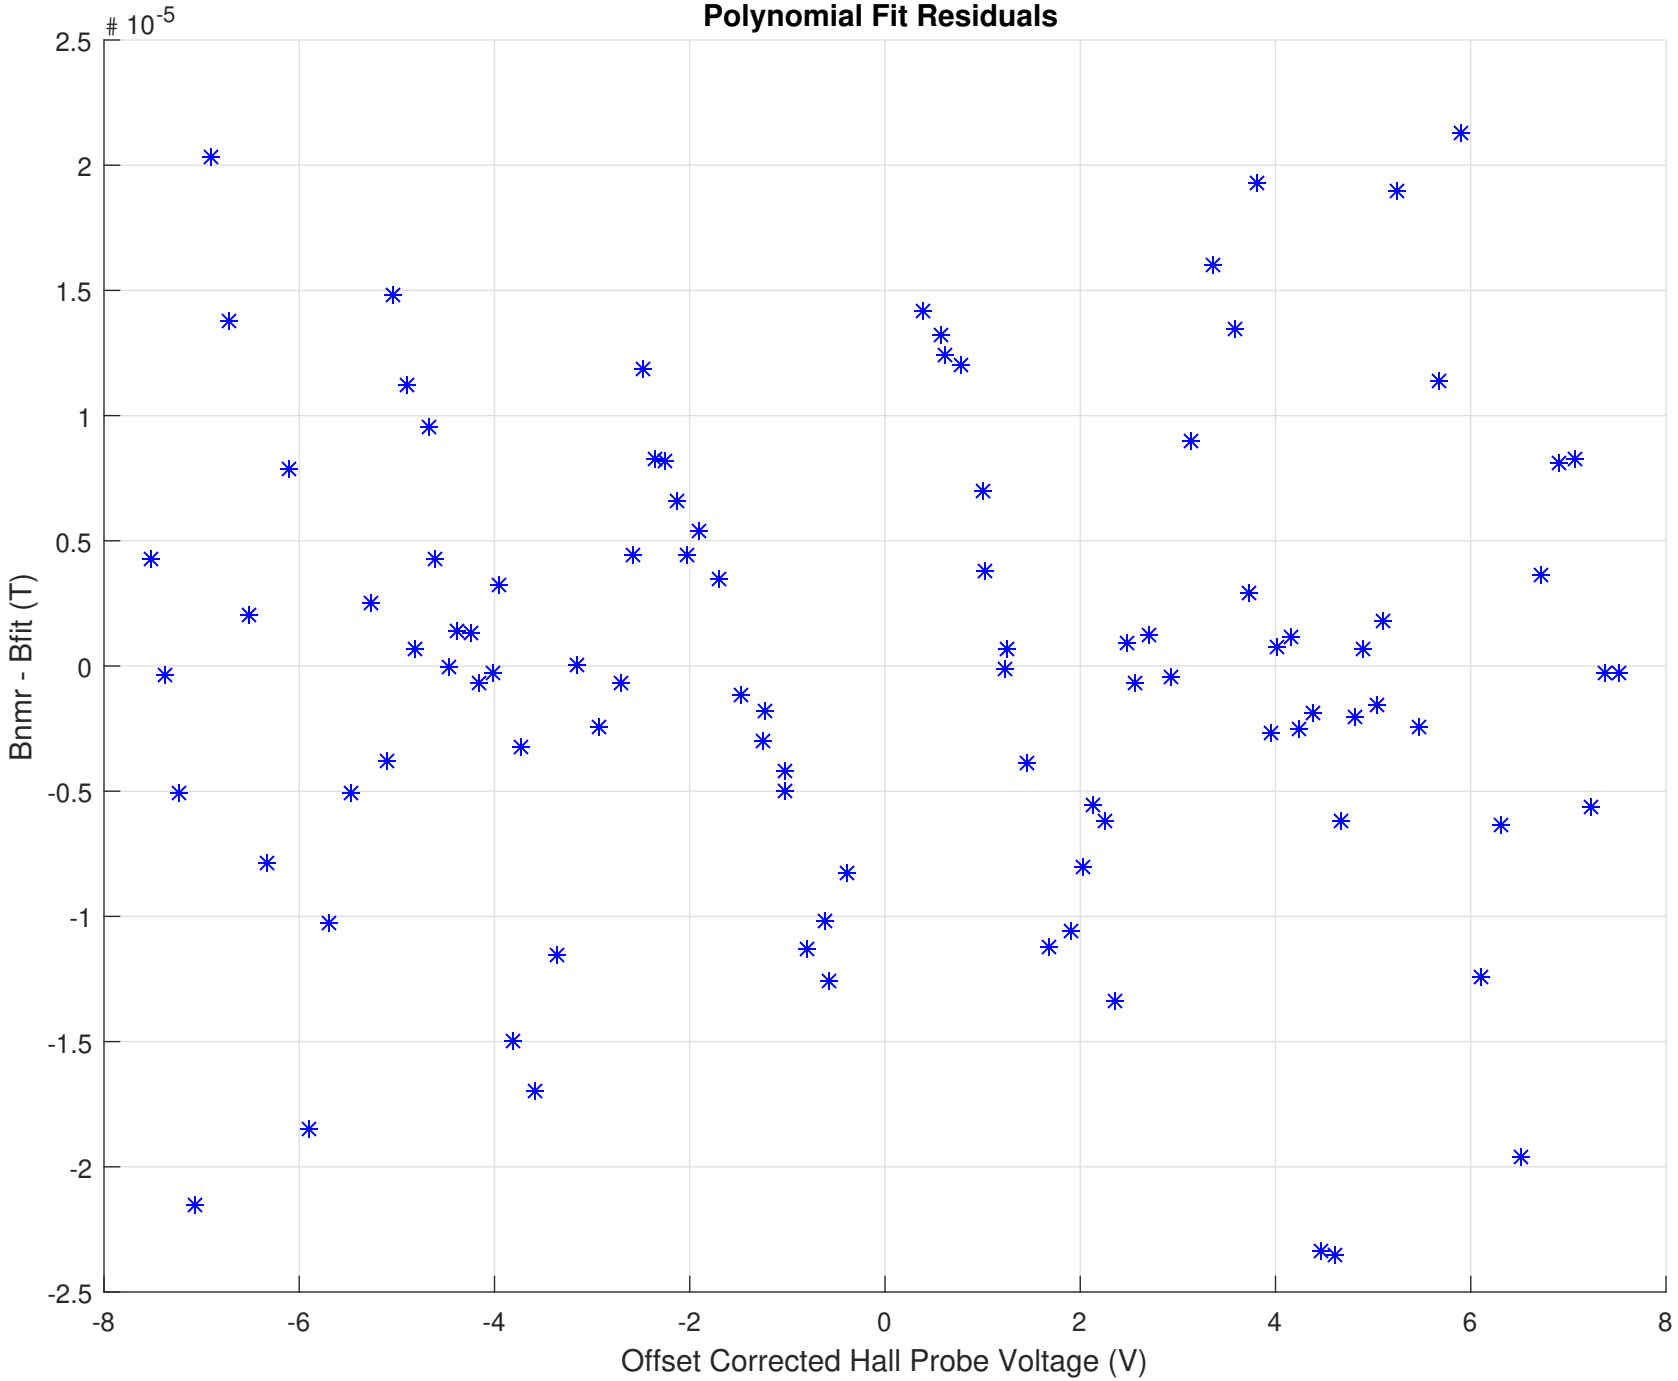
Polynomial Fit Residuals
# 10^-5
2.5
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
-2.5
Bnmr - Bfit (T)
-8
-6
-4
-2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)

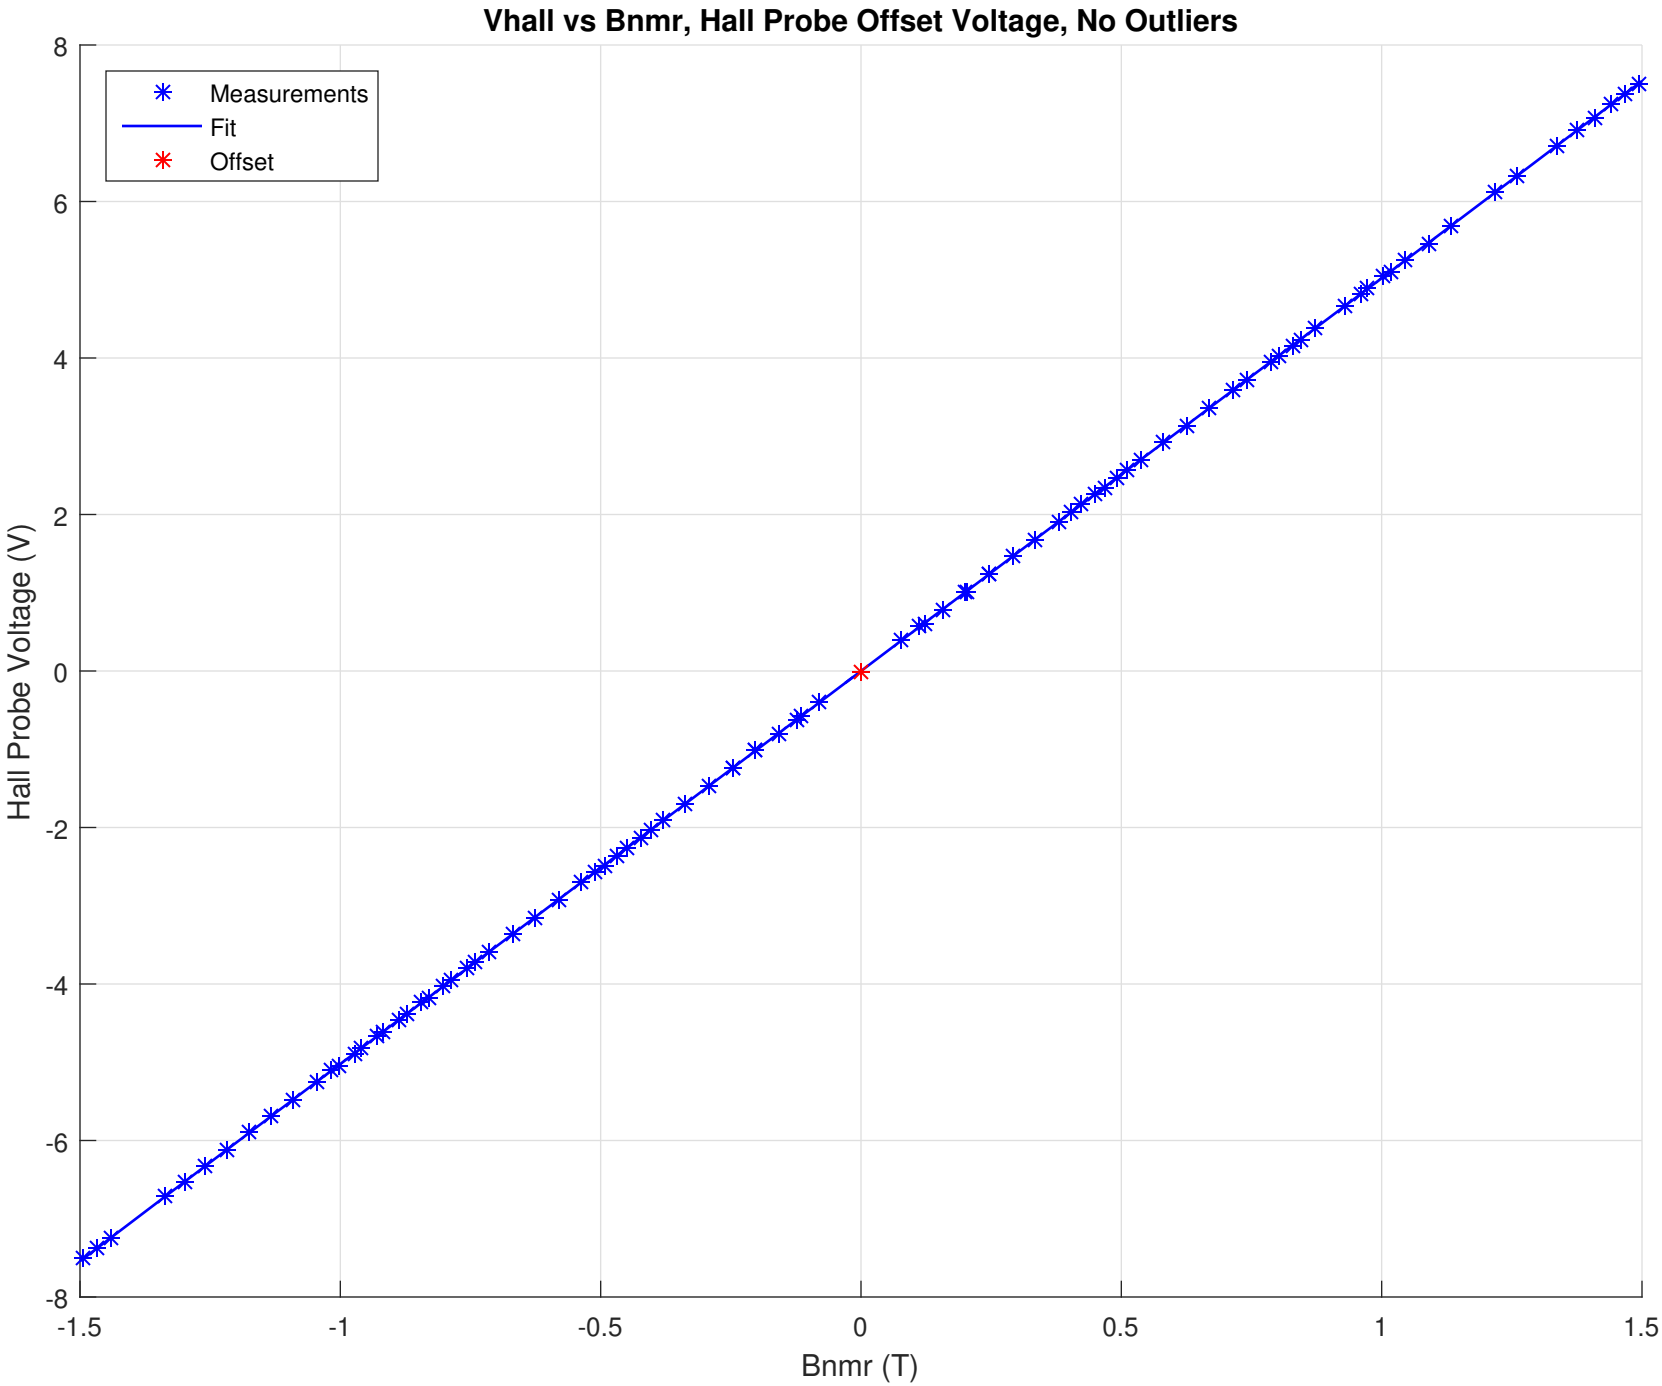
Vhall vs Bnmr, Hall Probe Offset Voltage, No Outliers
Measurements
Fit
Offset
Hall Probe Voltage (V)
Bnmr (T)
8
6
4
2
0
-2
-4
-6
-8
-1.5
-1
-0.5
0
0.5
1
1.5

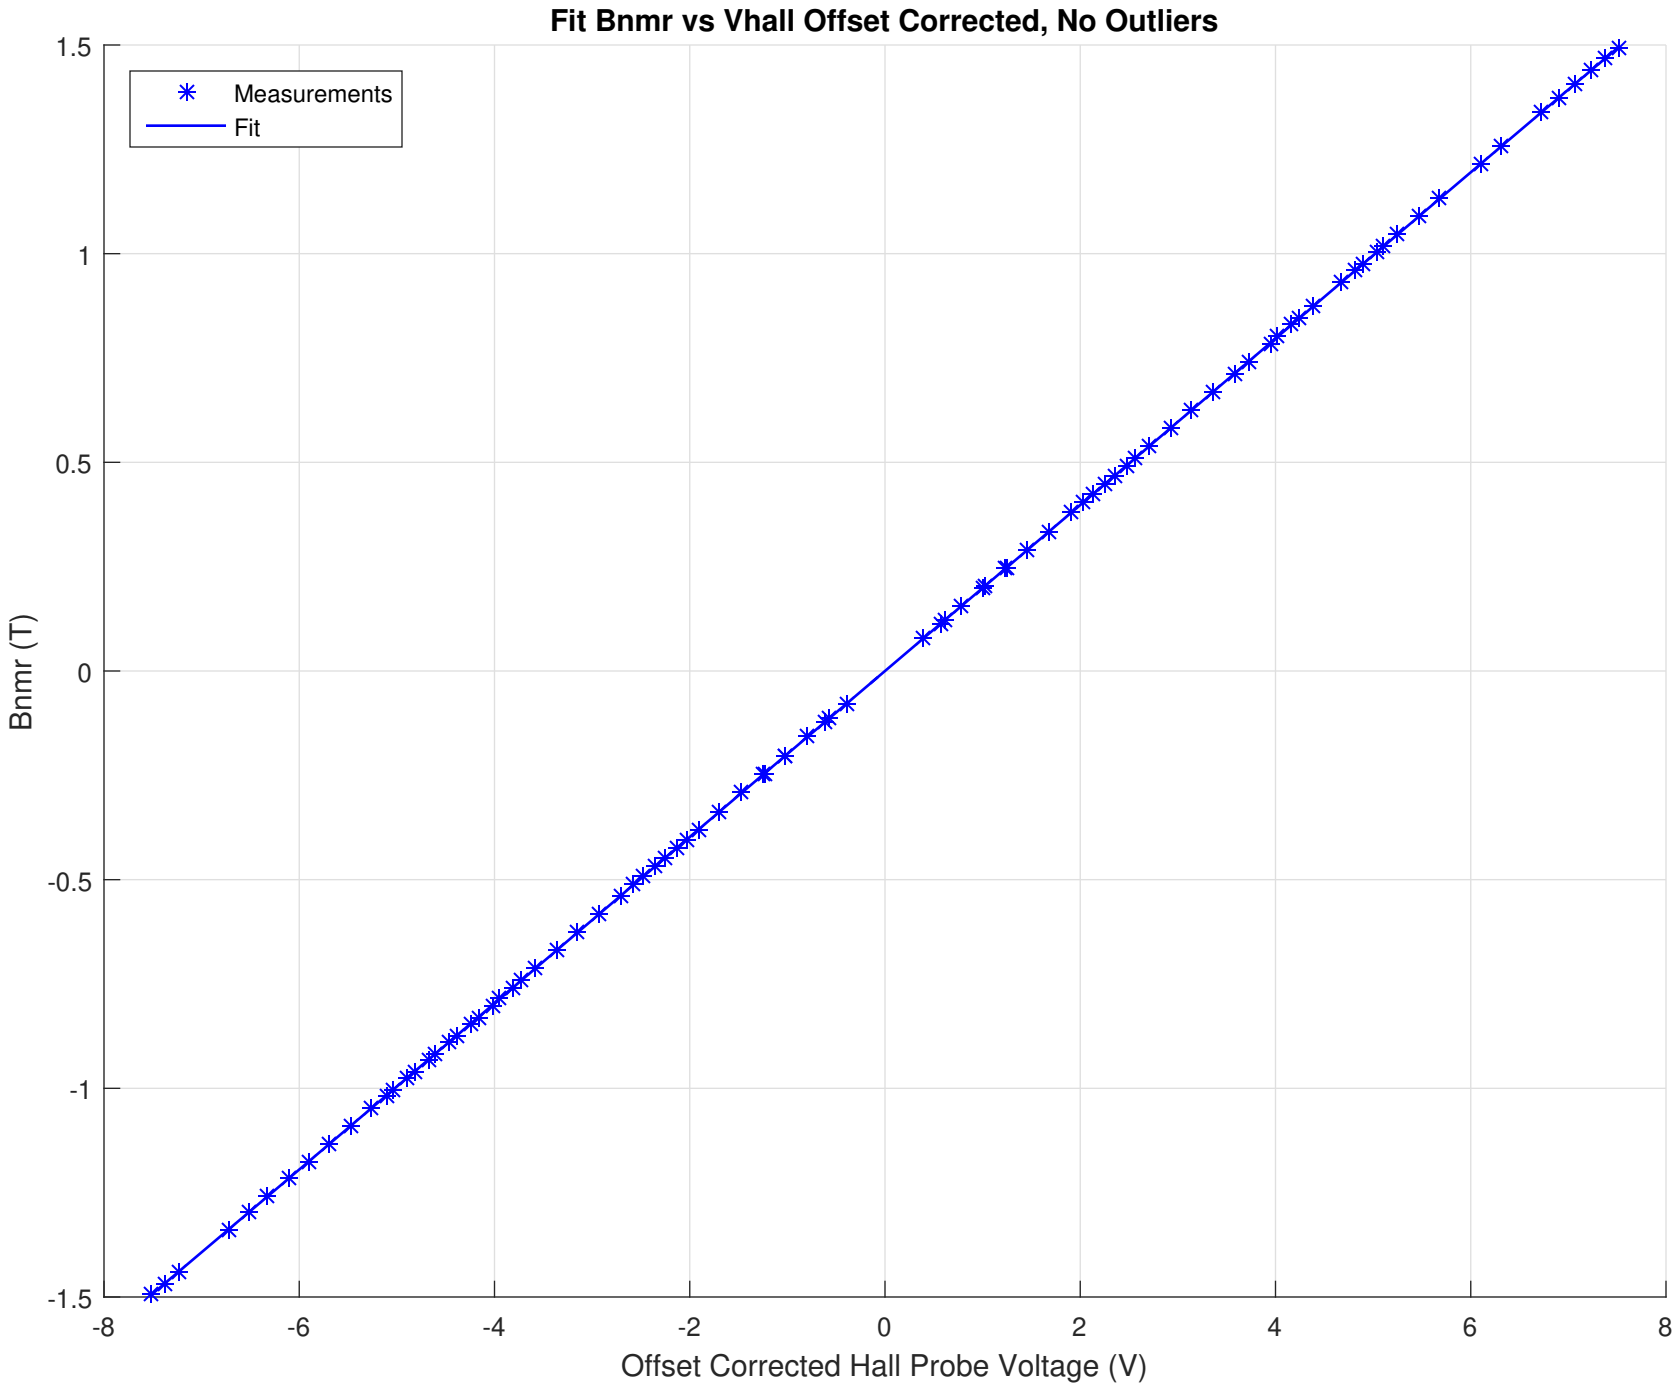
Fit Bnmr vs Vhall Offset Corrected, No Outliers
Measurements
Fit
Bnmr (T)
Offset Corrected Hall Probe Voltage (V)
1.5
1
0.5
0
-0.5
-1
-1.5
-8
-6
-4
-2
0
2
4
6
8

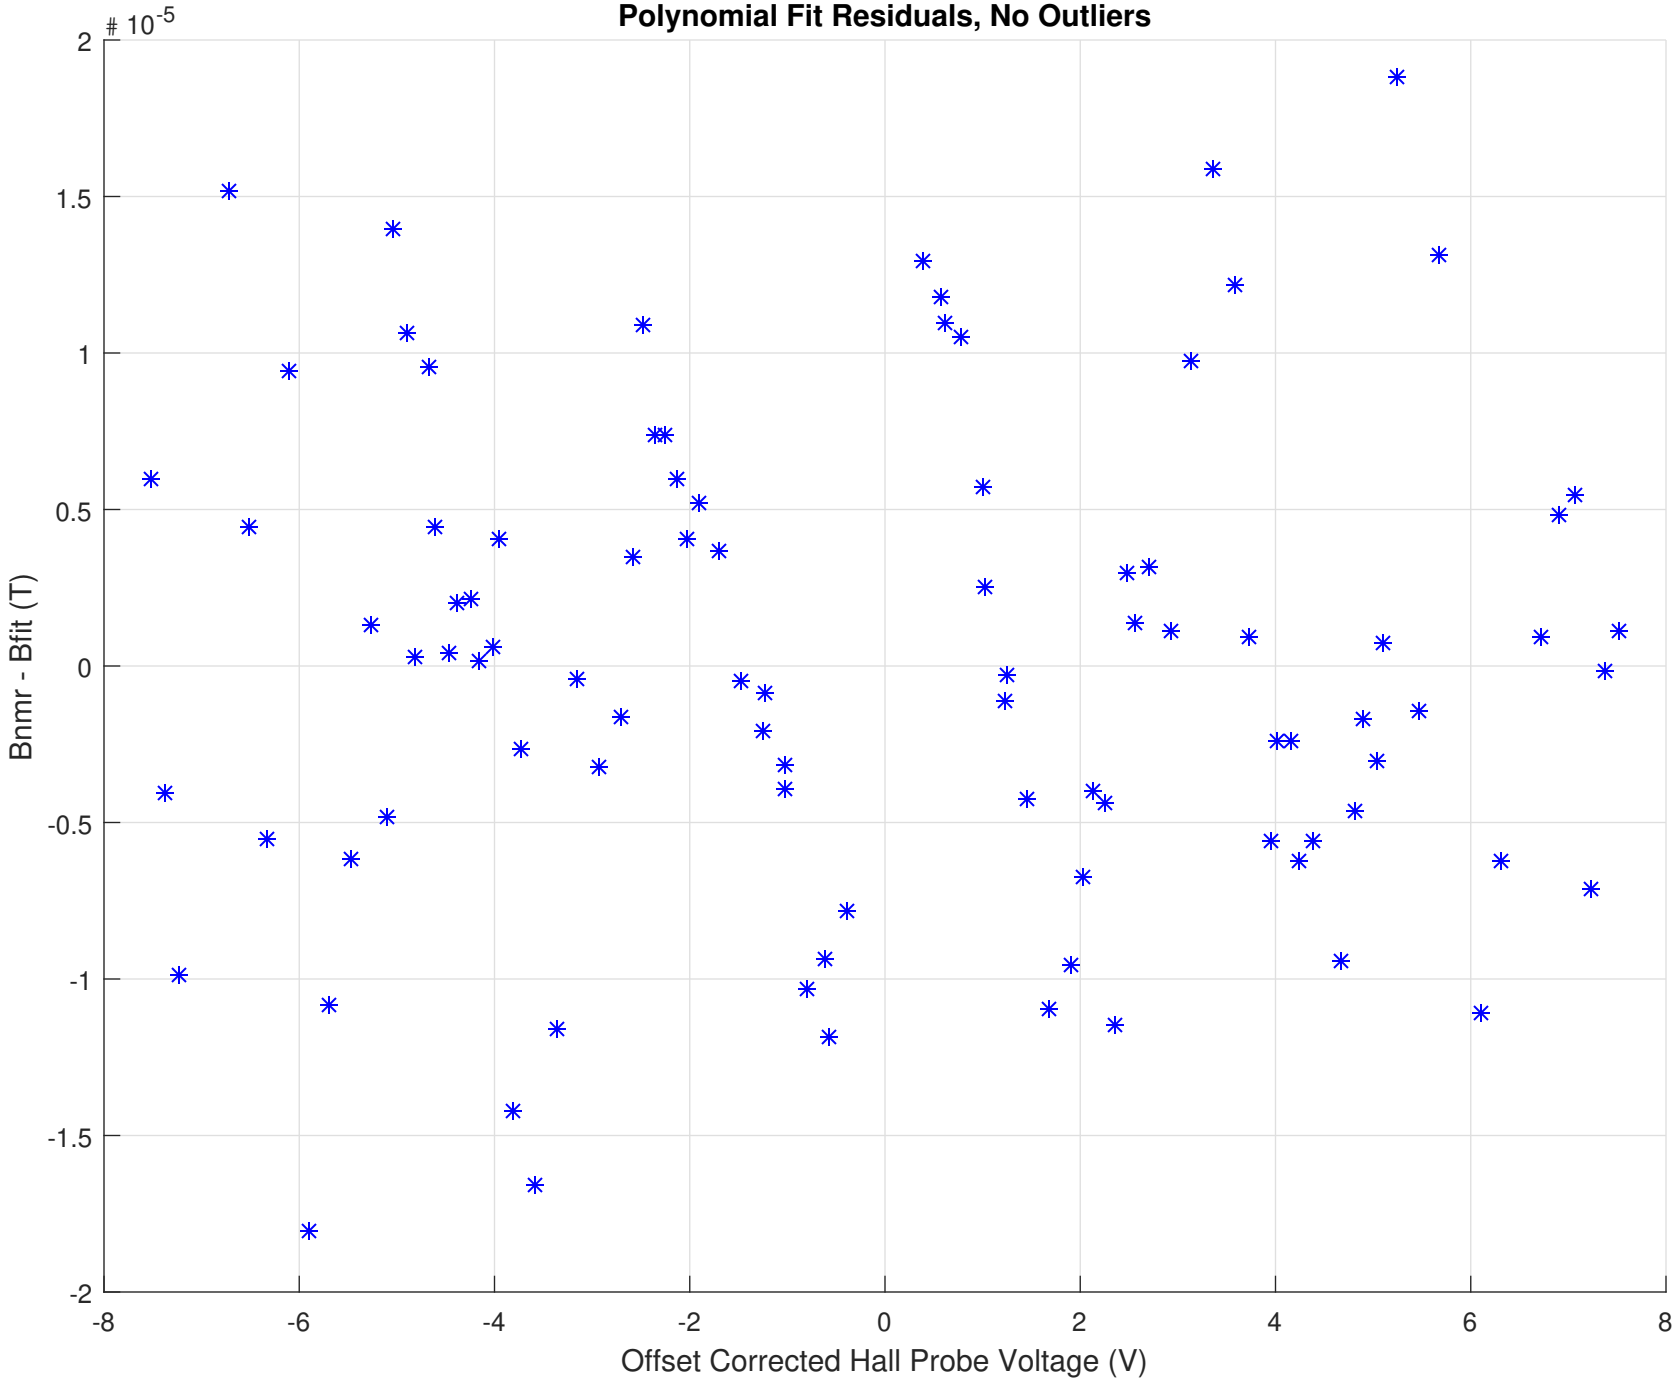
Polynomial Fit Residuals, No Outliers
# 10^-5
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
Bnmr - Bfit (T)
-8
-6
-4
-2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)

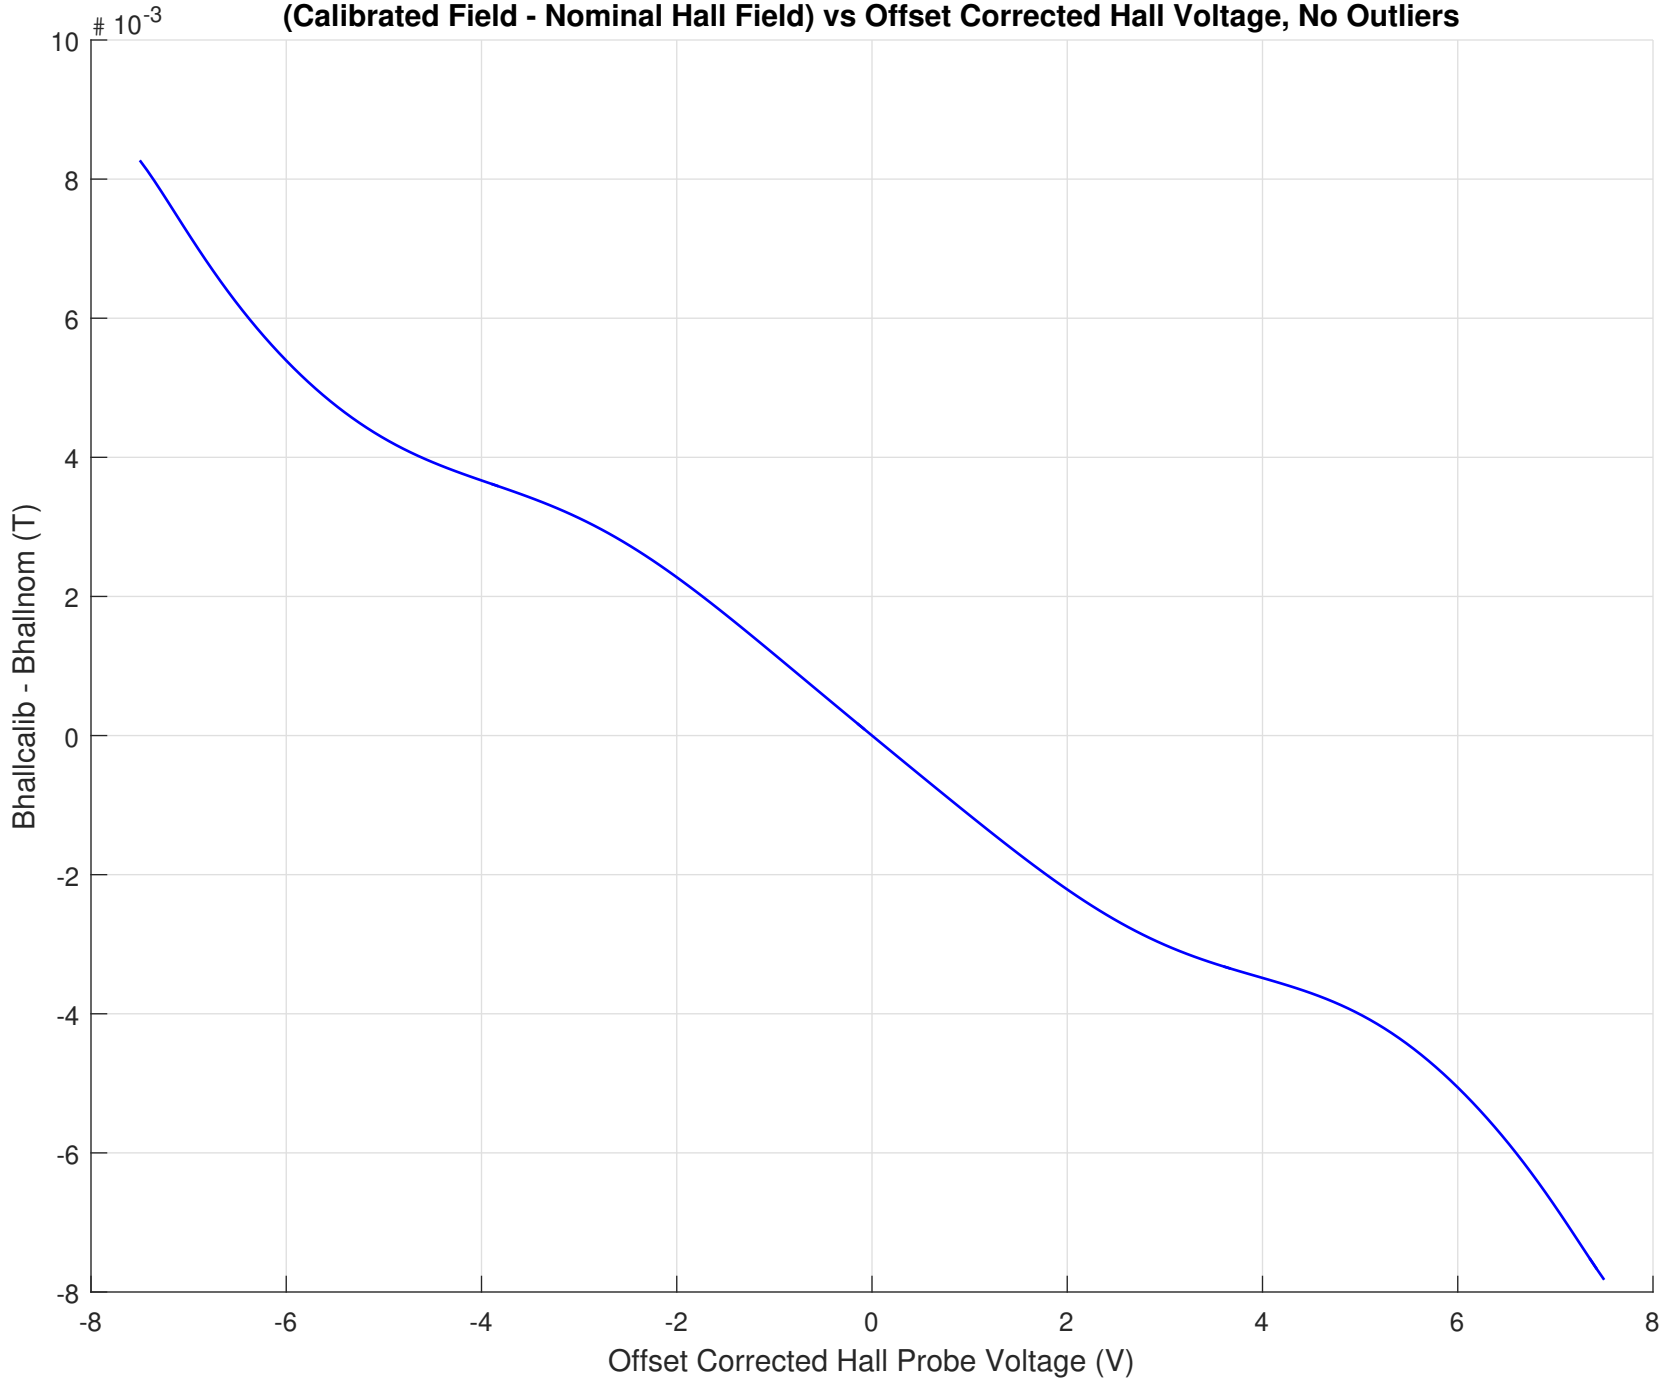
(Calibrated Field - Nominal Hall Field) vs Offset Corrected Hall Voltage, No Outliers
# 10-3
10
8
6
4
2
0
-2
-4
-6
-8
Bhallcalib - Bhallnom (T)
-8
-6
-4
-2
0
2
4
6
8
Offset Corrected Hall Probe Voltage (V)