SLAC Magnetic Measurements

EPU Analysis
––––––––––––

Parameters:
INPUT–FILE–DIR =V:\MET\MagServe\MagData\LCLS\Undulator\A1–ANL\DATASET0002\Rough Tuning\Z Scans\Run 002\
INPUT–FILE–NAME =x+00000–y+000–bscanz.dat
INPUT–FILE–TYPE =ZVXYBXYH
CORR–REQUIRED =1
GAMMA =26627.1
NOM–LAMBDA–U =0
NOM–K–VALUE =0
NOM–LAMBDA–R =0
NUM–POLES =144
NUM–END–POLES =4
CELL–LENGTH =3.126

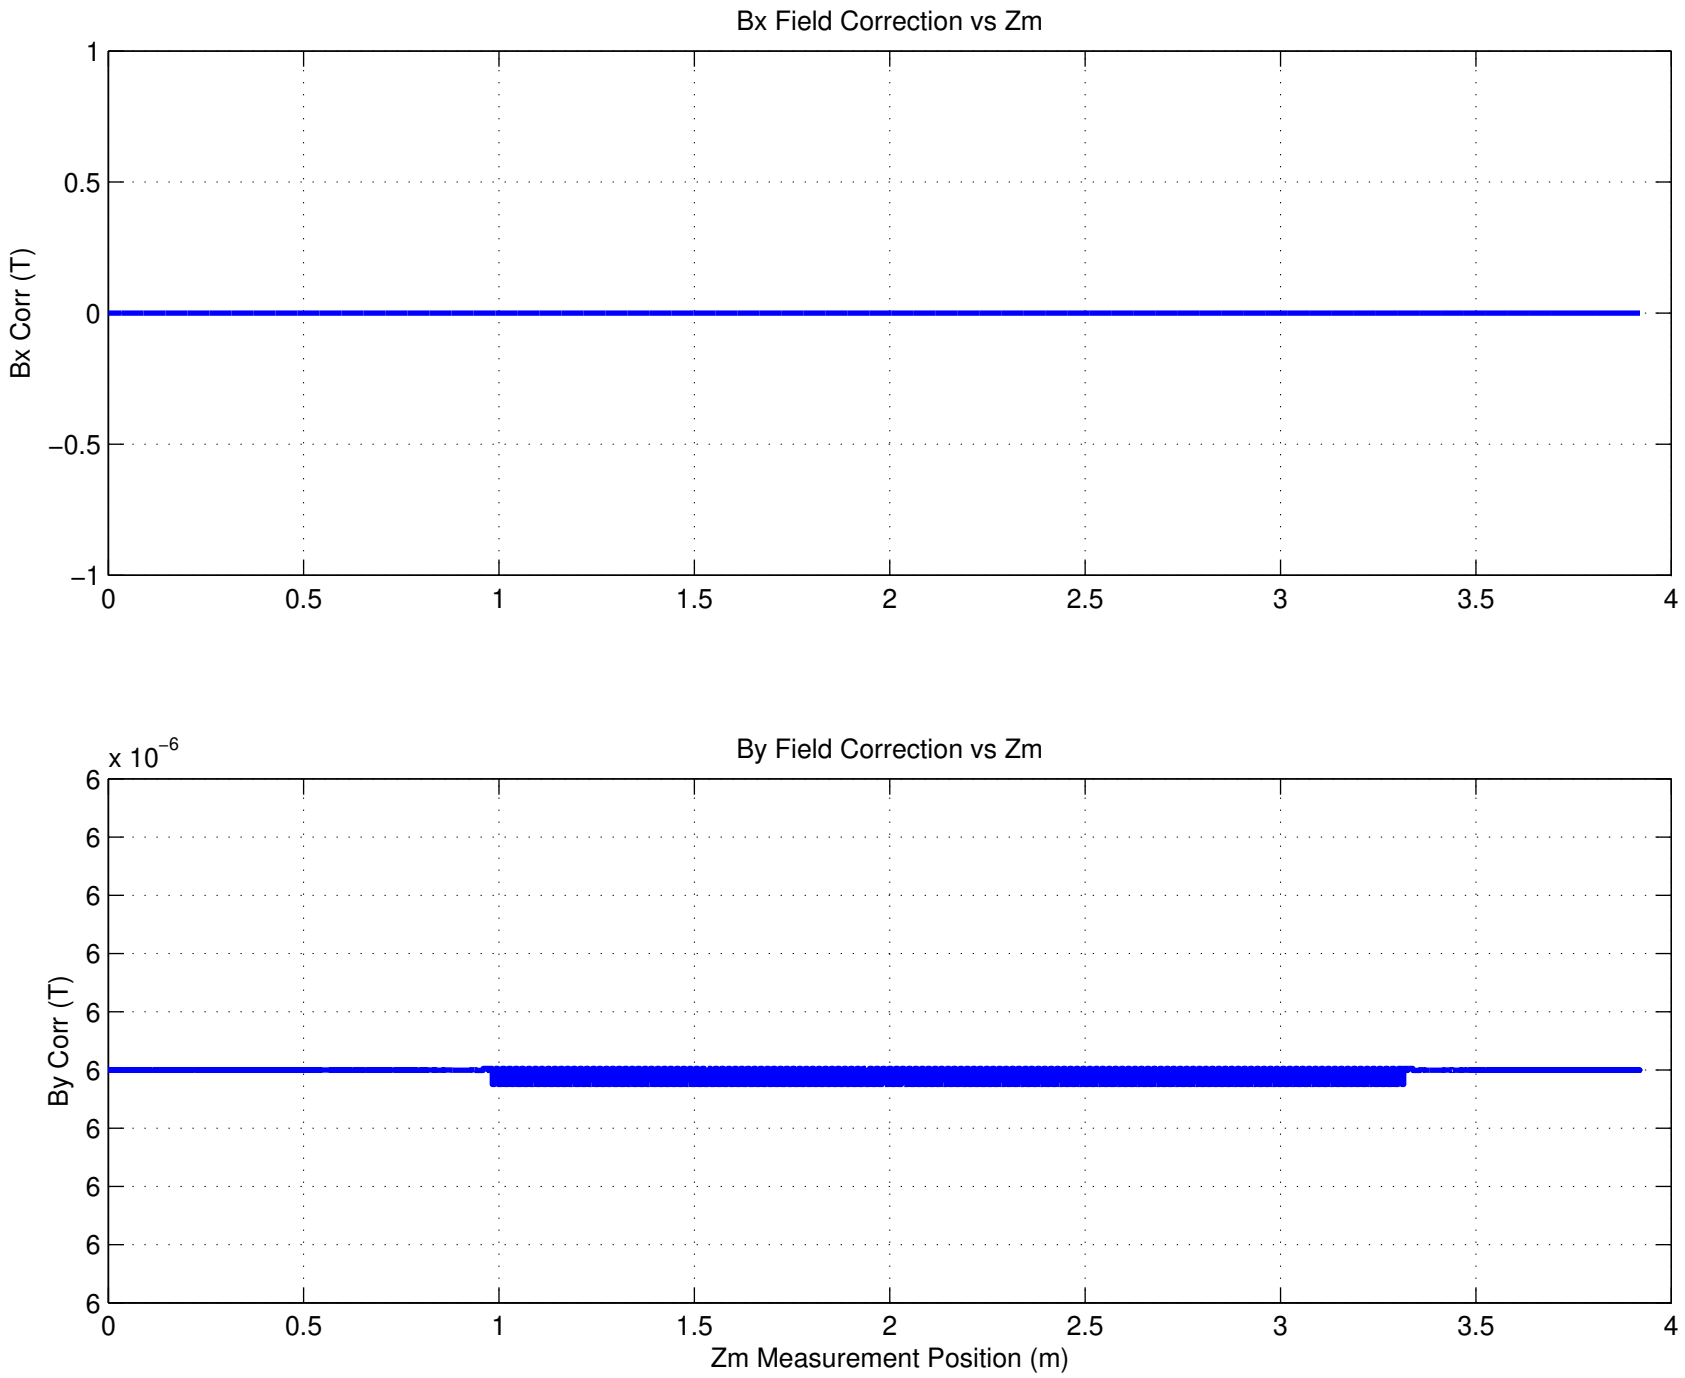
Bx Field Correction vs Zm
Bx Corr (T)
1
0.5
0
−0.5
−1
0
0.5
1
1.5
2
2.5
3
3.5
4
By Field Correction vs Zm
x 10^−6
By Corr (T)
6
6
6
6
6
6
6
6
6
0
0.5
1
1.5
2
2.5
3
3.5
4
Zm Measurement Position (m)

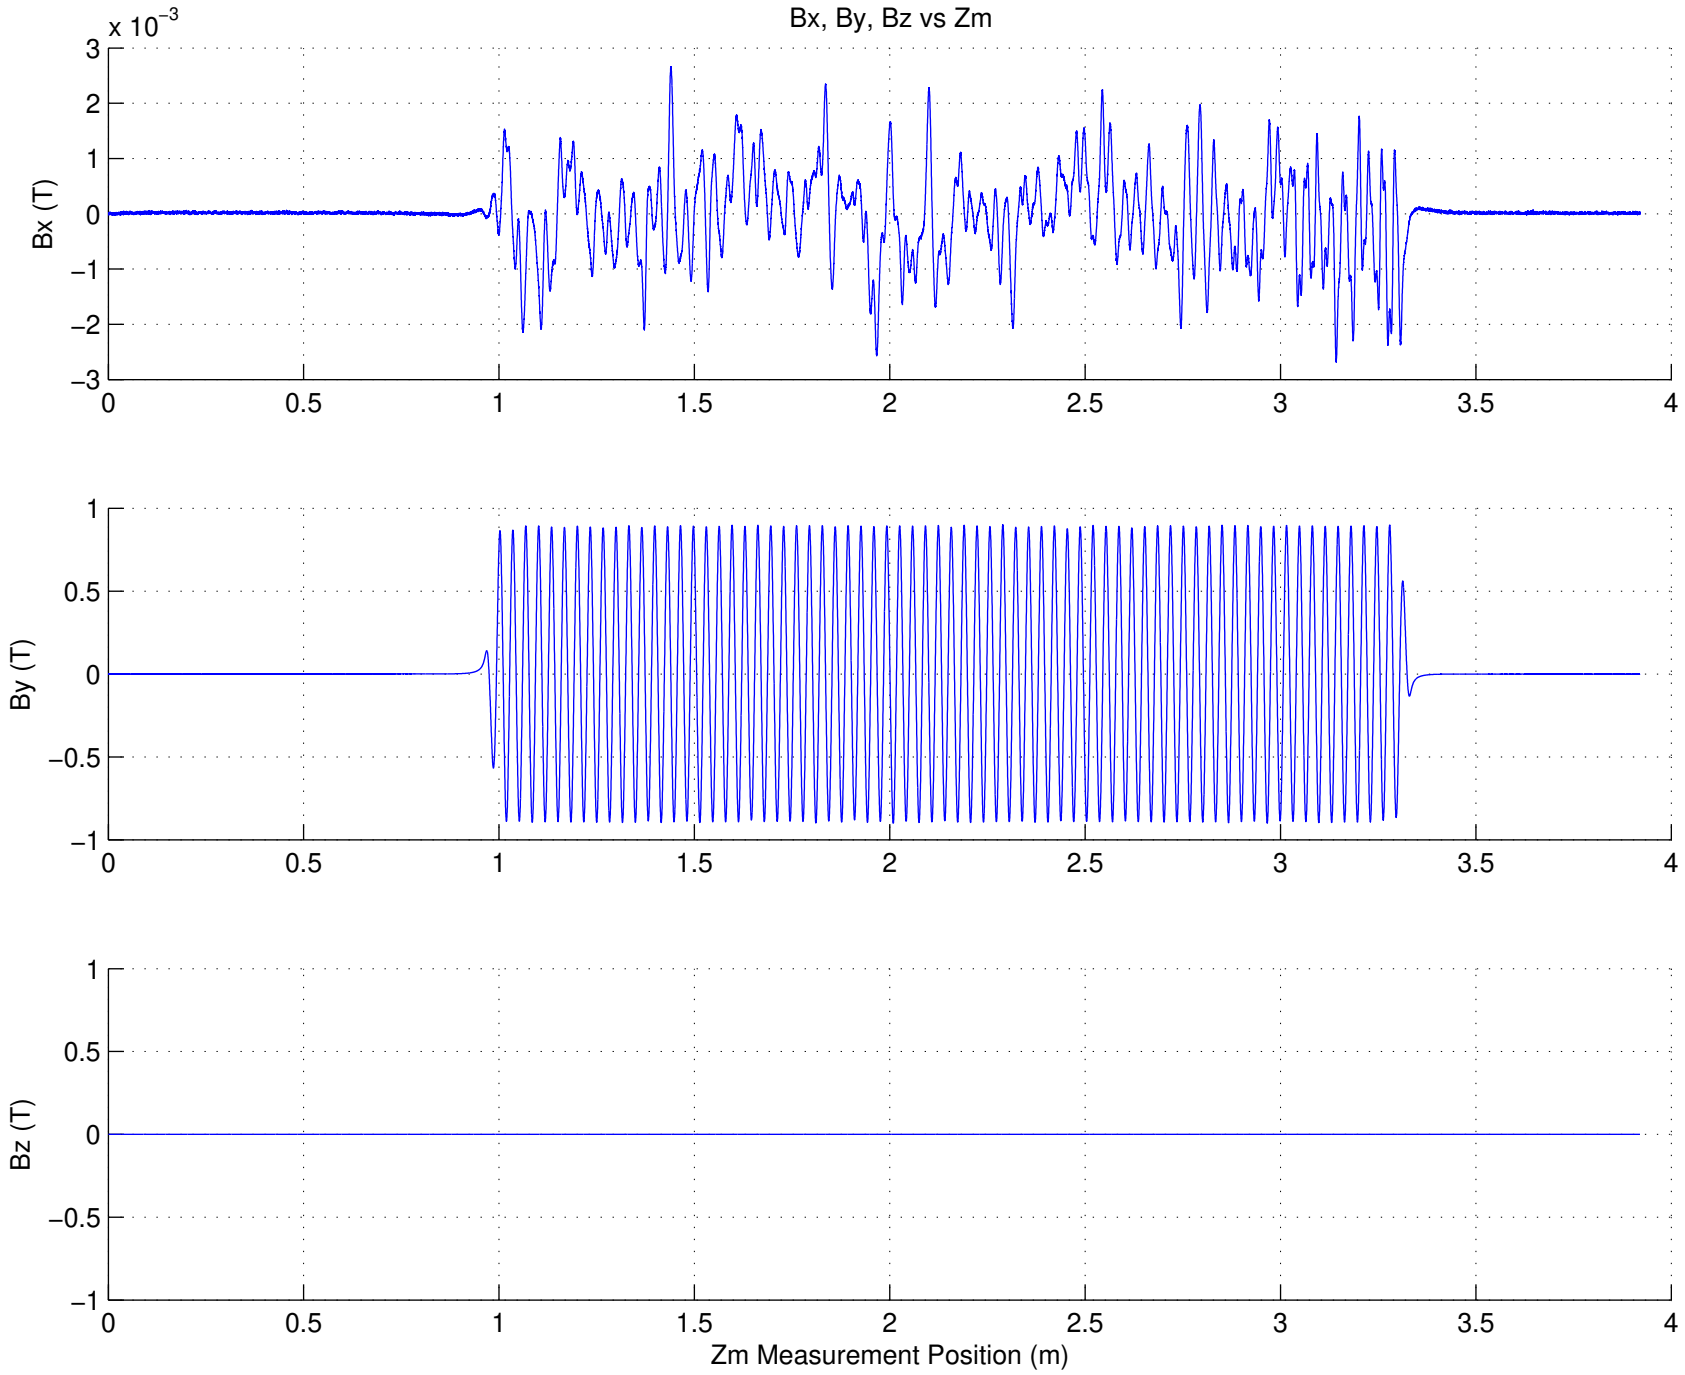
Bx, By, Bz vs Zm
x 10^-3
Bx (T)
By (T)
Bz (T)
Zm Measurement Position (m)

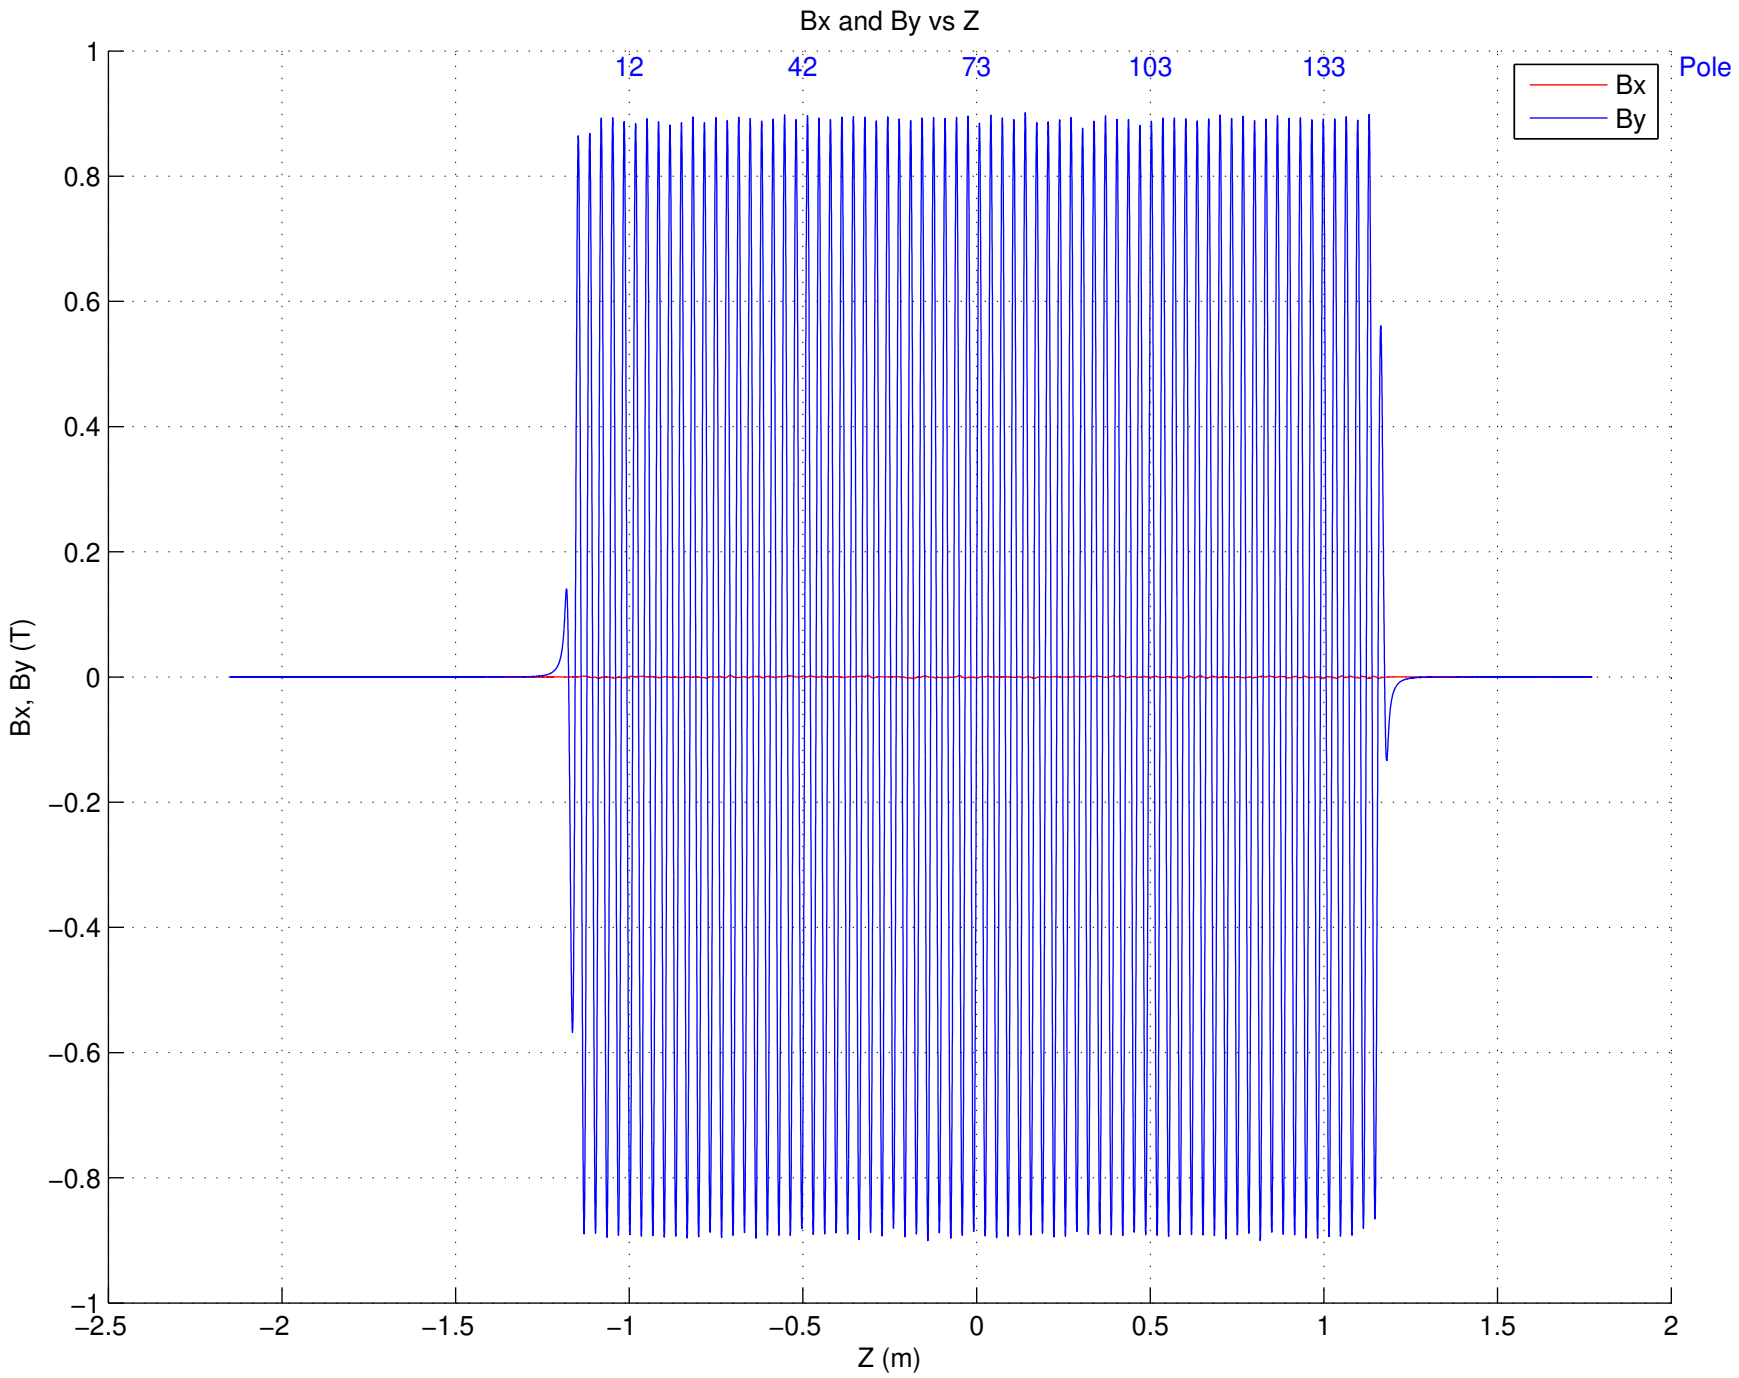
Bx and By vs Z
12
42
73
103
133
Pole
Bx
By
Bx, By (T)
Z (m)
1
0.8
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
−1
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

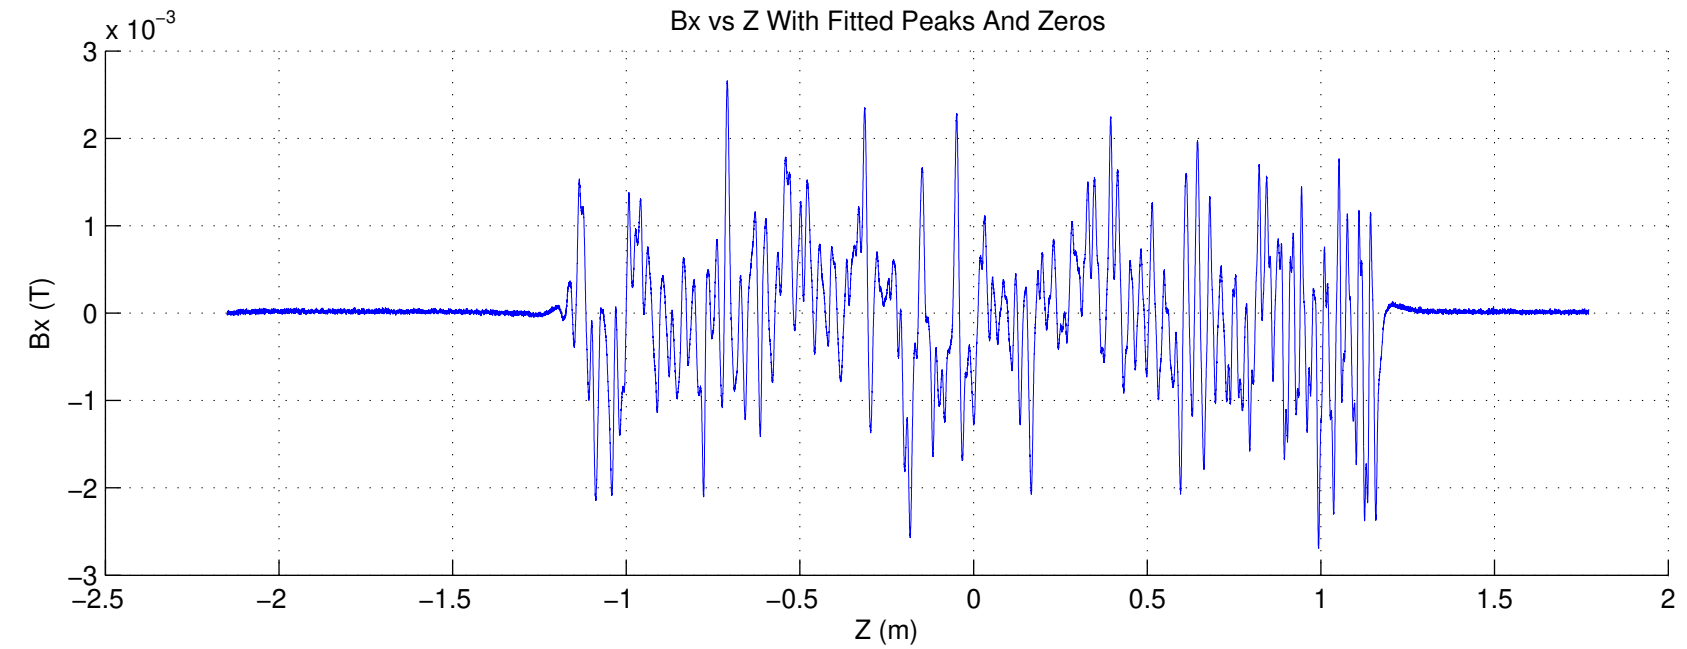
Bx vs Z With Fitted Peaks And Zeros
x 10^-3
Bx (T)
Z (m)
3
2
1
0
−1
−2
−3
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

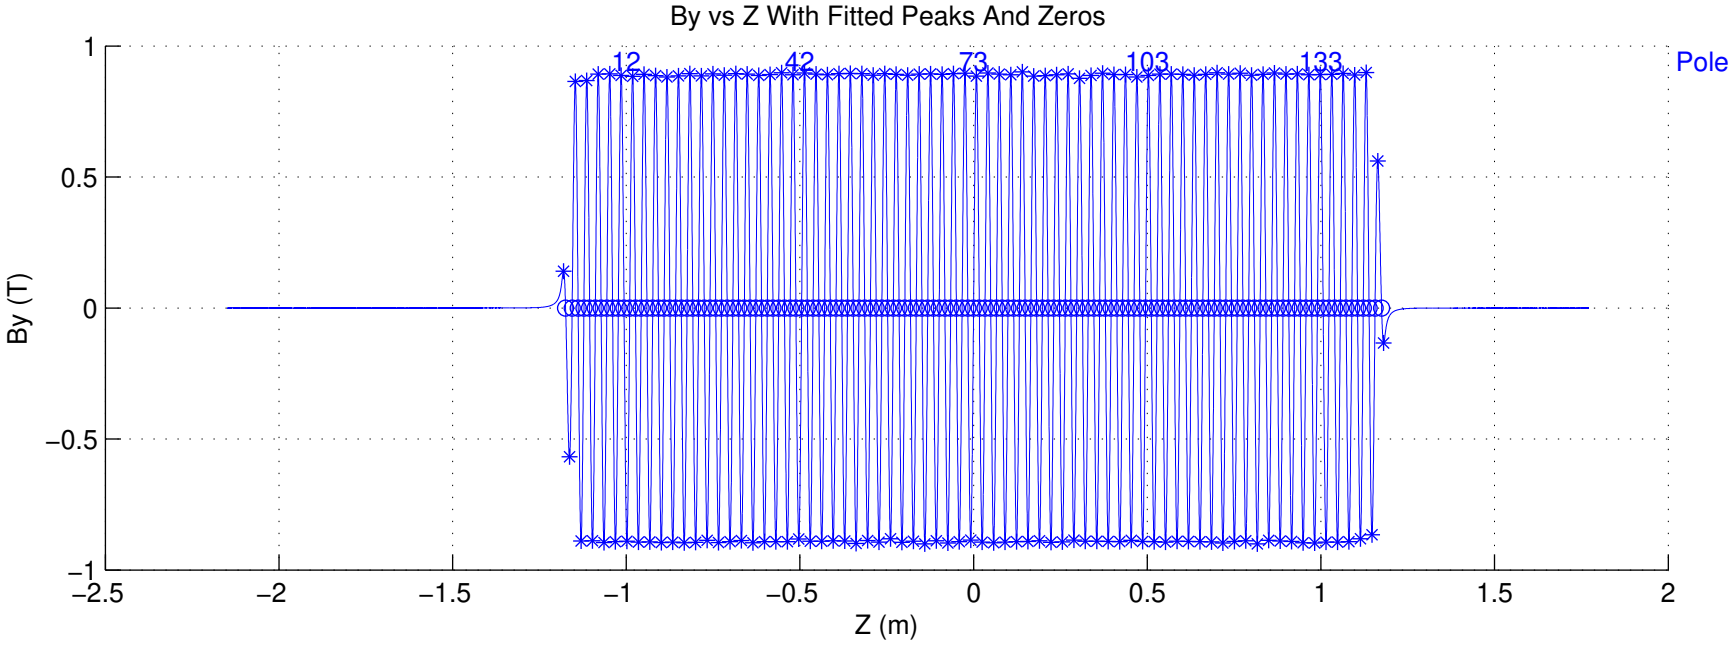
By vs Z With Fitted Peaks And Zeros
12
42
73
103
133
Pole
By (T)
Z (m)
1
0.5
0
−0.5
−1
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

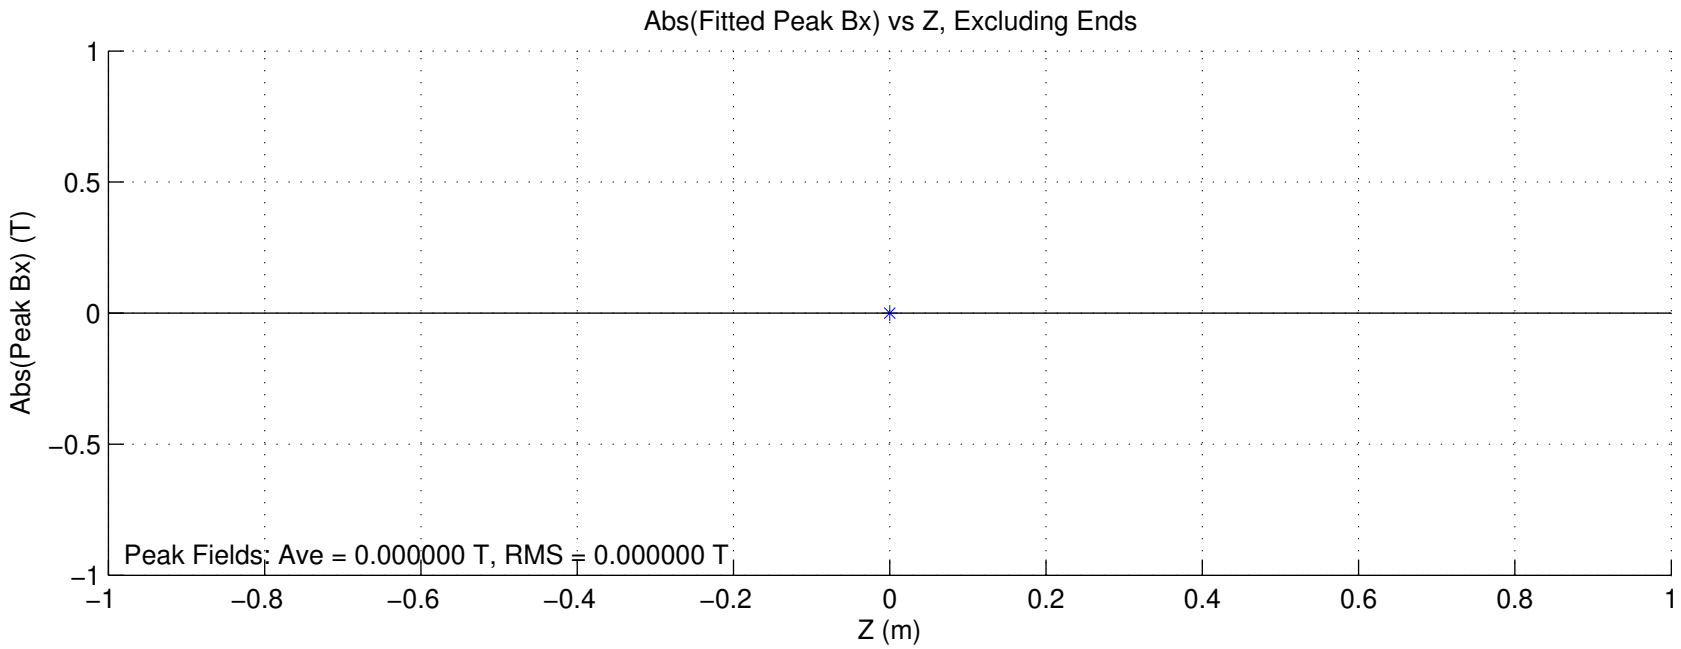
Abs(Fitted Peak Bx) vs Z, Excluding Ends
Abs(Peak Bx) (T)
Z (m)
Peak Fields: Ave = 0.000000 T, RMS = 0.000000 T
1
0.5
0
−0.5
−1
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1

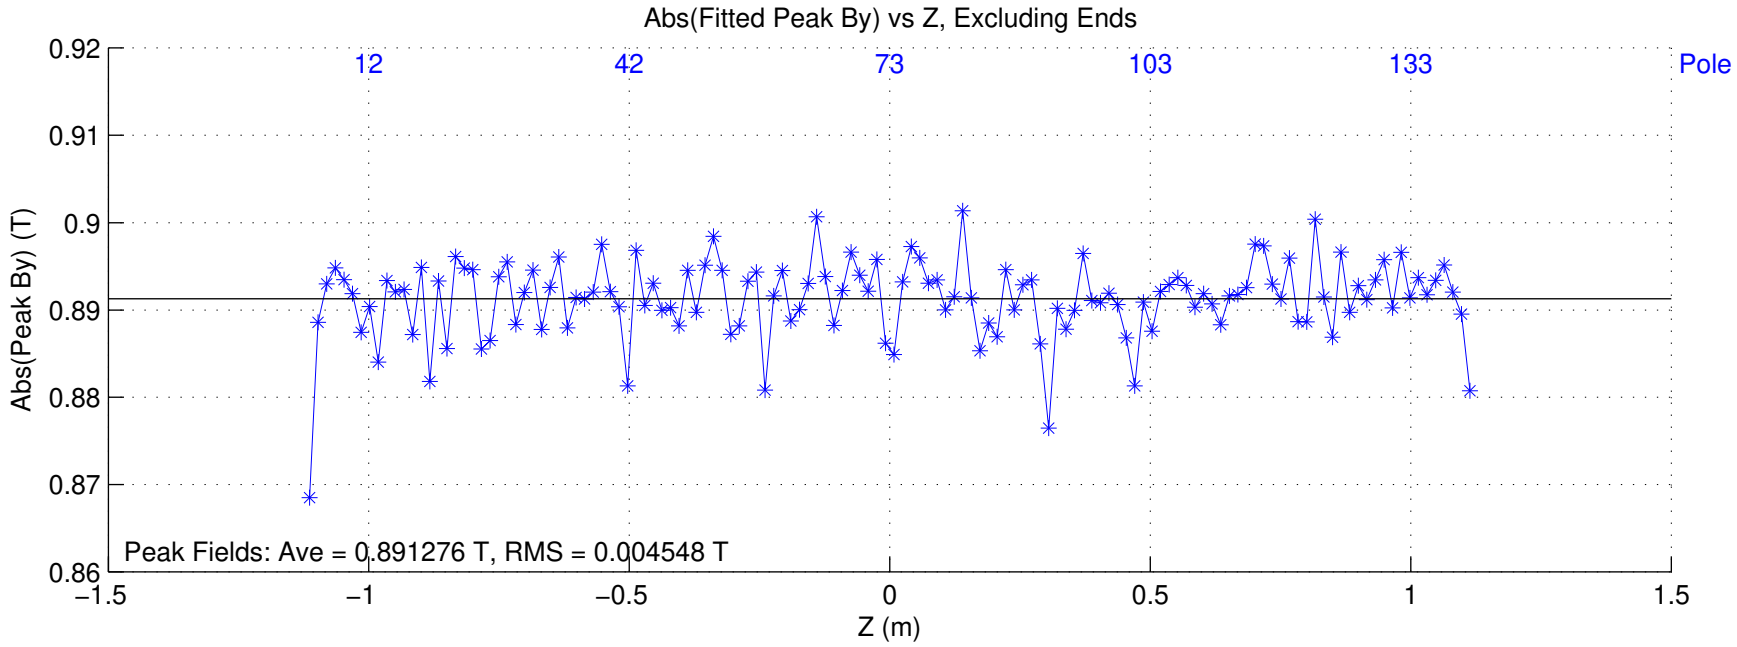
Abs(Fitted Peak By) vs Z, Excluding Ends
Abs(Peak By) (T)
Z (m)
Peak Fields: Ave = 0.891276 T, RMS = 0.004548 T
12
42
73
103
133
Pole
0.92
0.91
0.9
0.89
0.88
0.87
0.86
−1.5
−1
−0.5
0
0.5
1
1.5

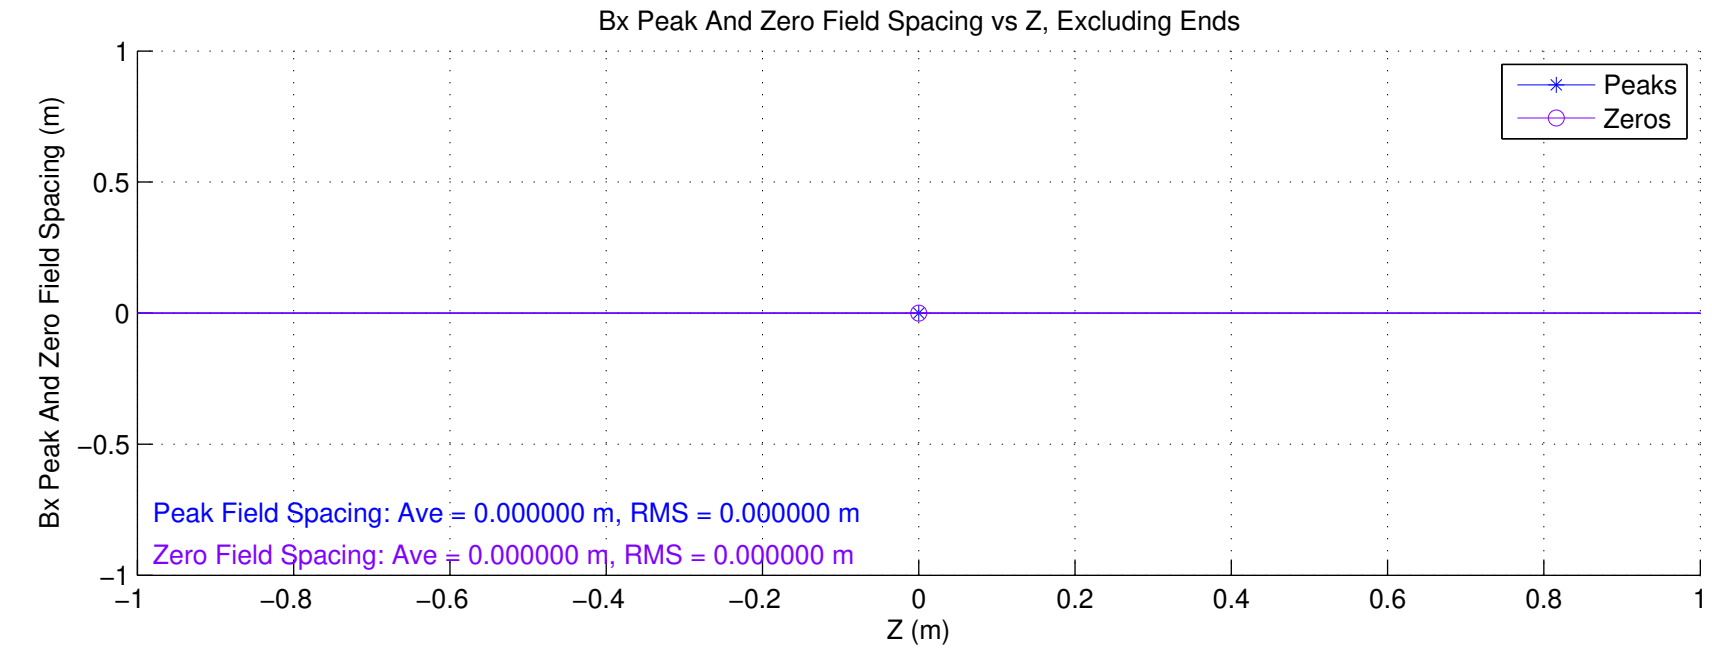
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Peaks
Zeros
Peak Field Spacing: Ave = 0.000000 m, RMS = 0.000000 m
Zero Field Spacing: Ave = 0.000000 m, RMS = 0.000000 m

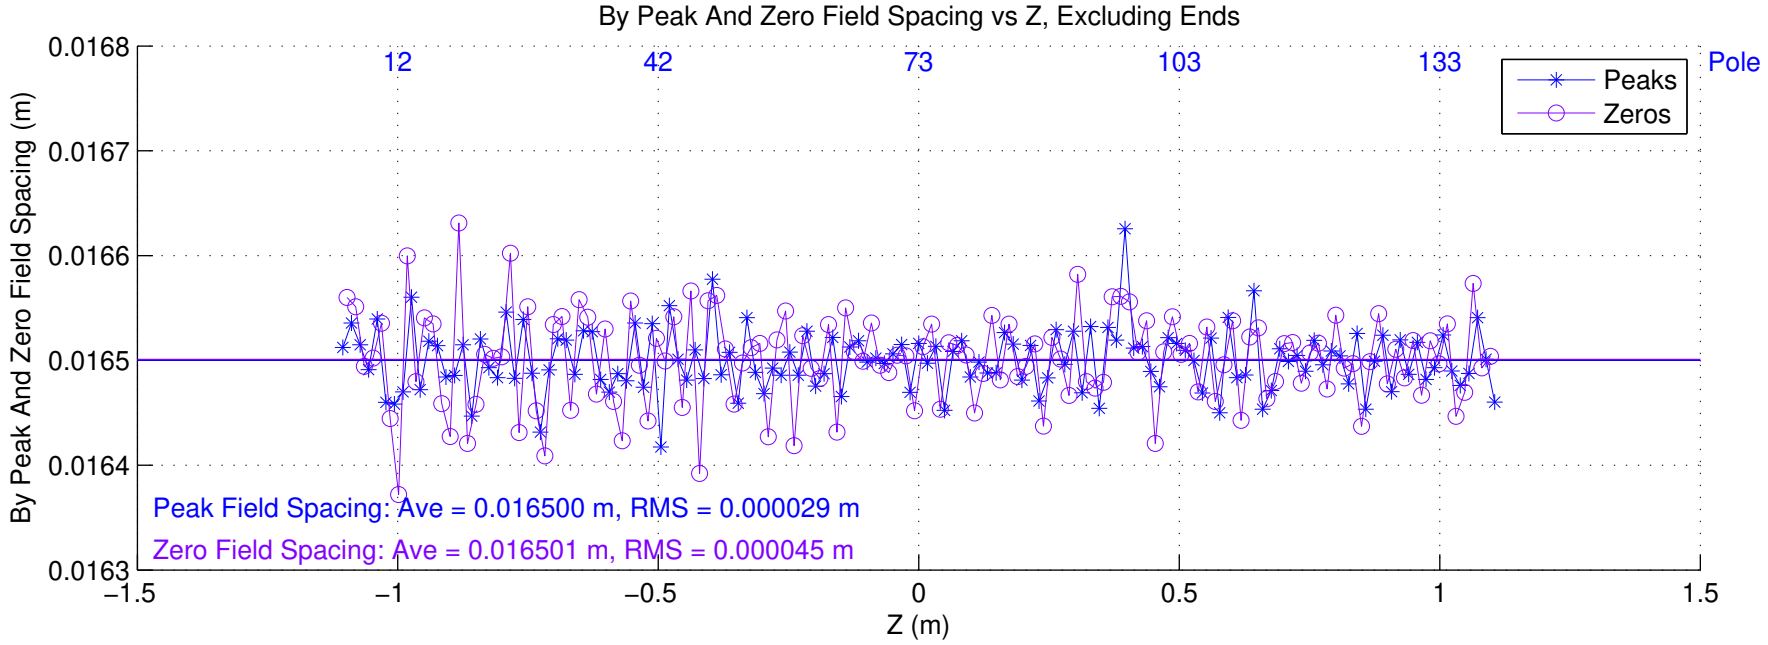
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
12
42
73
103
133
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.016500 m, RMS = 0.000029 m
Zero Field Spacing: Ave = 0.016501 m, RMS = 0.000045 m

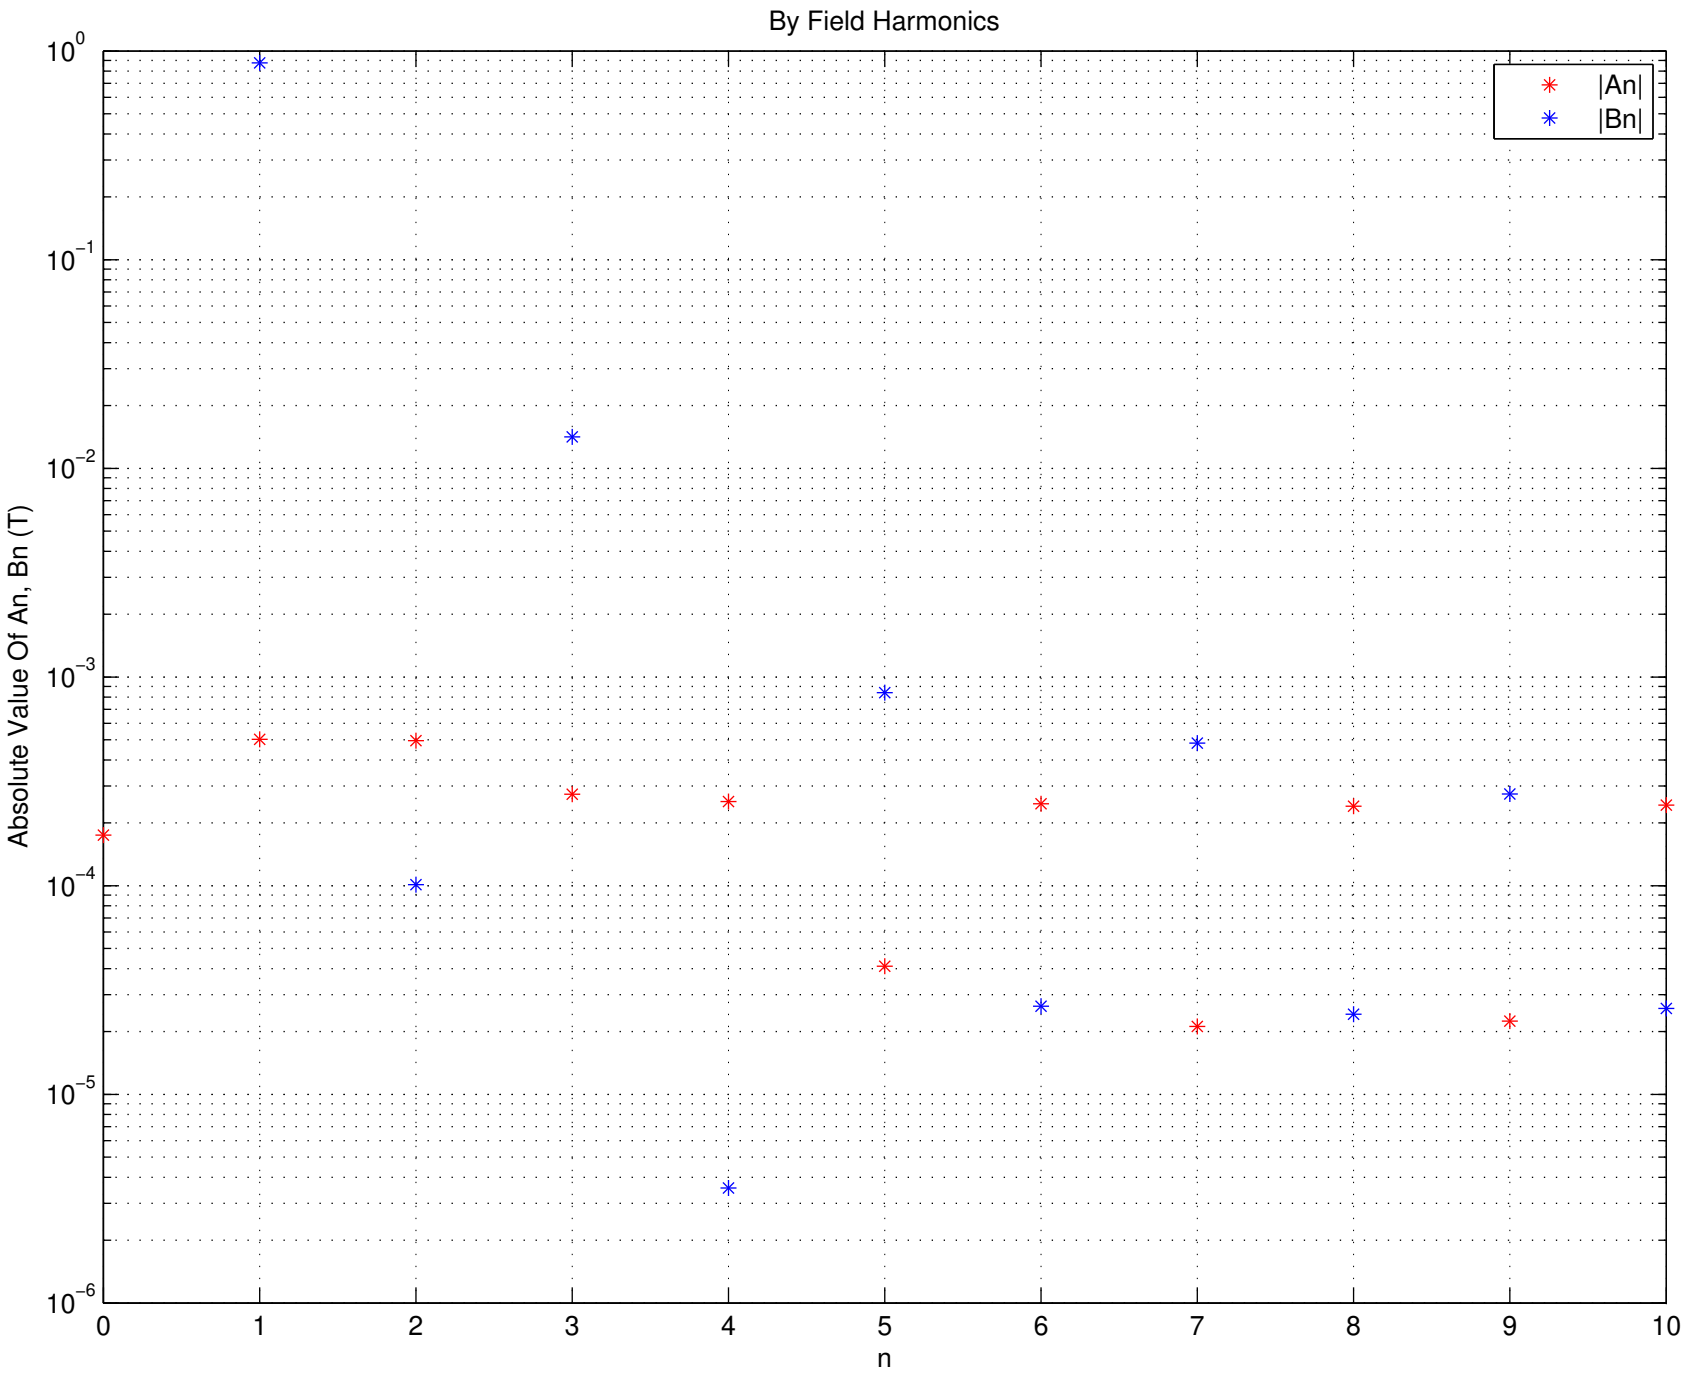
By Field Harmonics
|An|
|Bn|
Absolute Value Of An, Bn (T)
n
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
0
1
2
3
4
5
6
7
8
9
10

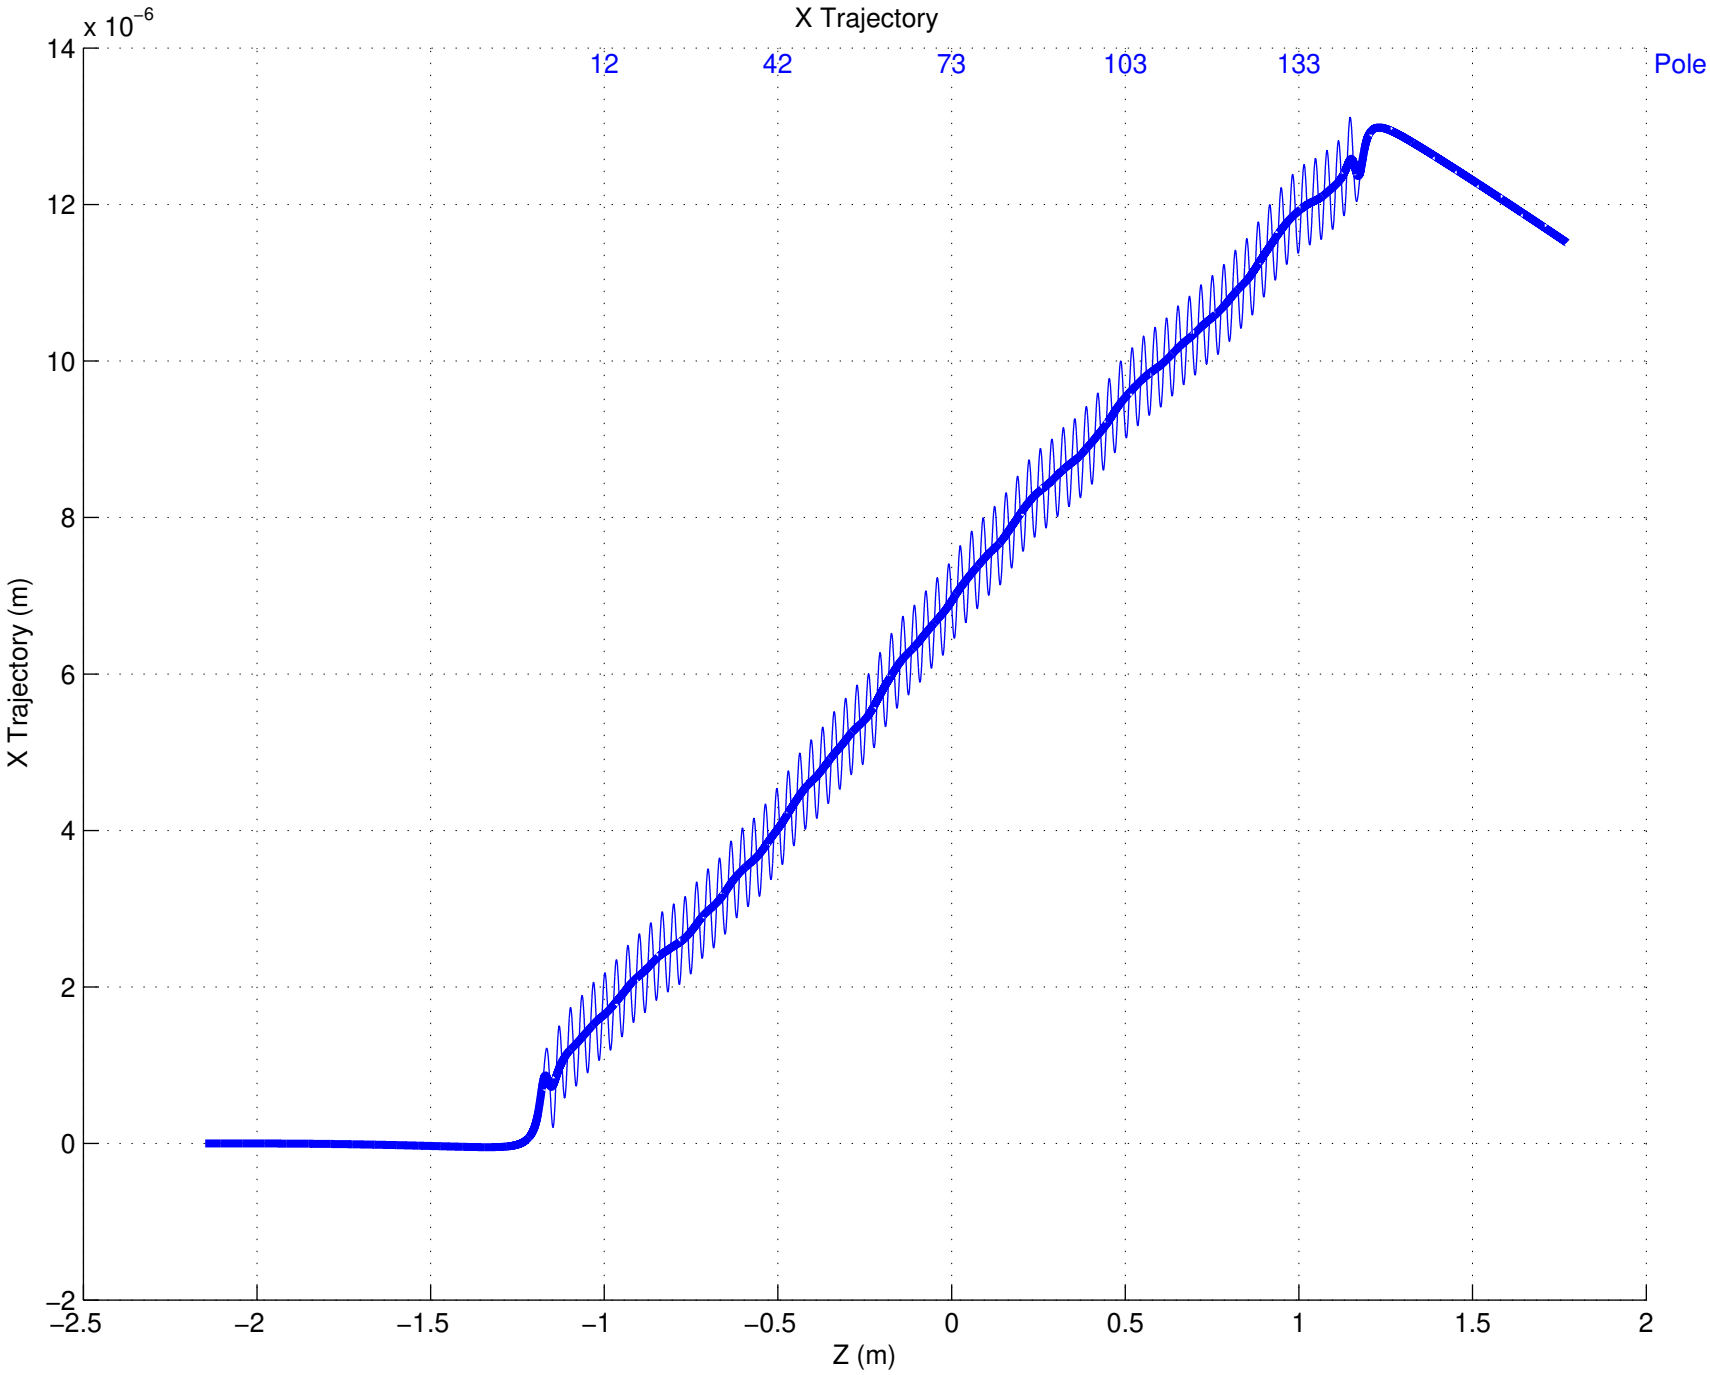
X Trajectory
x 10^-6
12
42
73
103
133
Pole
X Trajectory (m)
Z (m)
14
12
10
8
6
4
2
0
−2
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2

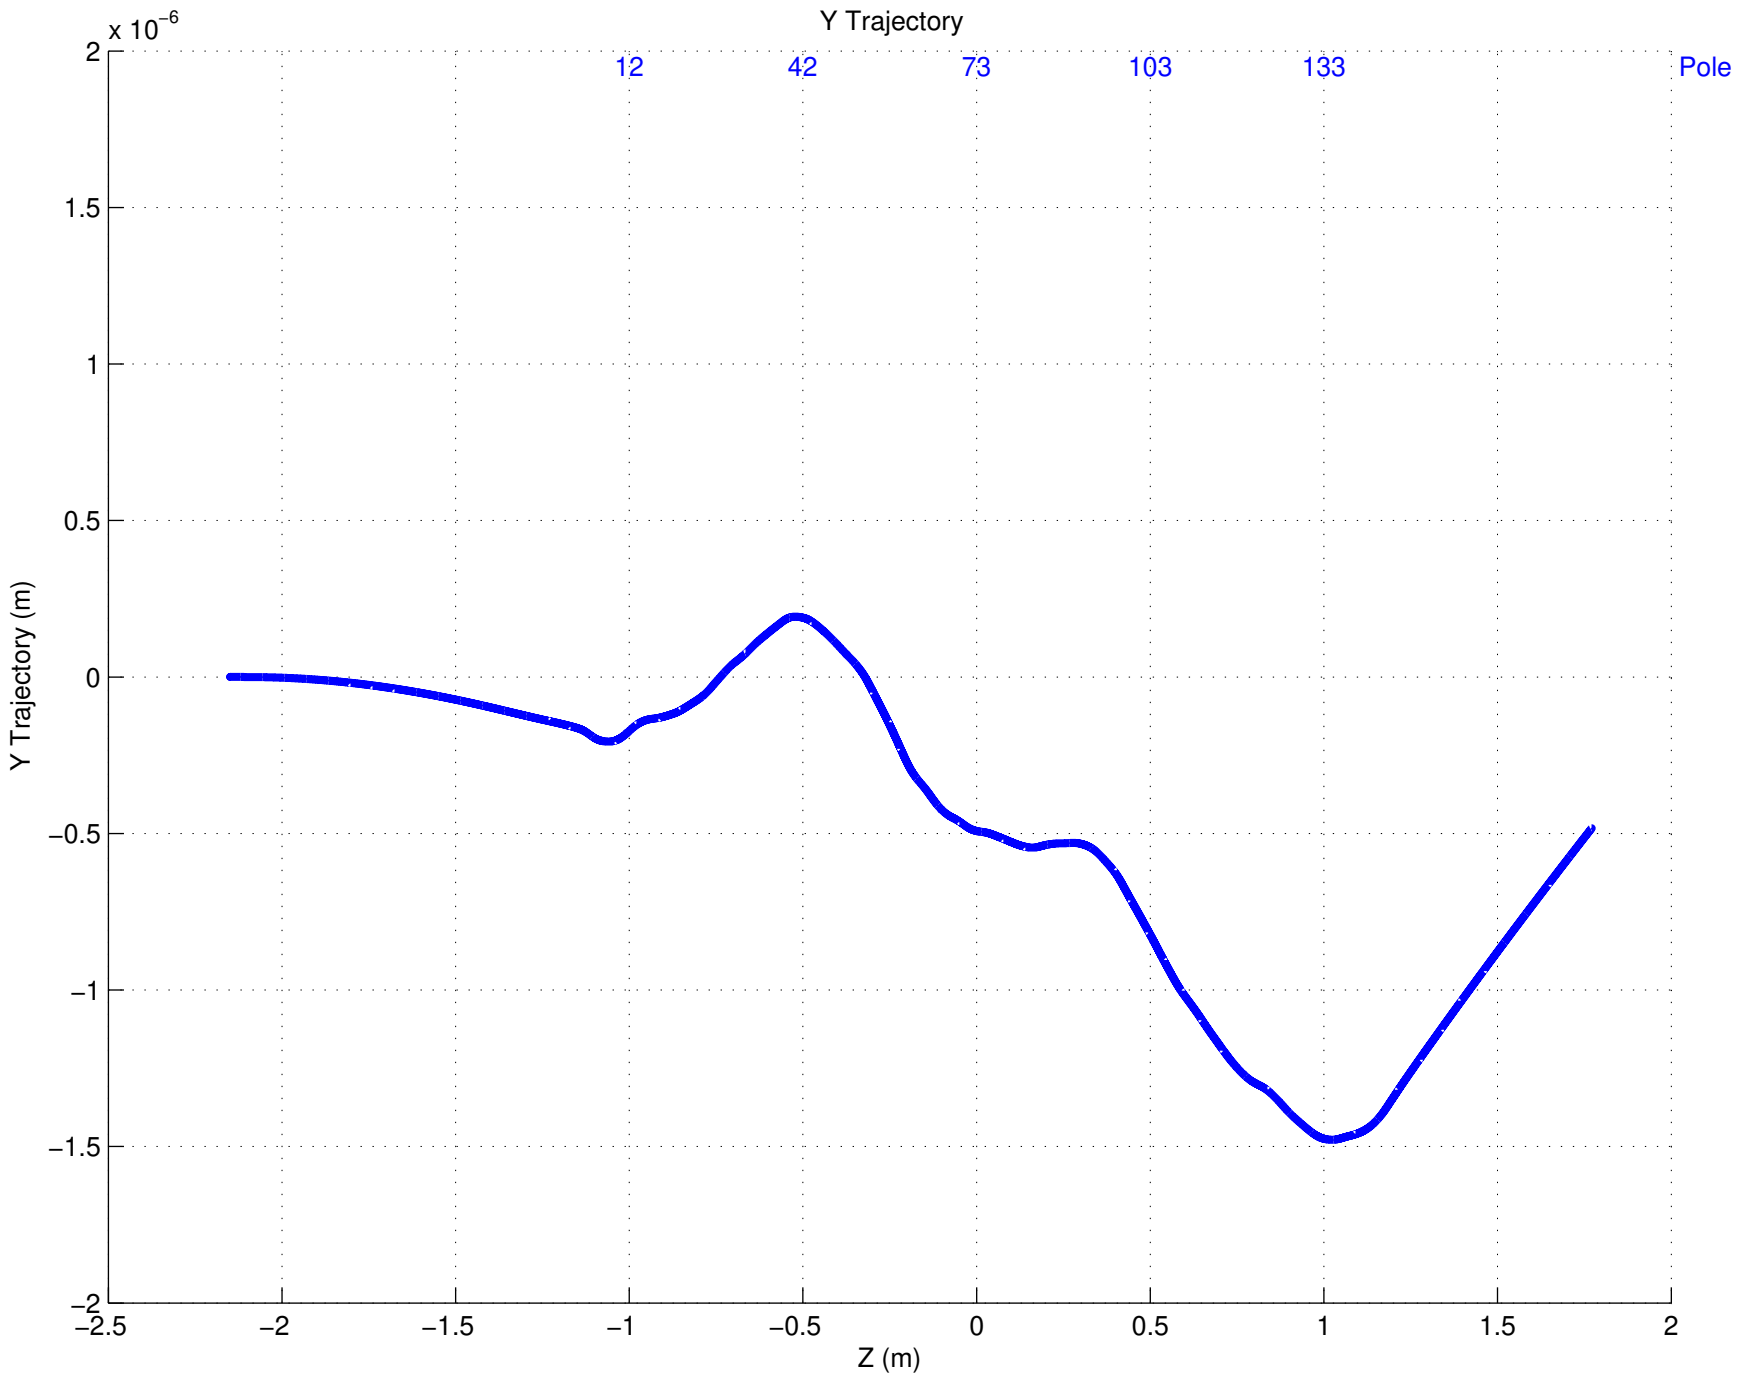
Y Trajectory
x 10^-6
12
42
73
103
133
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

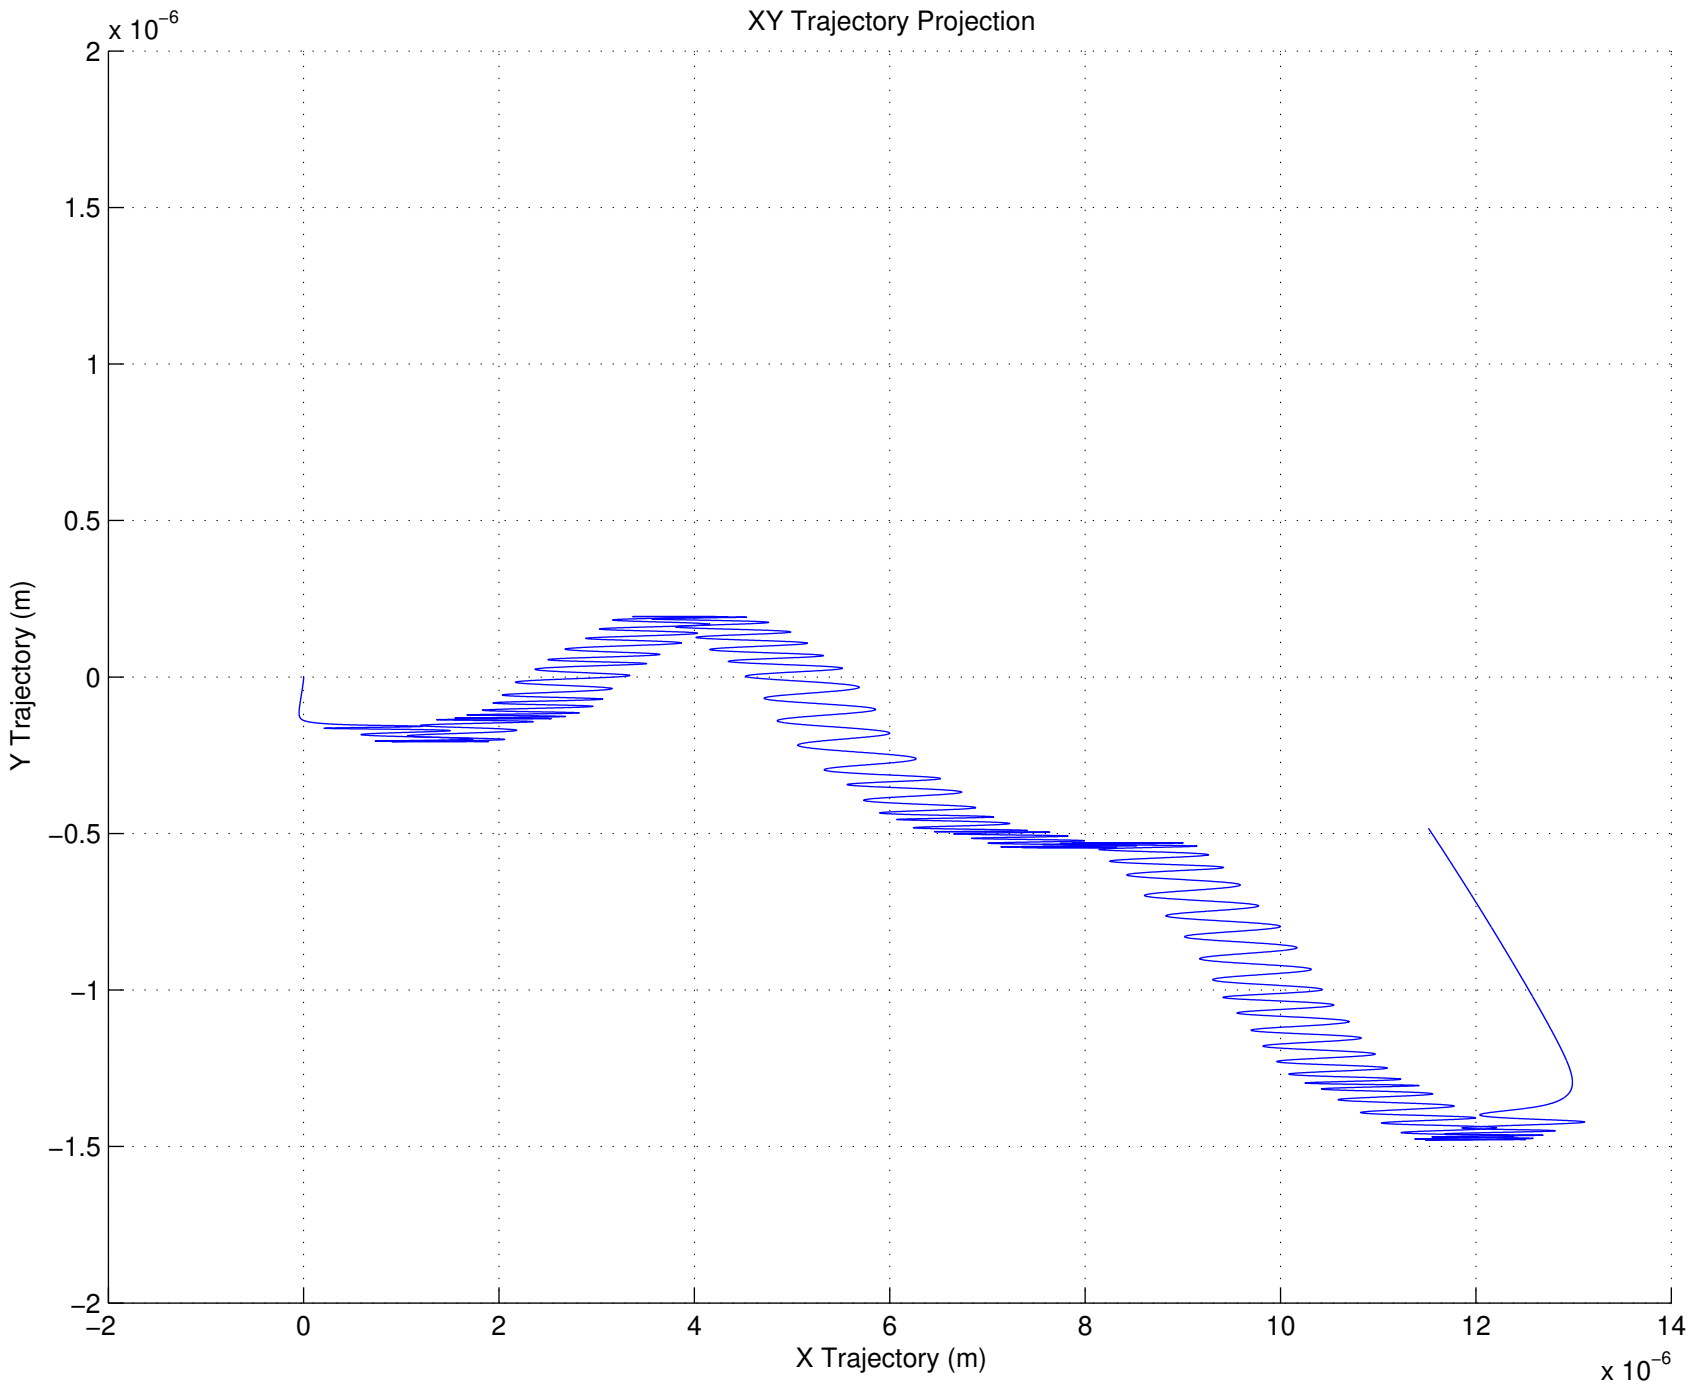
XY Trajectory Projection
x 10^-6
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y Trajectory (m)
−2
0
2
4
6
8
10
12
14
X Trajectory (m)
x 10^-6

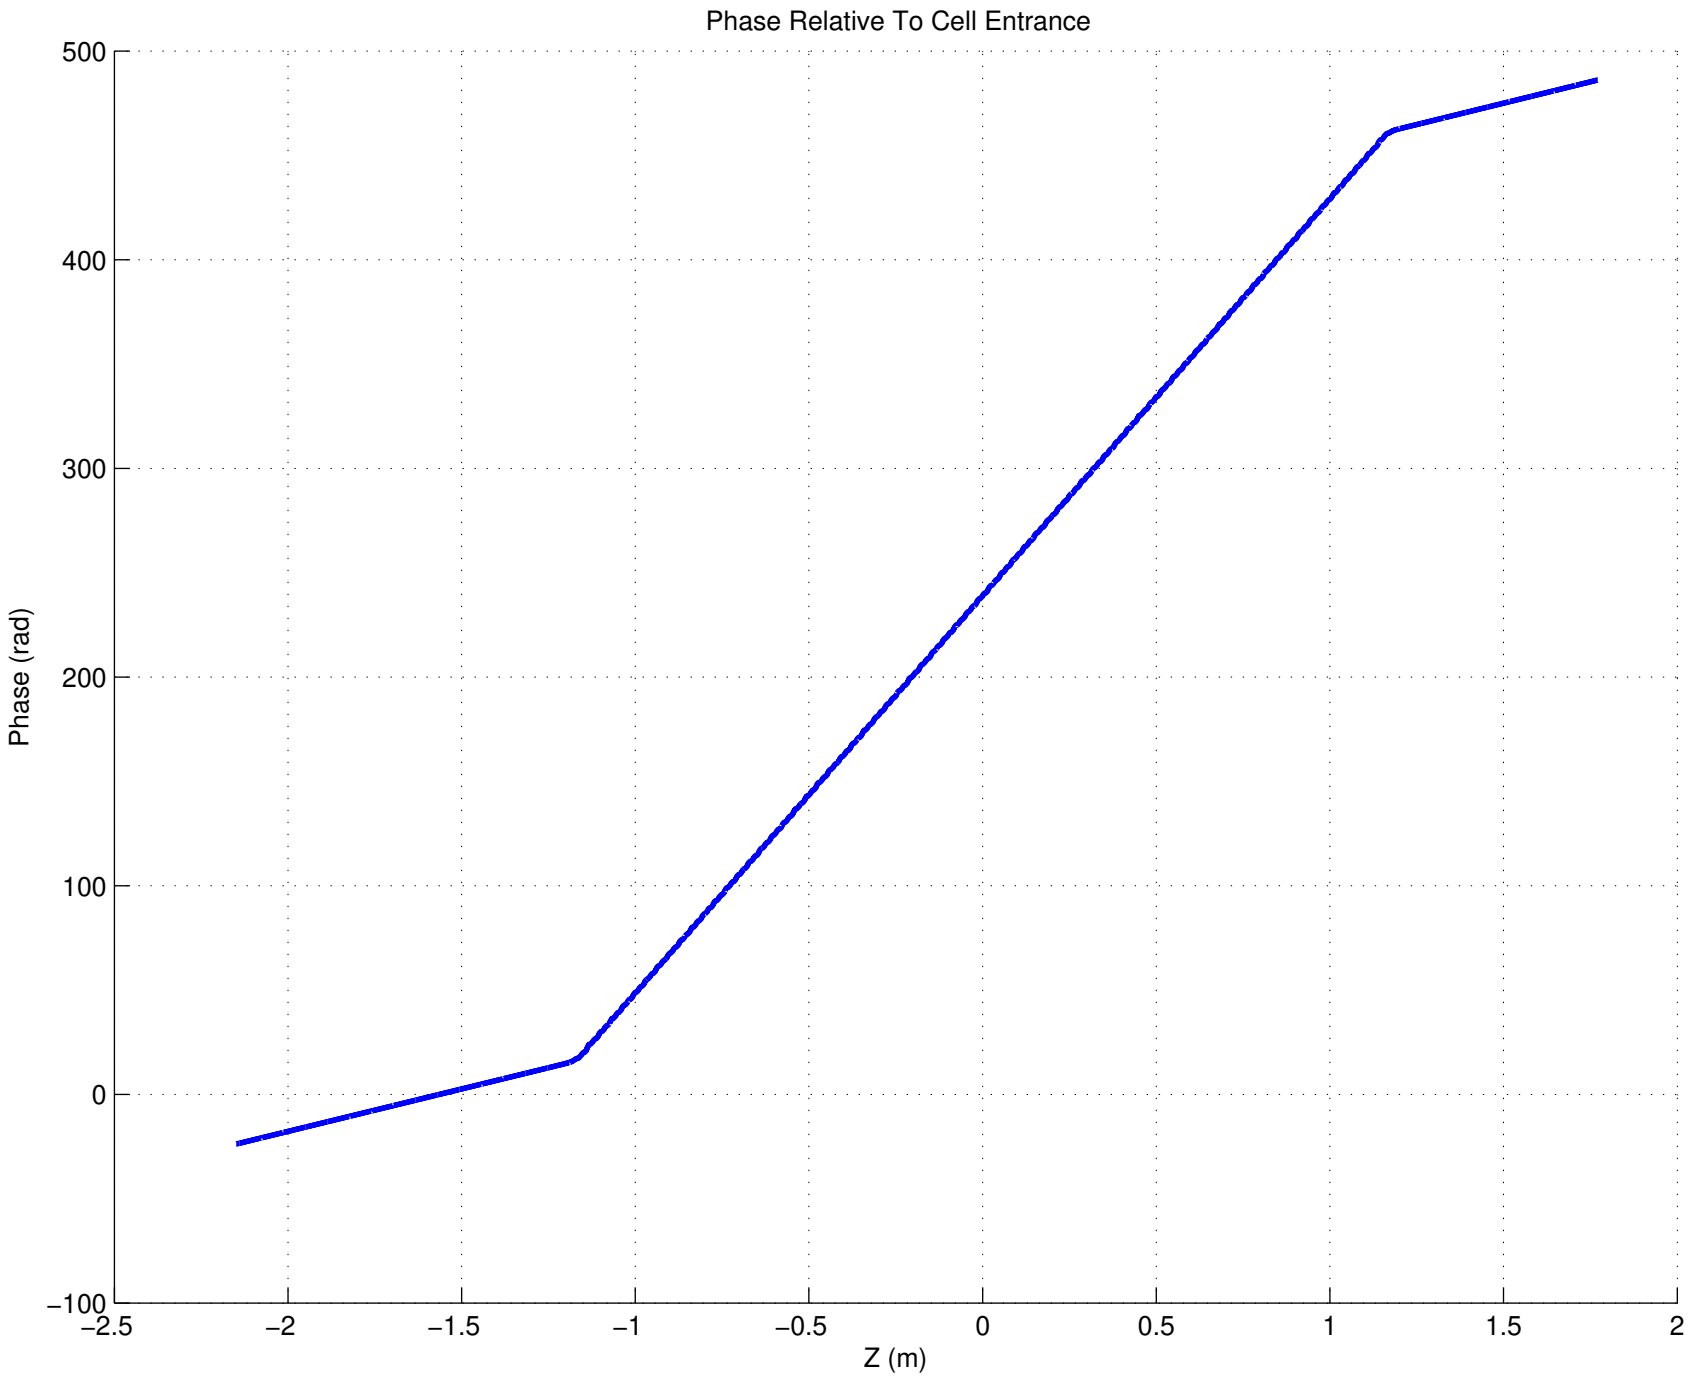
Phase Relative To Cell Entrance
500
400
300
200
100
0
−100
Phase (rad)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z (m)

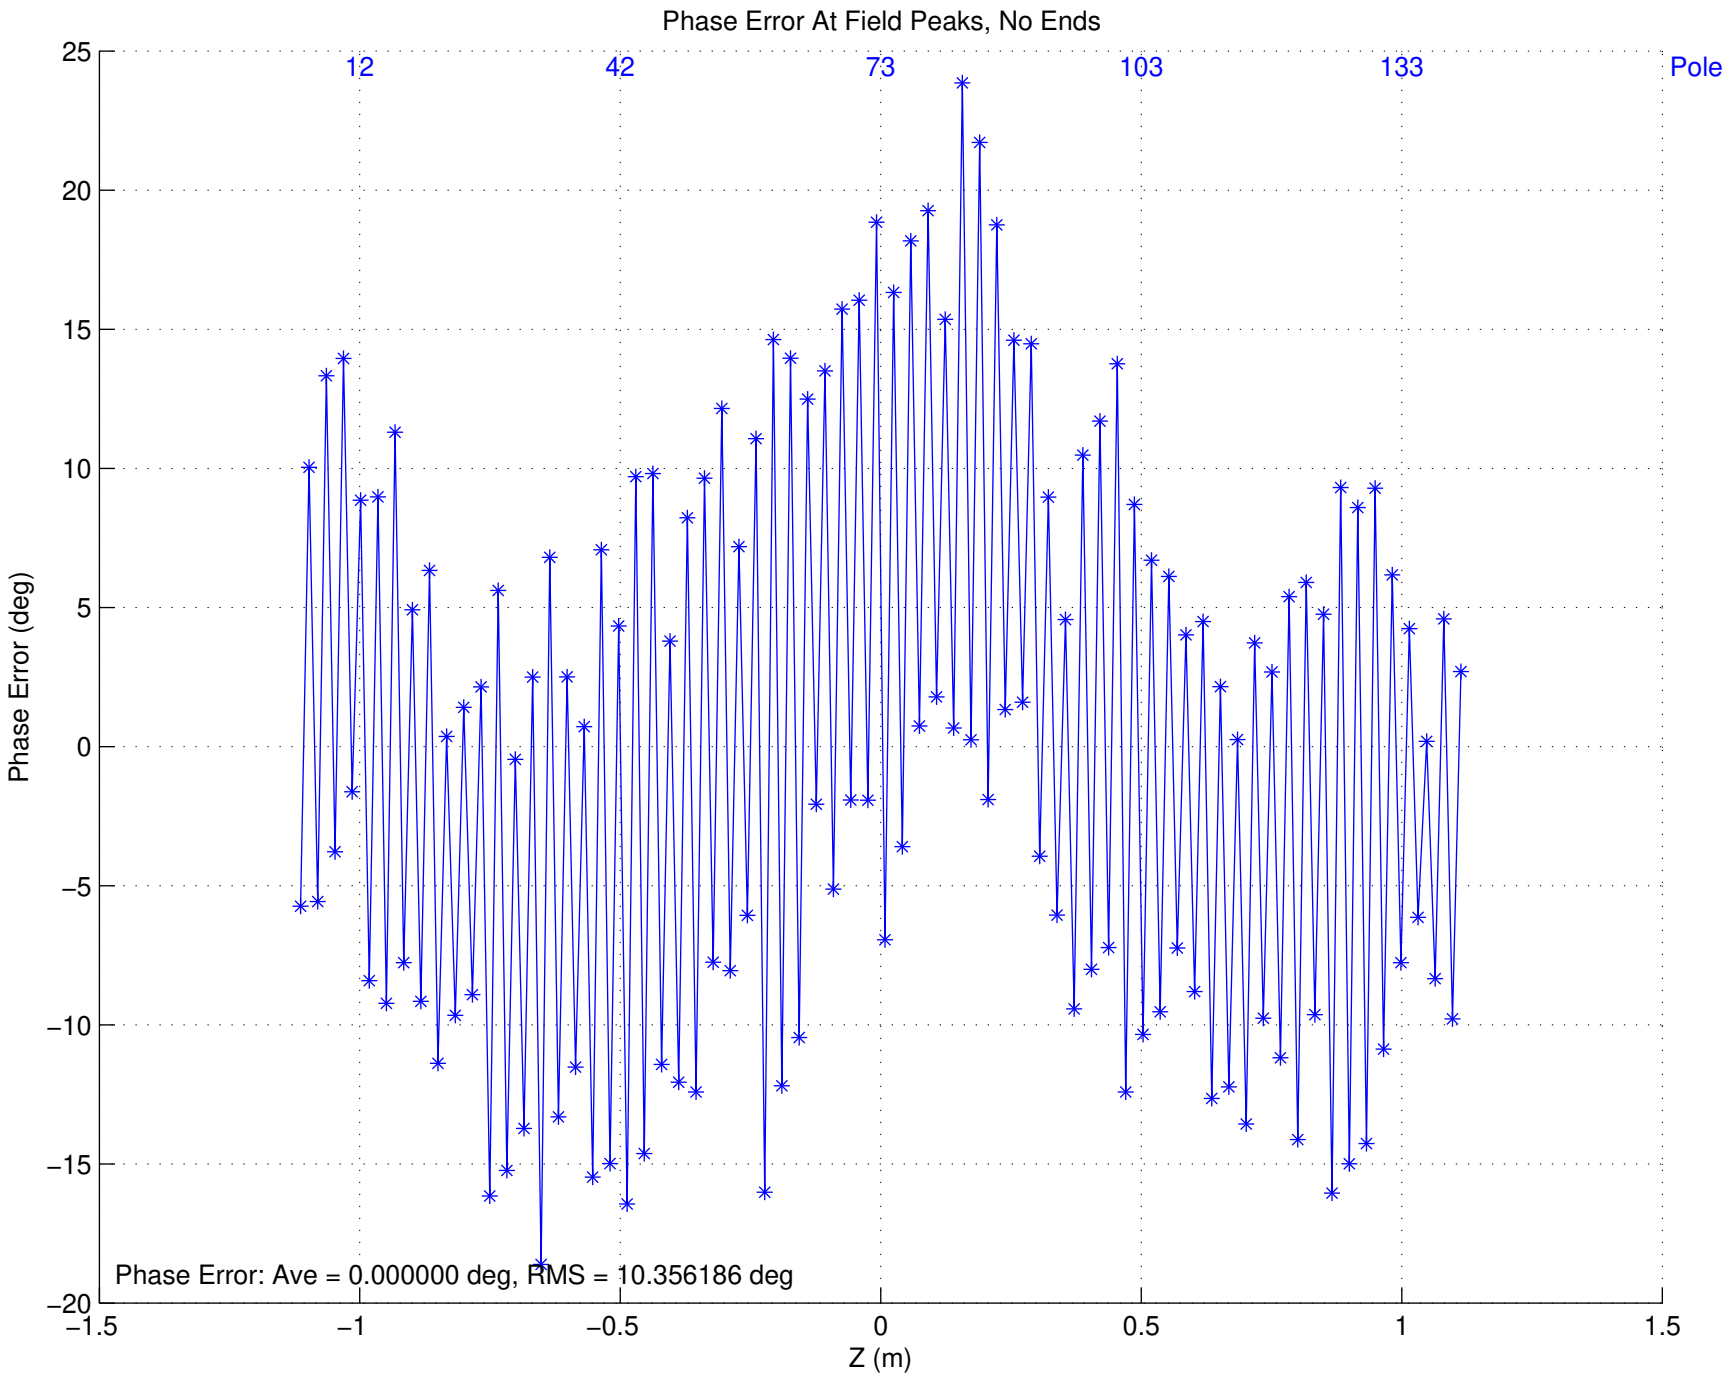
Phase Error At Field Peaks, No Ends
12
42
73
103
133
Pole
25
20
15
10
5
0
−5
−10
−15
−20
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)
Phase Error: Ave = 0.000000 deg, RMS = 10.356186 deg

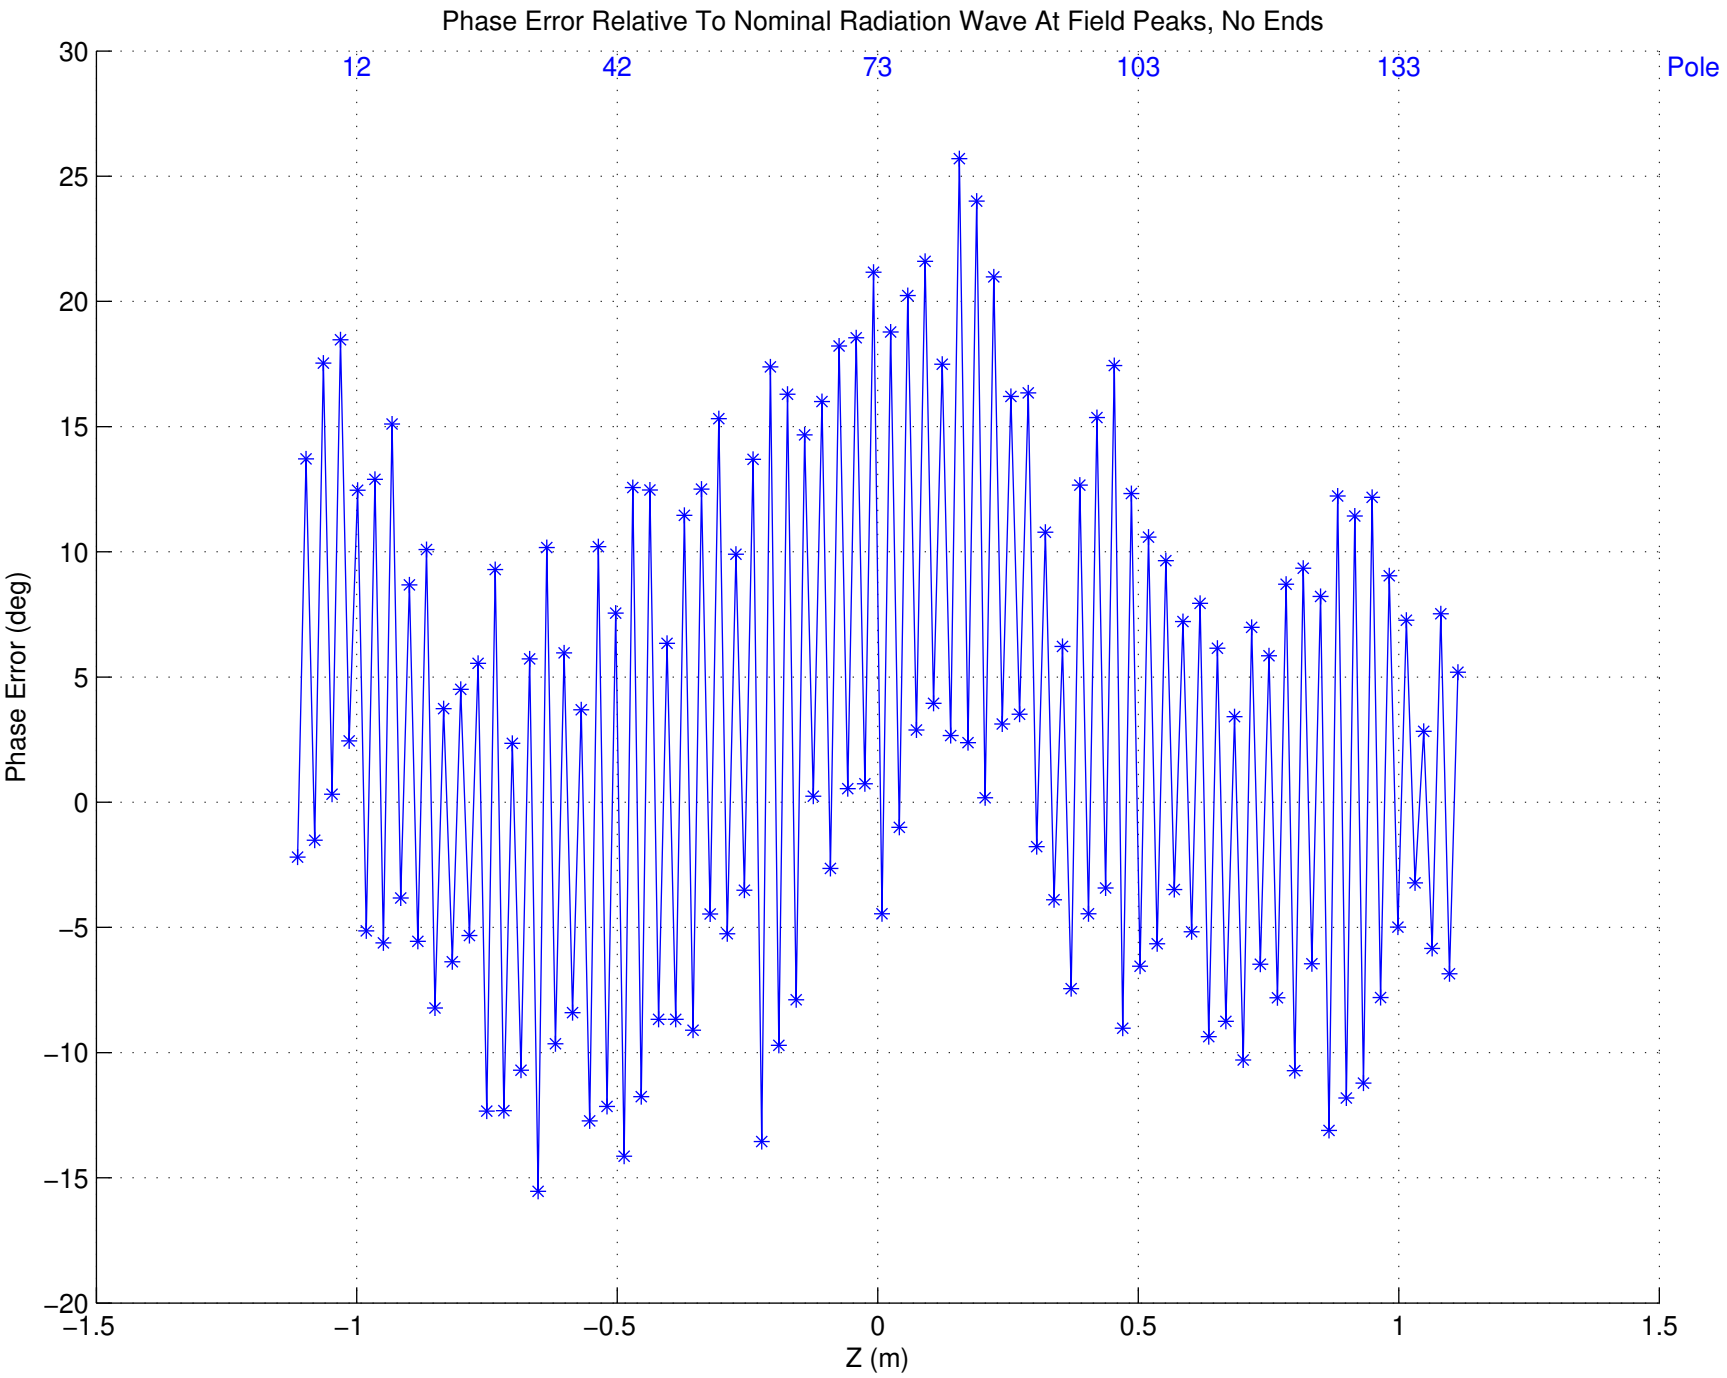
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
12
42
73
103
133
Pole
30
25
20
15
10
5
0
−5
−10
−15
−20
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z (m)

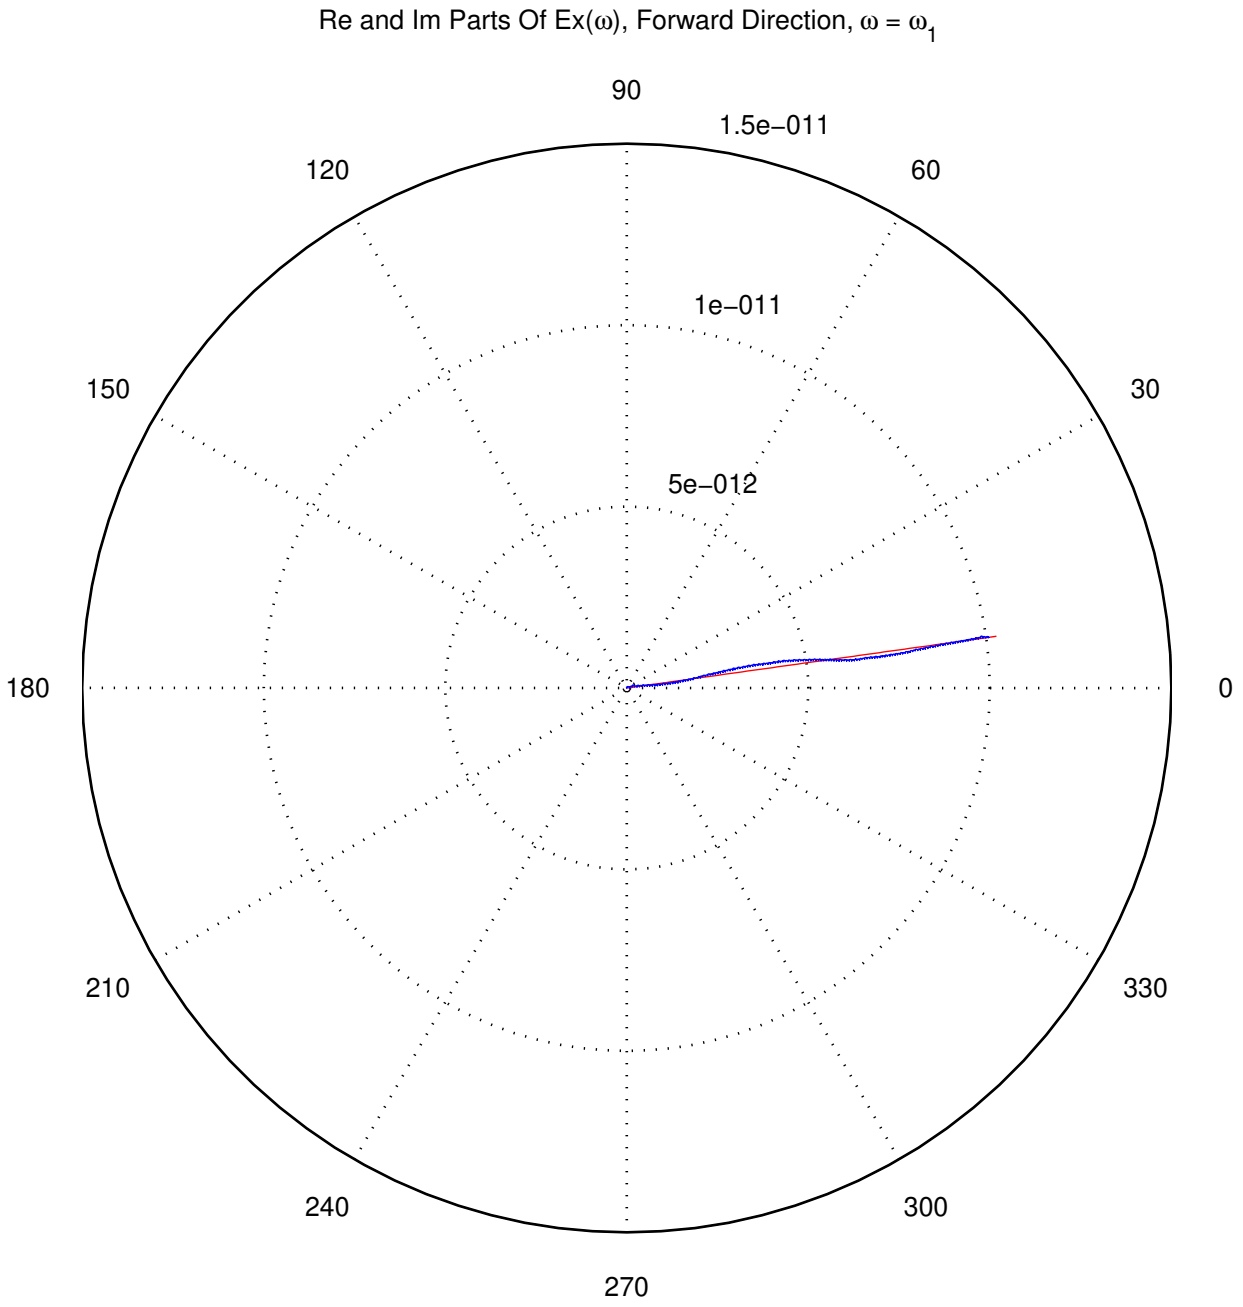
Re and Im Parts Of Ex(ω), Forward Direction, ω = ω1
90
1.5e−011
120
60
1e−011
150
30
5e−012
180
0
210
330
240
300
270

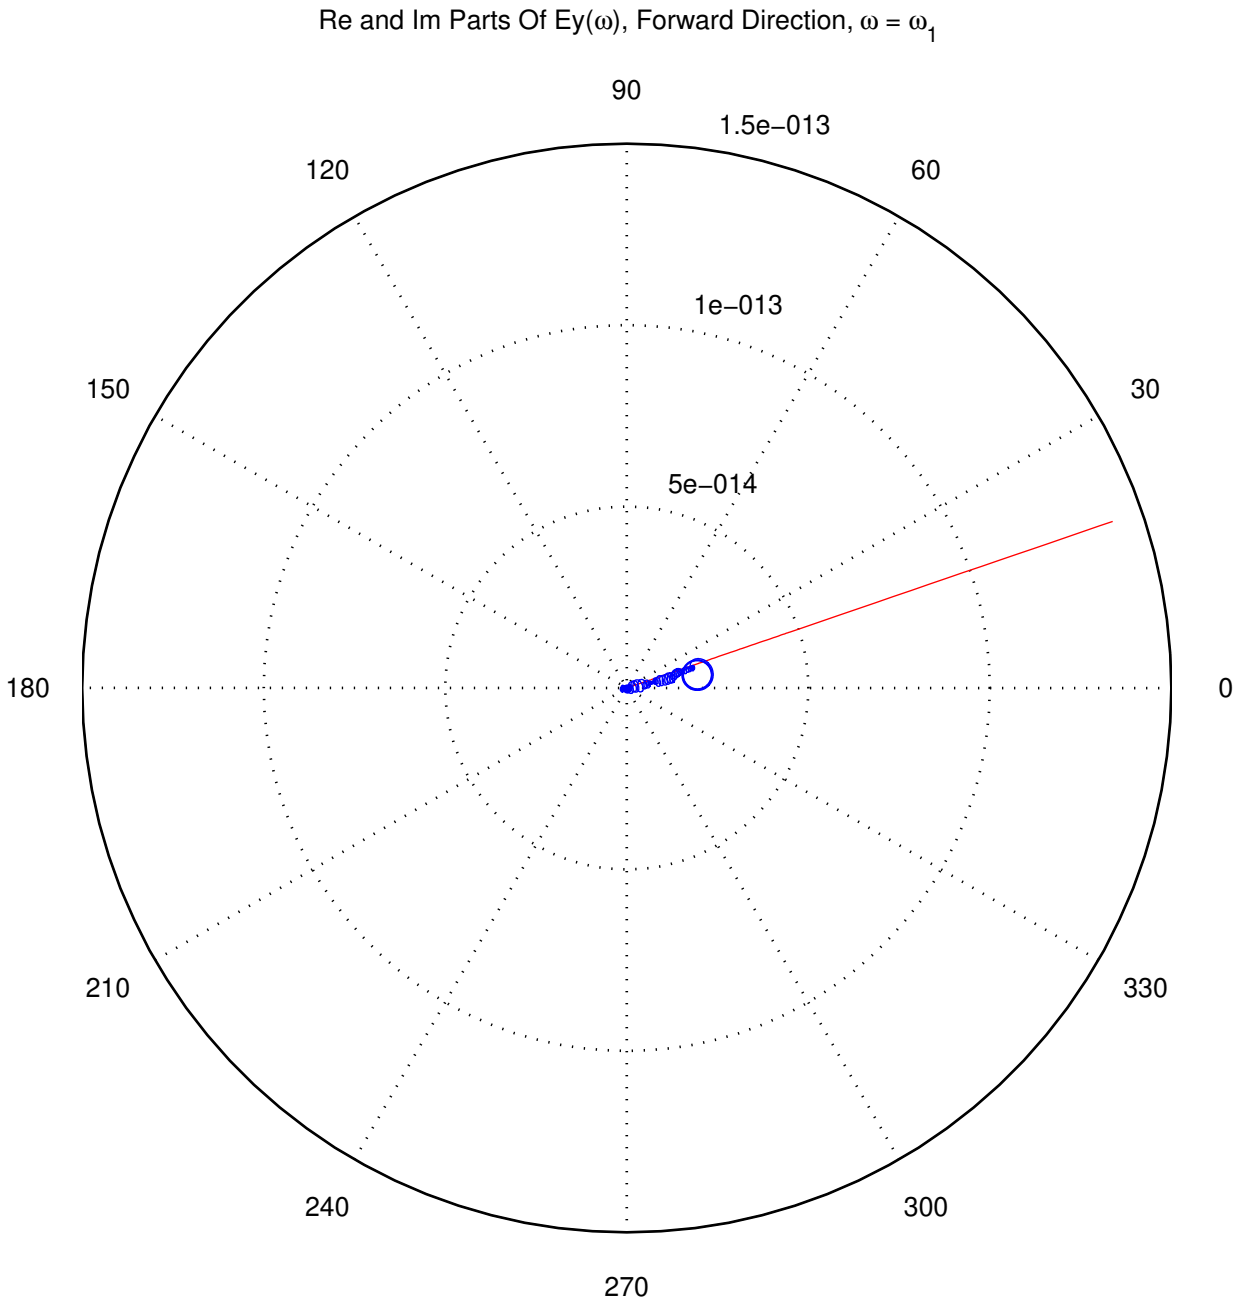
Re and Im Parts Of Ey(ω), Forward Direction, ω = ω1
90
1.5e−013
120
60
1e−013
150
30
5e−014
180
0
210
330
240
300
270

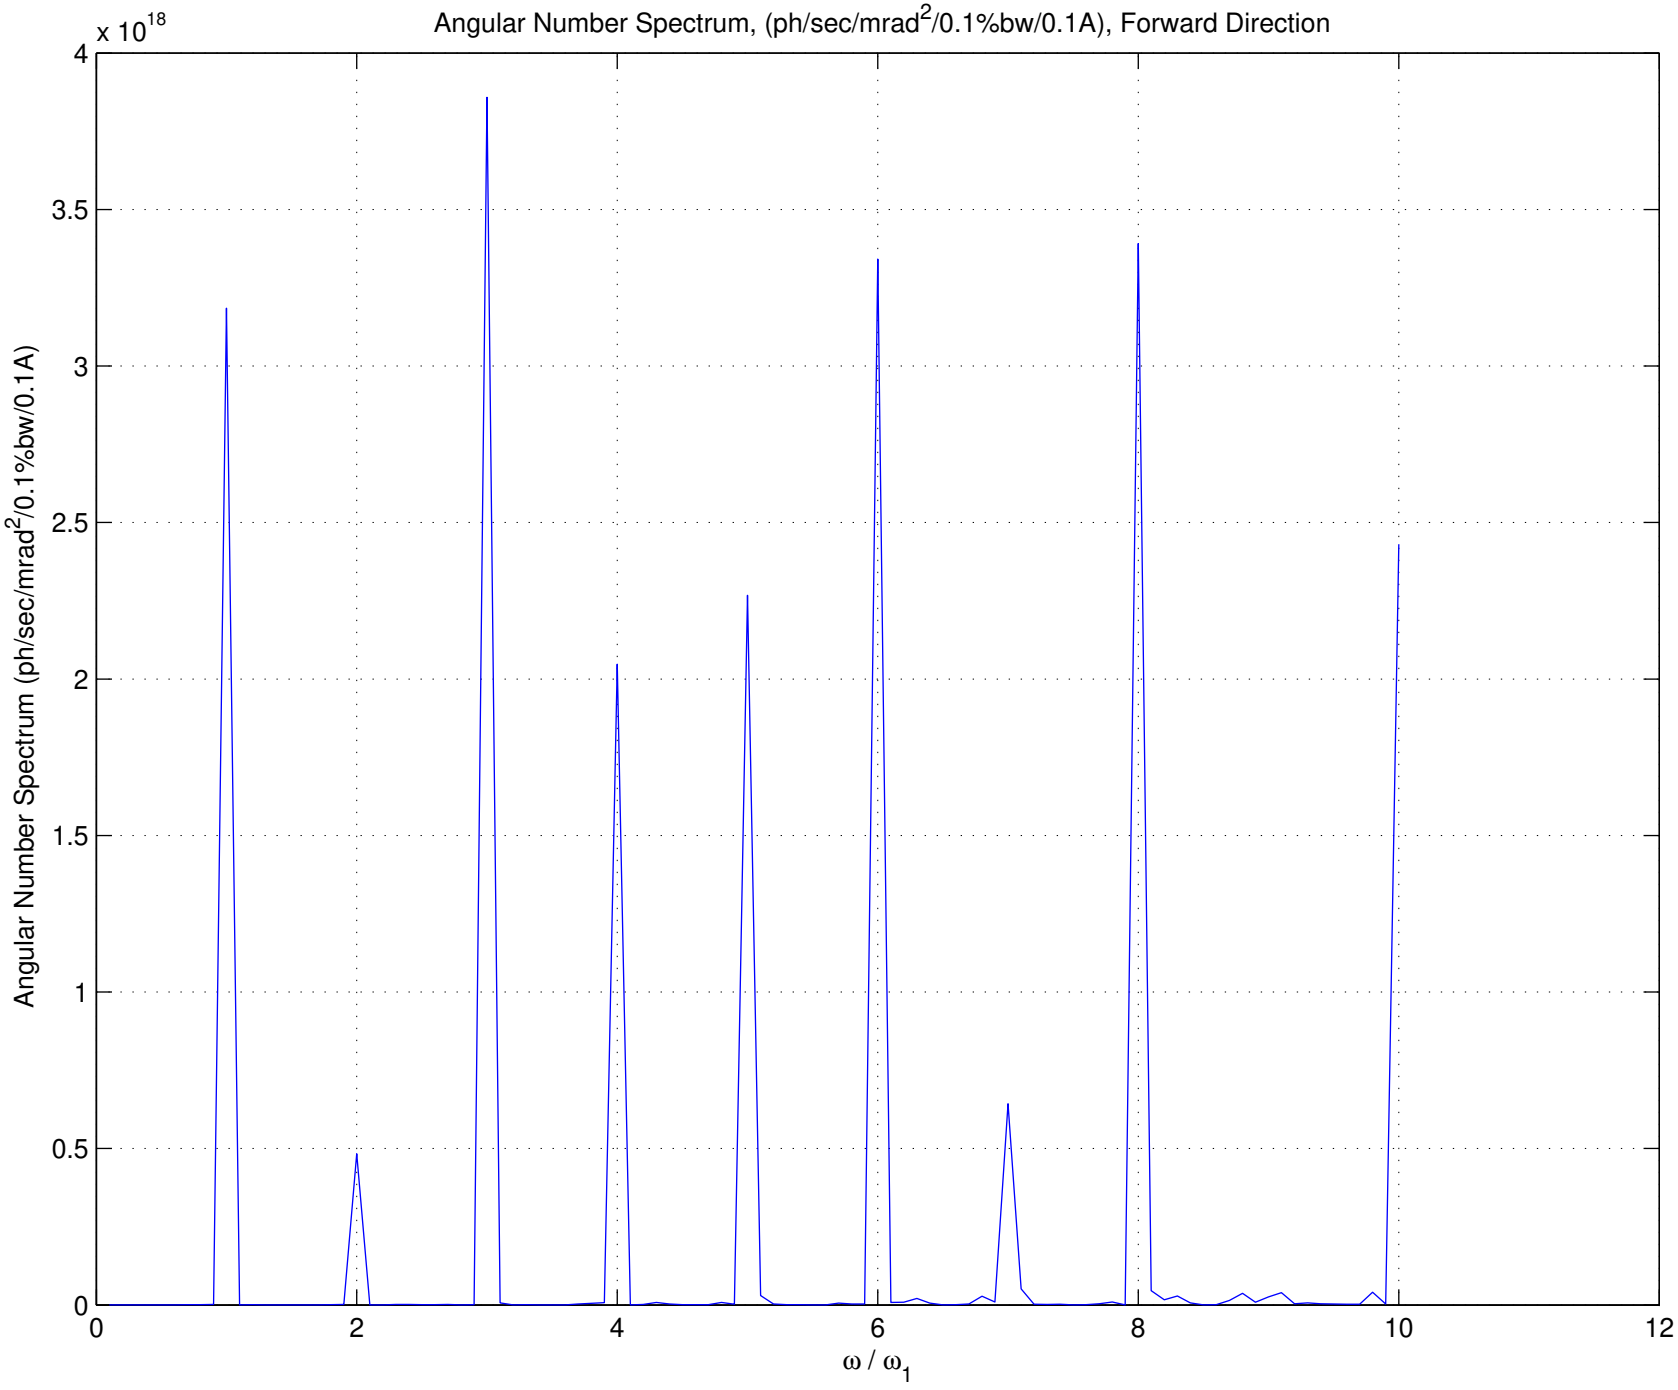
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{18}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
ω / ω_1
0
0.5
1
1.5
2
2.5
3
3.5
4
0
2
4
6
8
10
12

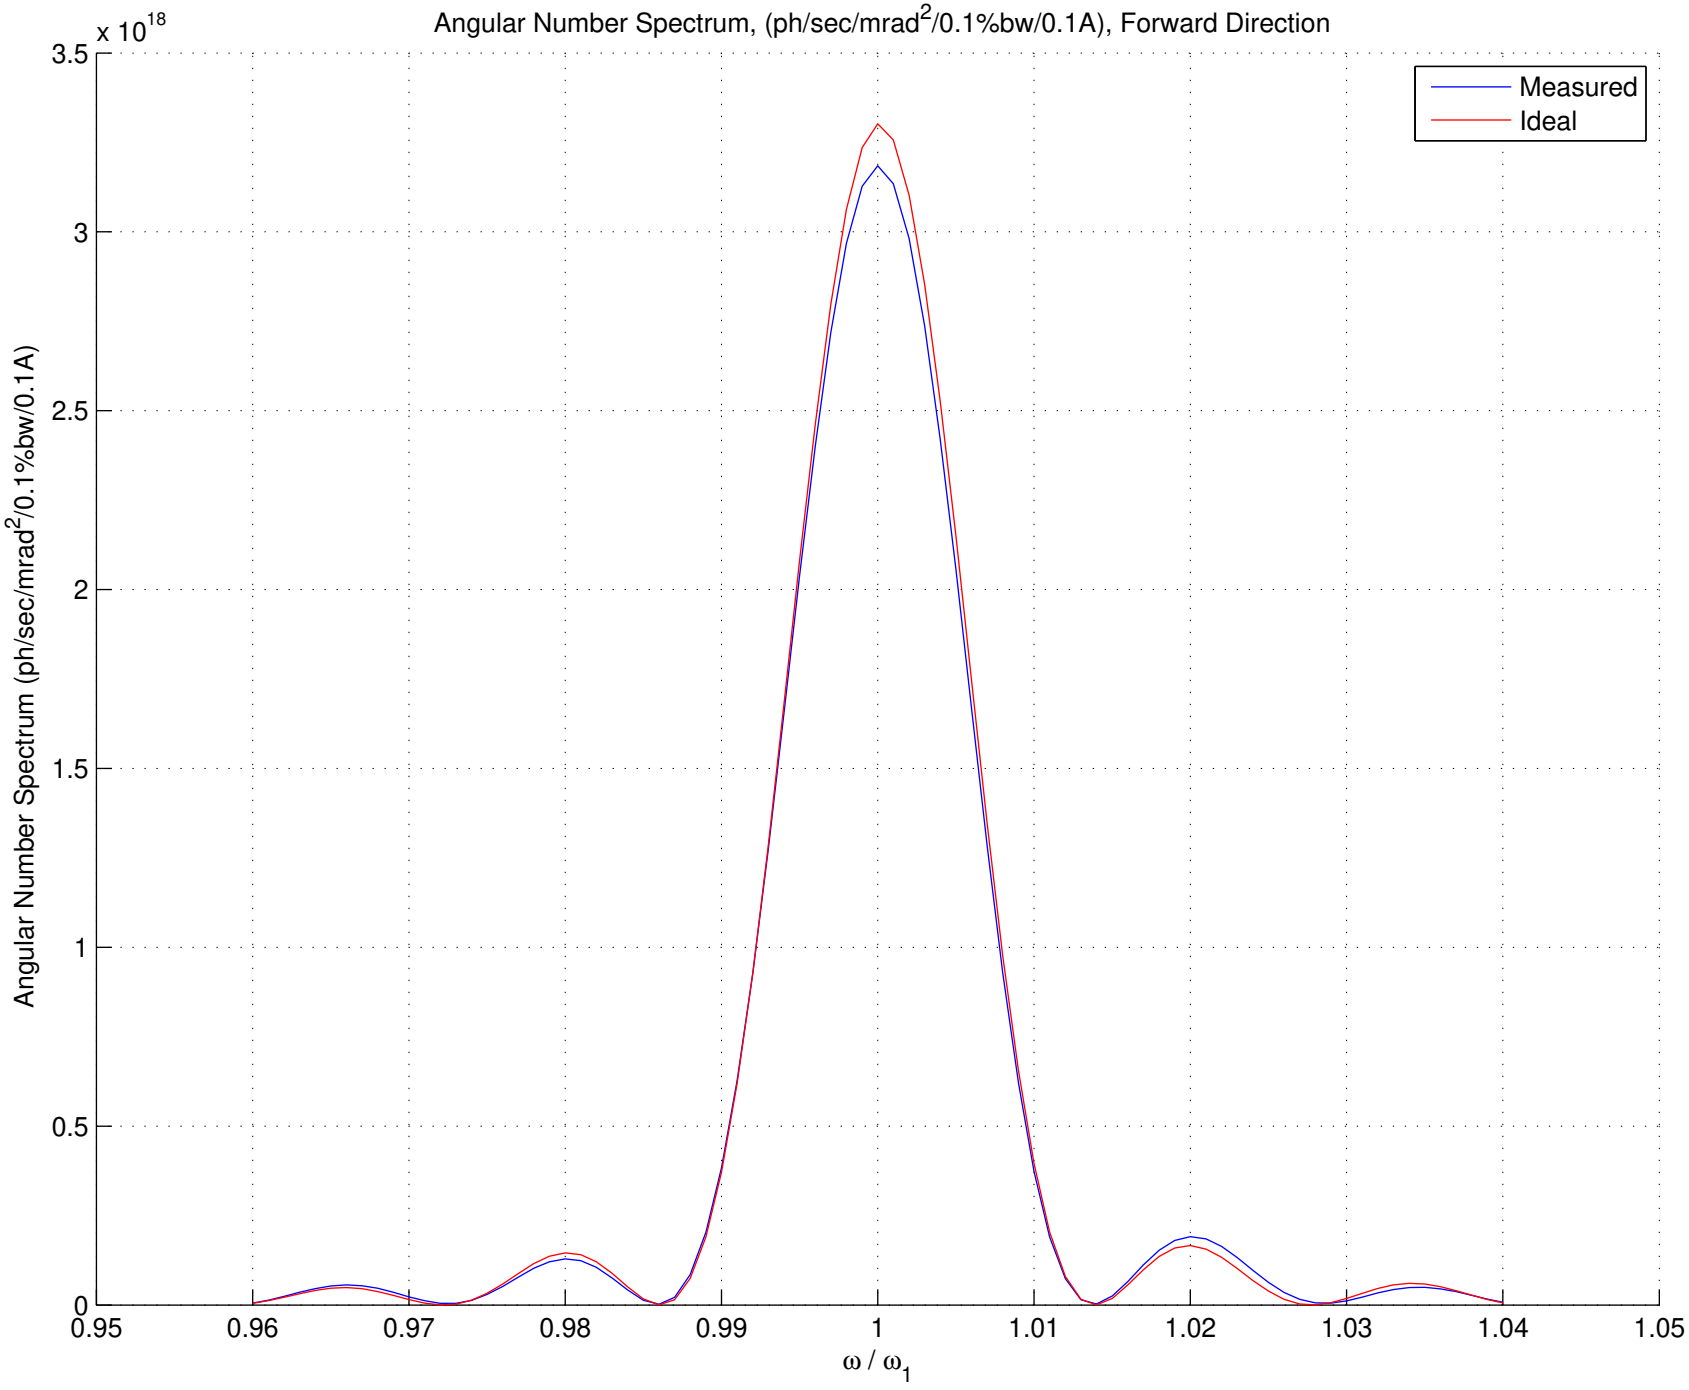
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{18}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
ω / $ω_1$
Measured
Ideal
3.5
3
2.5
2
1.5
1
0.5
0
0.95
0.96
0.97
0.98
0.99
1
1.01
1.02
1.03
1.04
1.05

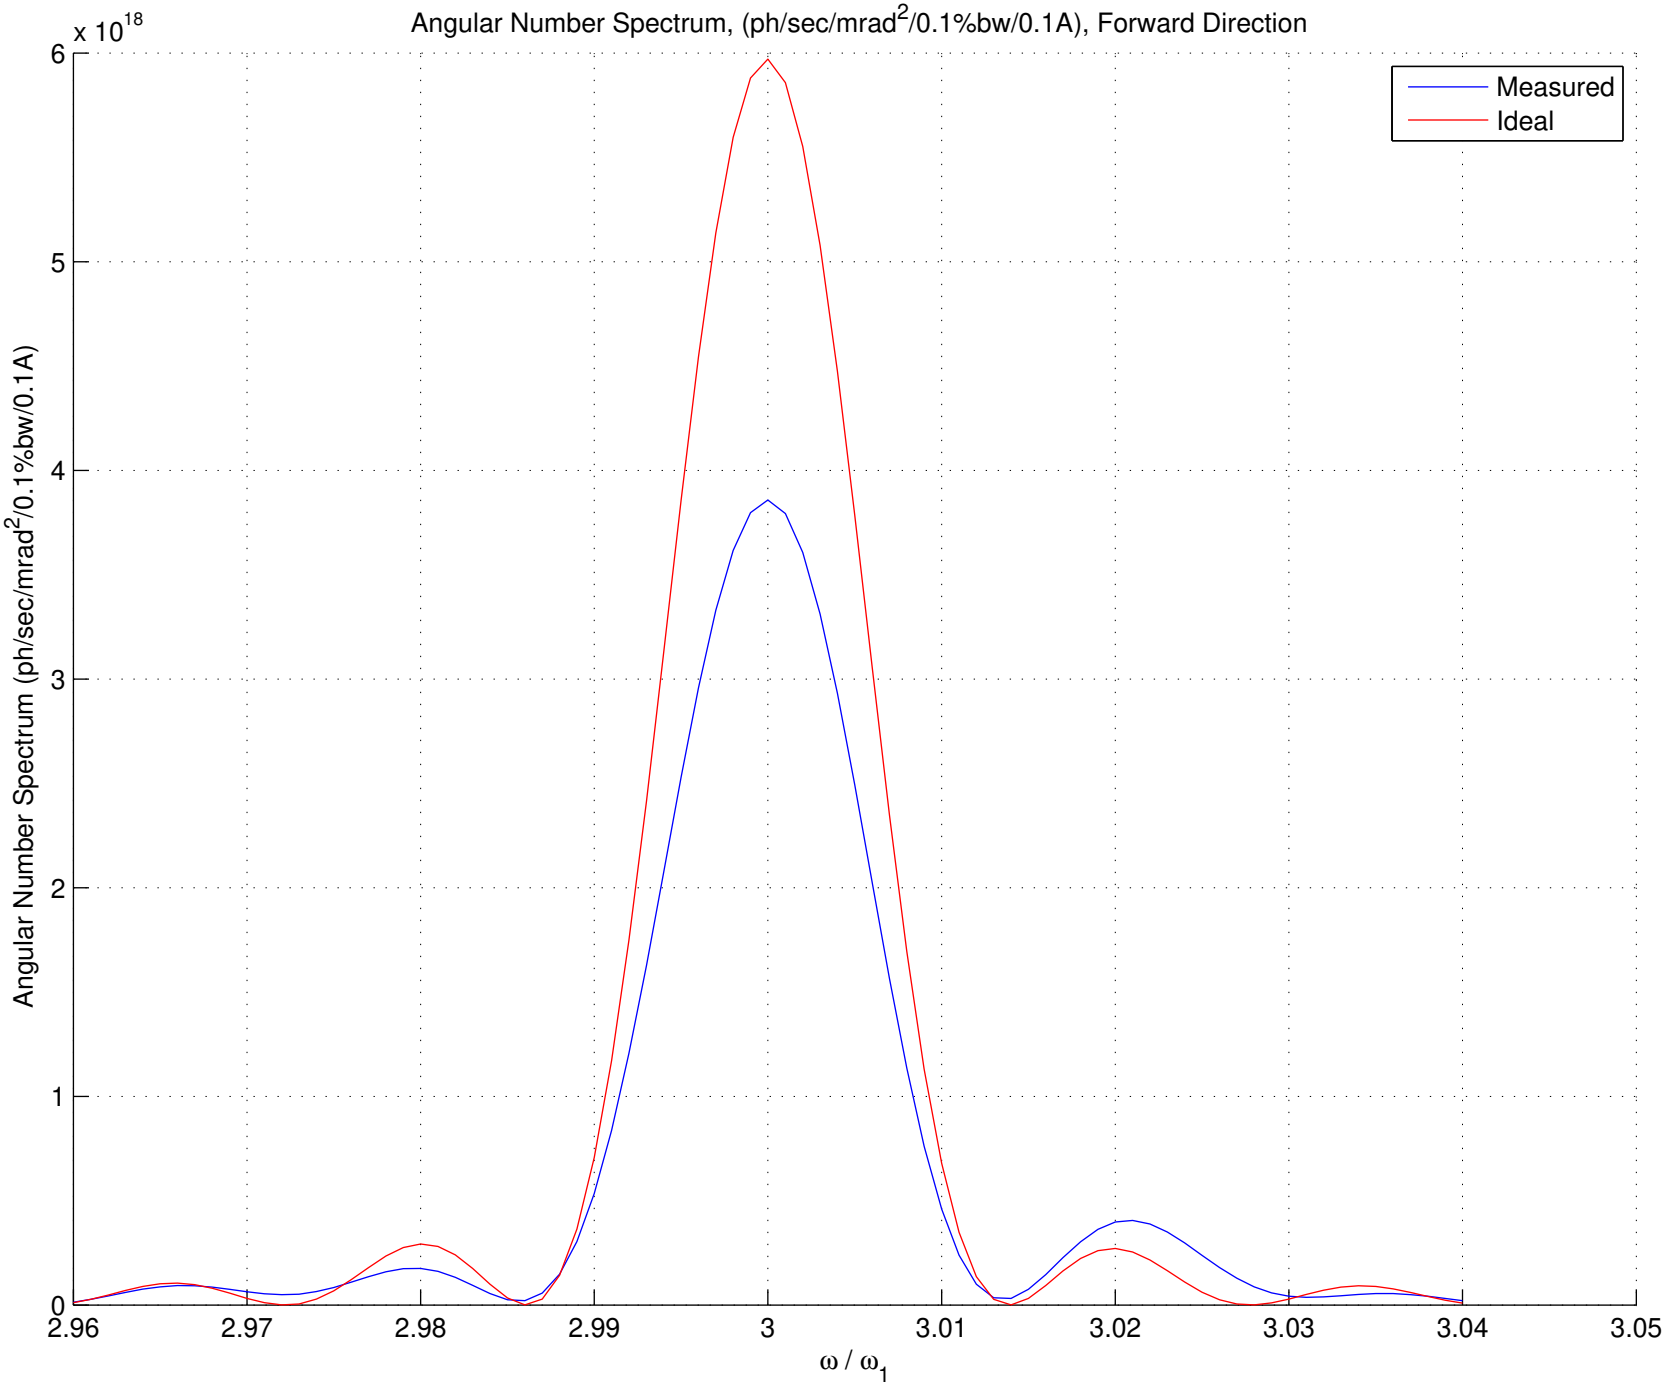
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{18}
Measured
Ideal
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
0
1
2
3
4
5
6
2.96
2.97
2.98
2.99
3
3.01
3.02
3.03
3.04
3.05
ω / $ω_1$

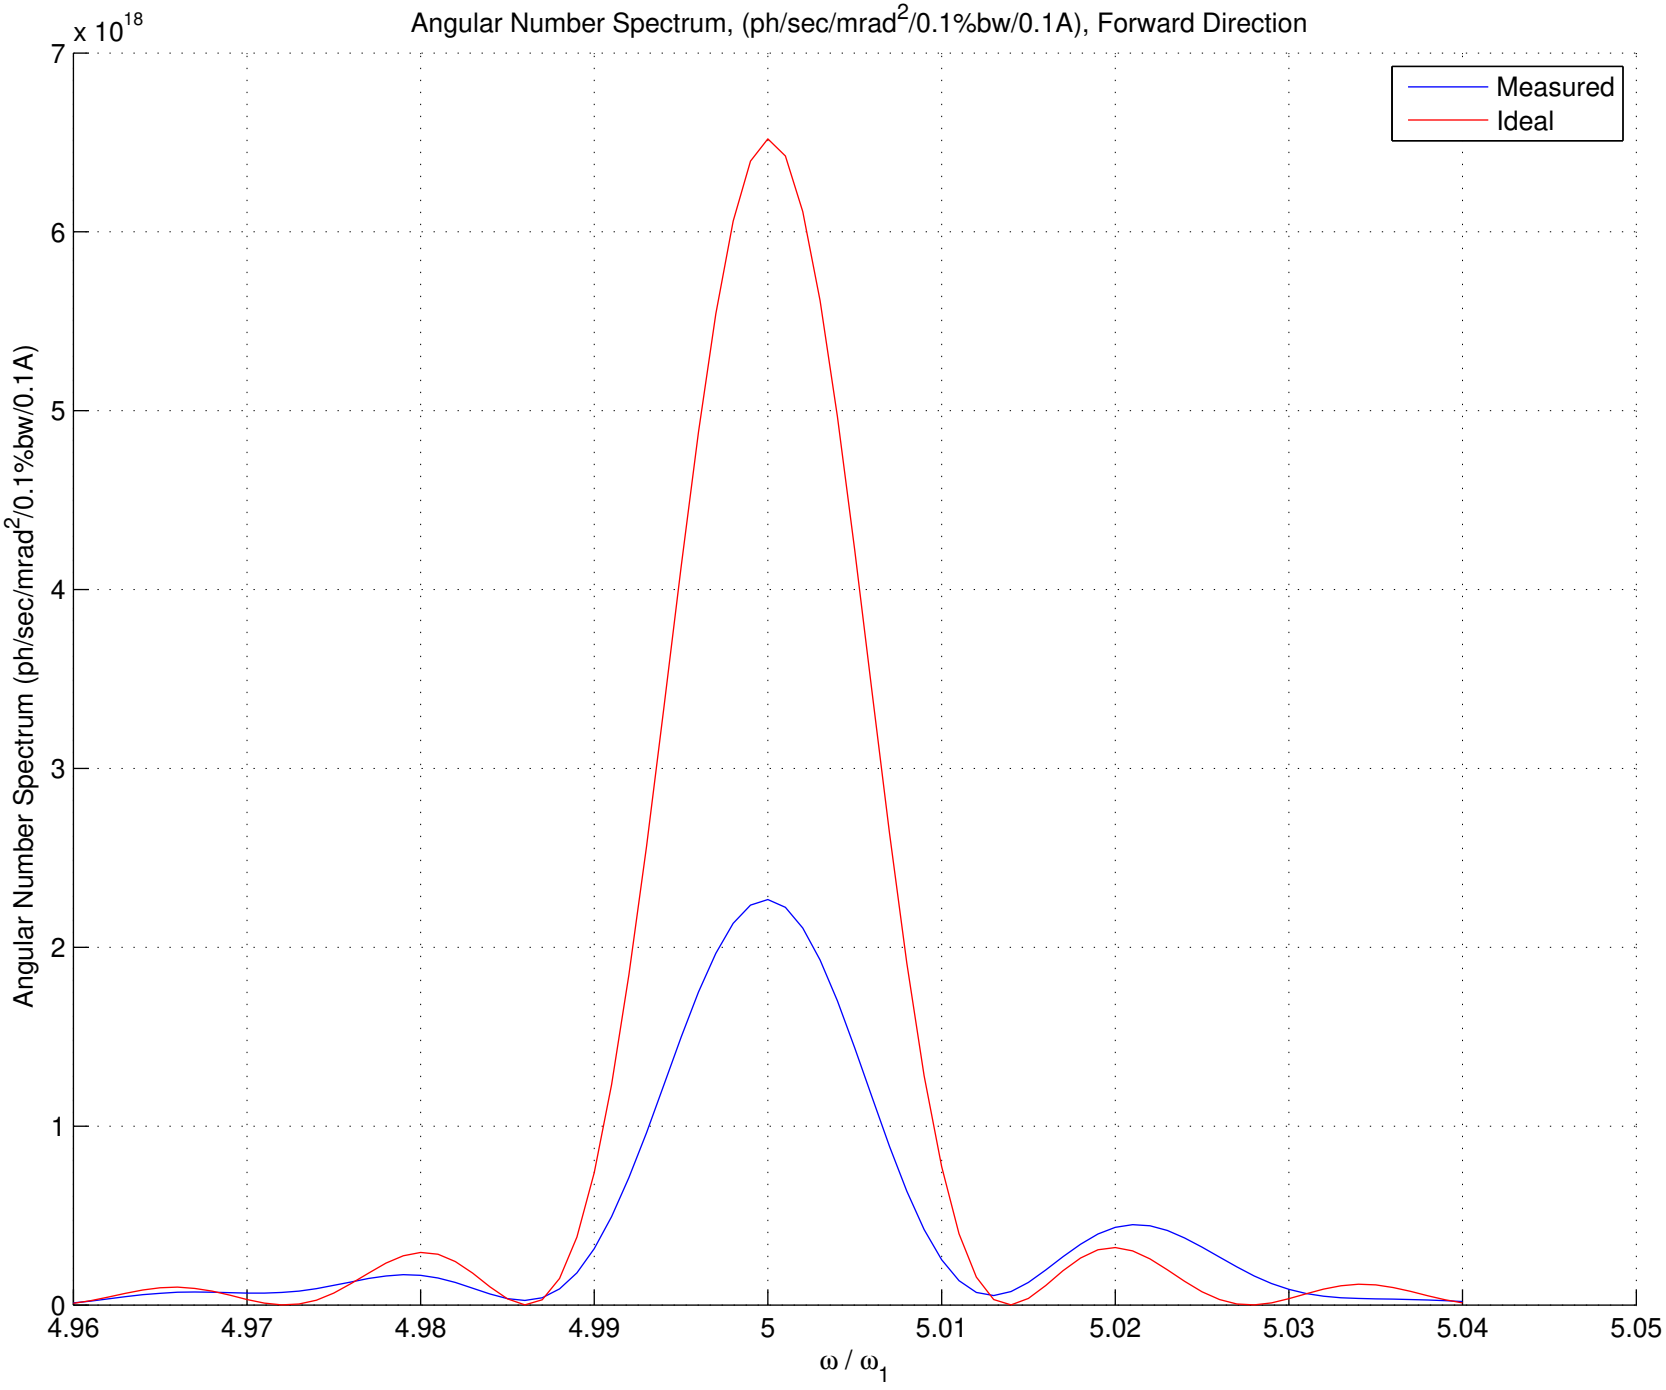
Angular Number Spectrum, (ph/sec/mrad^2/0.1%bw/0.1A), Forward Direction
x 10^{18}
Angular Number Spectrum (ph/sec/mrad^2/0.1%bw/0.1A)
ω / $ω_1$
Measured
Ideal
0
1
2
3
4
5
6
7
4.96
4.97
4.98
4.99
5
5.01
5.02
5.03
5.04
5.05