SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 04−19−2013
Time: 09:33:51

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 1
Tuning Stage: Fine Tuning
Run Number: 60
Measurement Type: Z Scans
Operator: YL
Comment: Q3; #1 +4, #3 −8, #81 −4, #1 +x, #3 −x
Session first run: 60
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0001\Fine Tuning\Z Scans\Run 060\bscanz.dat

Temperature (C)
DELTA:−−> T1 19.96 −−> T2 20.10 −−> T5 19.88 −−> T3 19.96 −−> Air 20.00 −−> T4 19.94

Axes position (m) X:0.020011 Y:0.000025
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000788 V
Vy_0i = −0.003783 V

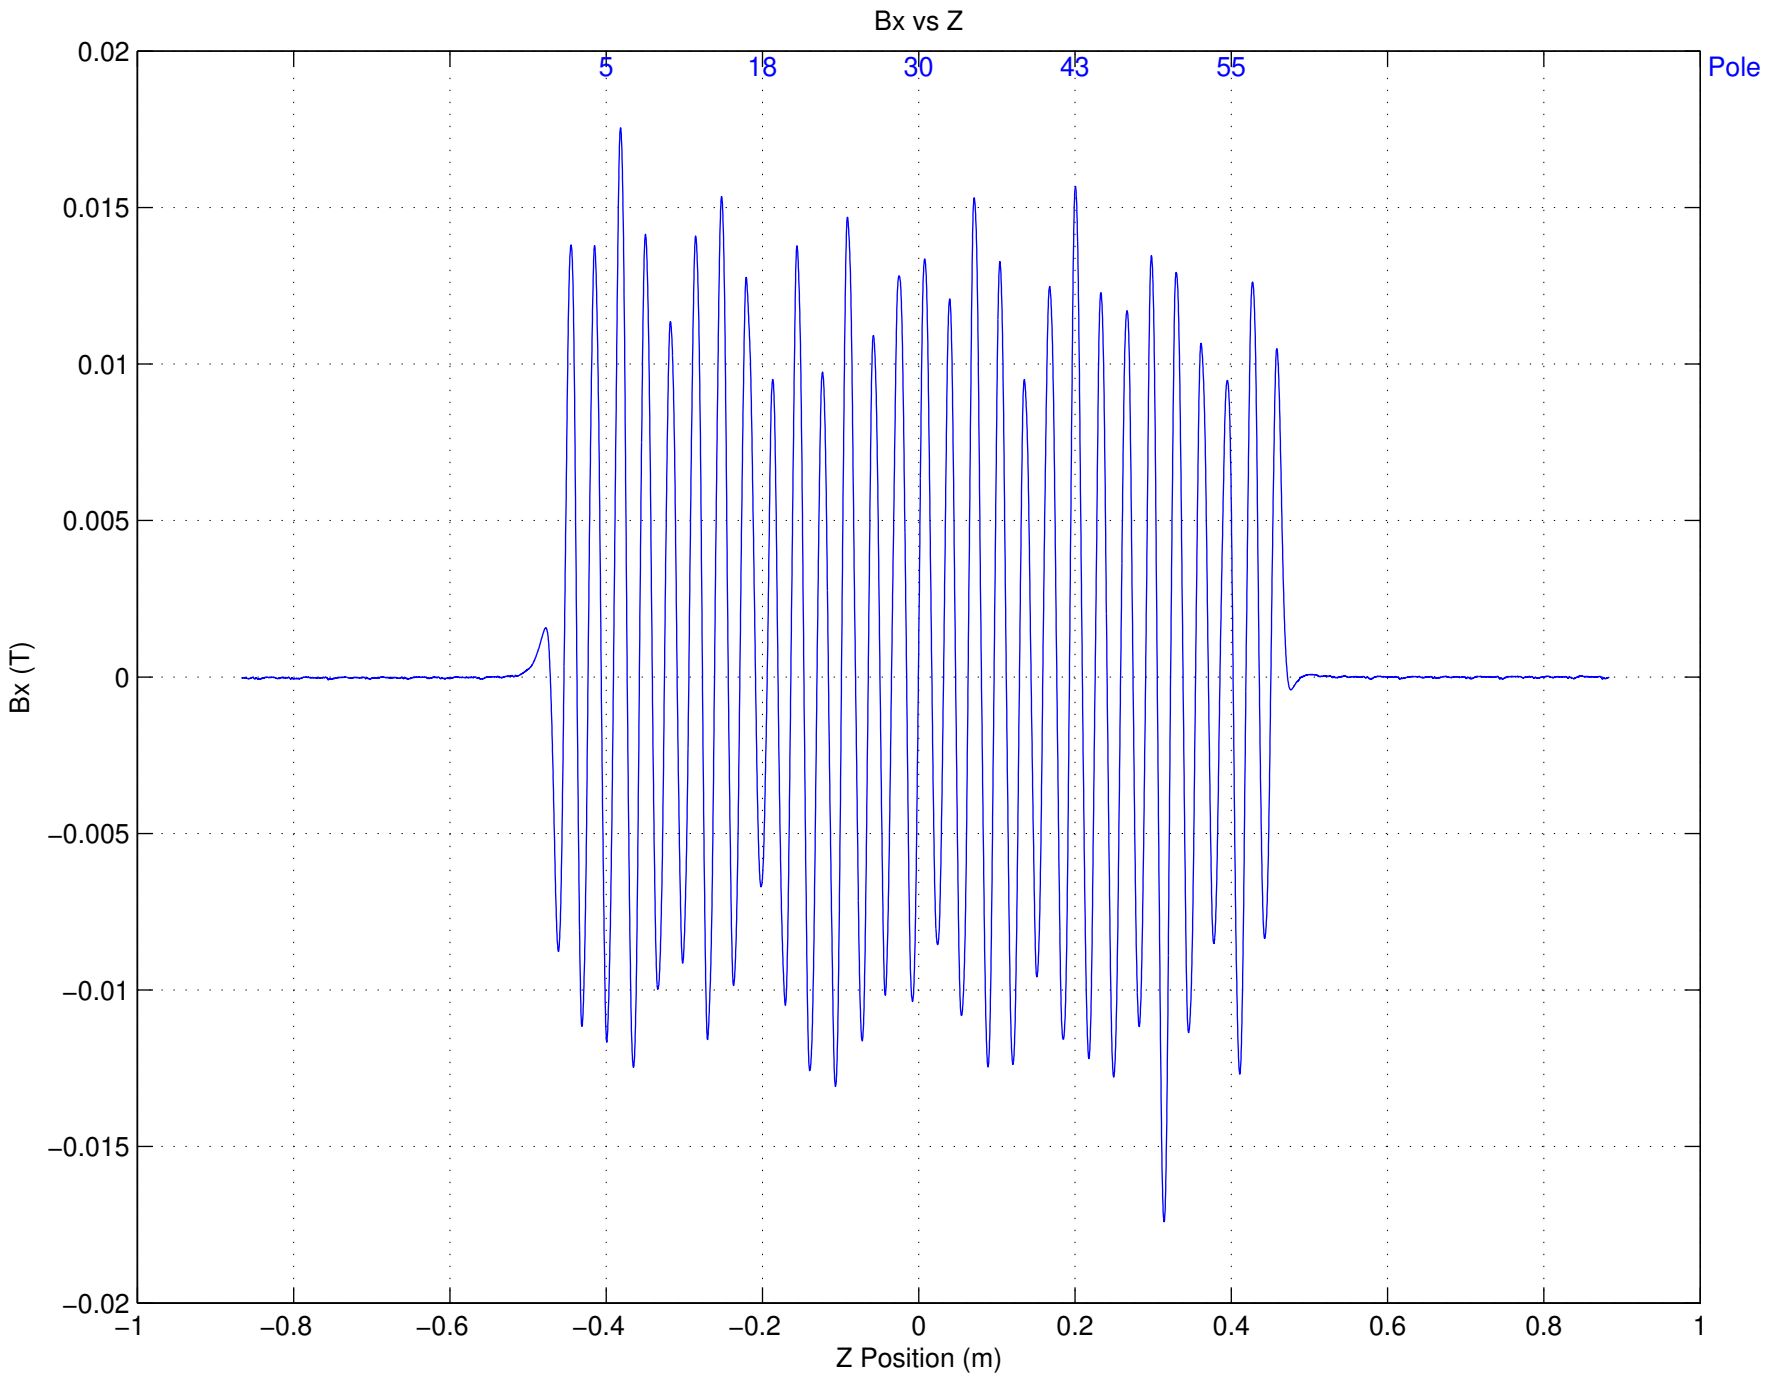
Bx vs Z
5
18
30
43
55
Pole
0.02
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
−0.02
Bx (T)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z Position (m)

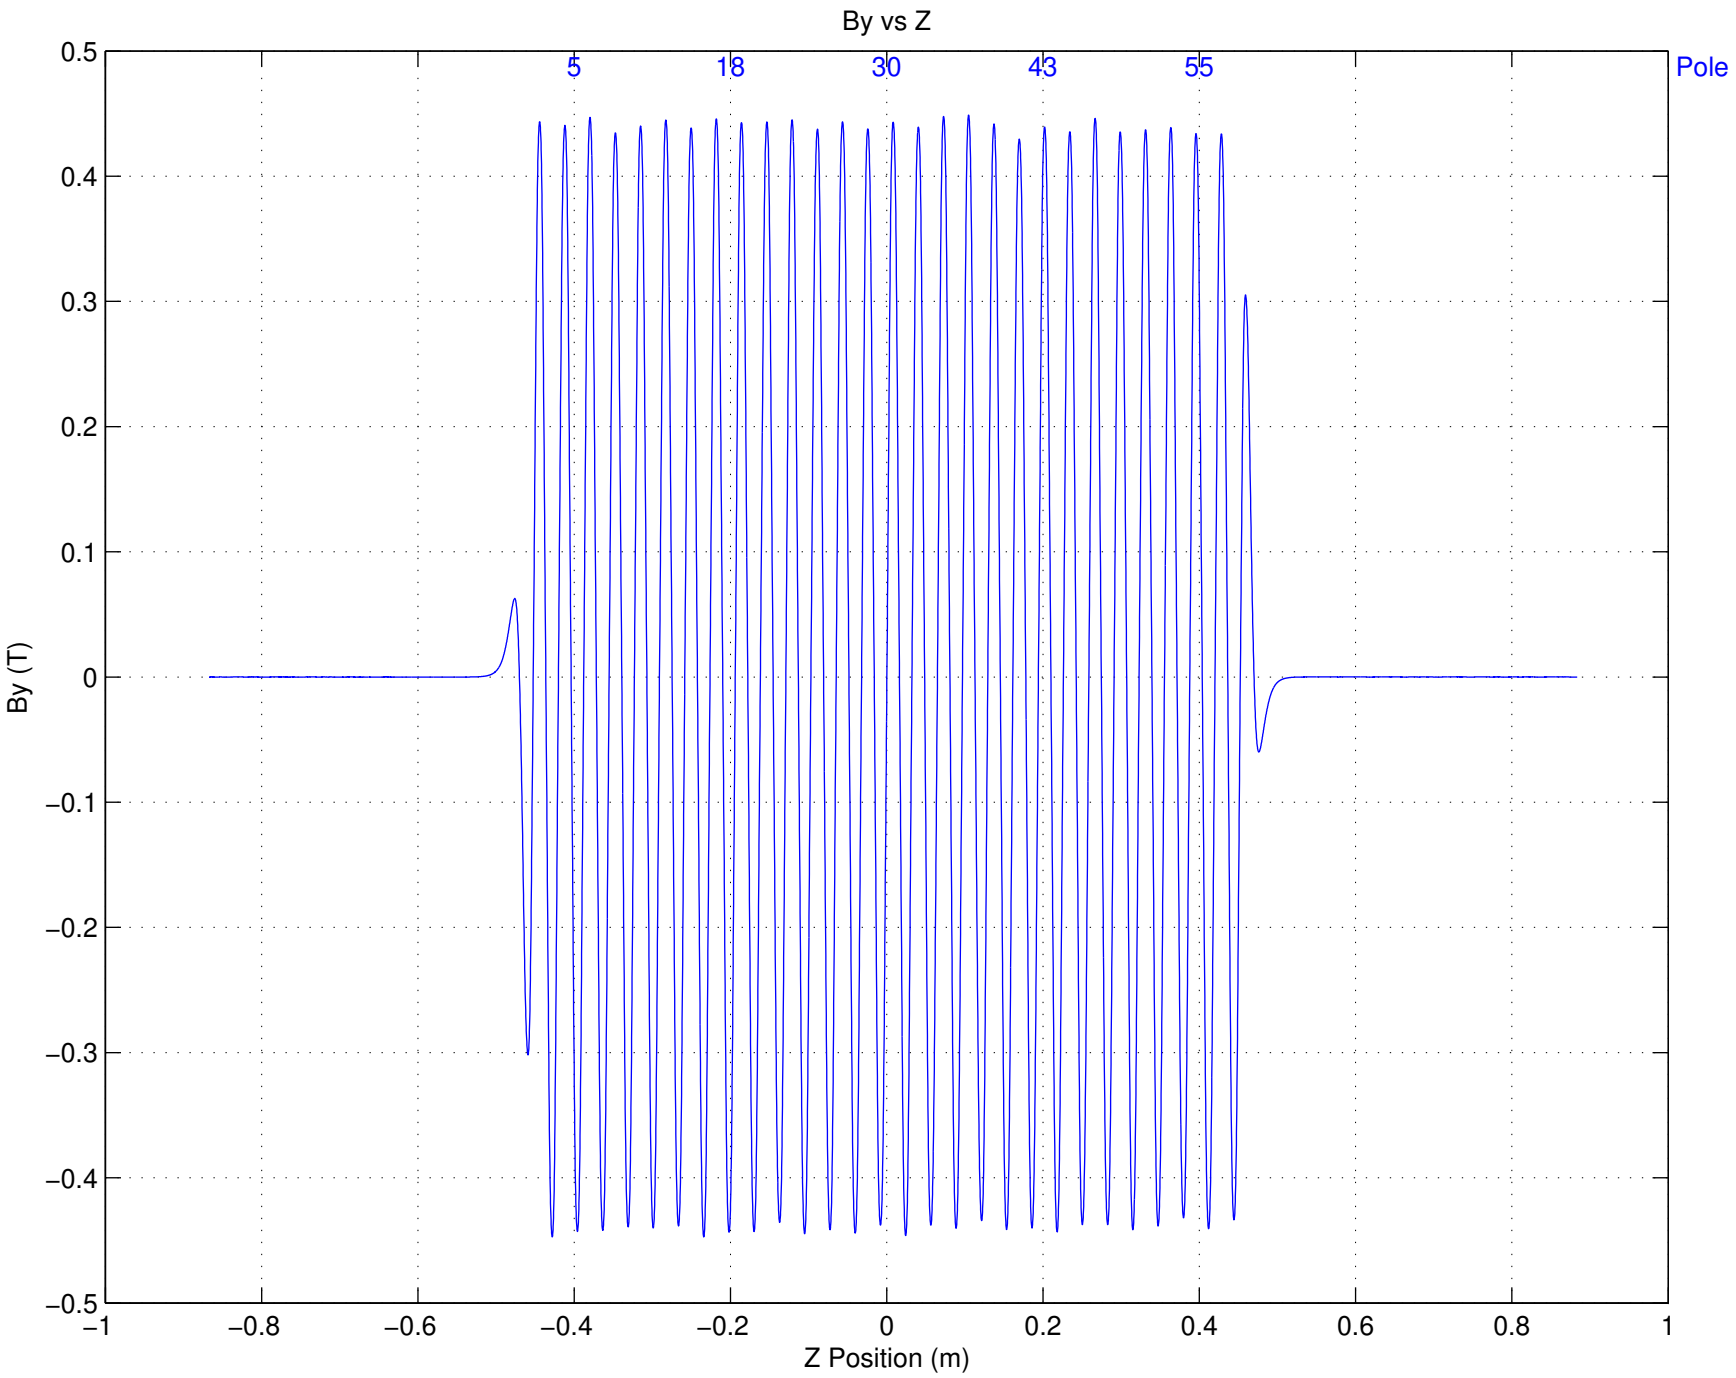
By vs Z
5
18
30
43
55
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z Position (m)

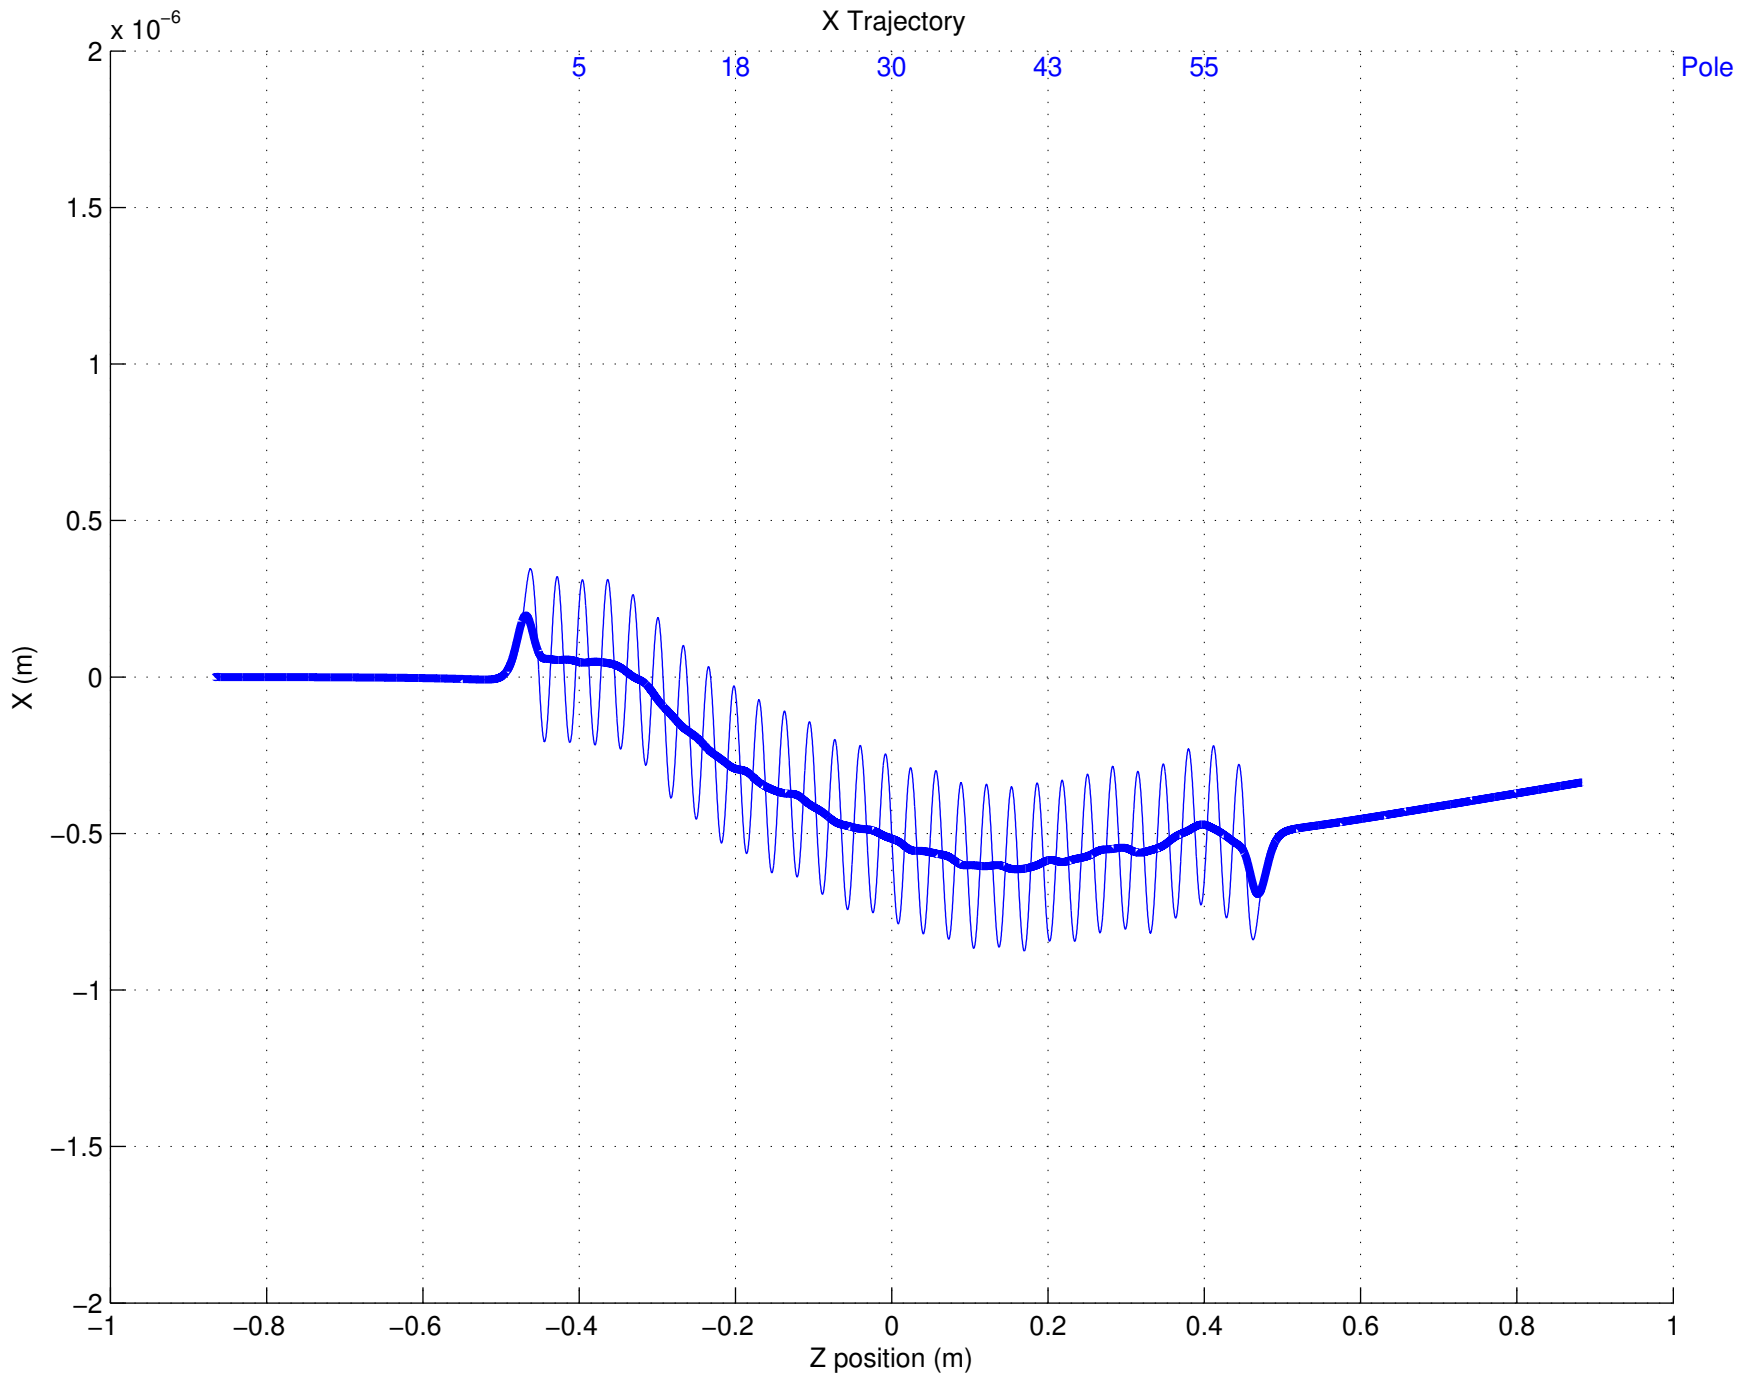
X Trajectory
x 10^-6
5
18
30
43
55
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z position (m)

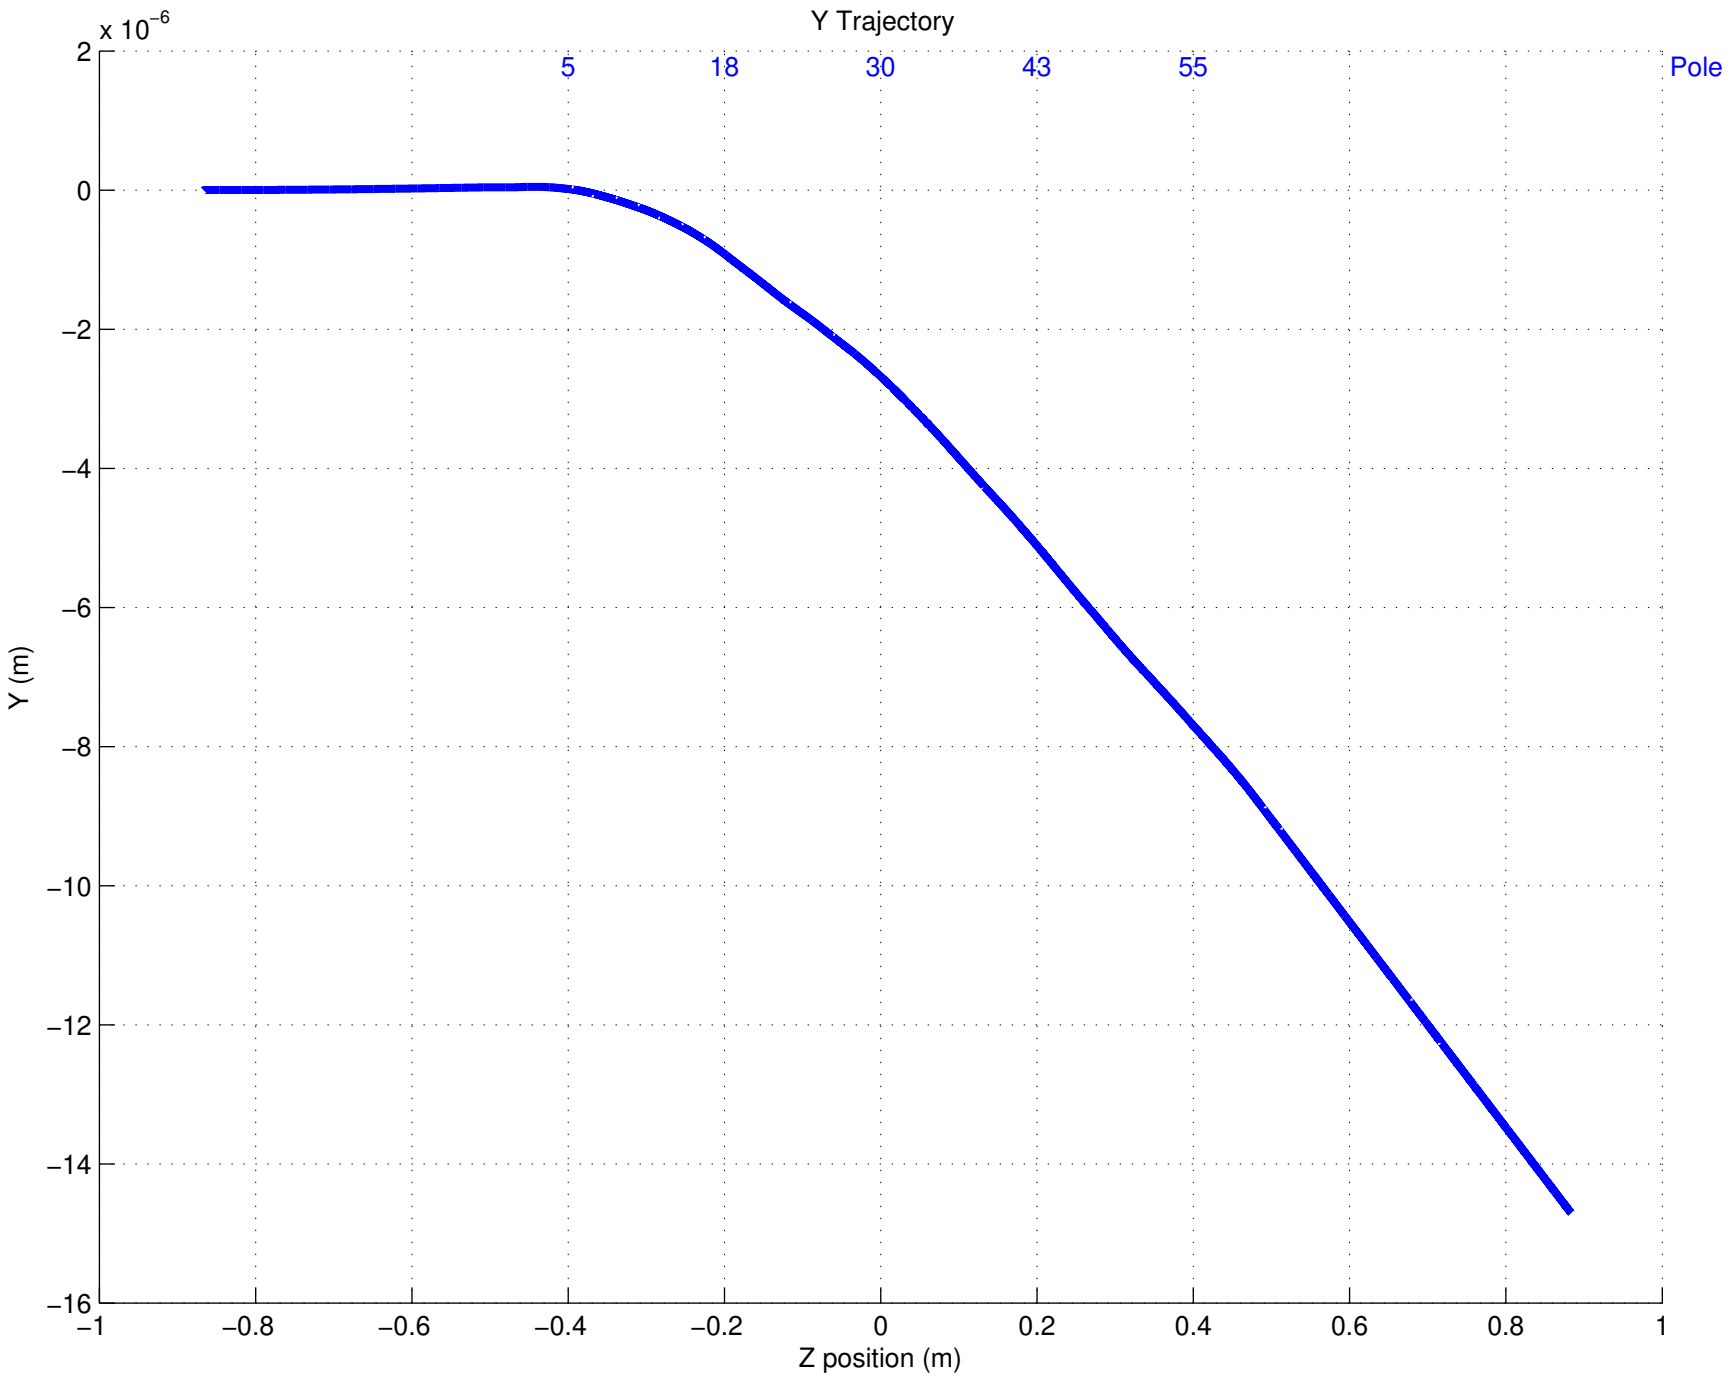
Y Trajectory
x 10^-6
2
0
−2
−4
−6
−8
−10
−12
−14
−16
Y (m)
5
18
30
43
55
Pole
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z position (m)

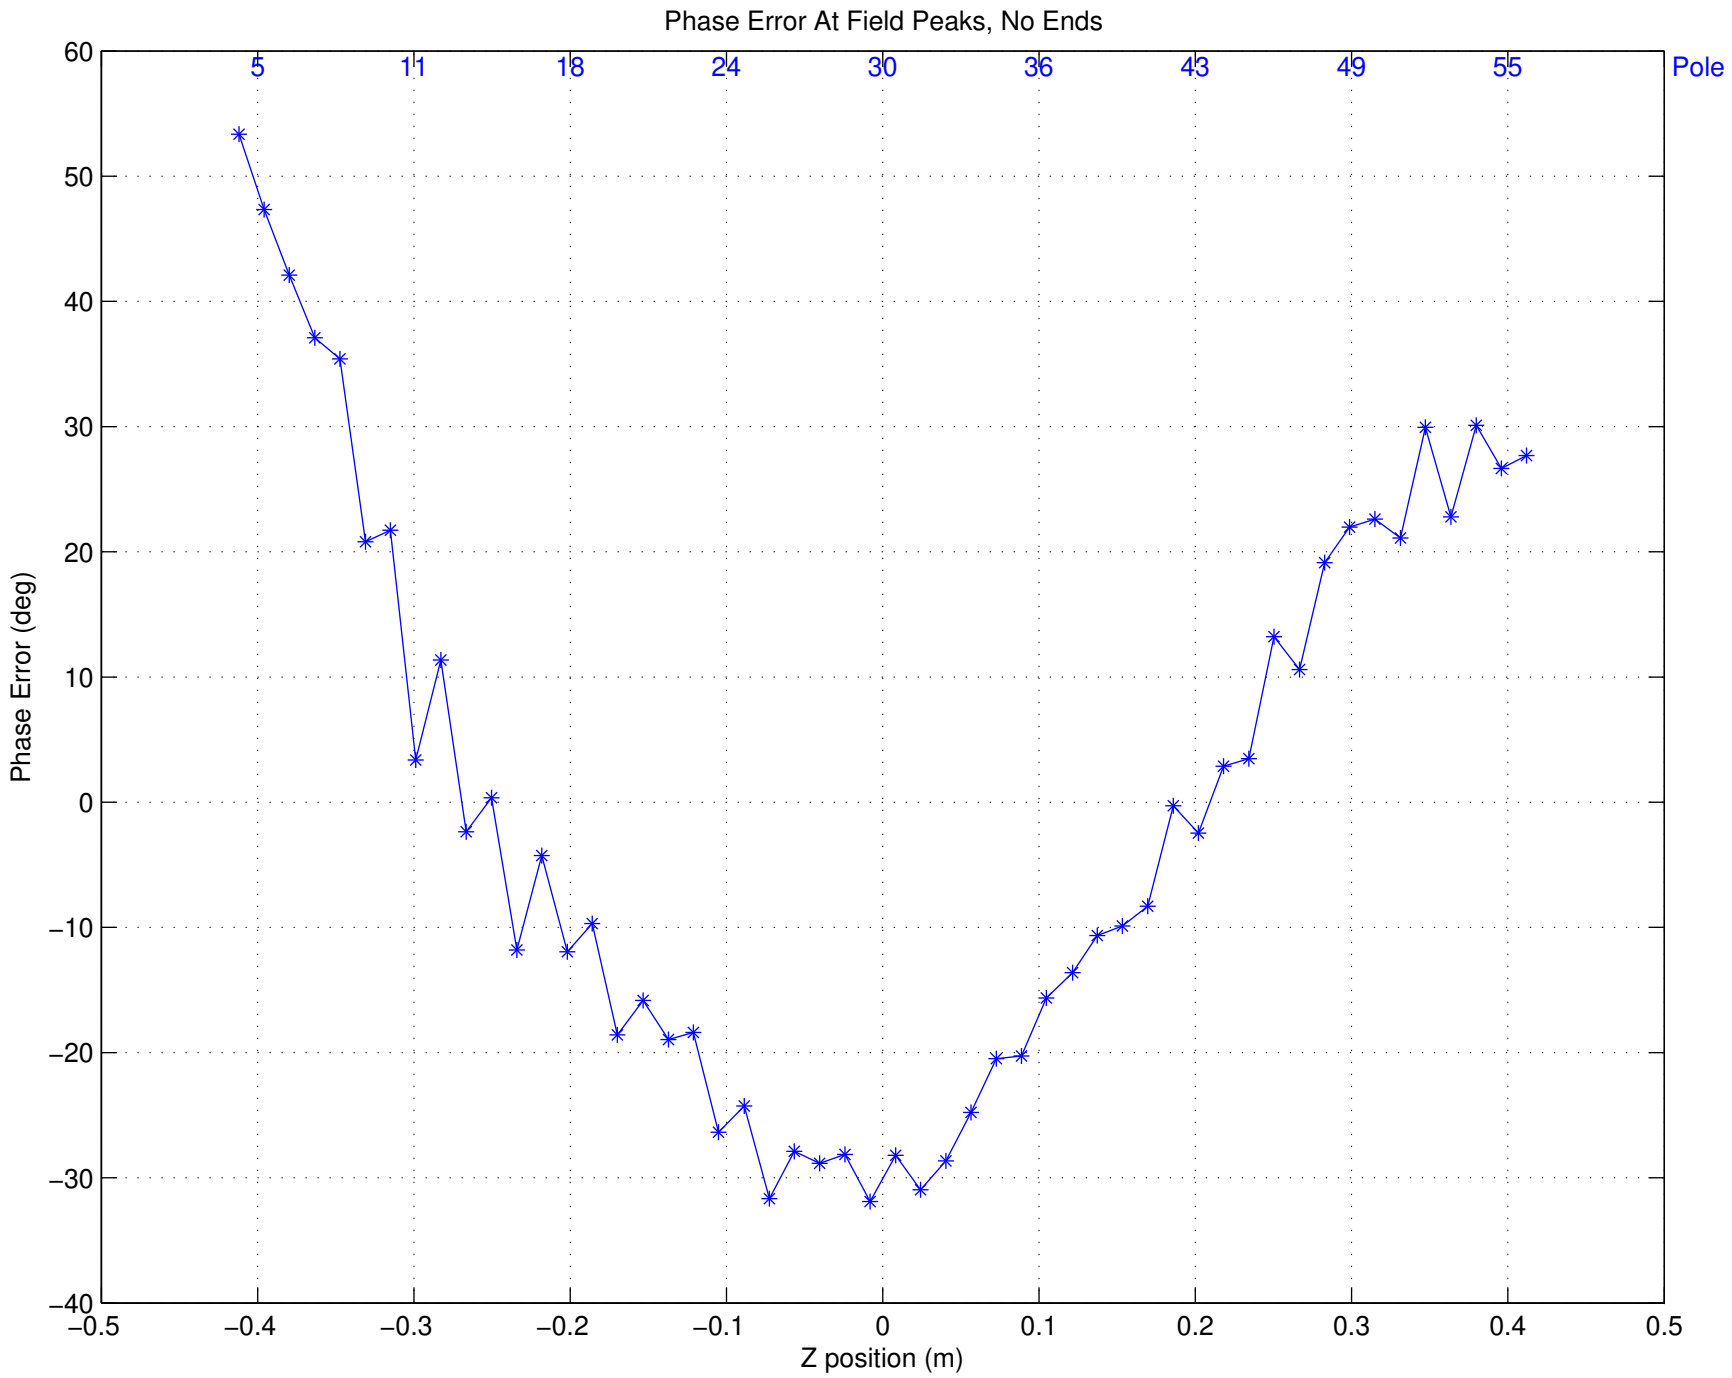

Phase Error: Ave = −0.000000 deg, RMS = 23.673145 deg

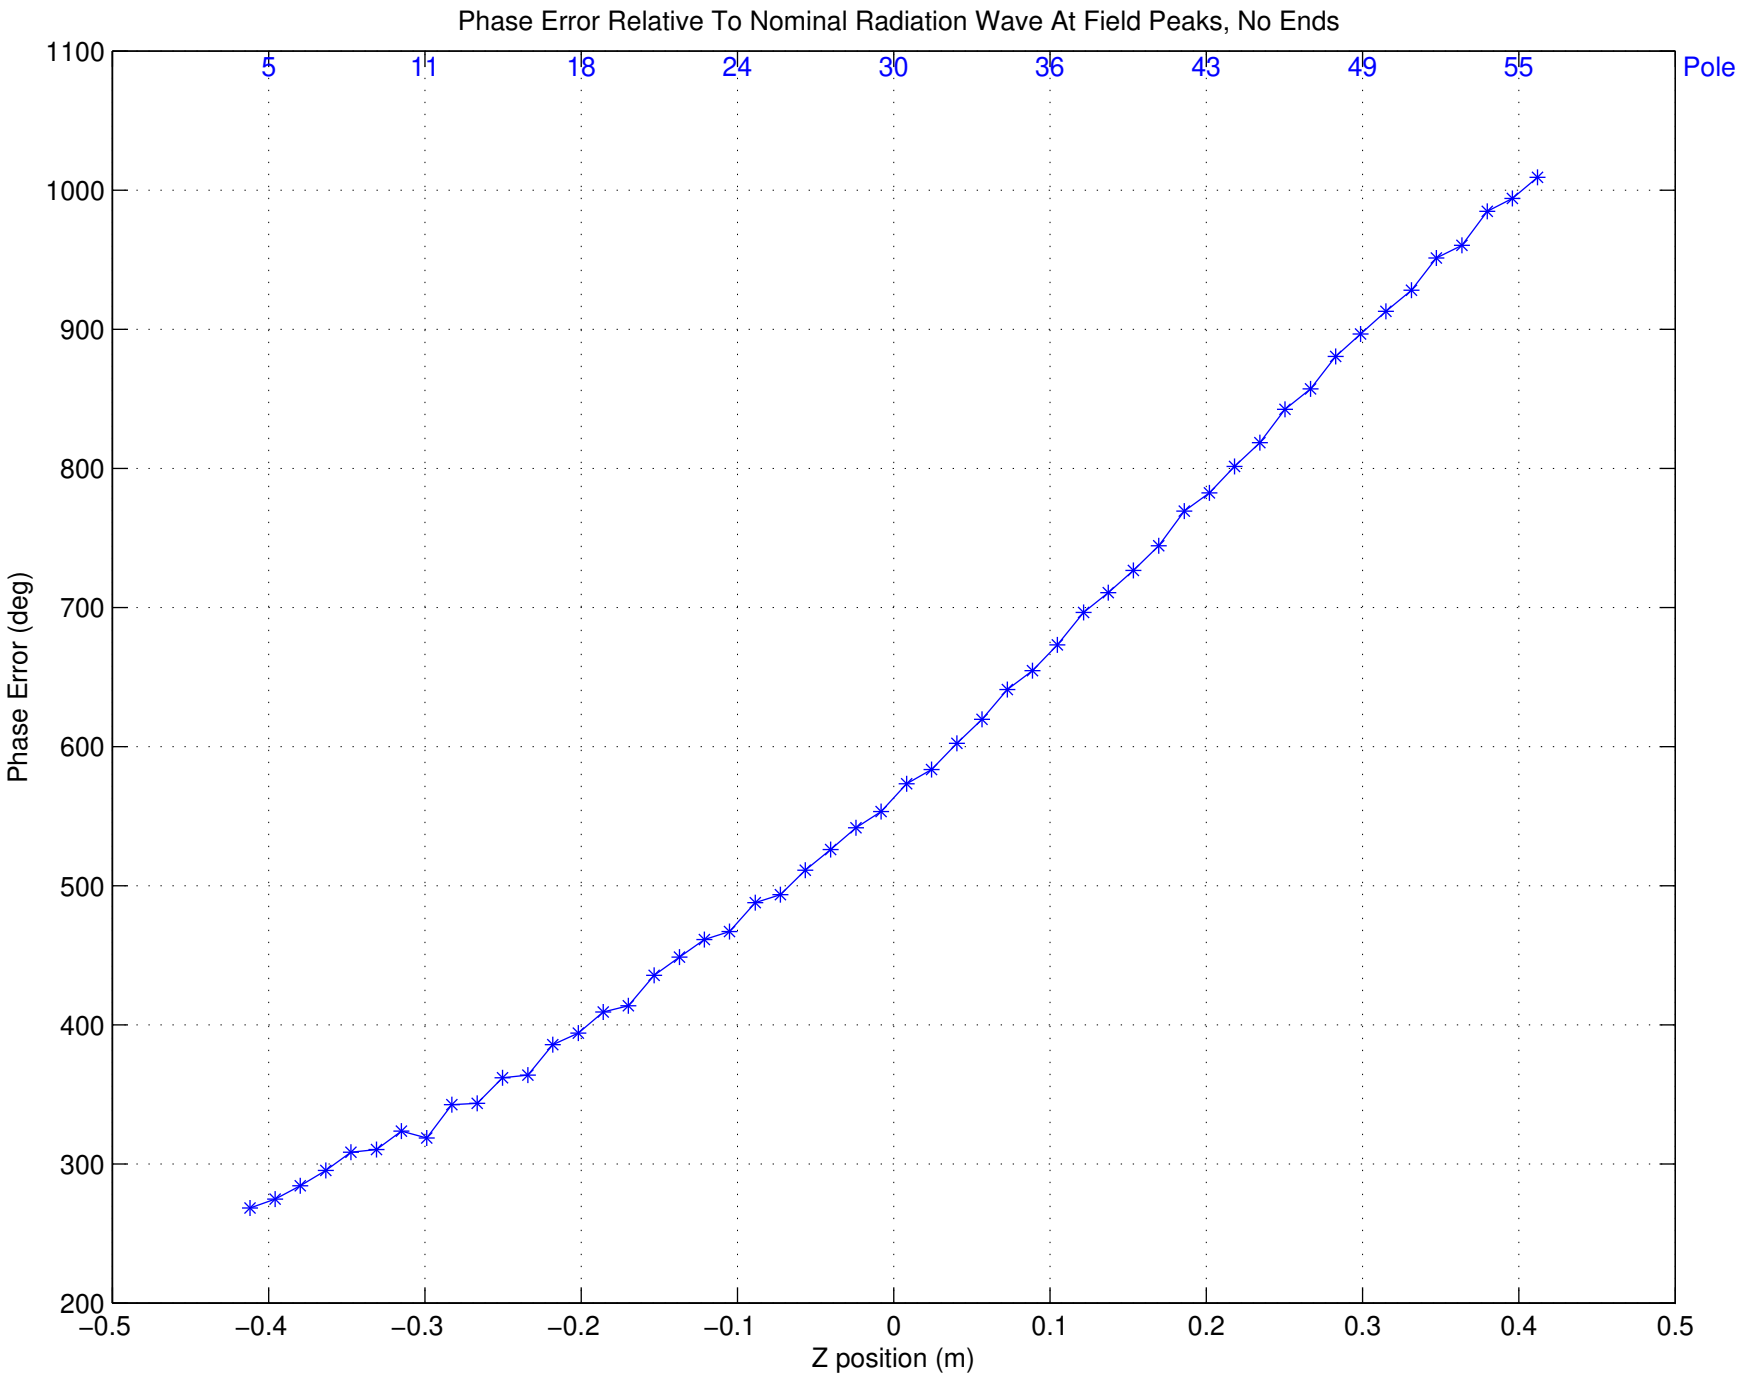
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
Pole
5
11
18
24
30
36
43
49
55
1100
1000
900
800
700
600
500
400
300
200
Phase Error (deg)
−0.5
−0.4
−0.3
−0.2
−0.1
0
0.1
0.2
0.3
0.4
0.5
Z position (m)