SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 04–19–2013
Time: 10:11:05

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 1
Tuning Stage: Fine Tuning
Run Number: 61
Measurement Type: Z Scans
Operator: YL
Comment: Q3; #15 –4, #19 –4,#29 –2, #33 –4, #7 –50,#11 –50um
Session first run: 60
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0001\Fine Tuning\Z Scans\Run 061\bscanz.dat

Temperature (C)
DELTA:––> T1 19.96 ––> T2 20.17 ––> T5 19.87 ––> T3 19.97 ––> Air 19.99 ––> T4 19.94

Axes position (m) X:0.020011 Y:0.000025
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000702 V
Vy_0i = –0.003796 V

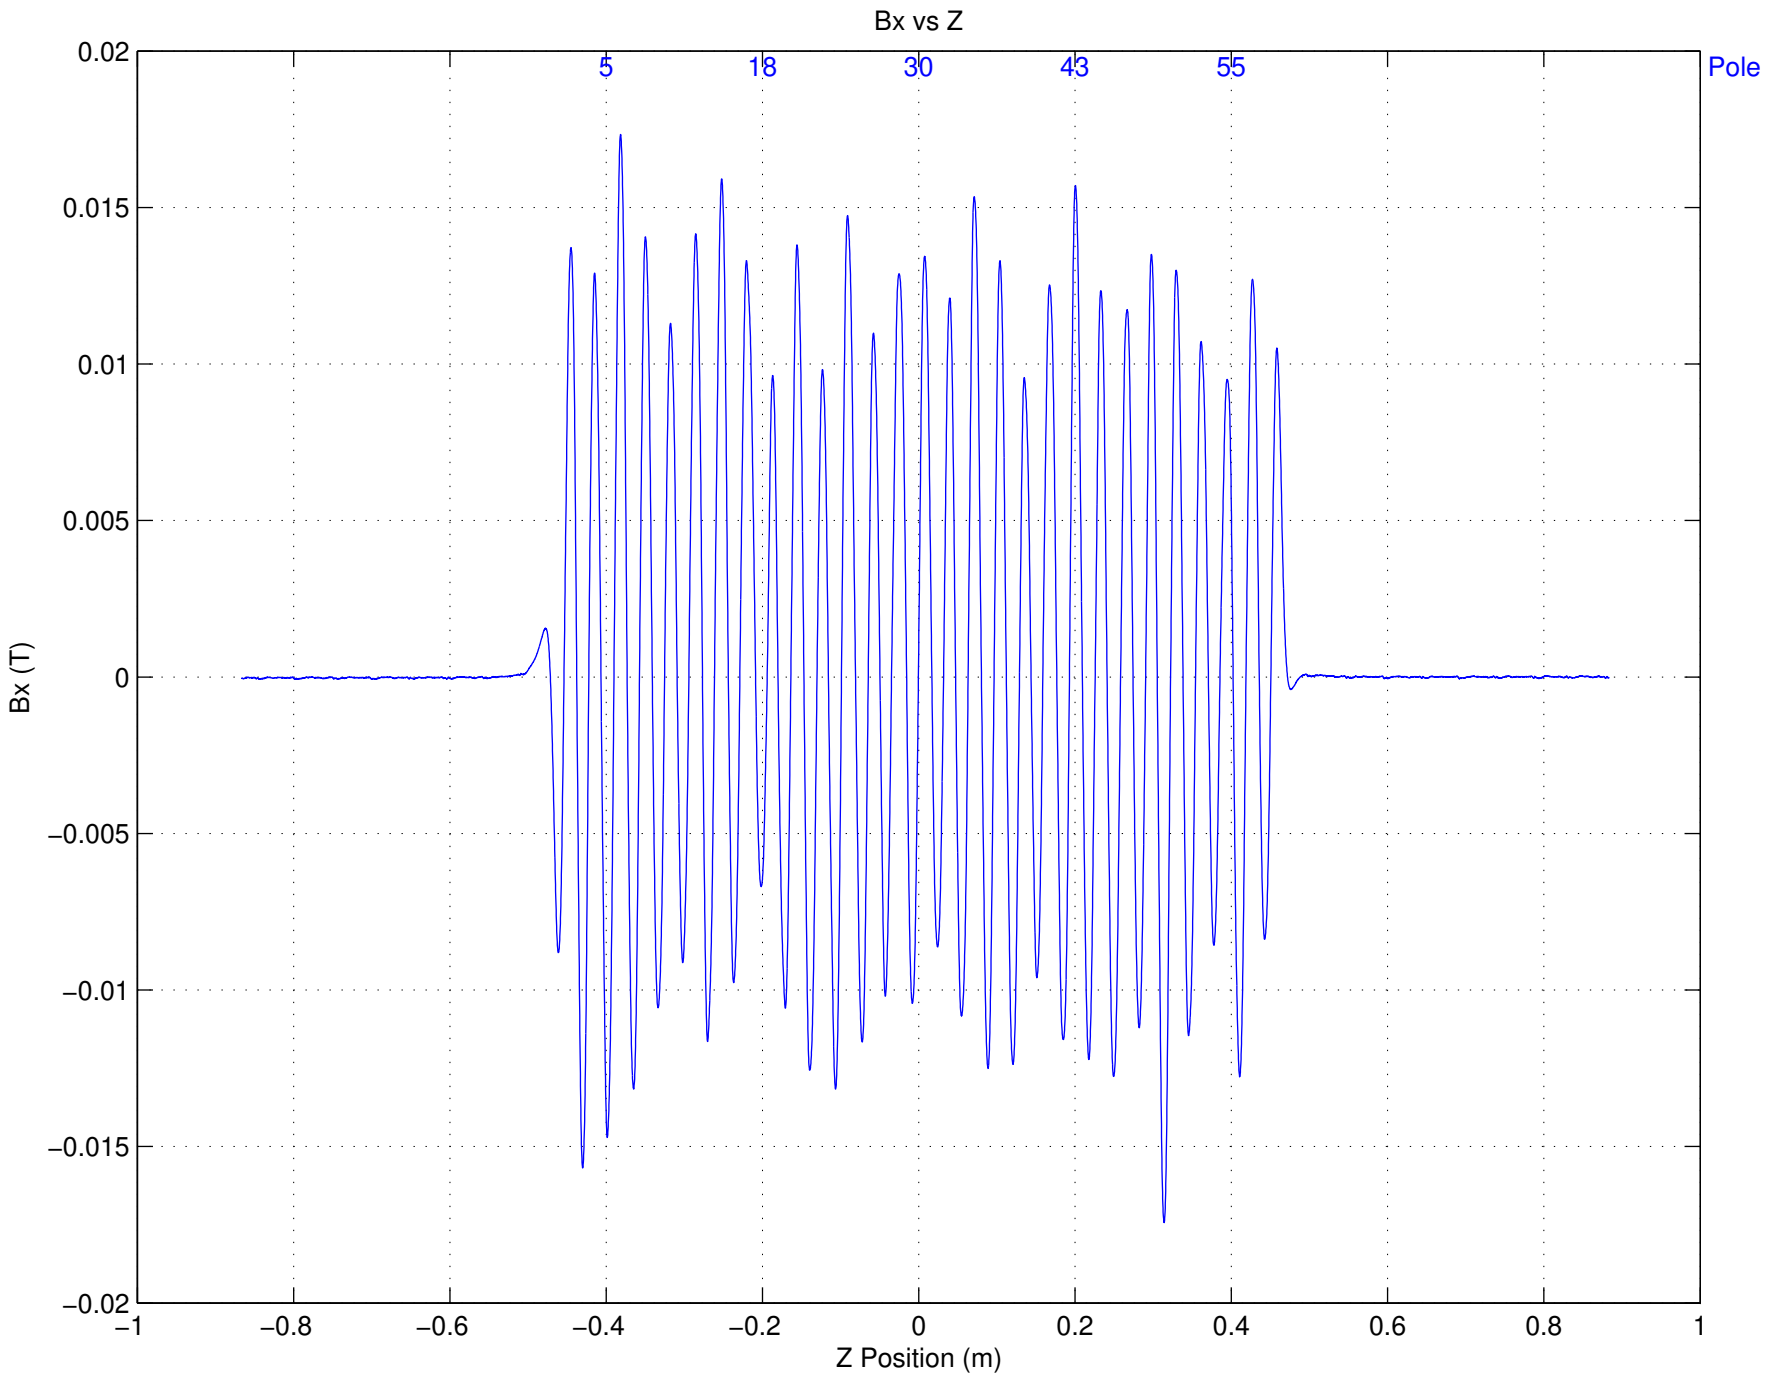
Bx vs Z
5
18
30
43
55
Pole
0.02
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
−0.02
Bx (T)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z Position (m)

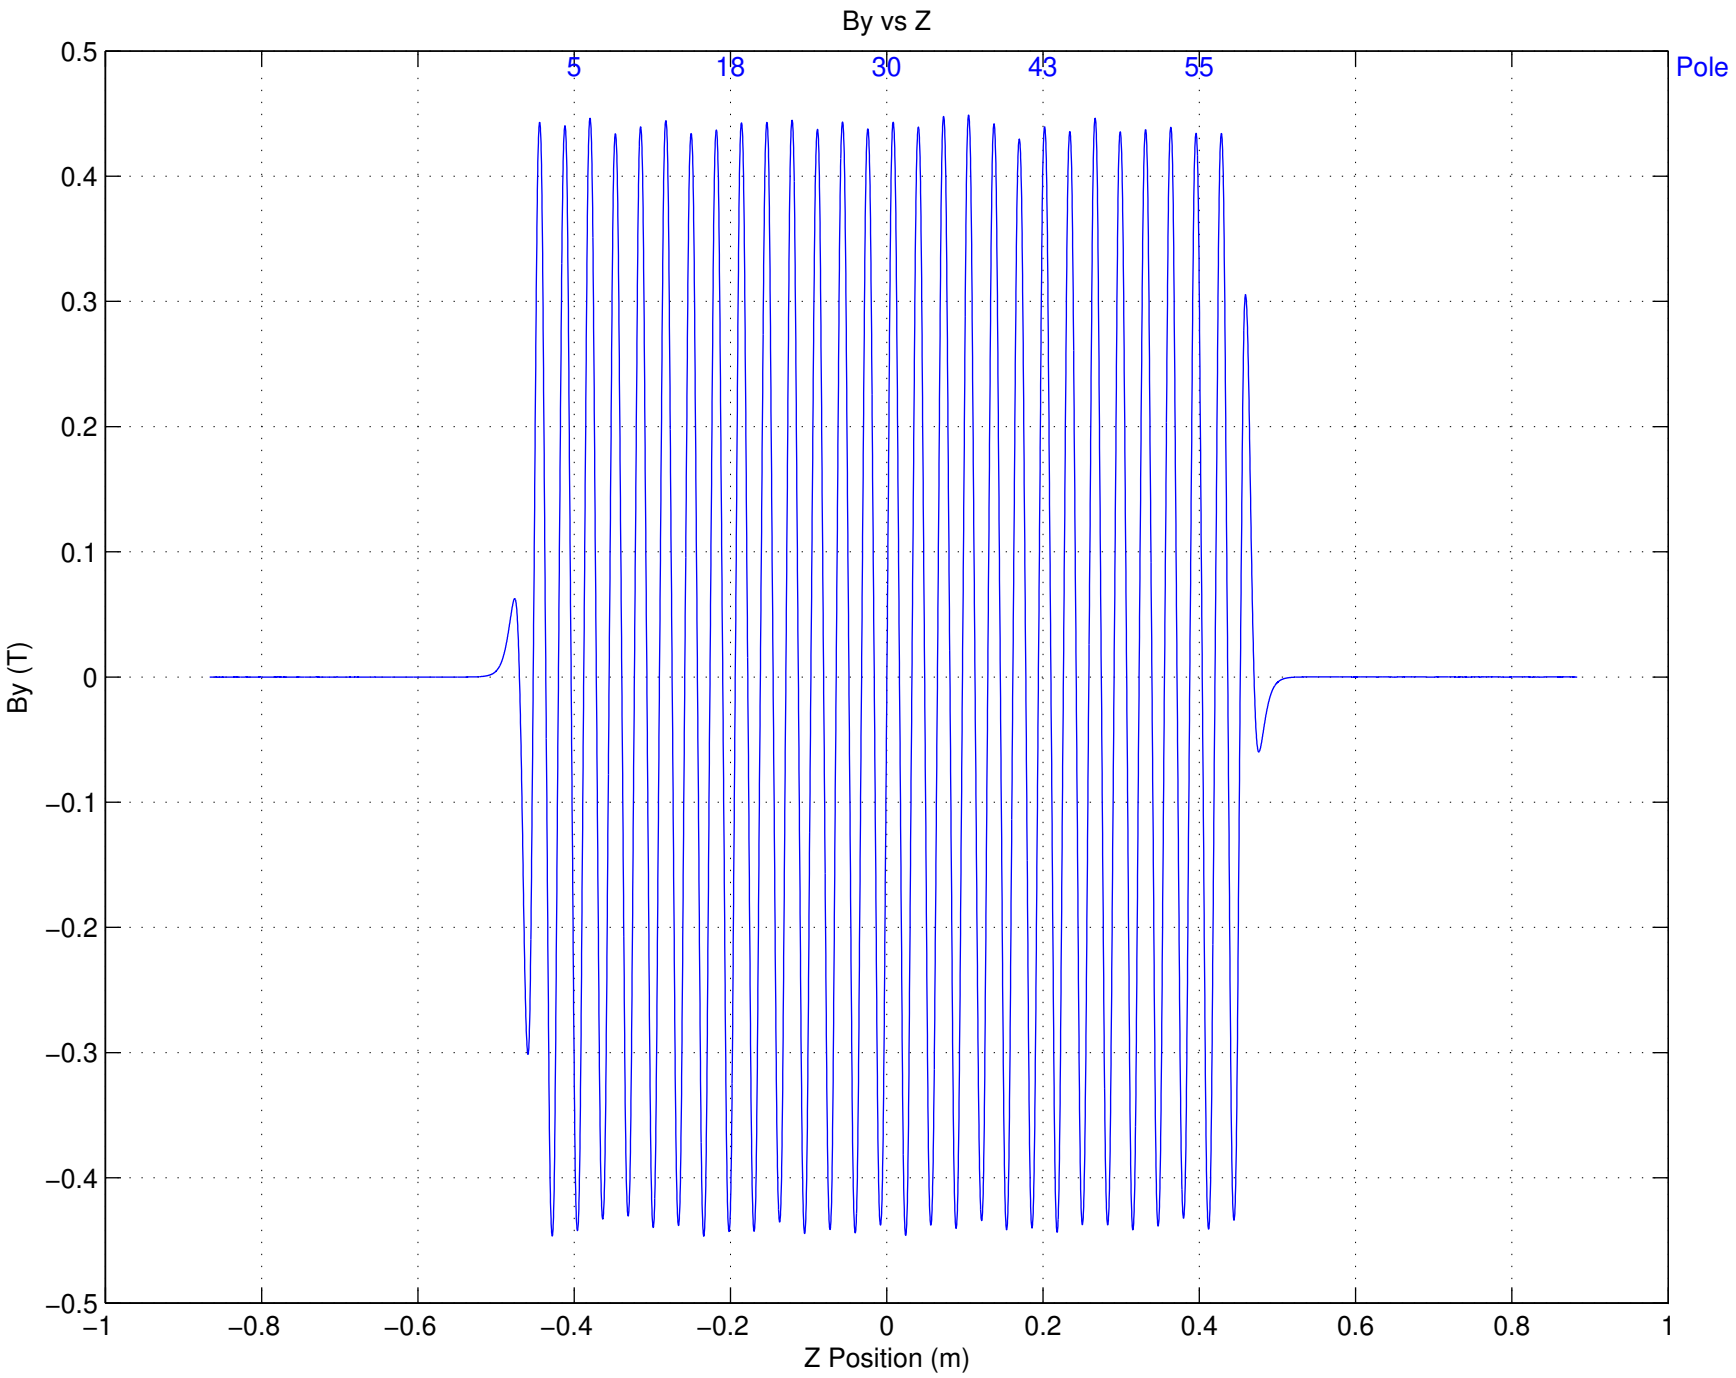
By vs Z
5
18
30
43
55
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z Position (m)

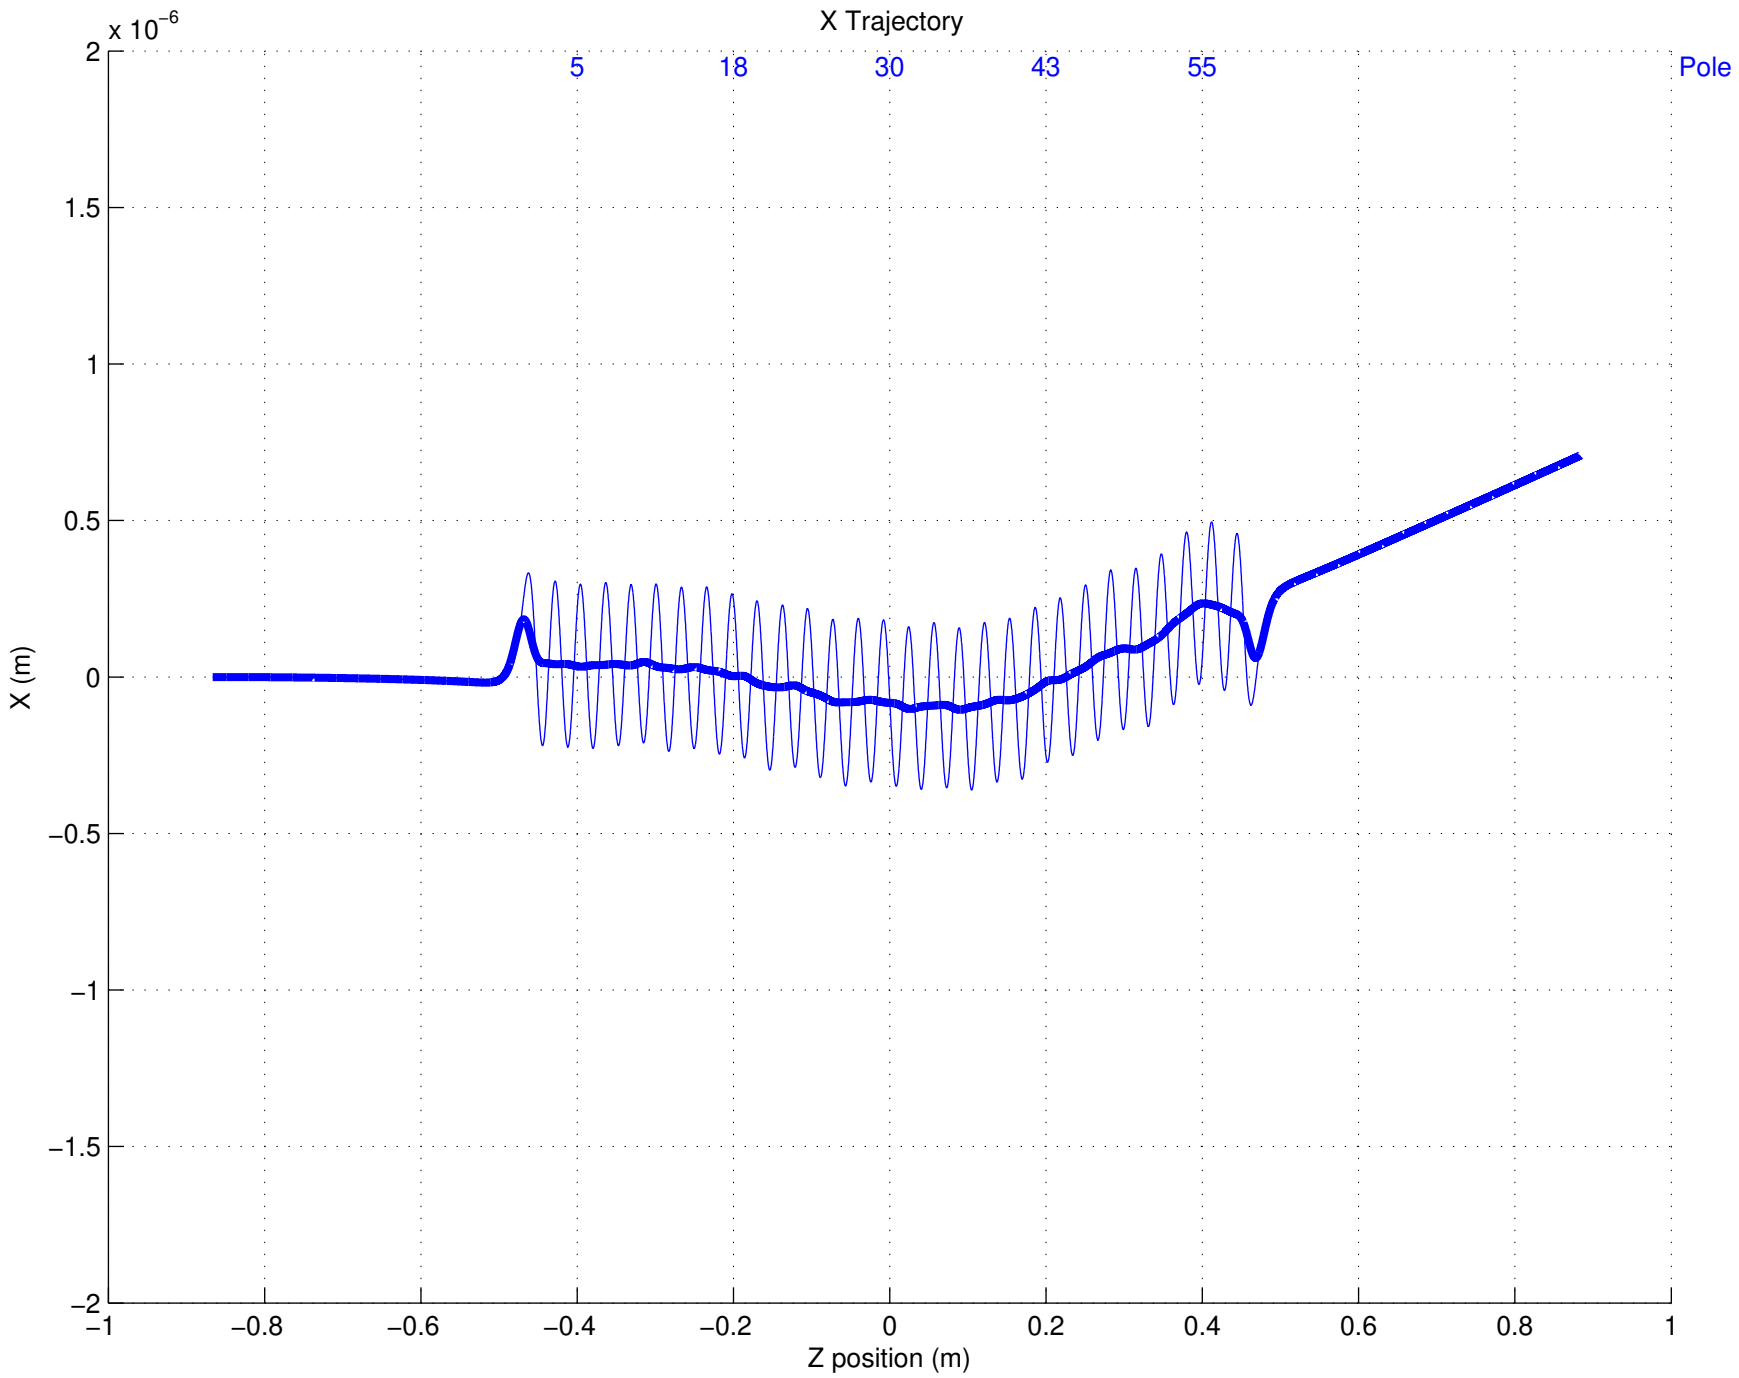
X Trajectory
x 10^-6
5
18
30
43
55
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z position (m)

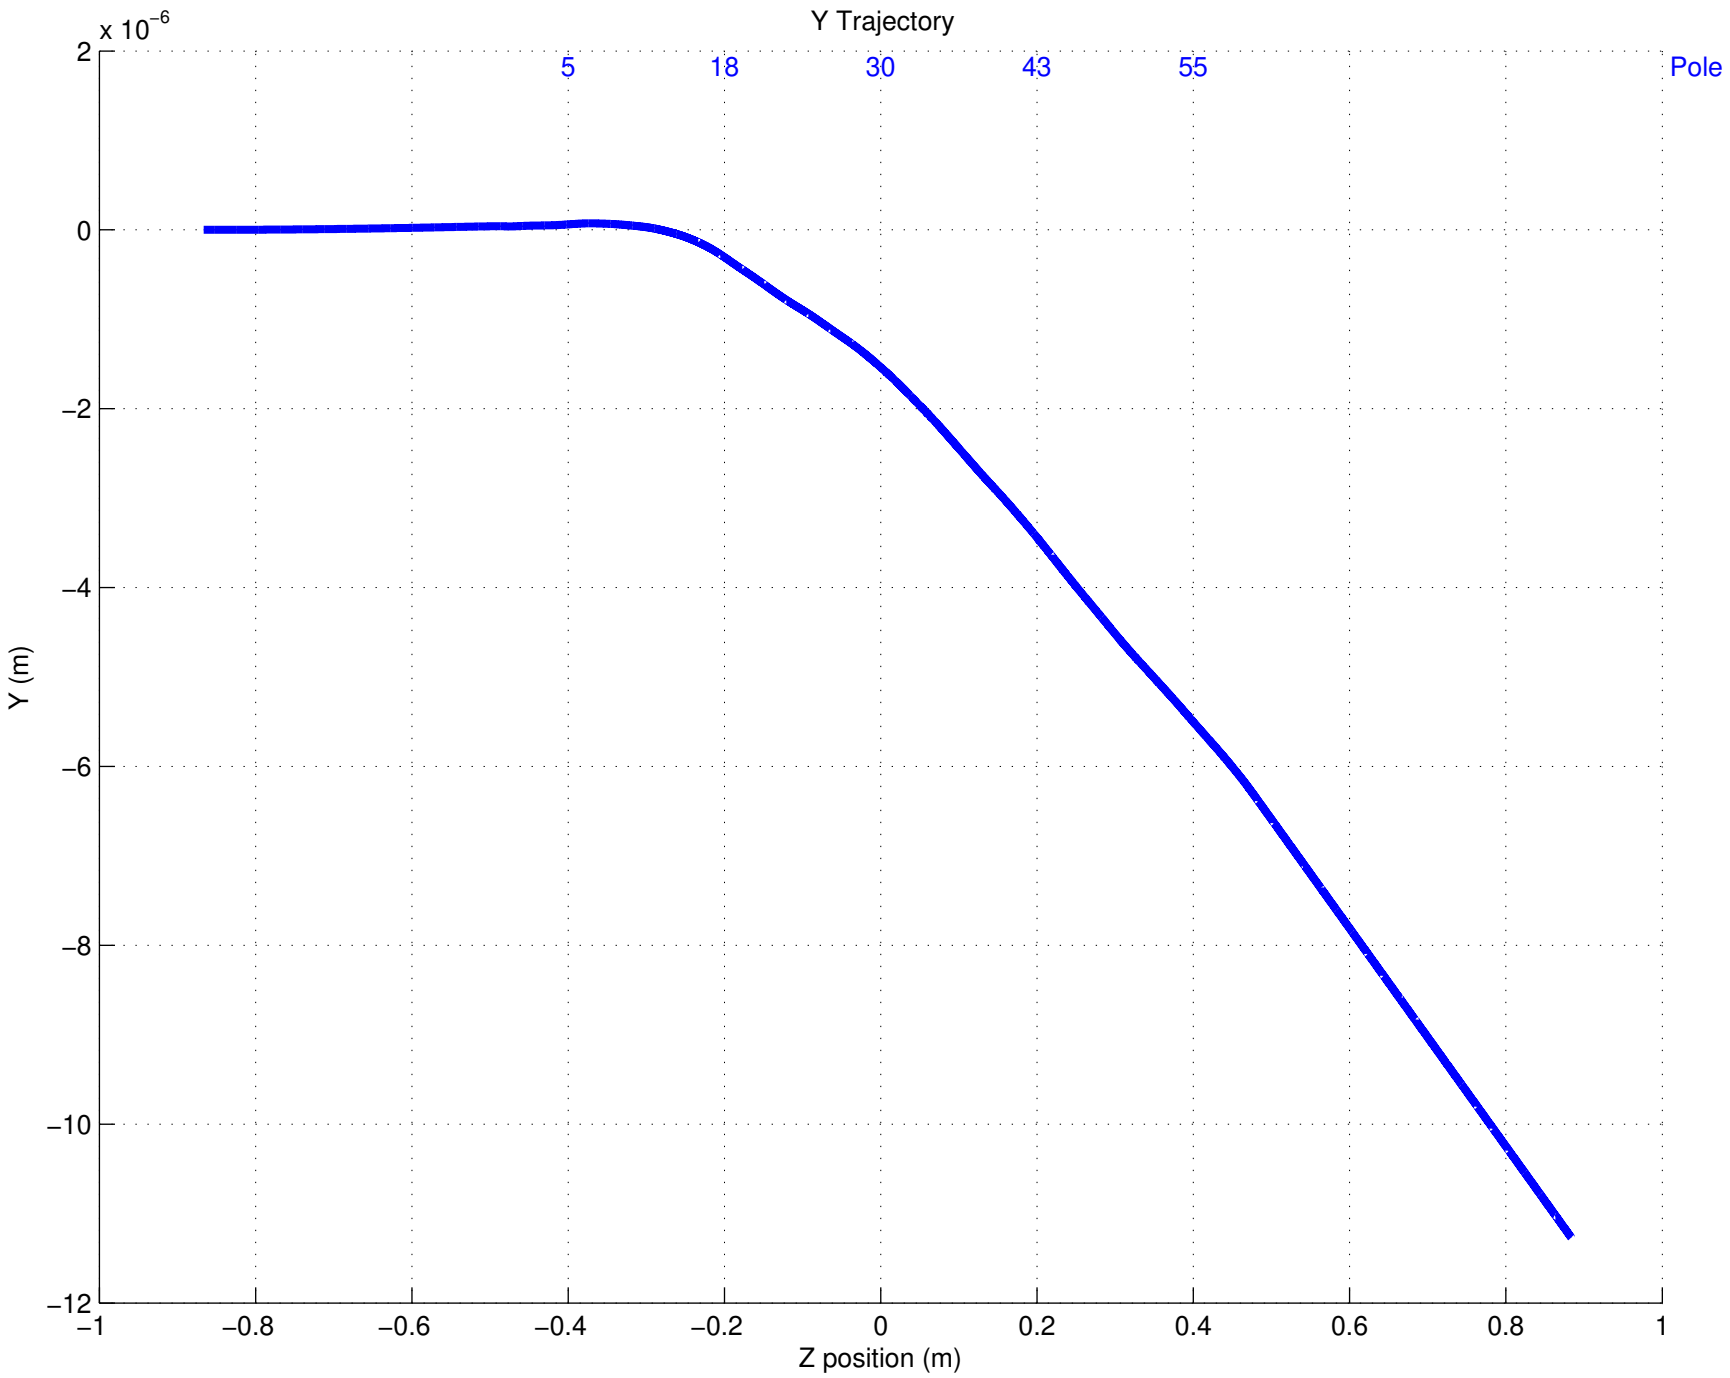
Y Trajectory
x 10^-6
2
0
−2
−4
−6
−8
−10
−12
5
18
30
43
55
Pole
Y (m)
−1
−0.8
−0.6
−0.4
−0.2
0
0.2
0.4
0.6
0.8
1
Z position (m)

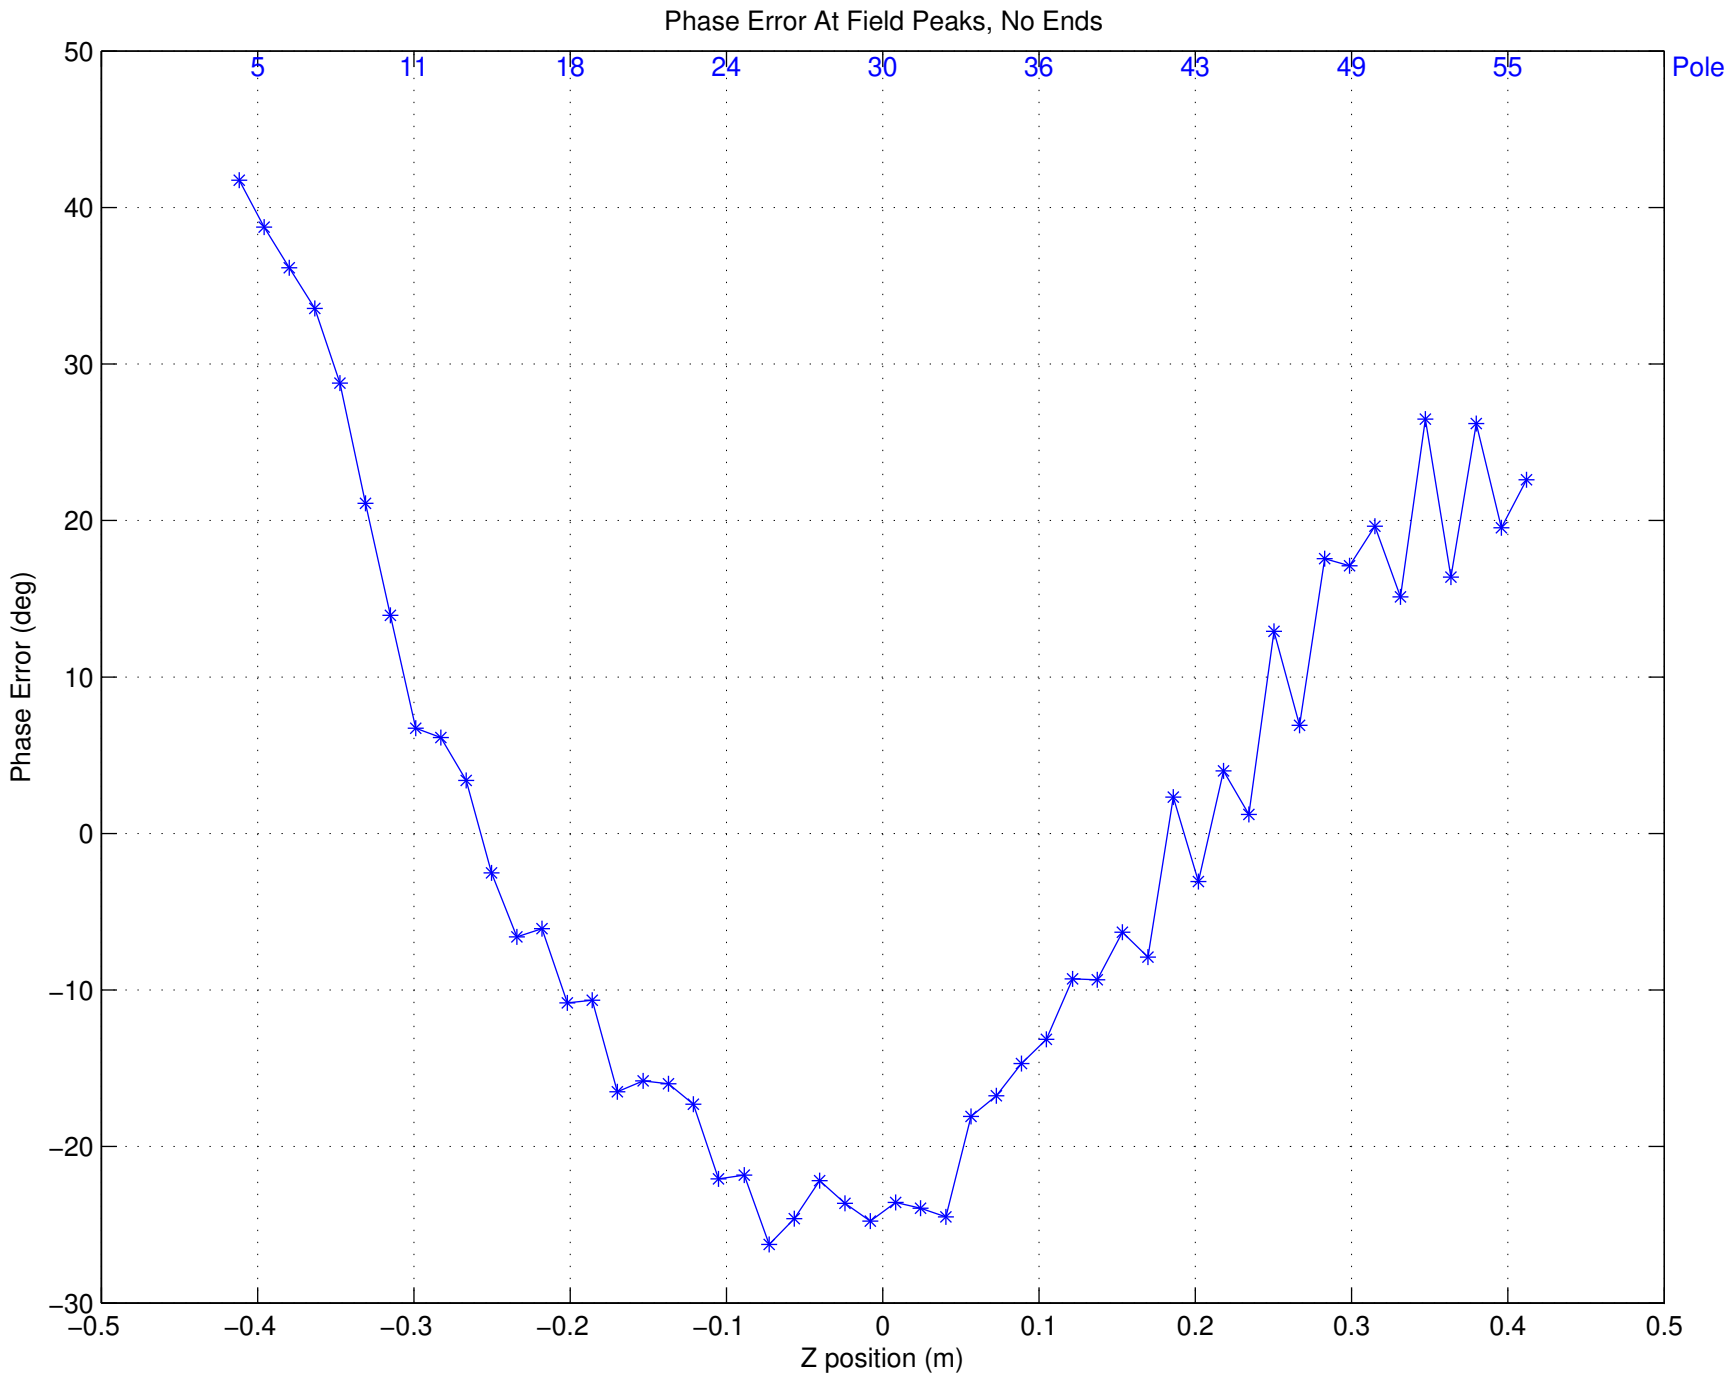

Phase Error: Ave = 0.000000 deg, RMS = 19.587551 deg

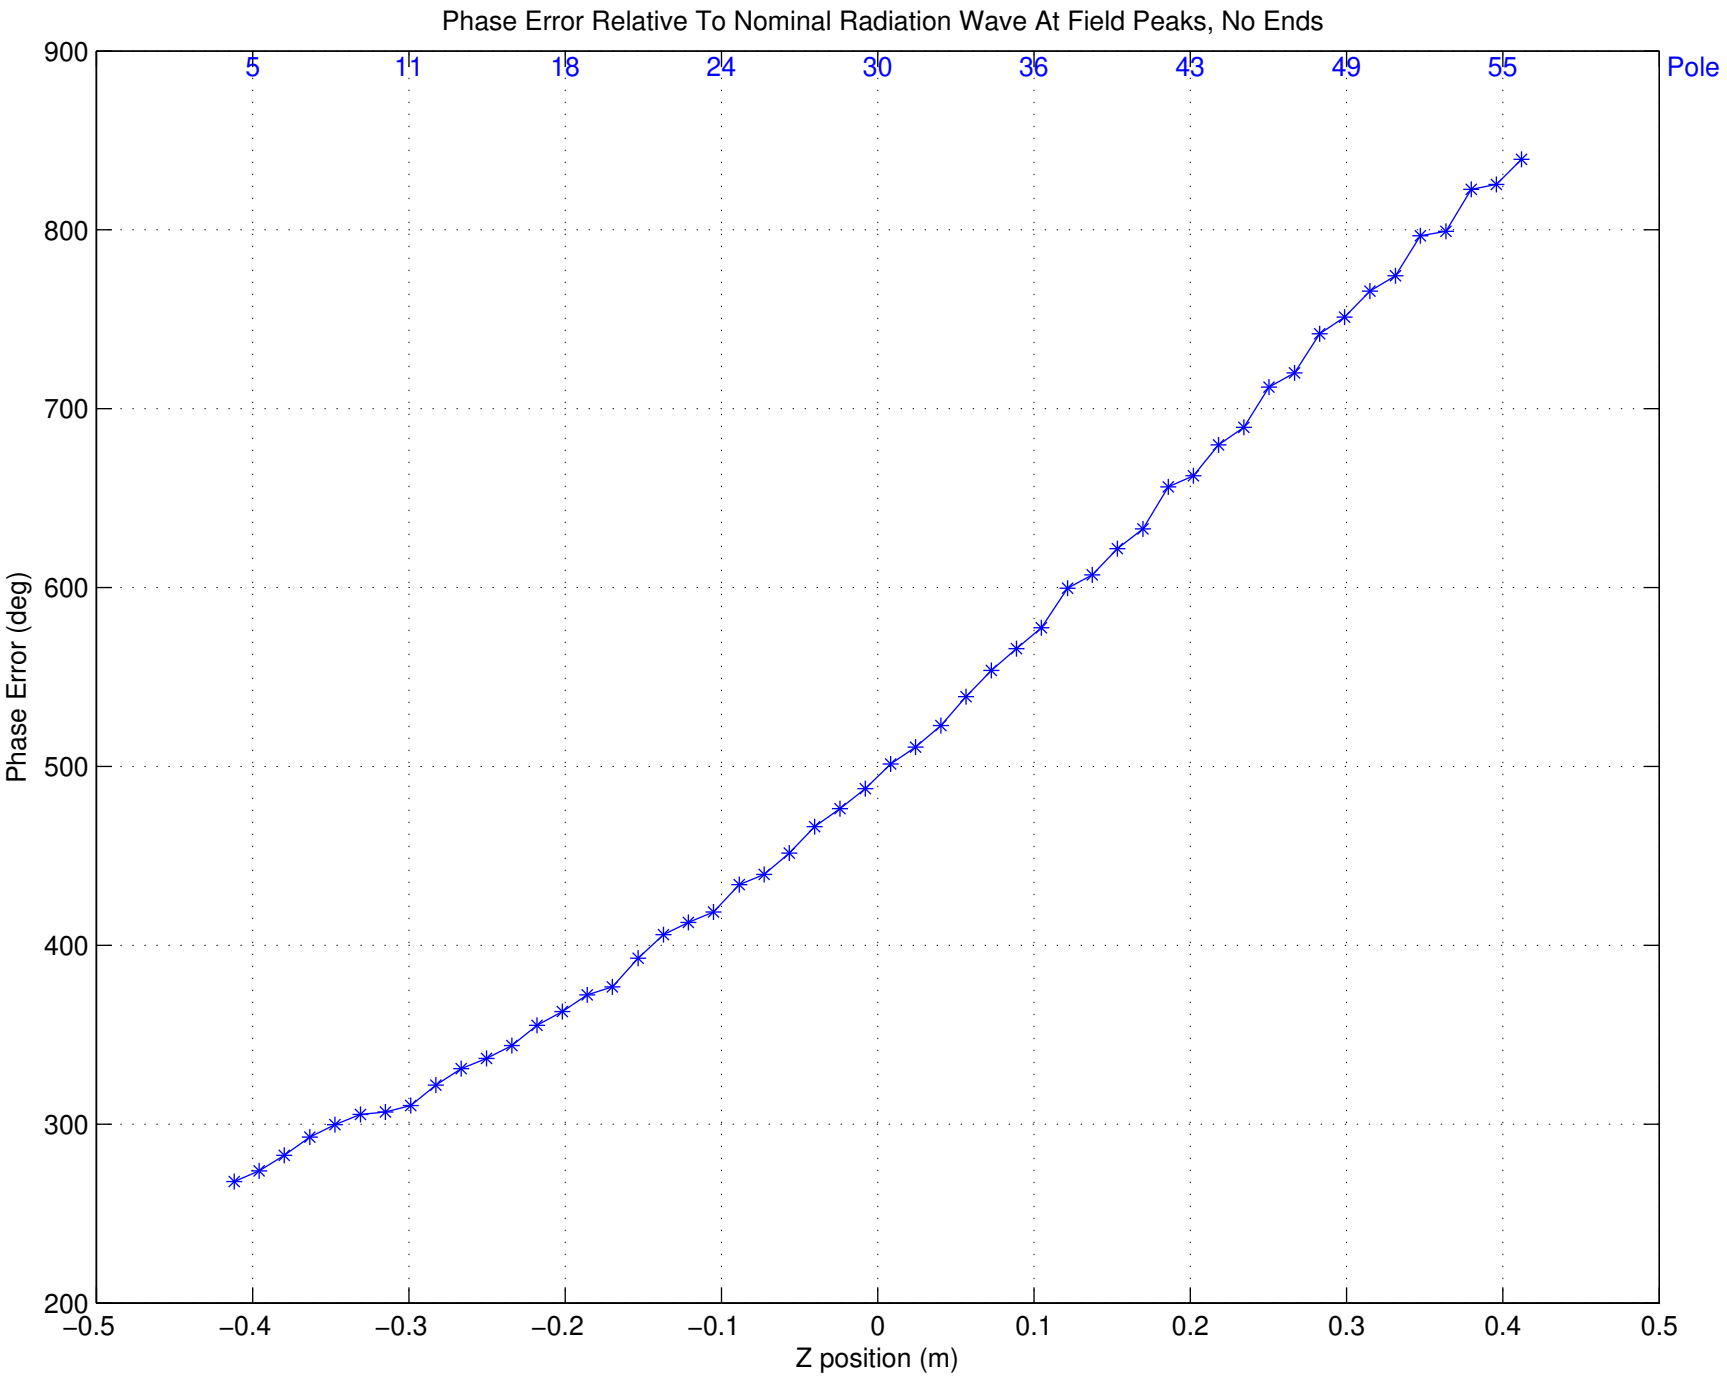
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
Pole
5
11
18
24
30
36
43
49
55
900
800
700
600
500
400
300
200
Phase Error (deg)
−0.5
−0.4
−0.3
−0.2
−0.1
0
0.1
0.2
0.3
0.4
0.5
Z position (m)