SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 08–25–2014
Time: 17:14:14

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 4
Tuning Stage: Fine Tuning
Run Number: 32
Measurement Type: Z Scans
Operator: YL
Comment: block #332 moved in +x , #334 –x
Session first run: 20
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0004\Fine Tuning\Z Scans\Run 032\bscanz.dat

Temperature (C)
DELTA:––> T1 20.19 ––> T2 20.15 ––> T5 20.05 ––> T3 20.16 ––> Air 20.09 ––> T4 20.13

Axes position (m) X:0.021643 Y:0.000194
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001122 V
Vy_0i = –0.002827 V

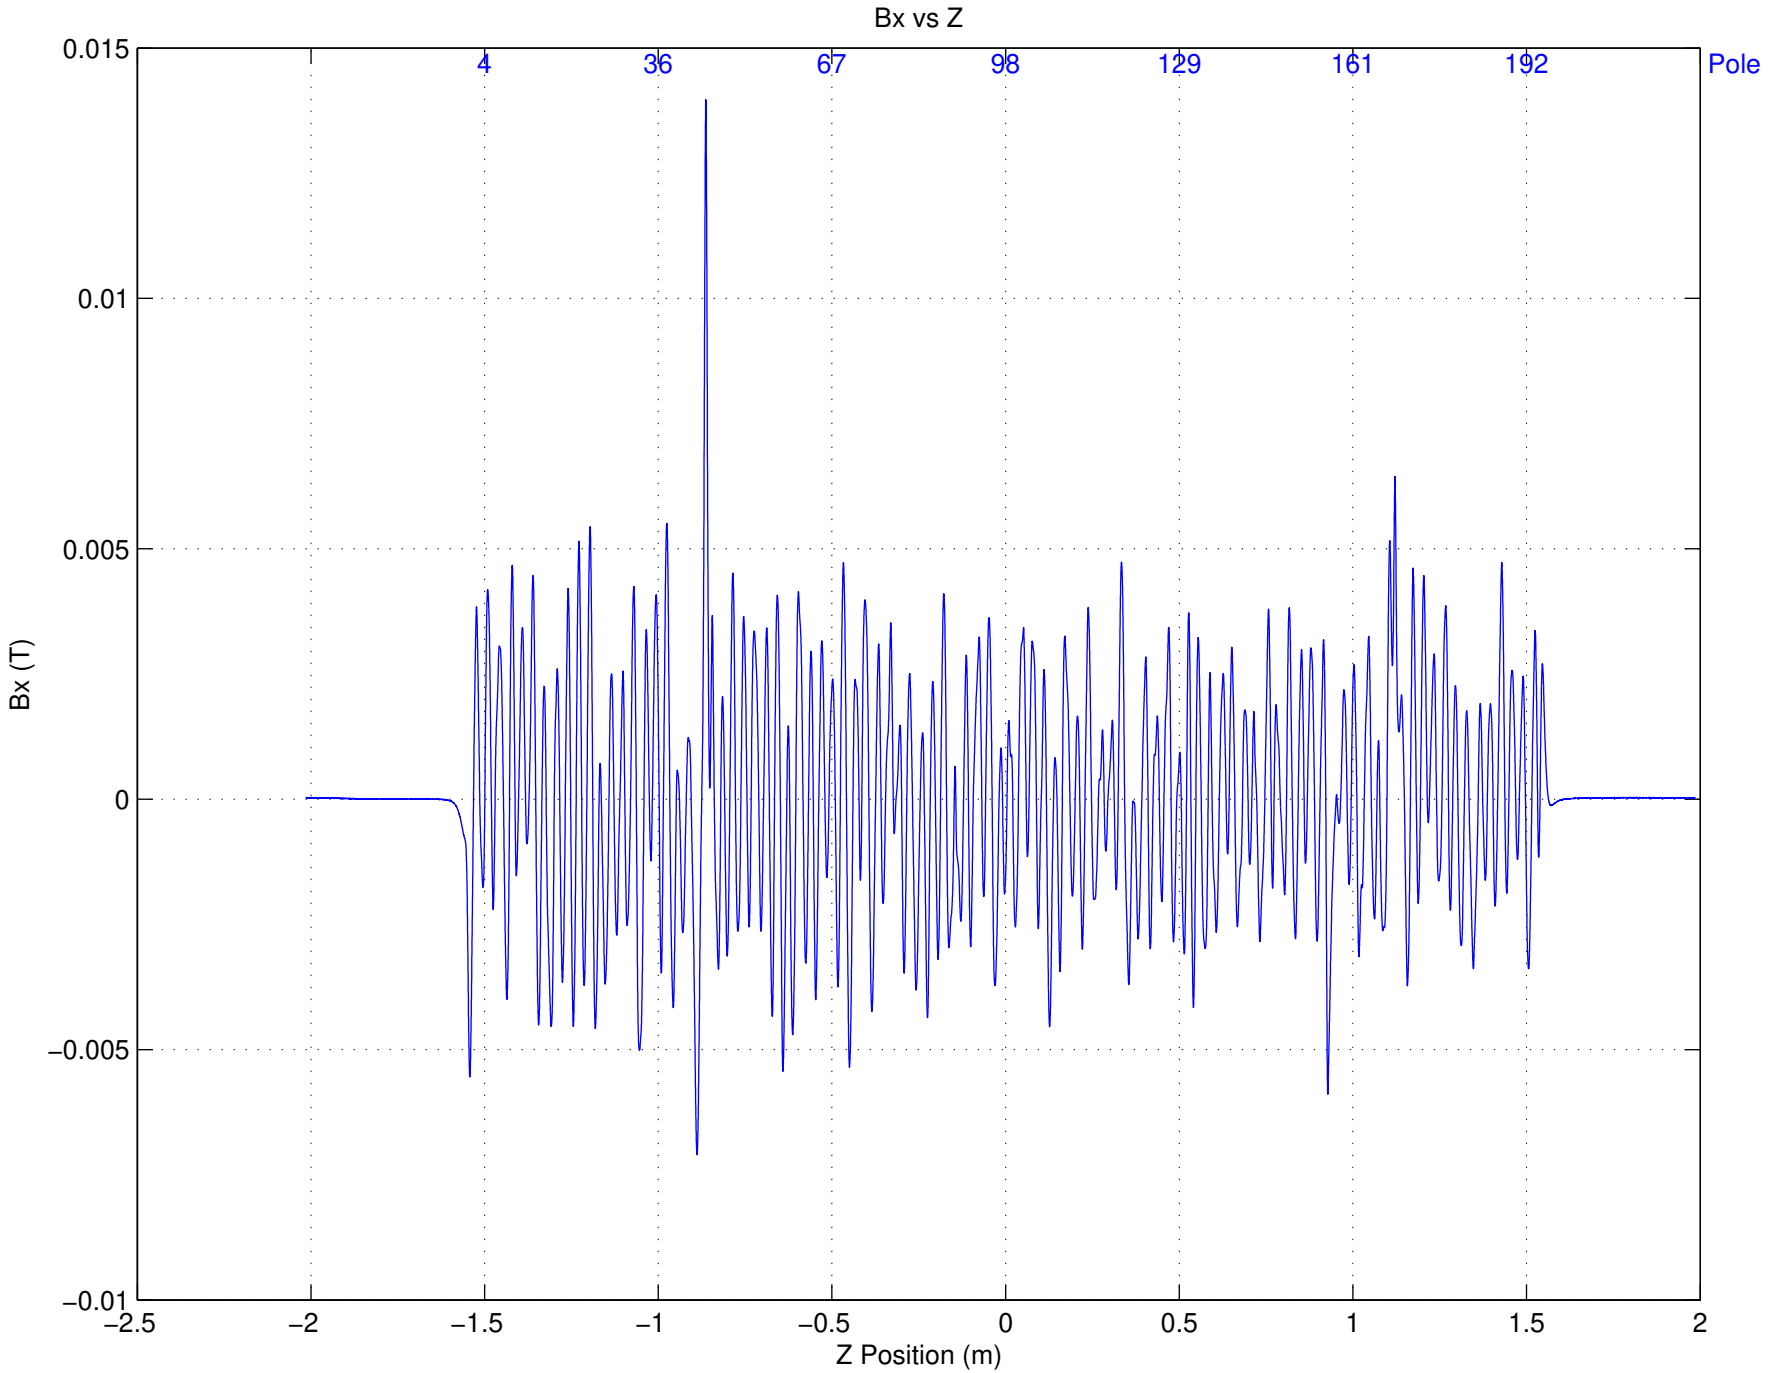
Bx vs Z
0.015
0.01
0.005
0
−0.005
−0.01
Bx (T)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

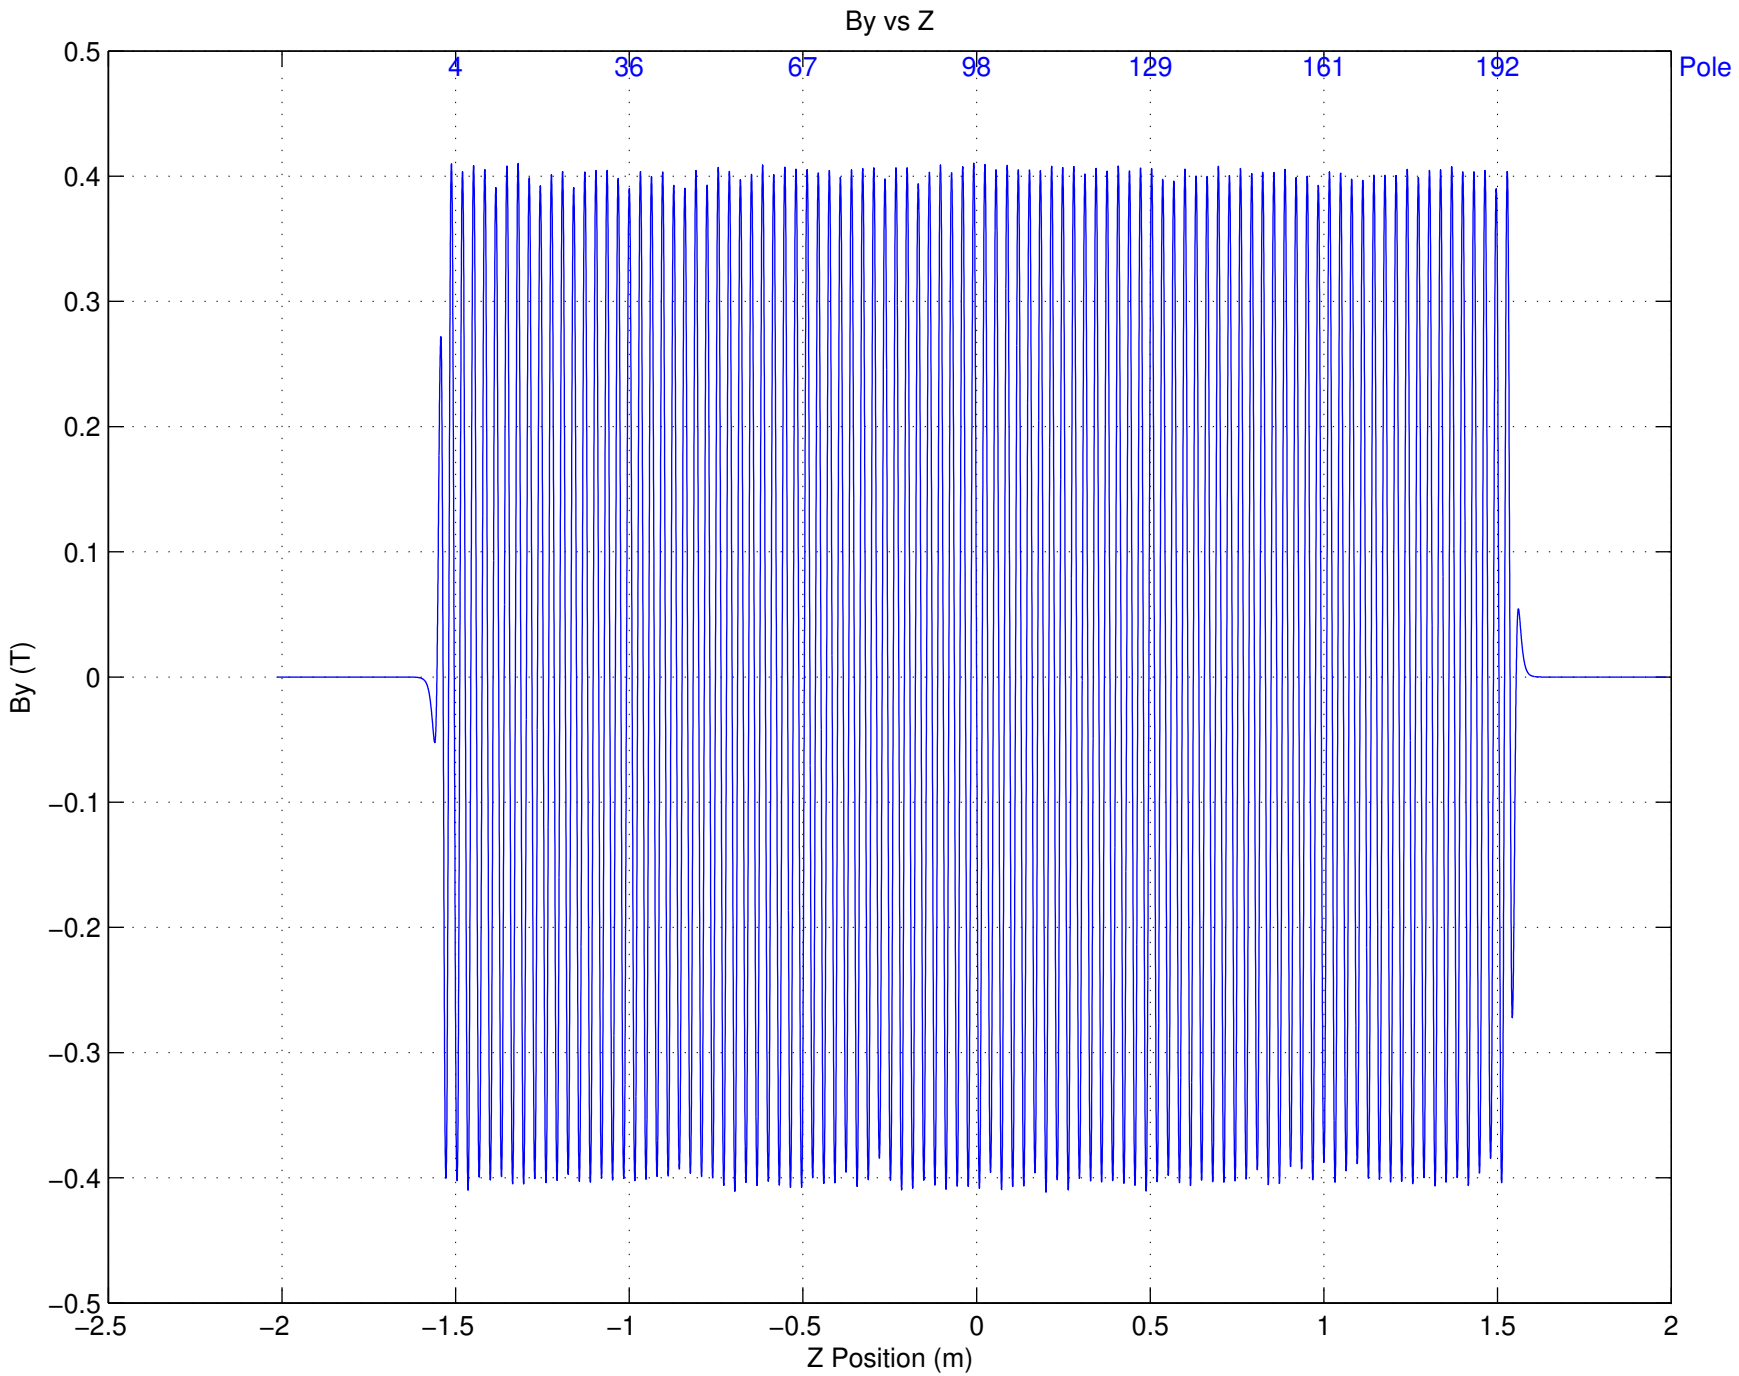
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

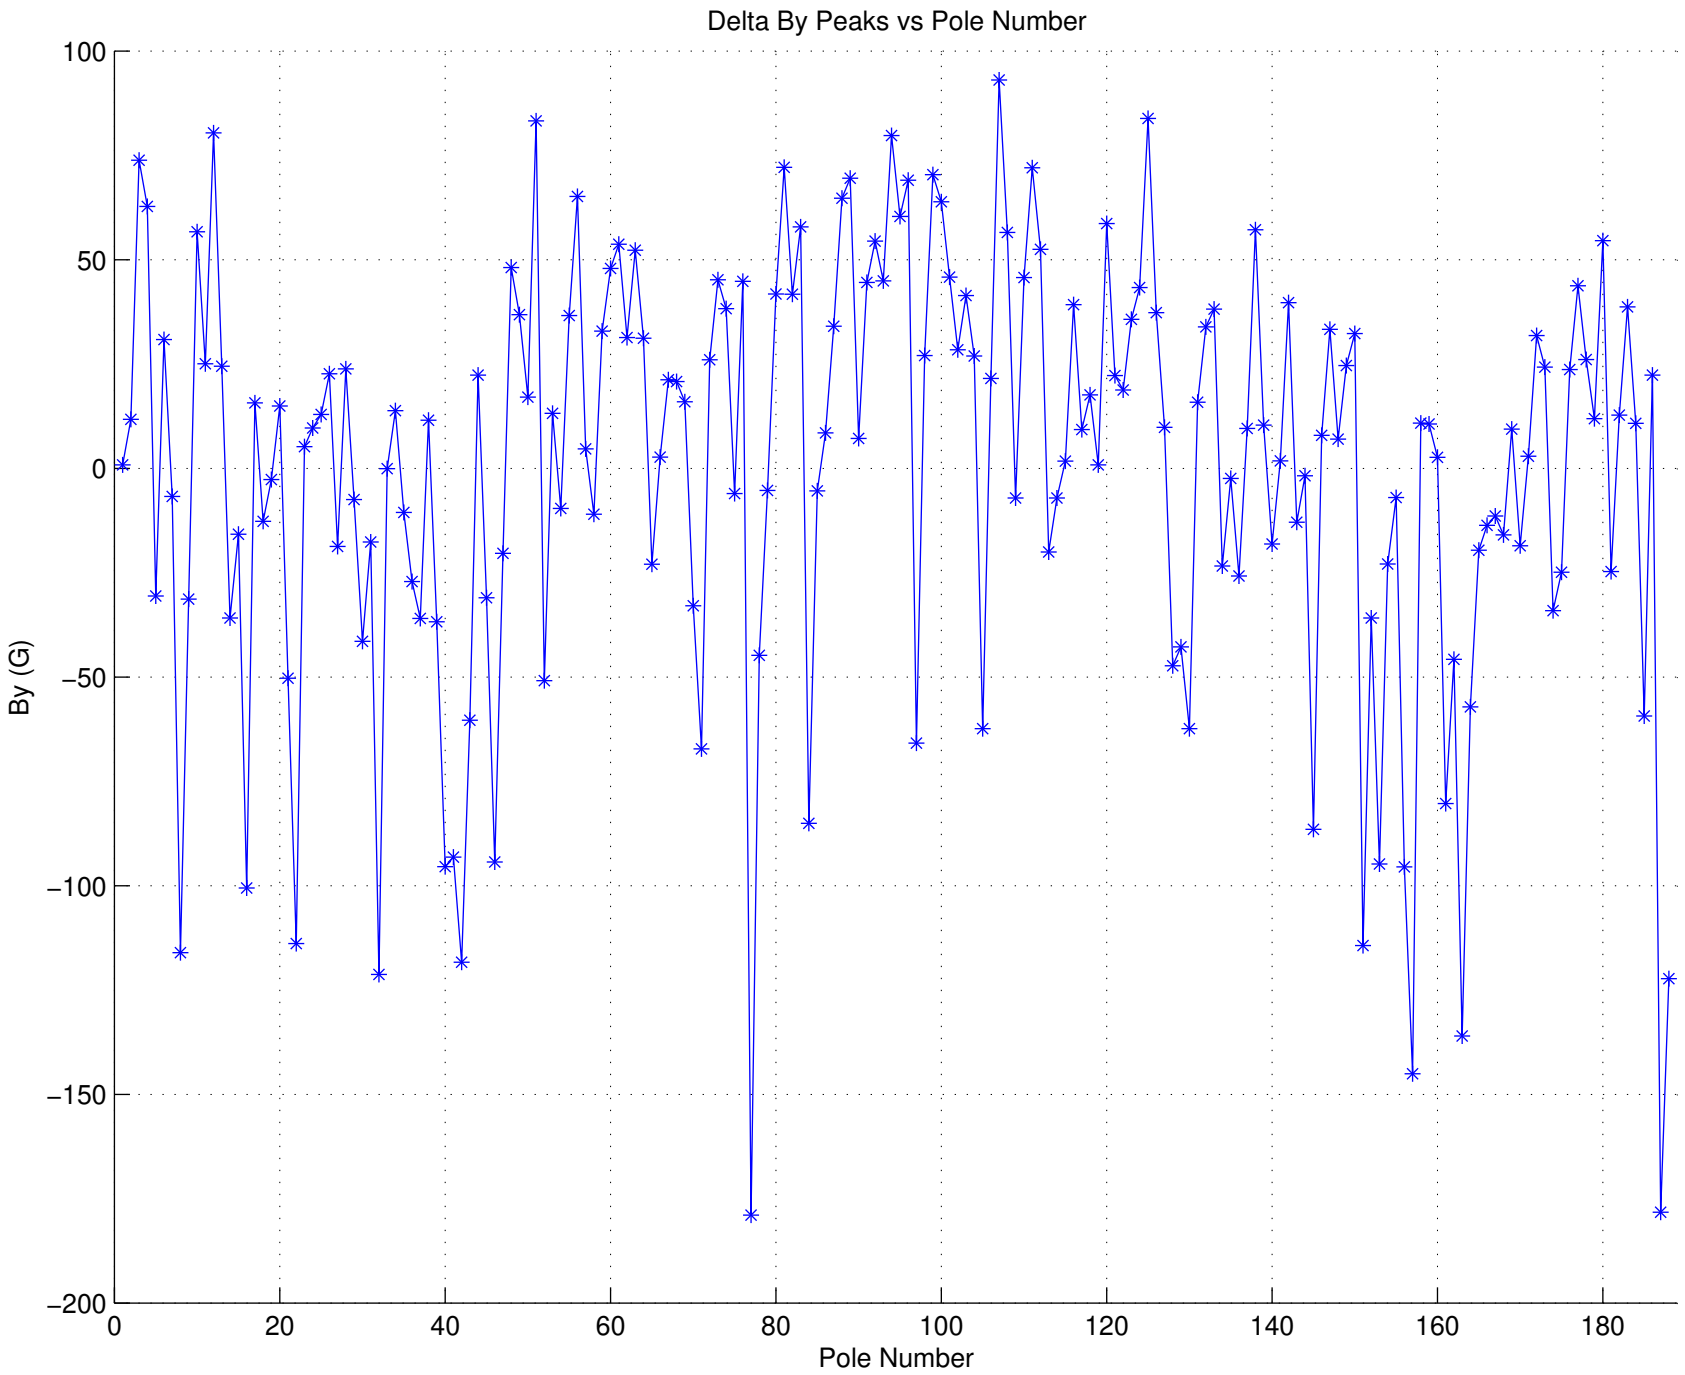
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
50
0
−50
−100
−150
−200
0
20
40
60
80
100
120
140
160
180

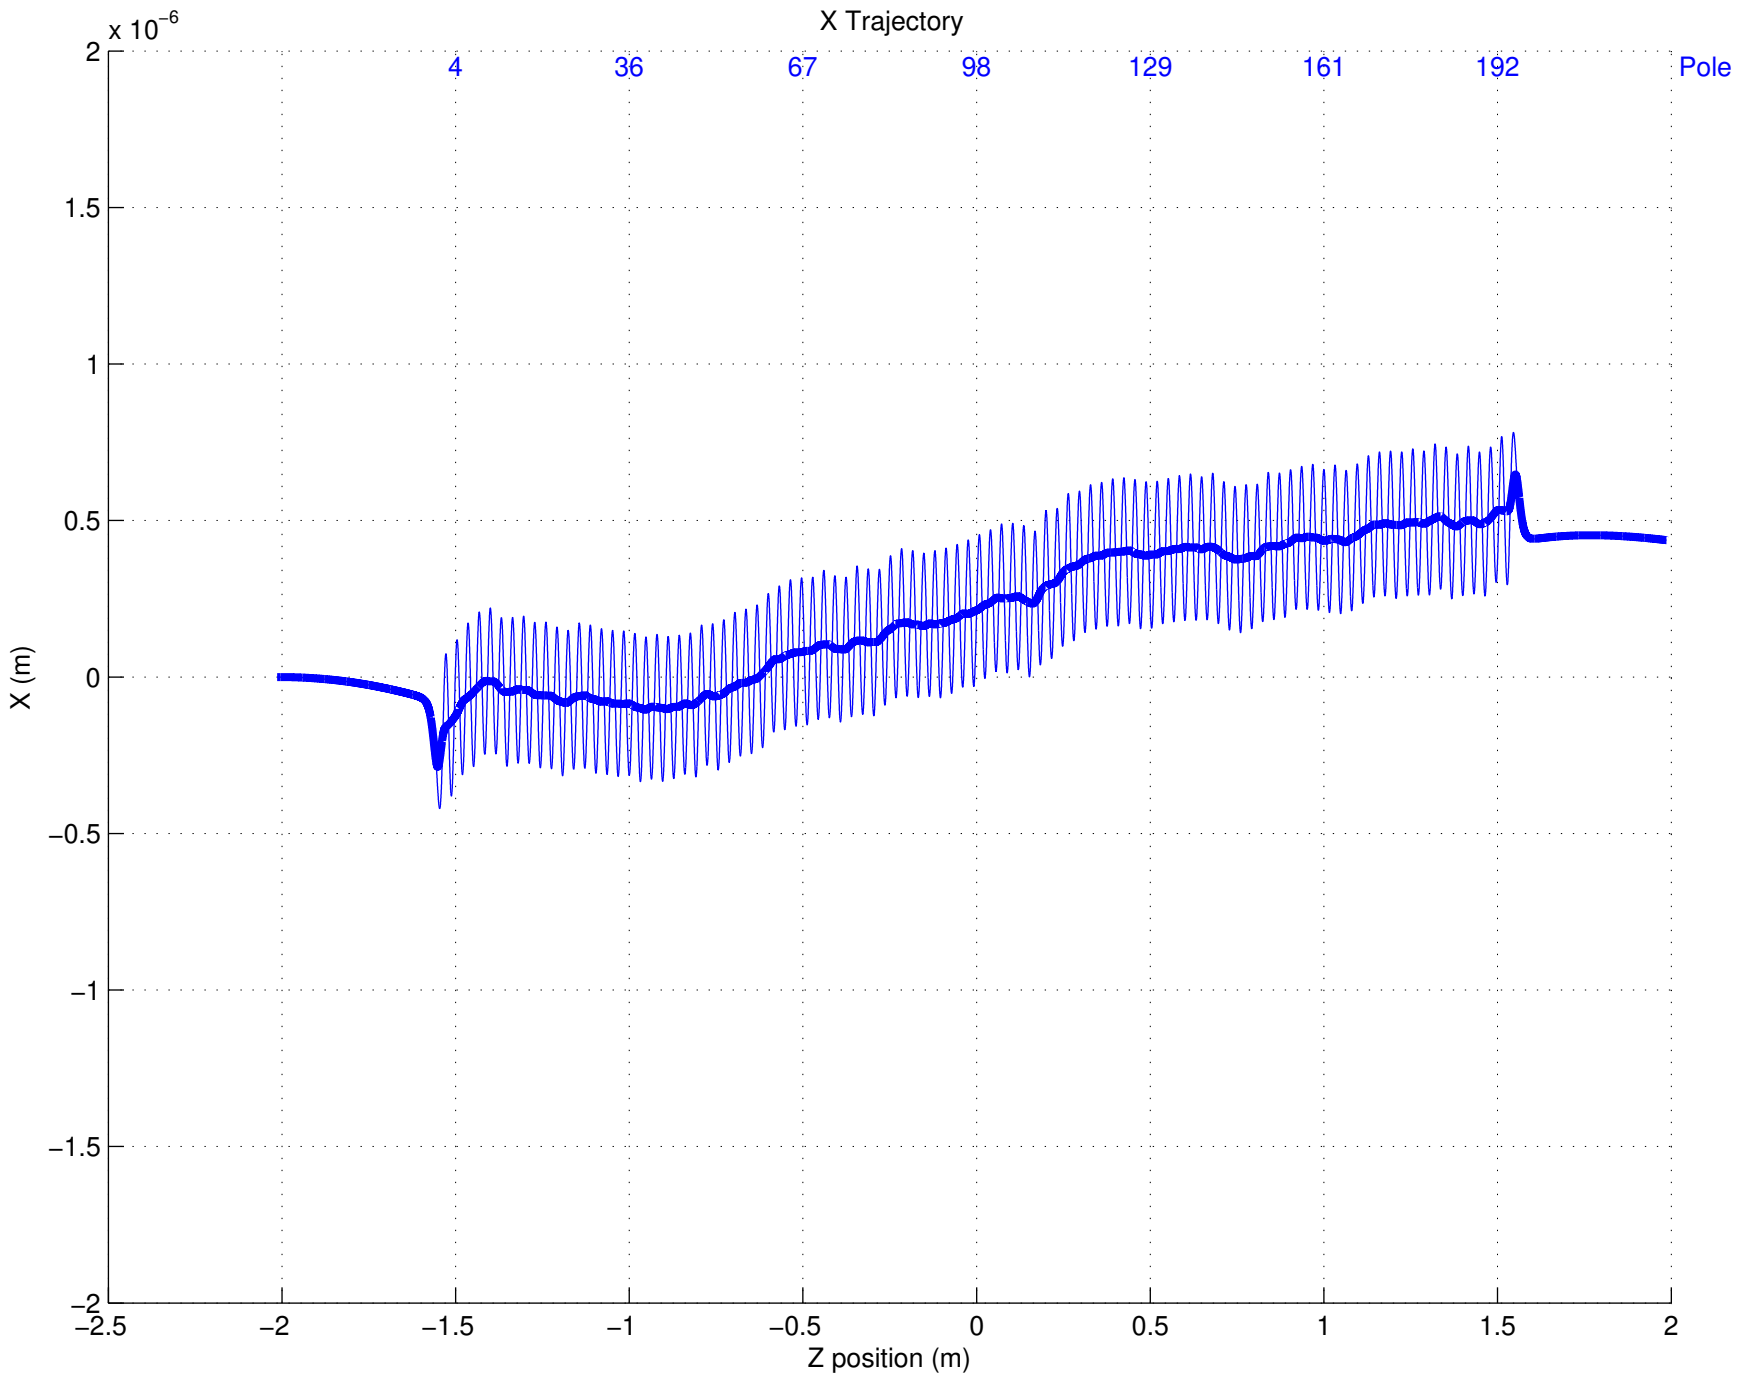
X Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

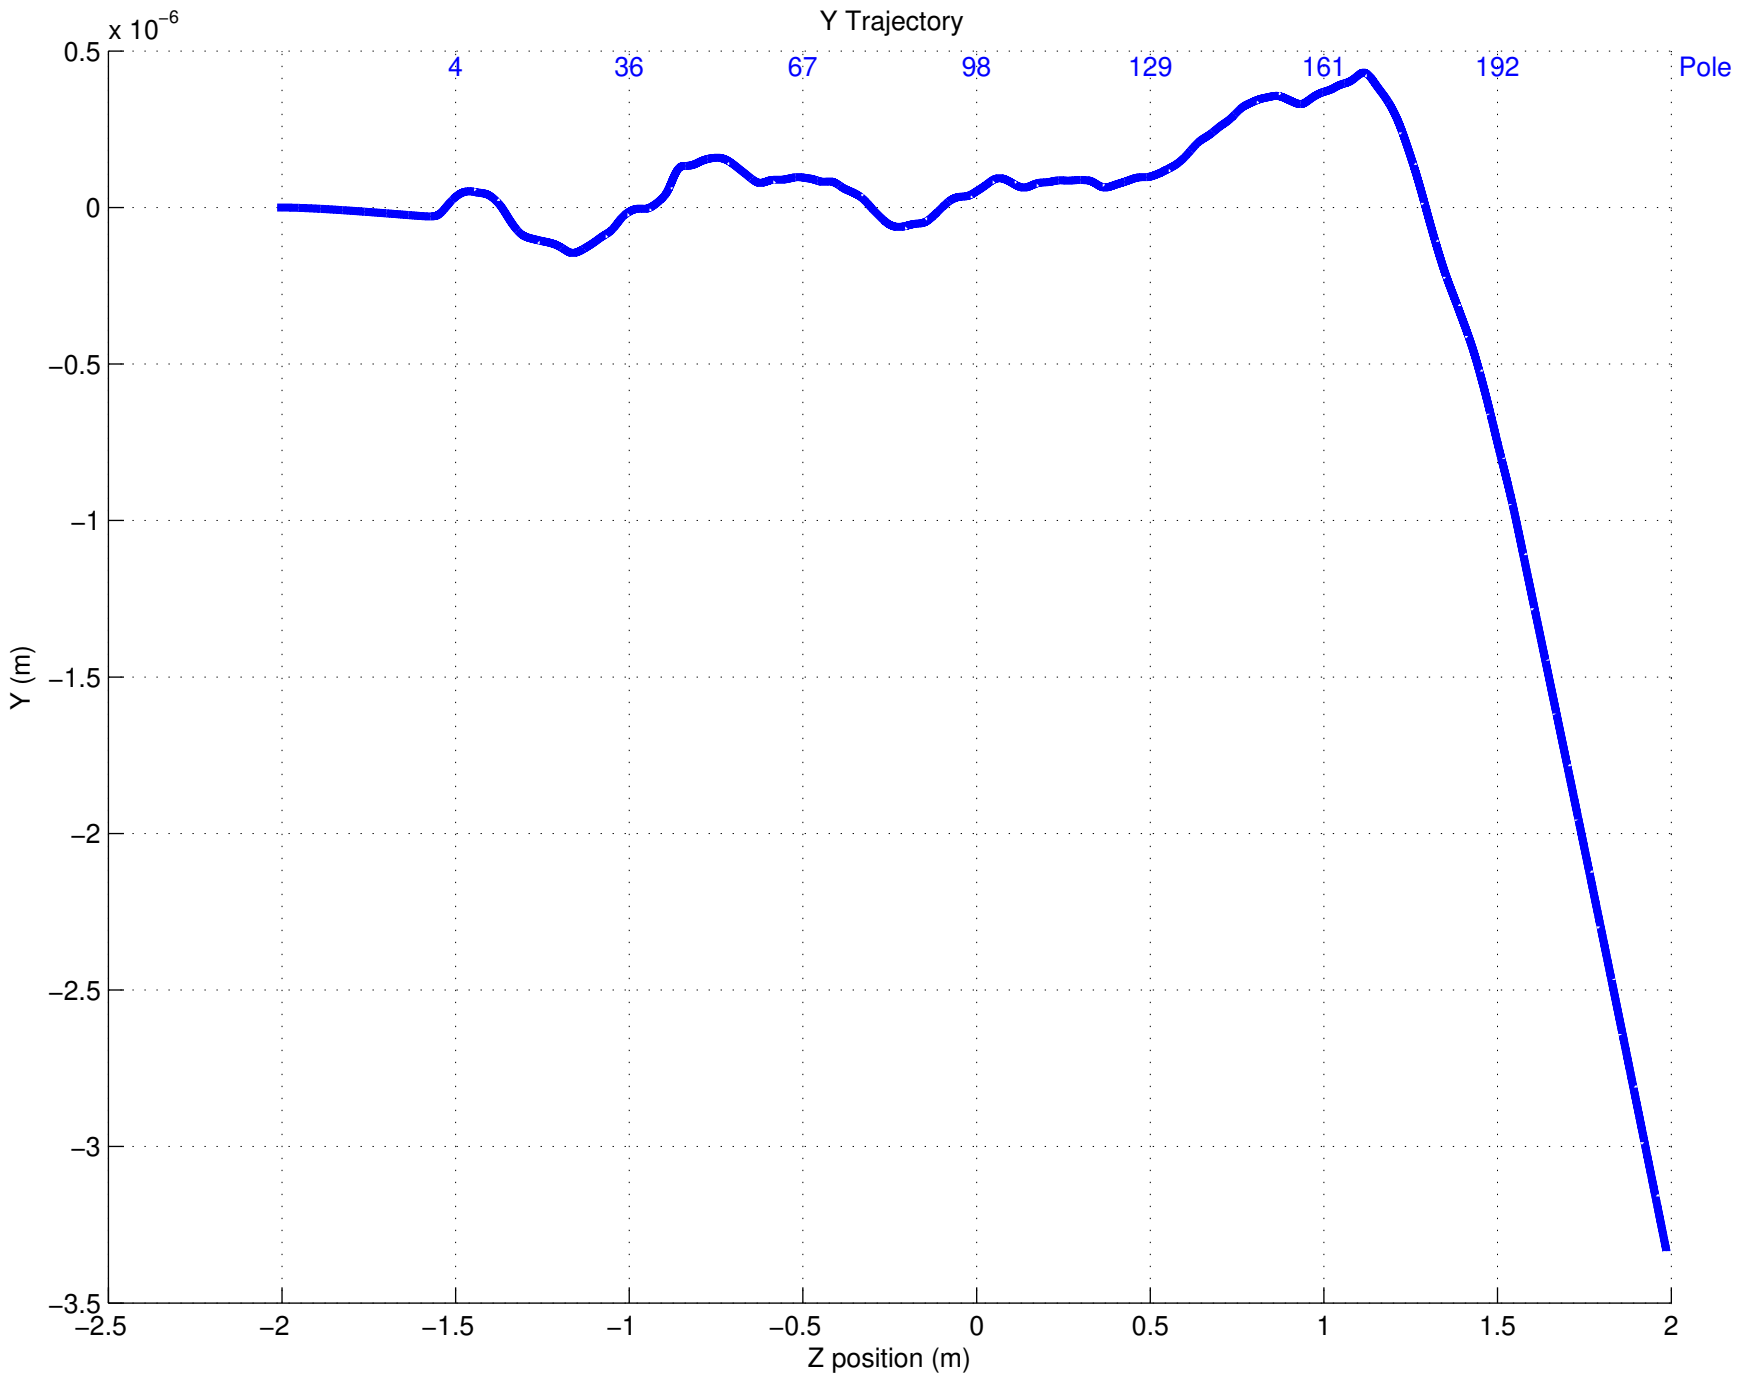
Y Trajectory
x 10^-6
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−3.5
Y (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

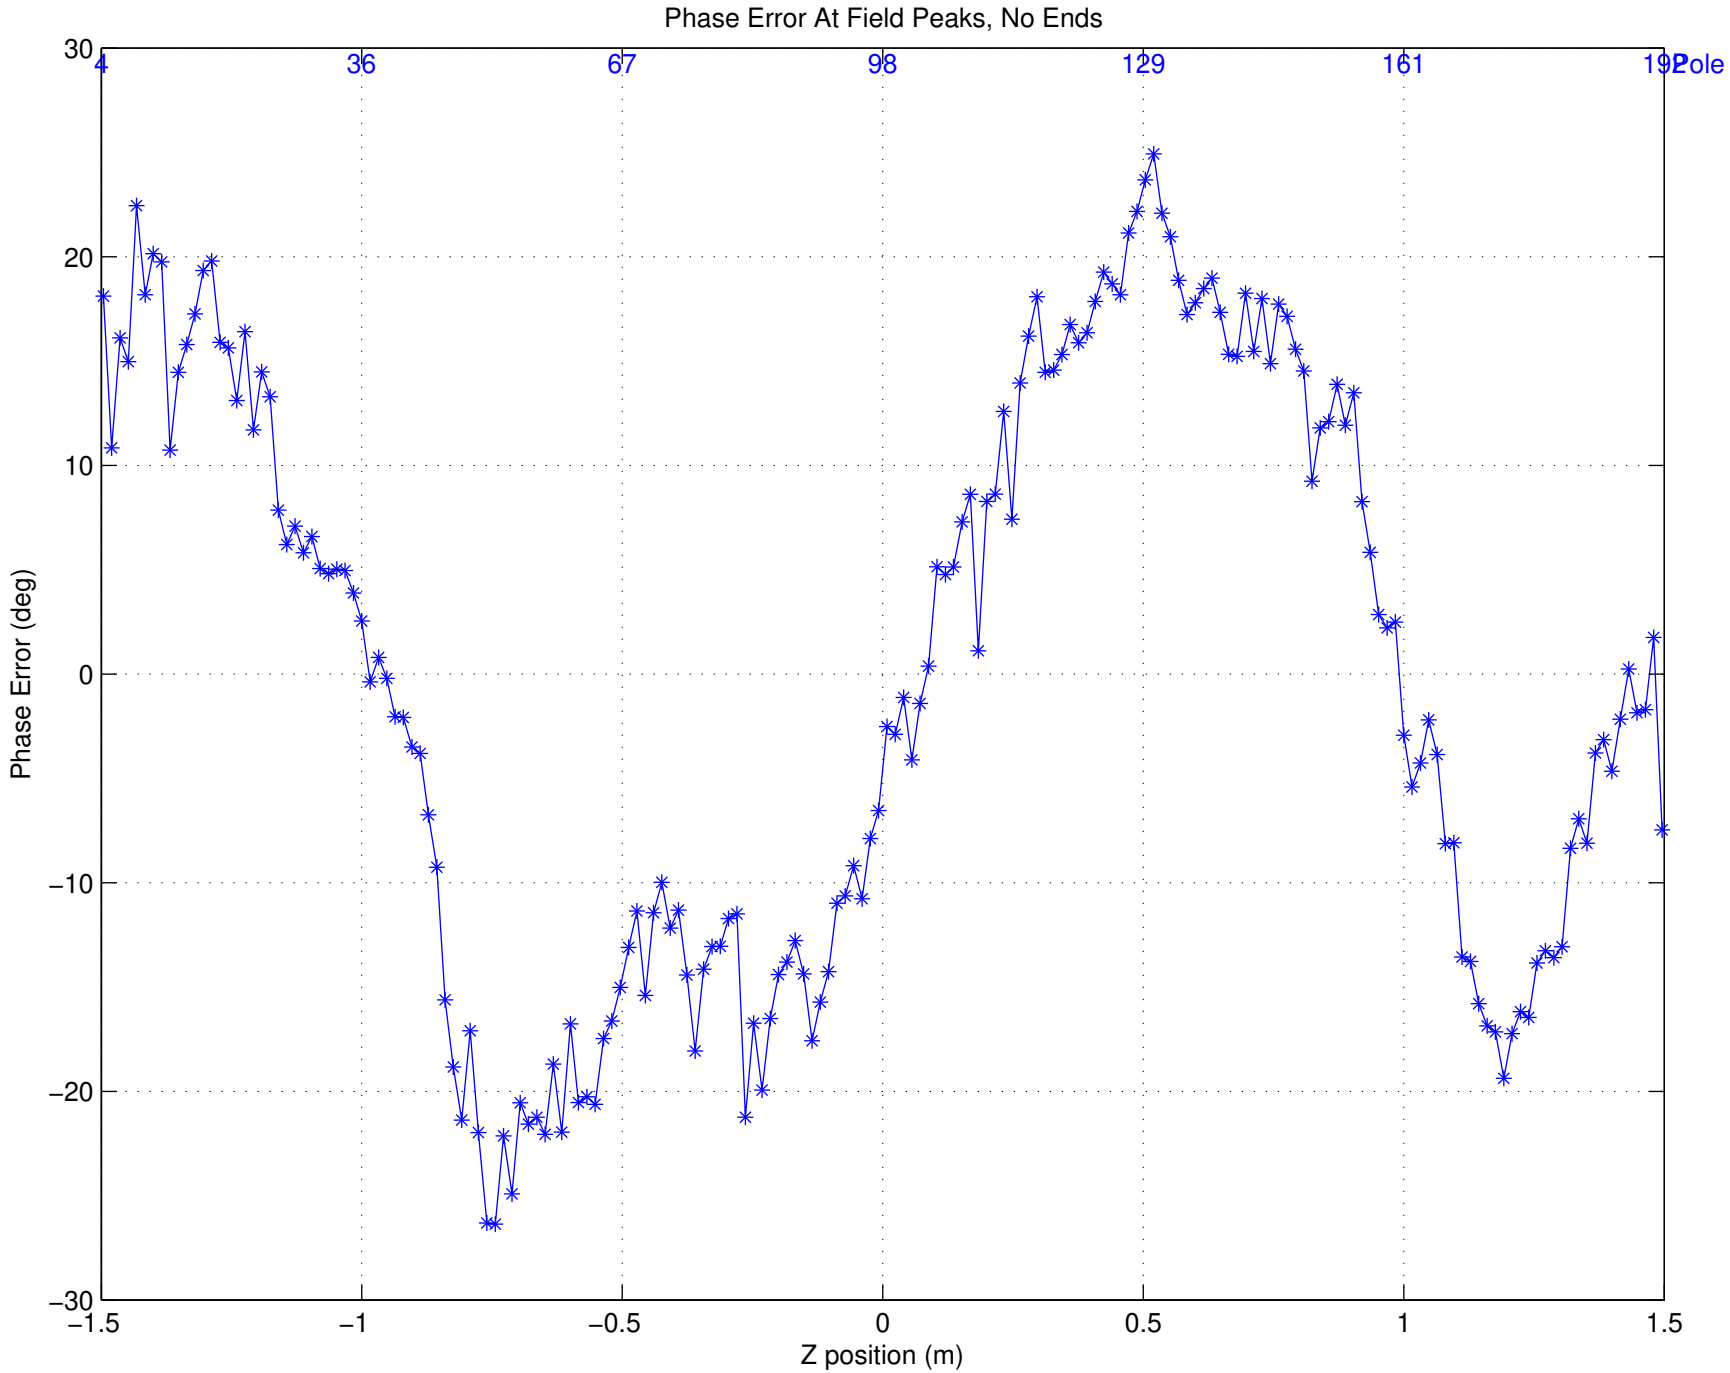

Phase Error: Ave = −0.000000 deg, RMS = 14.231070 deg

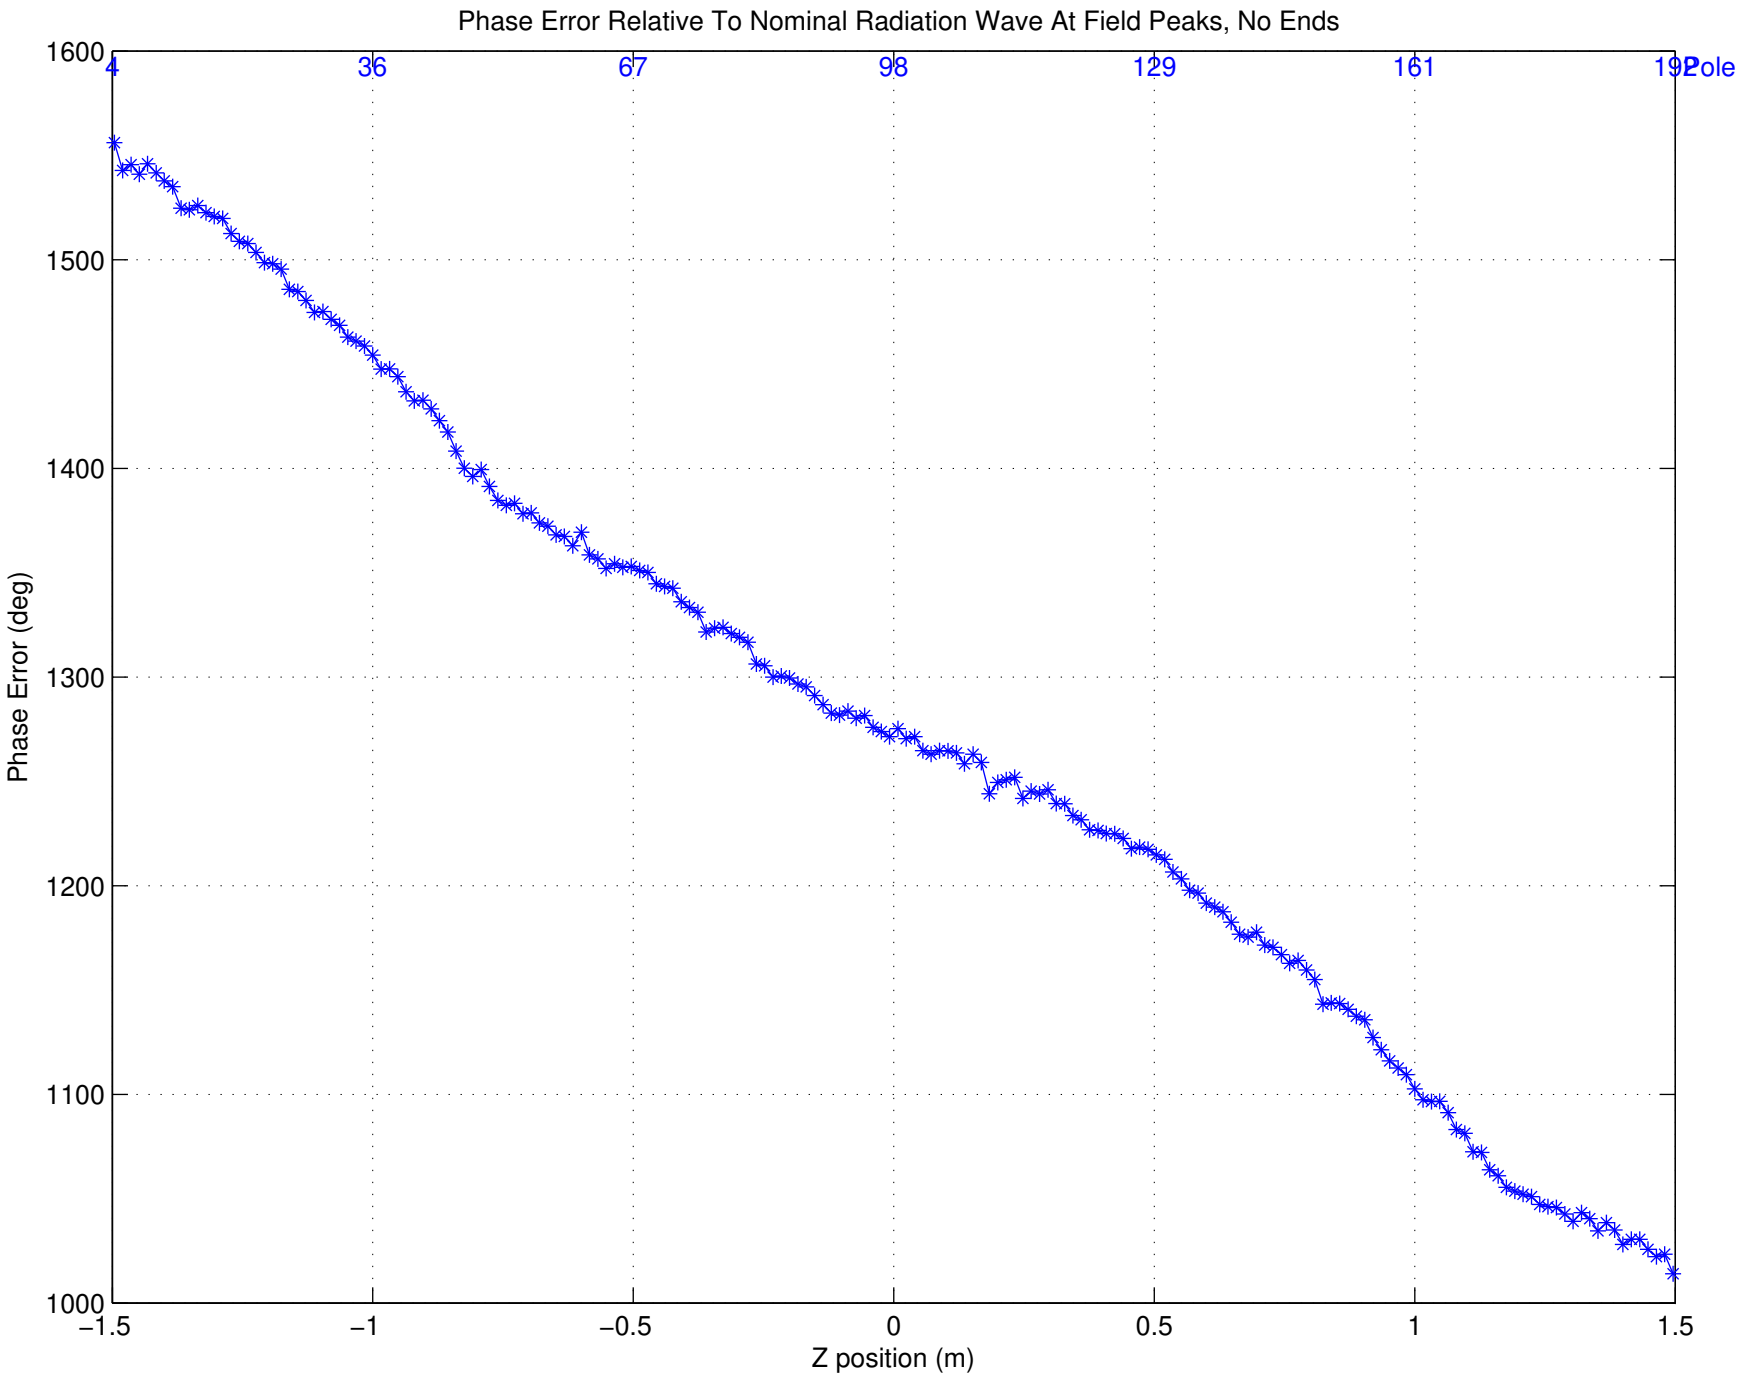
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
4
36
67
98
129
161
192
Pole
1600
1500
1400
1300
1200
1100
1000
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z position (m)