SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 08−29−2014
Time: 14:40:10

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 5
Tuning Stage: Fine Tuning
Run Number: 5
Measurement Type: Z Scans
Operator: YL
Comment: #304 −4, #342 −3
Session first run: 2
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0005\Fine Tuning\Z Scans\Run 005\bscanz.dat

Temperature (C)
DELTA:−−> T1 20.17 −−> T2 20.15 −−> T5 20.02 −−> T3 20.16 −−> Air 20.07 −−> T4 20.11

Axes position (m) X:0.021665 Y:0.000191
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001134 V
Vy_0i = −0.002849 V

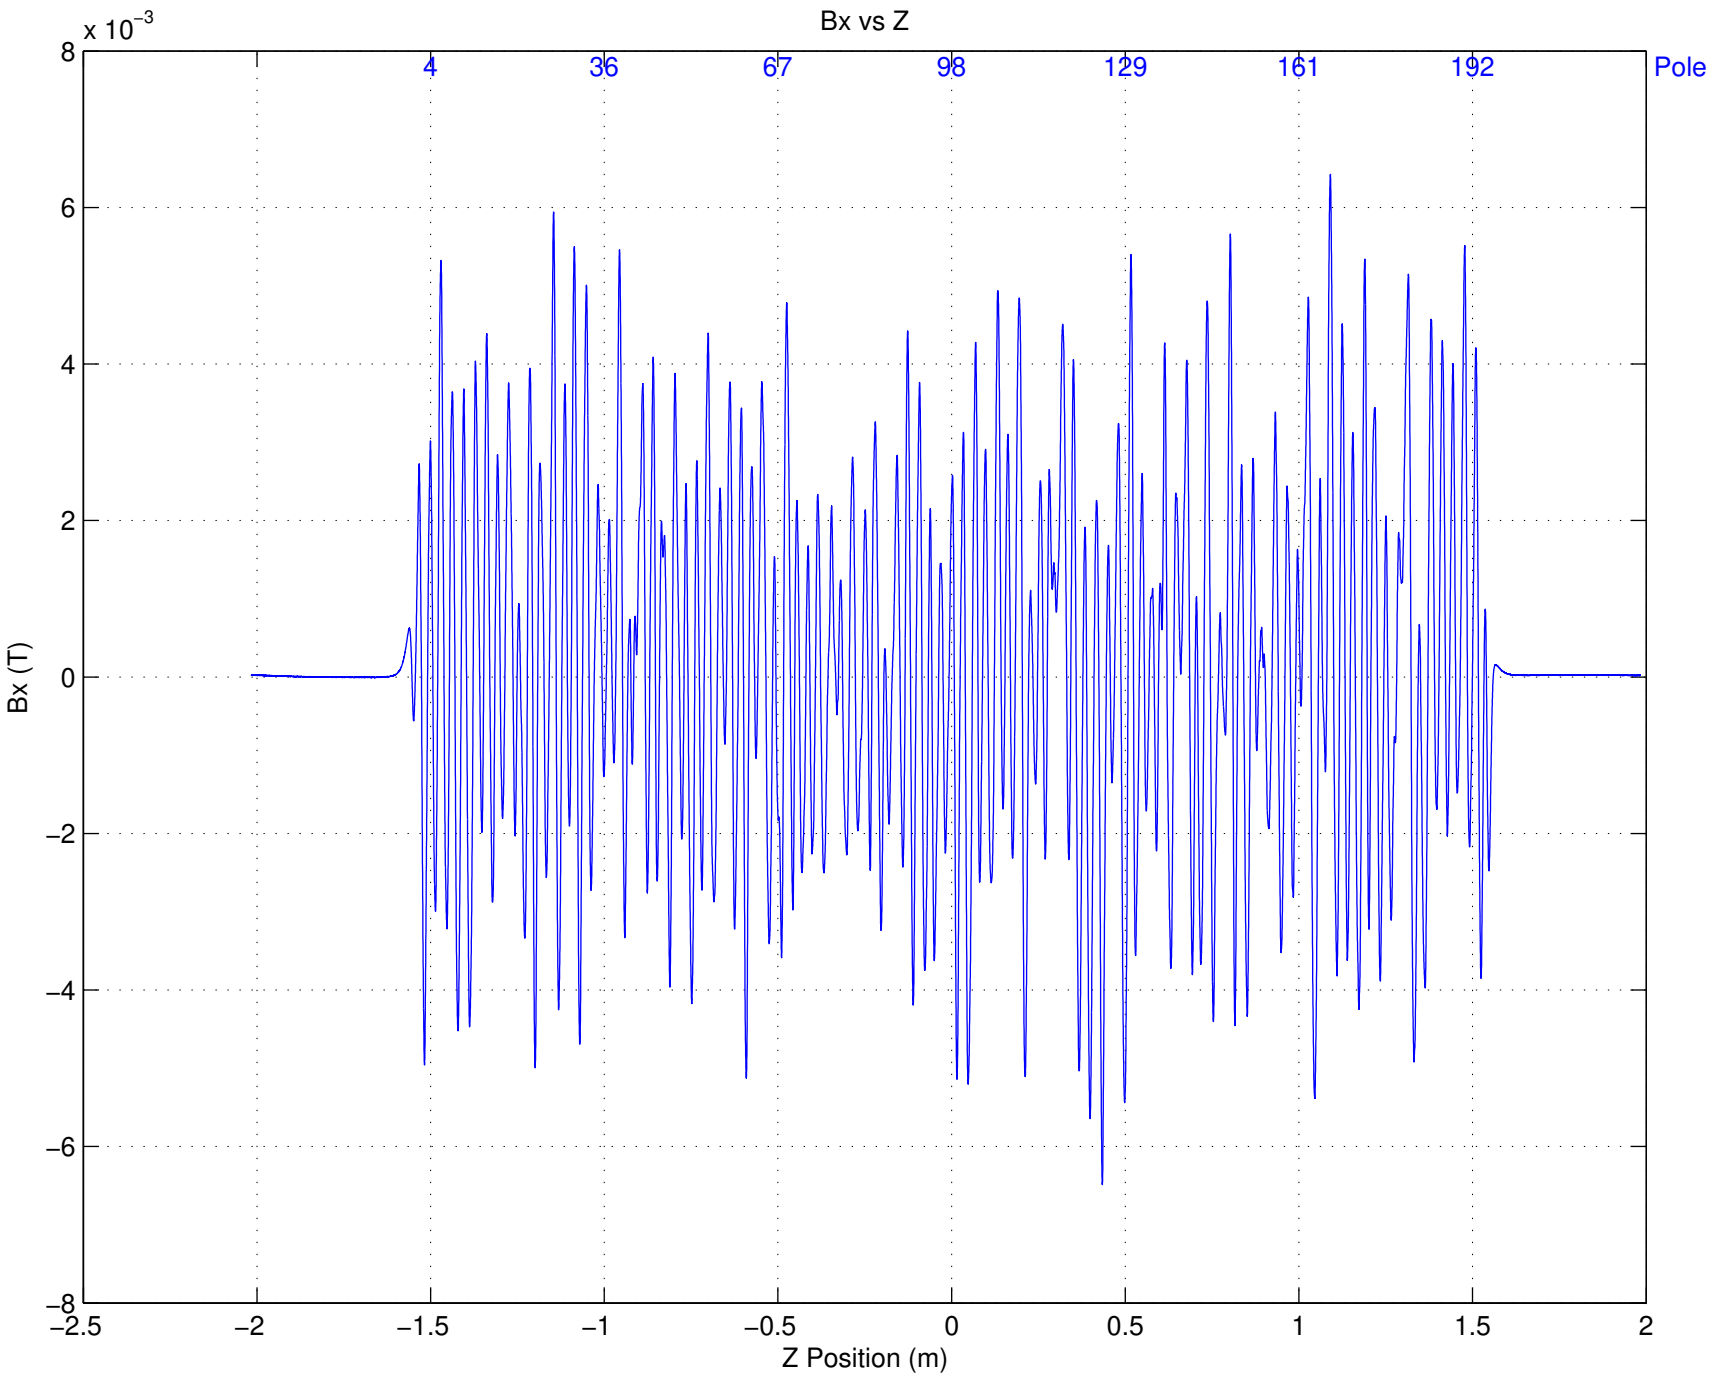
Bx vs Z
x 10^-3
8
6
4
2
0
−2
−4
−6
−8
Bx (T)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

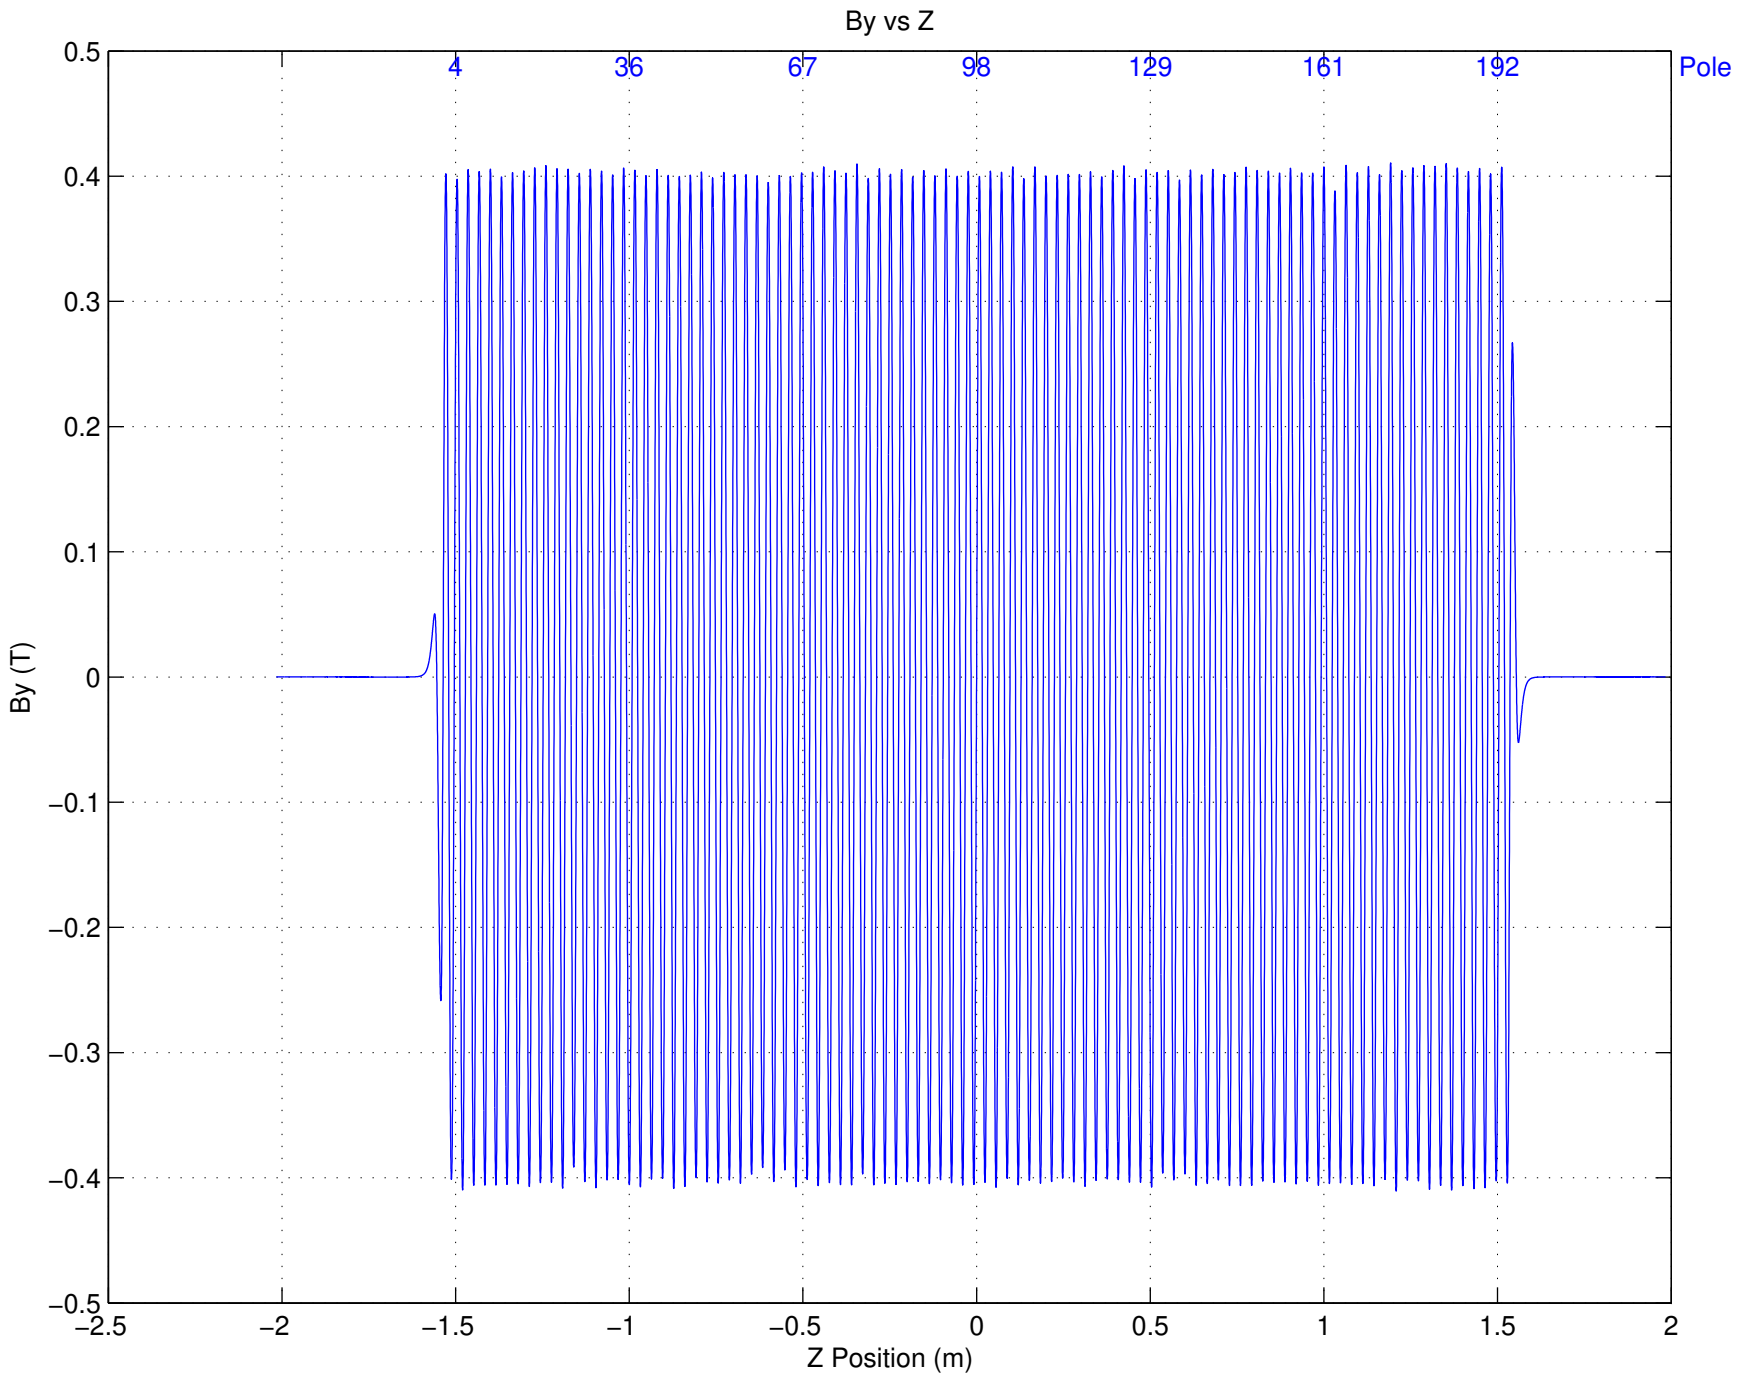
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

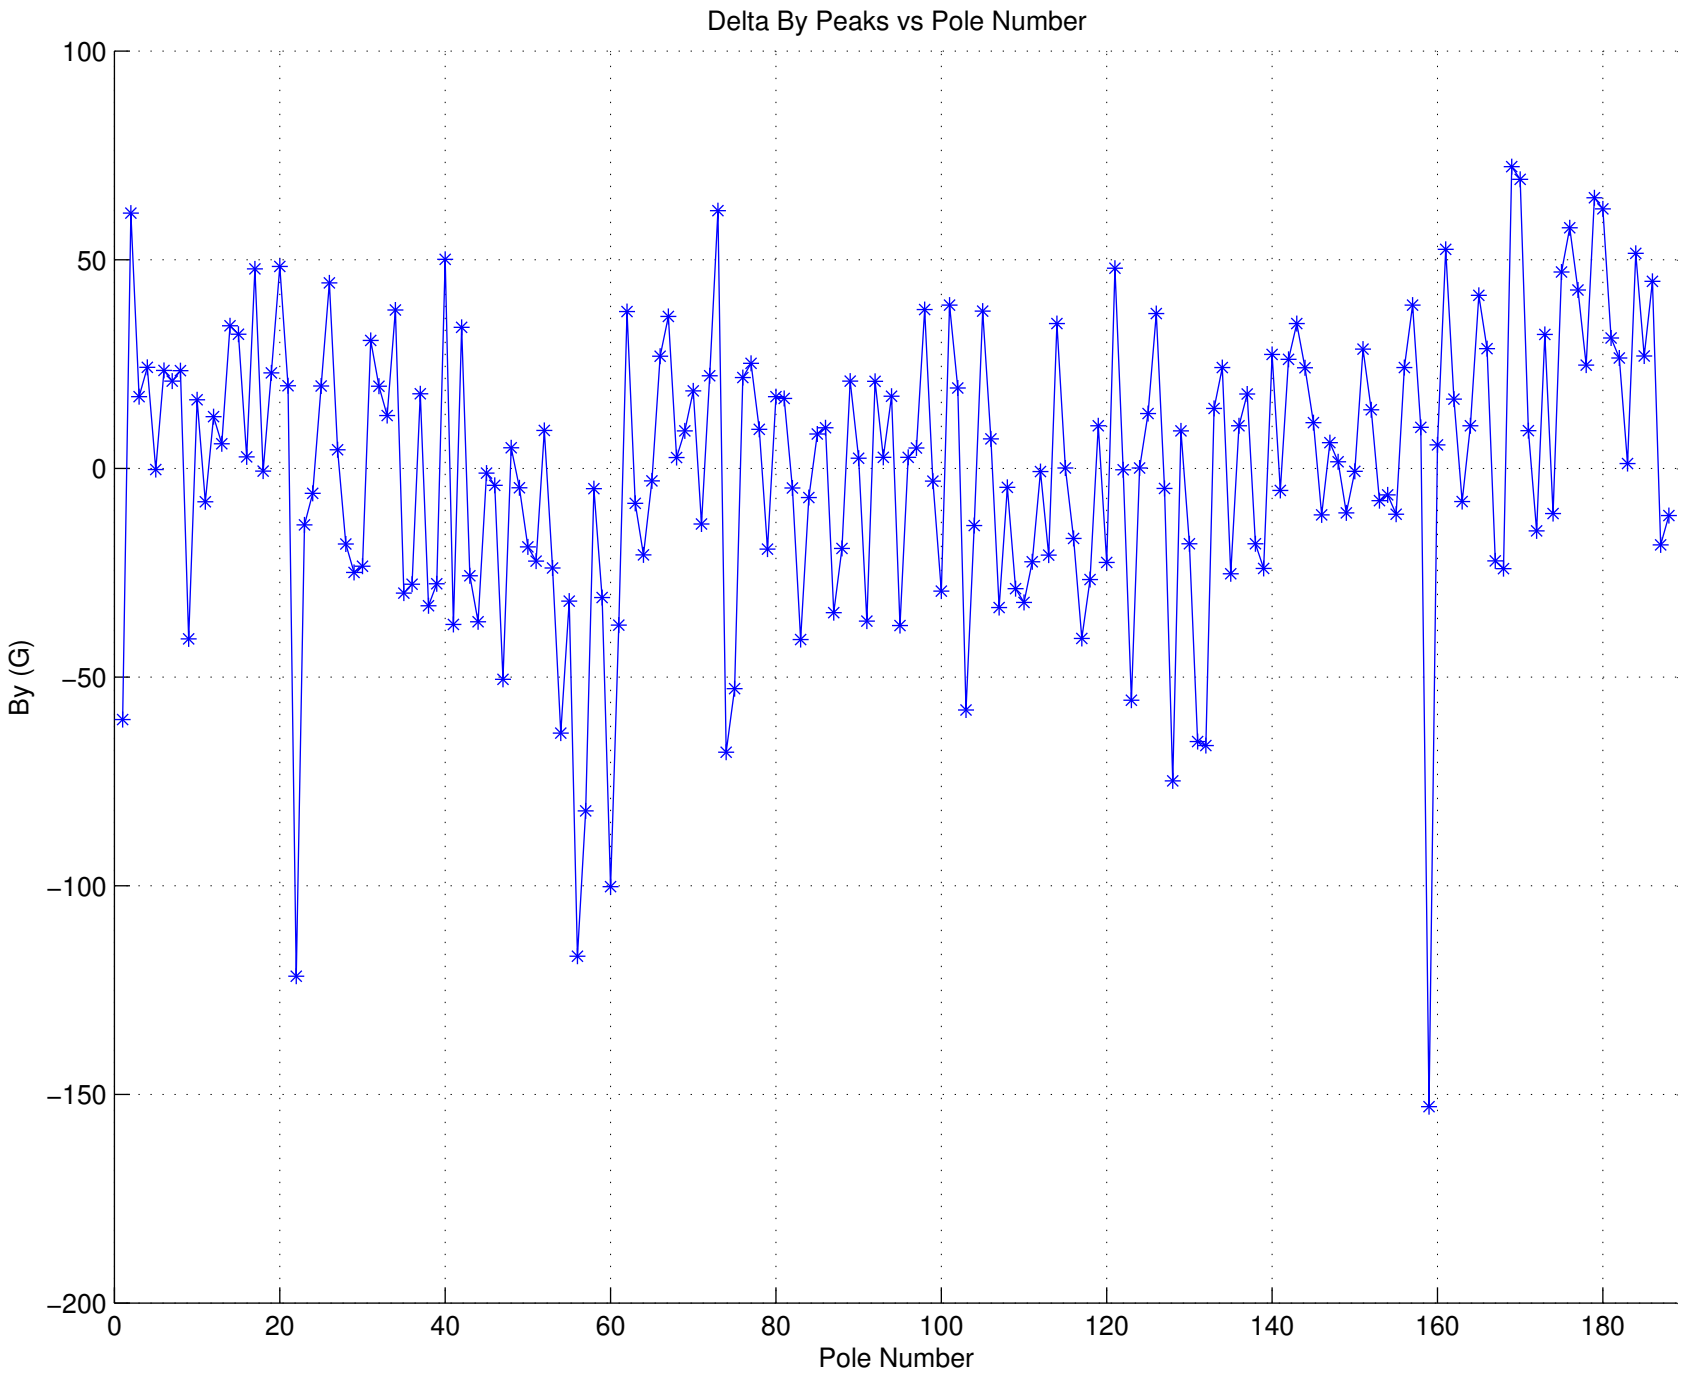
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
50
0
−50
−100
−150
−200
0
20
40
60
80
100
120
140
160
180

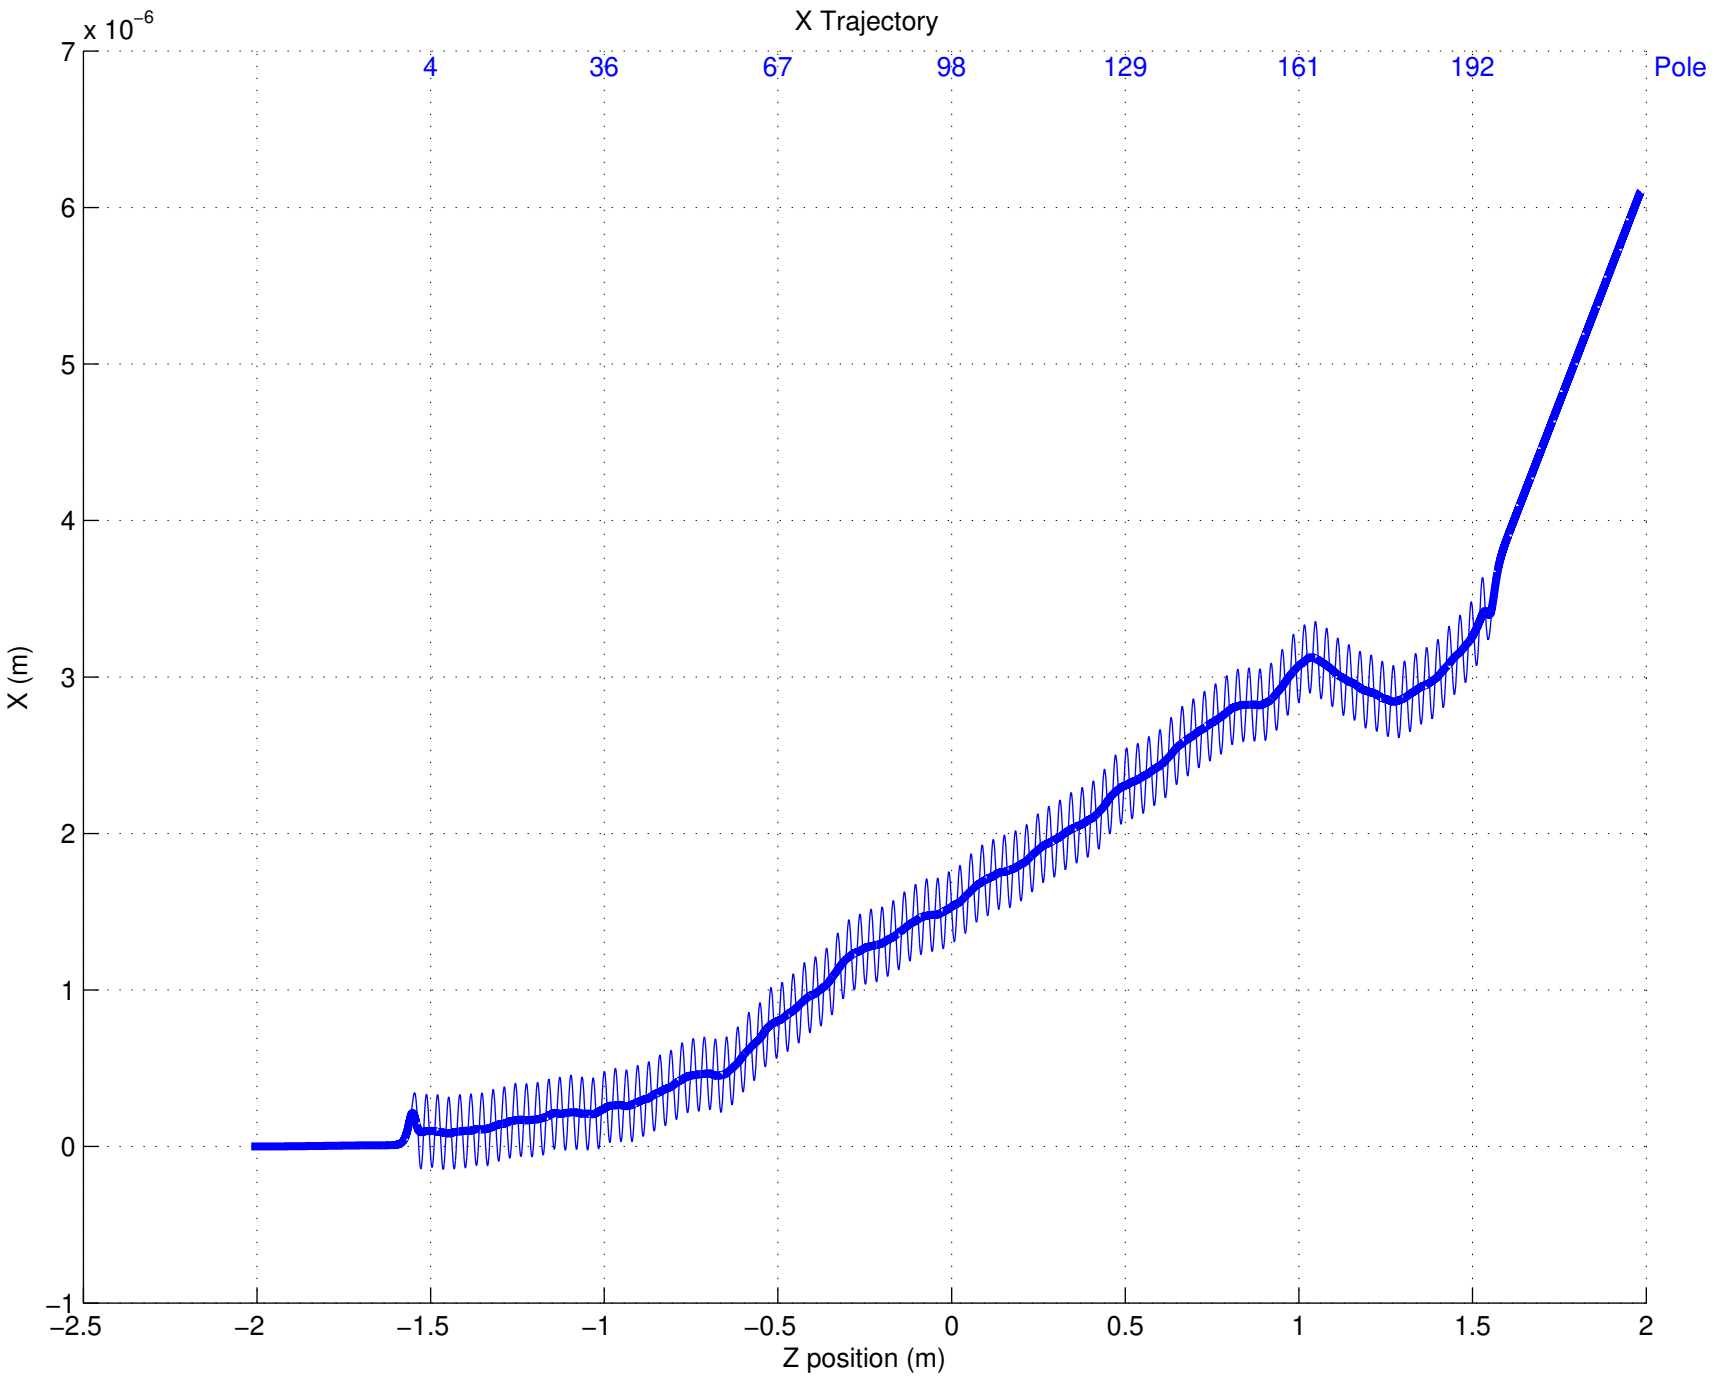
X Trajectory
x 10^-6
7
6
5
4
3
2
1
0
−1
X (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

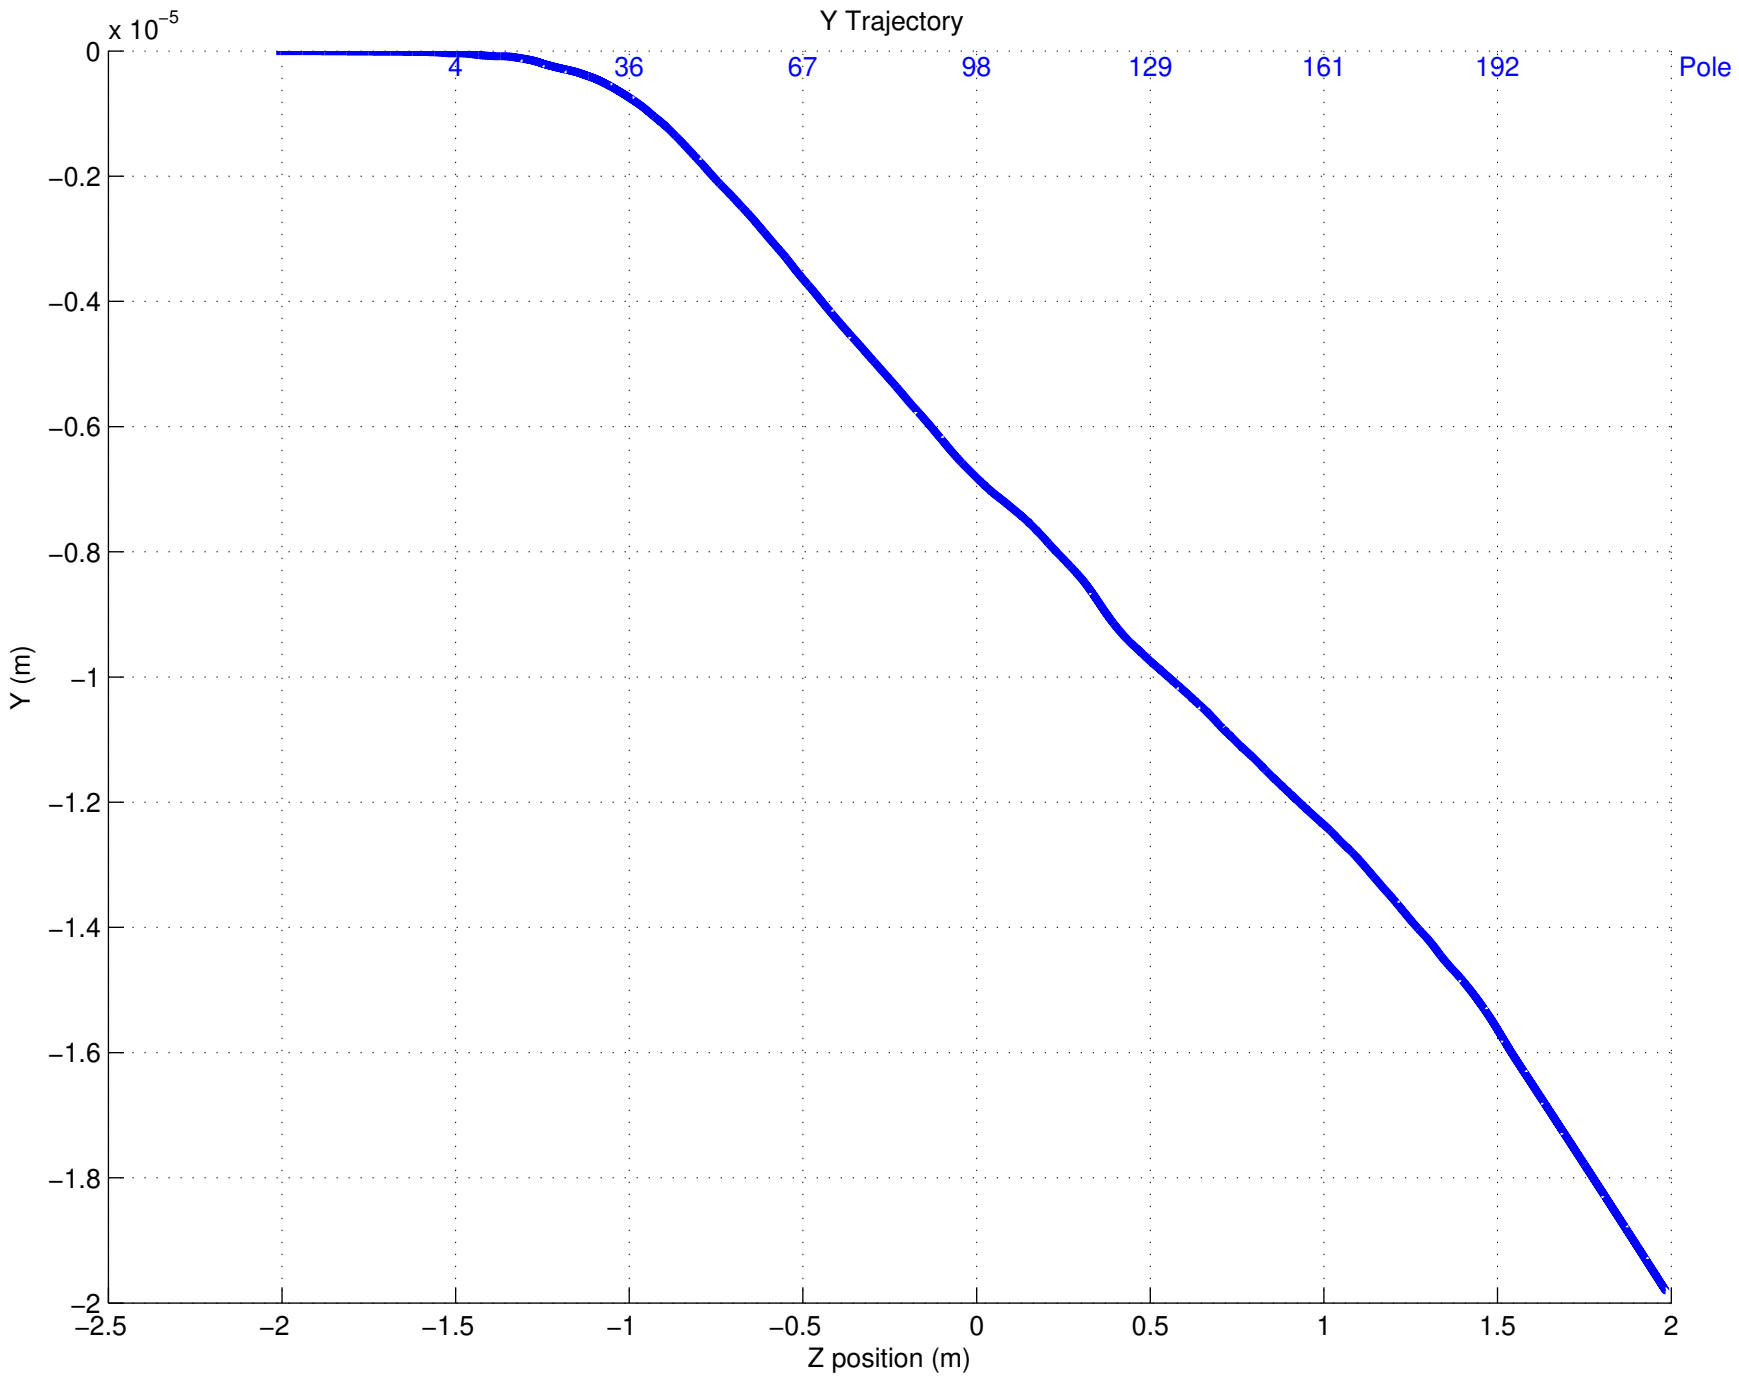
Y Trajectory
x 10^-5
0
−0.2
−0.4
−0.6
−0.8
−1
−1.2
−1.4
−1.6
−1.8
−2
Y (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

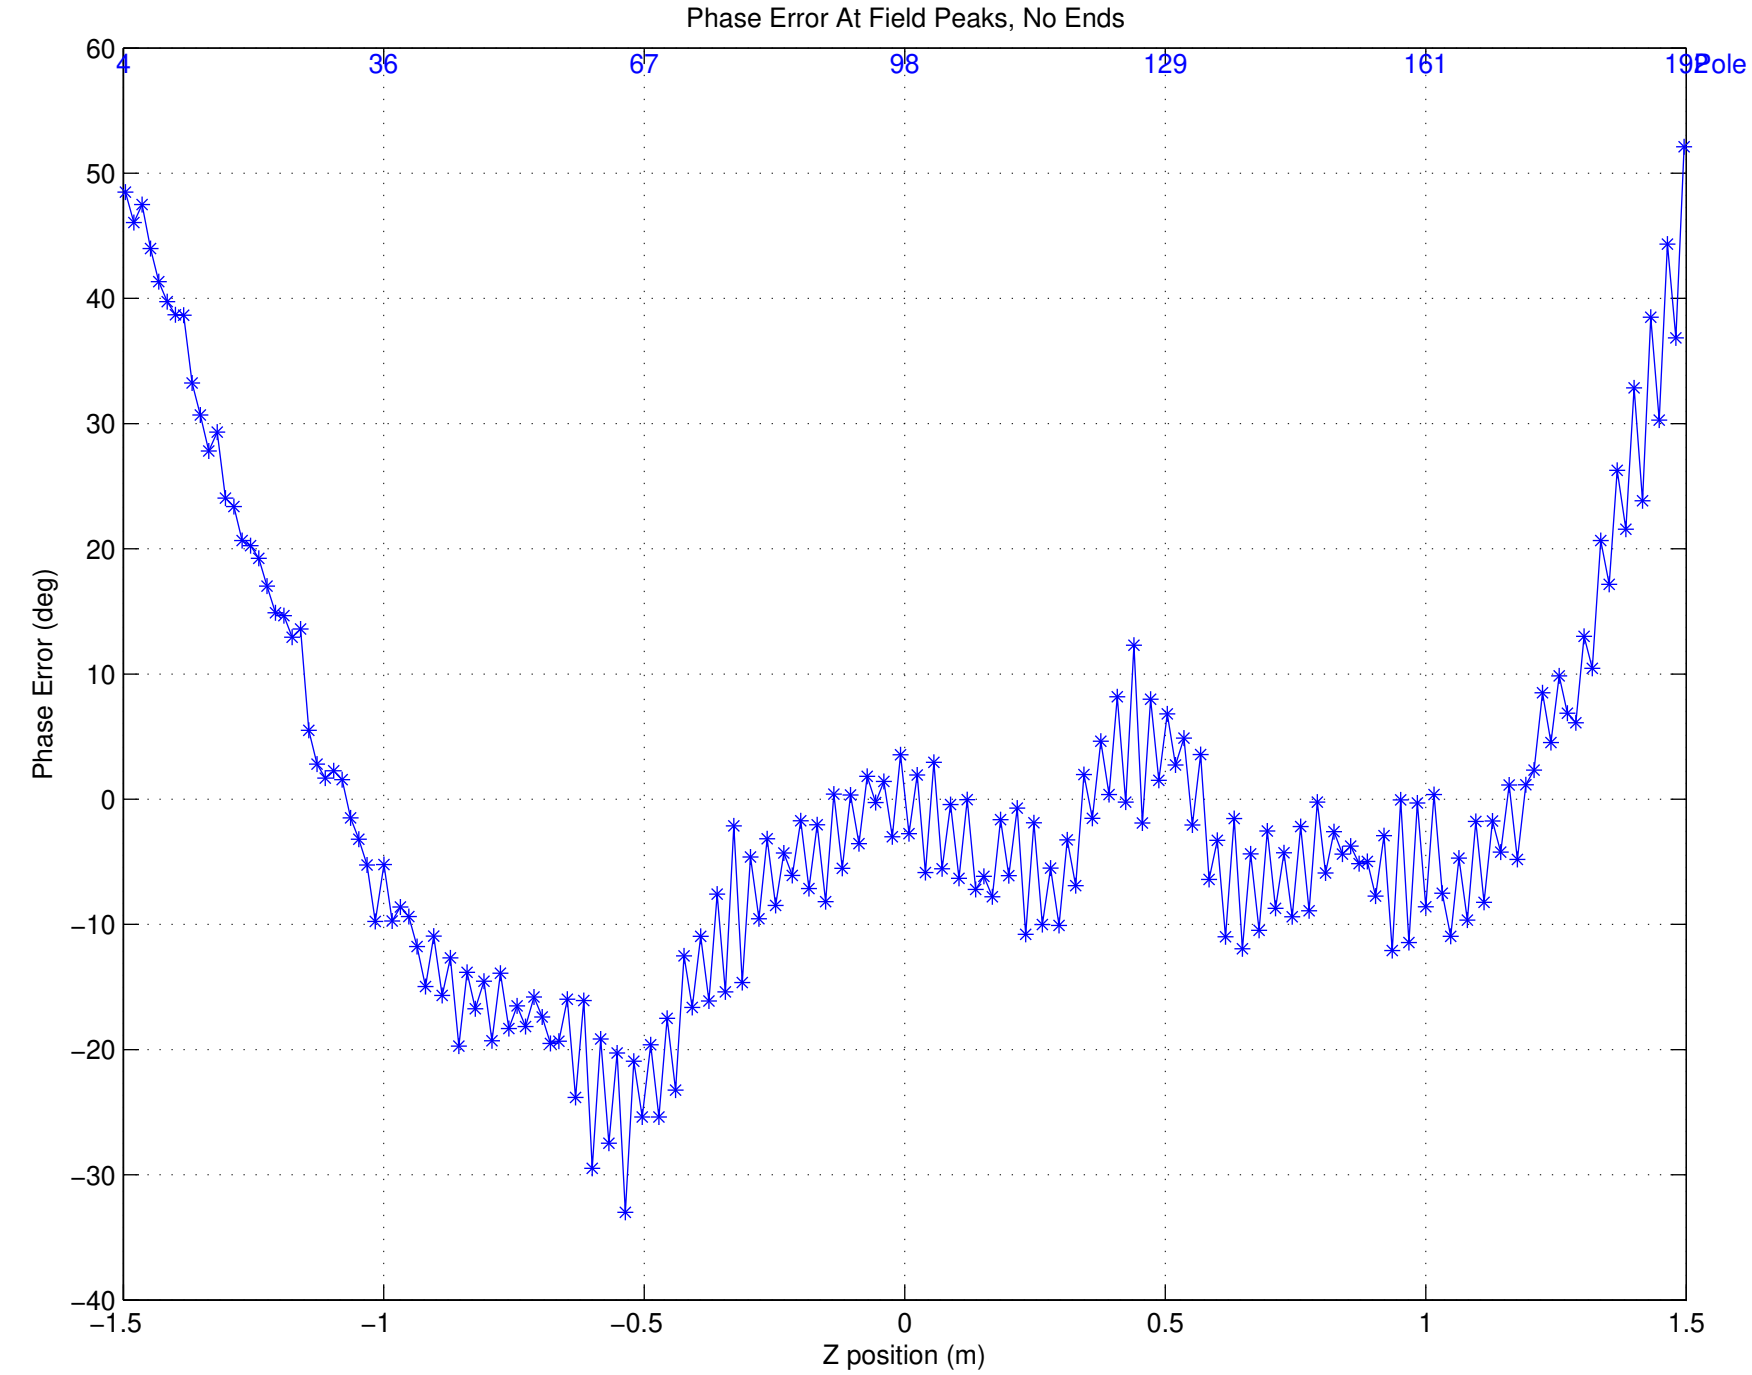

Phase Error: Ave = −0.000000 deg, RMS = 16.660247 deg

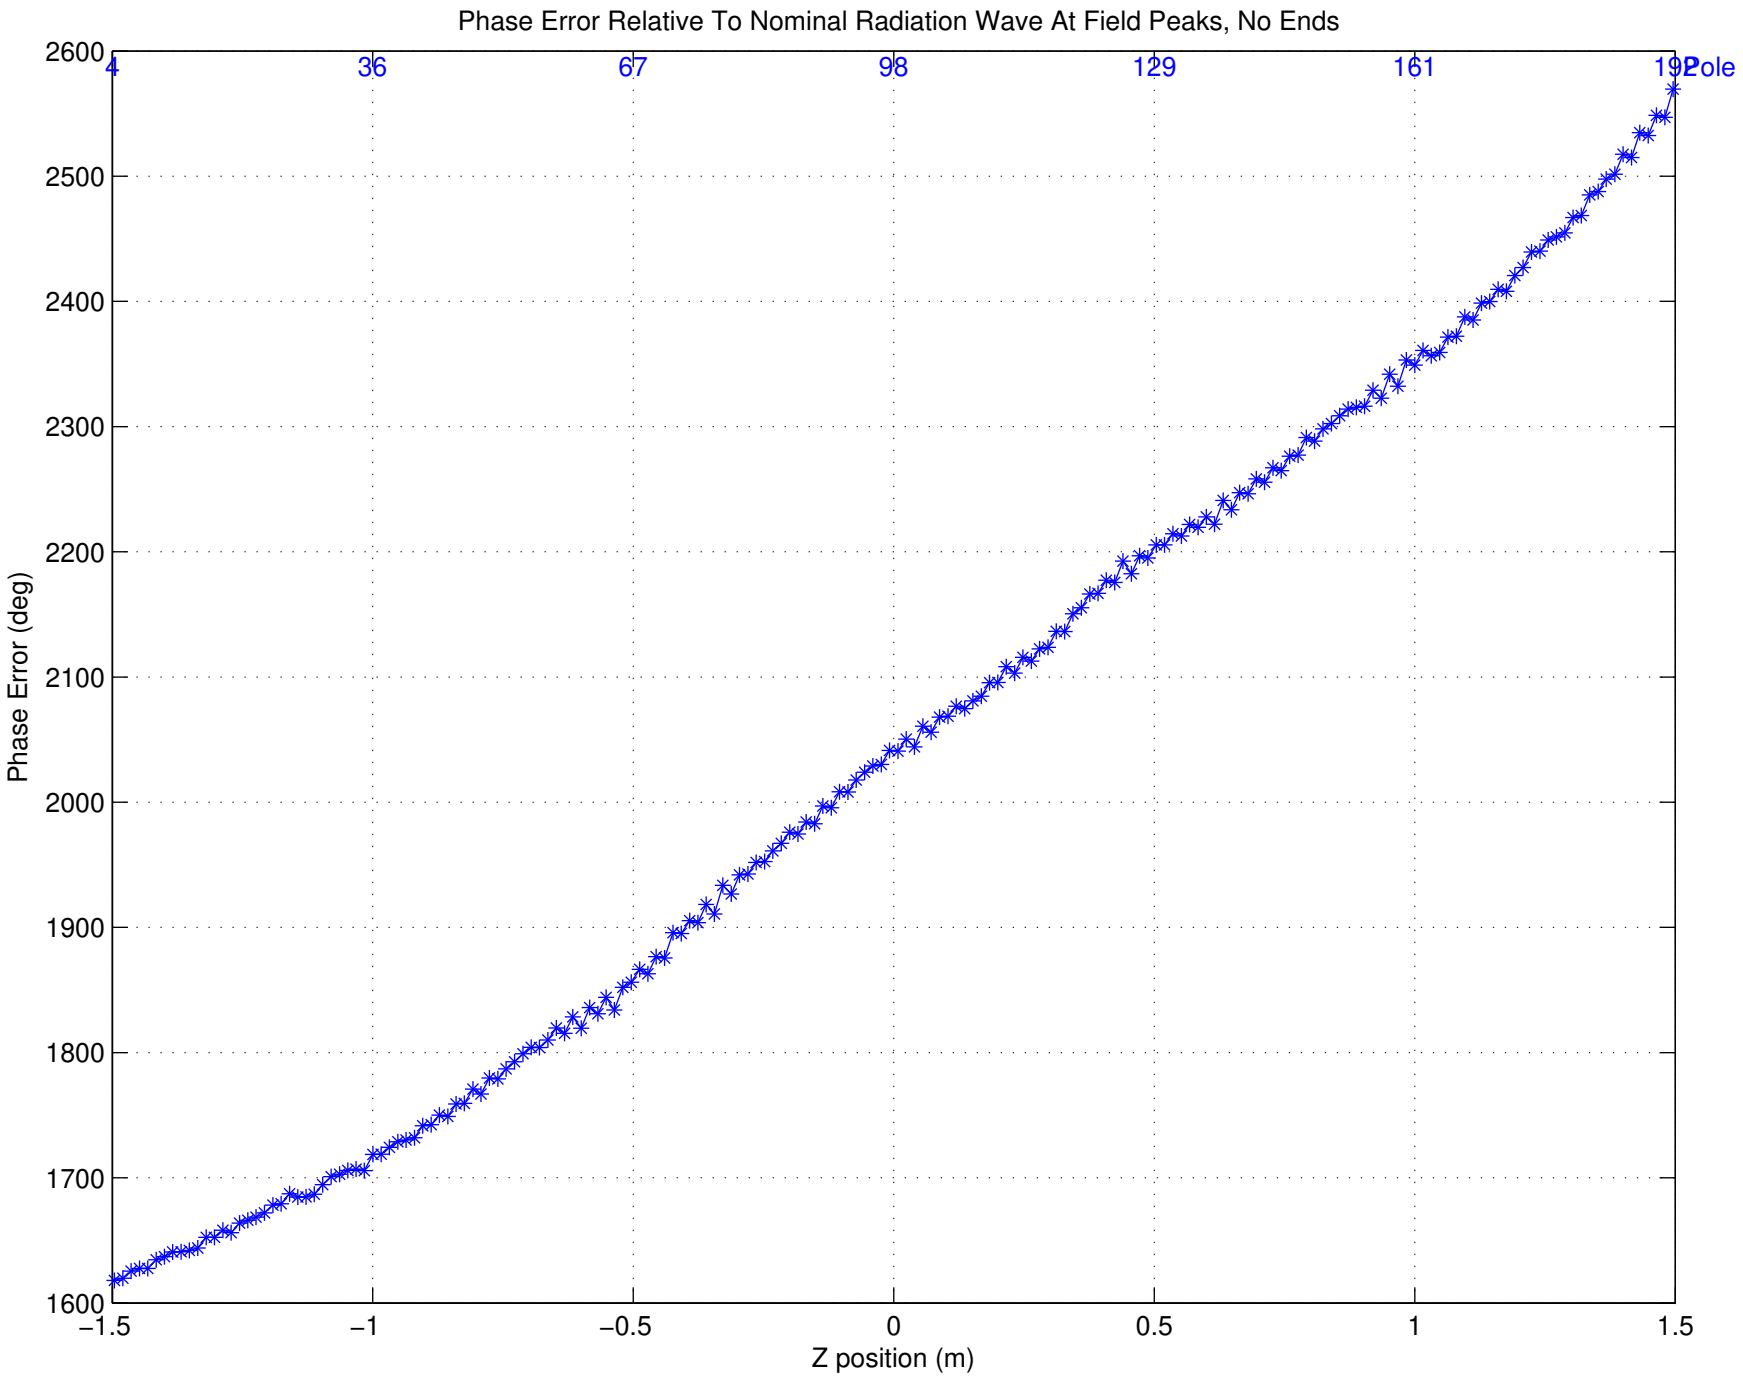
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
Phase Error (deg)
Z position (m)
Pole
4
36
67
98
129
161
192
2600
2500
2400
2300
2200
2100
2000
1900
1800
1700
1600
−1.5
−1
−0.5
0
0.5
1
1.5