SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 09−02−2014
Time: 14:33:27

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 5
Tuning Stage: Fine Tuning
Run Number: 11
Measurement Type: Z Scans
Operator: YL
Comment: #358,298 −2,#340−80, #338,366 +80, #322 +60
Session first run: 7
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0005\Fine Tuning\Z Scans\Run 011\bscanz.dat

Temperature (C)
DELTA:−−> T1 20.12 −−> T2 20.12 −−> T5 20.12 −−> T3 20.09 −−> Air 20.18 −−> T4 20.18

Axes position (m) X:0.021666 Y:0.000191
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001146 V
Vy_0i = −0.002976 V

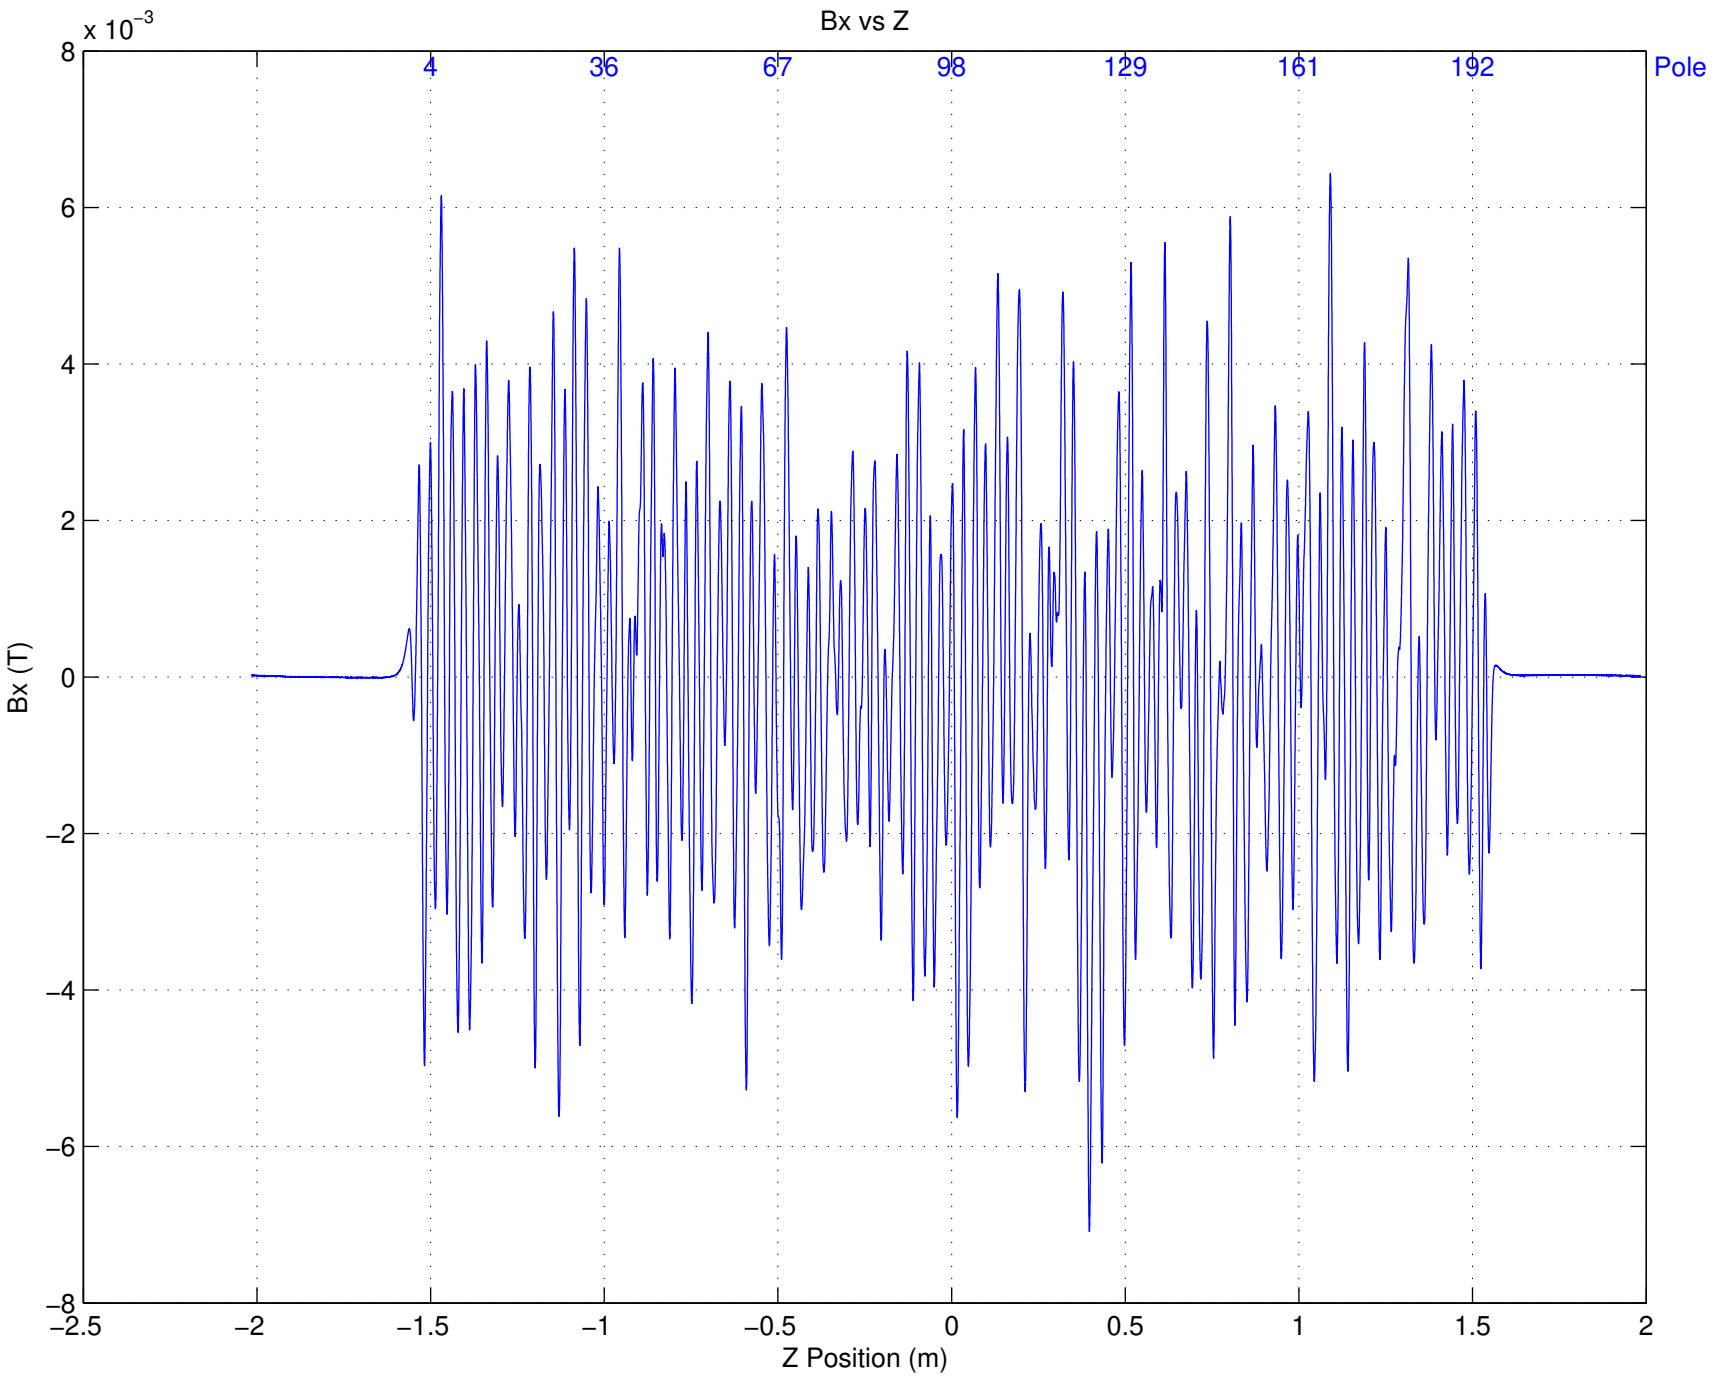
Bx vs Z
x 10^-3
8
6
4
2
0
−2
−4
−6
−8
Bx (T)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

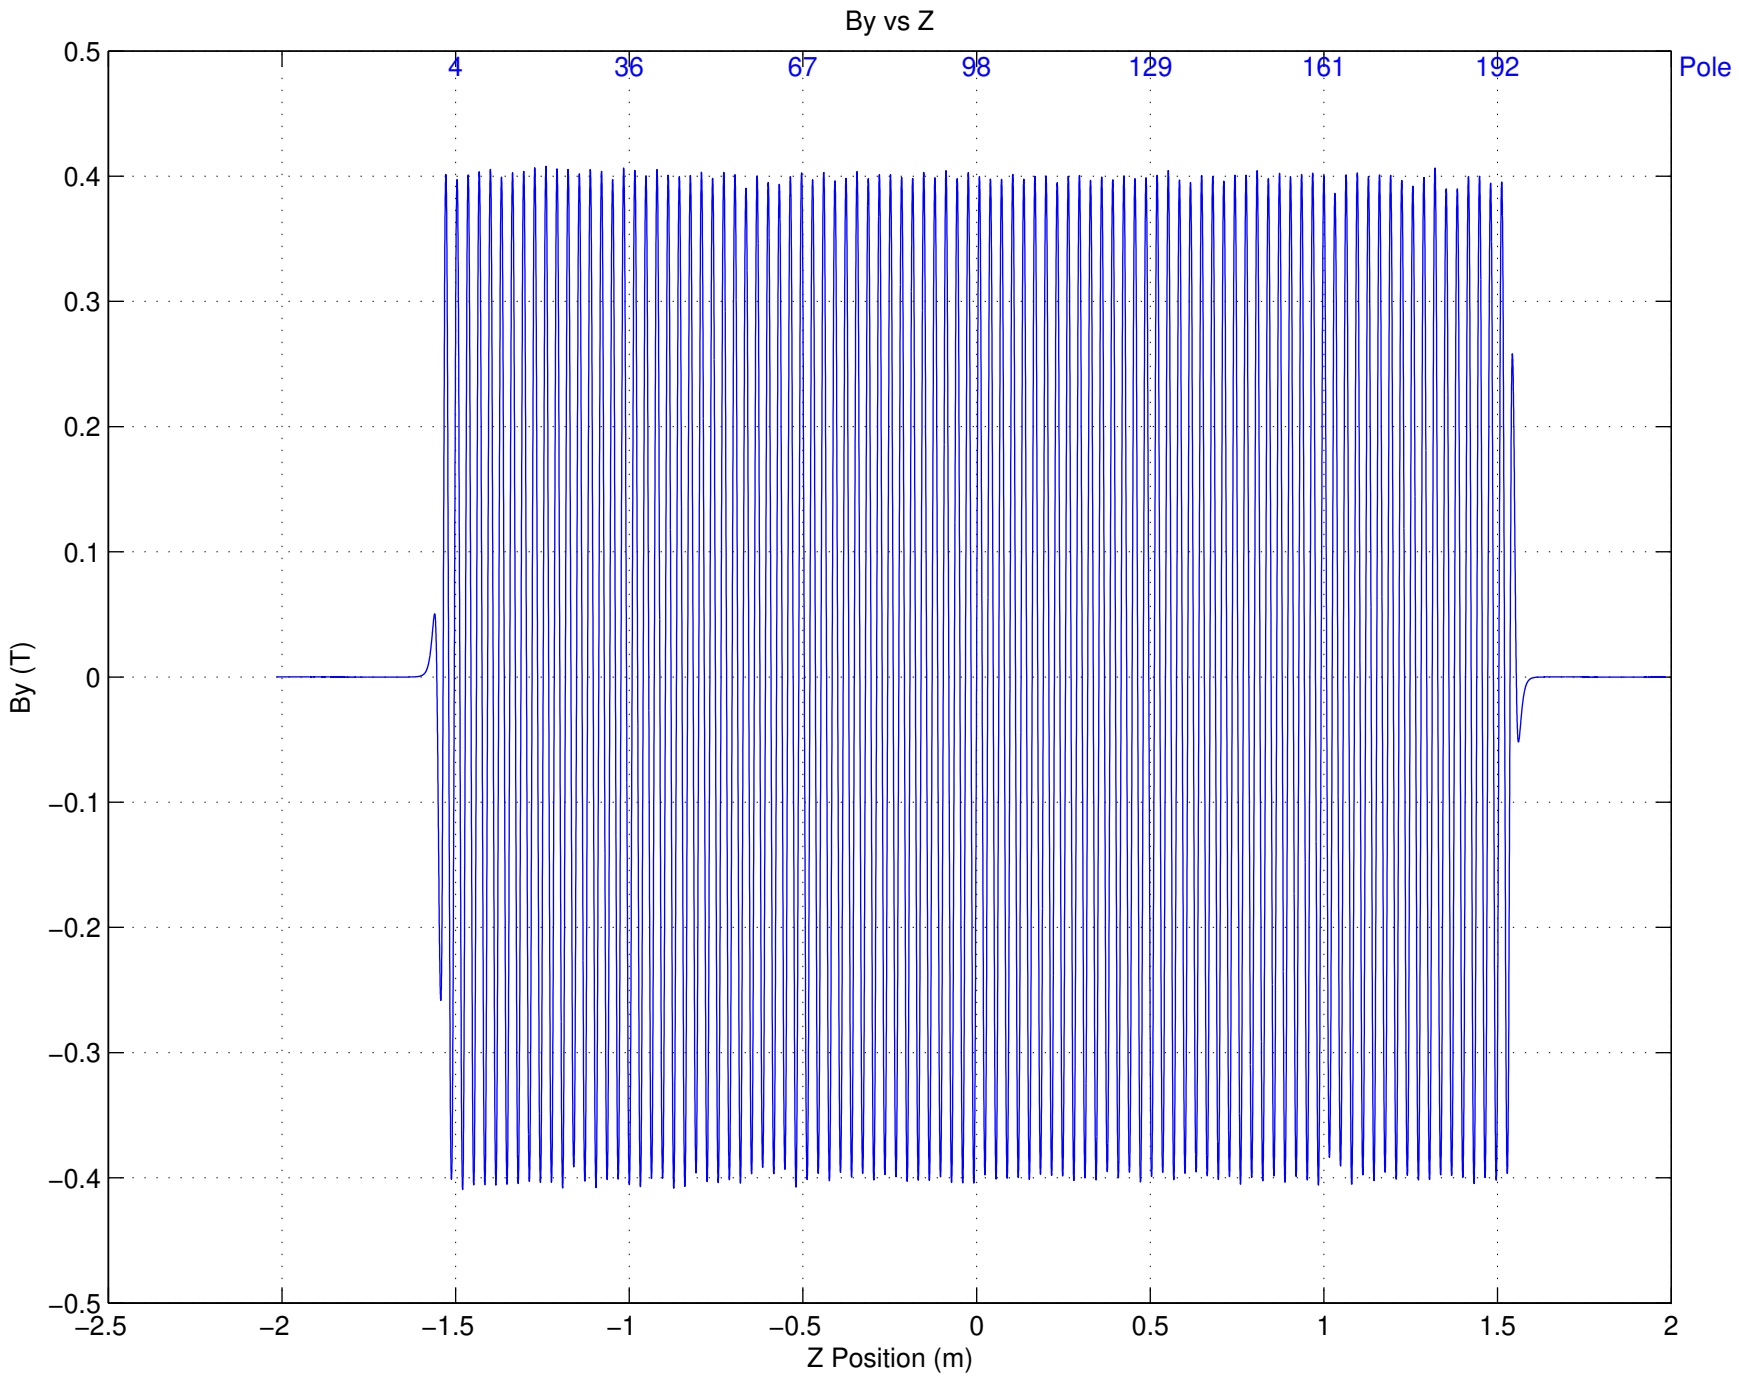
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

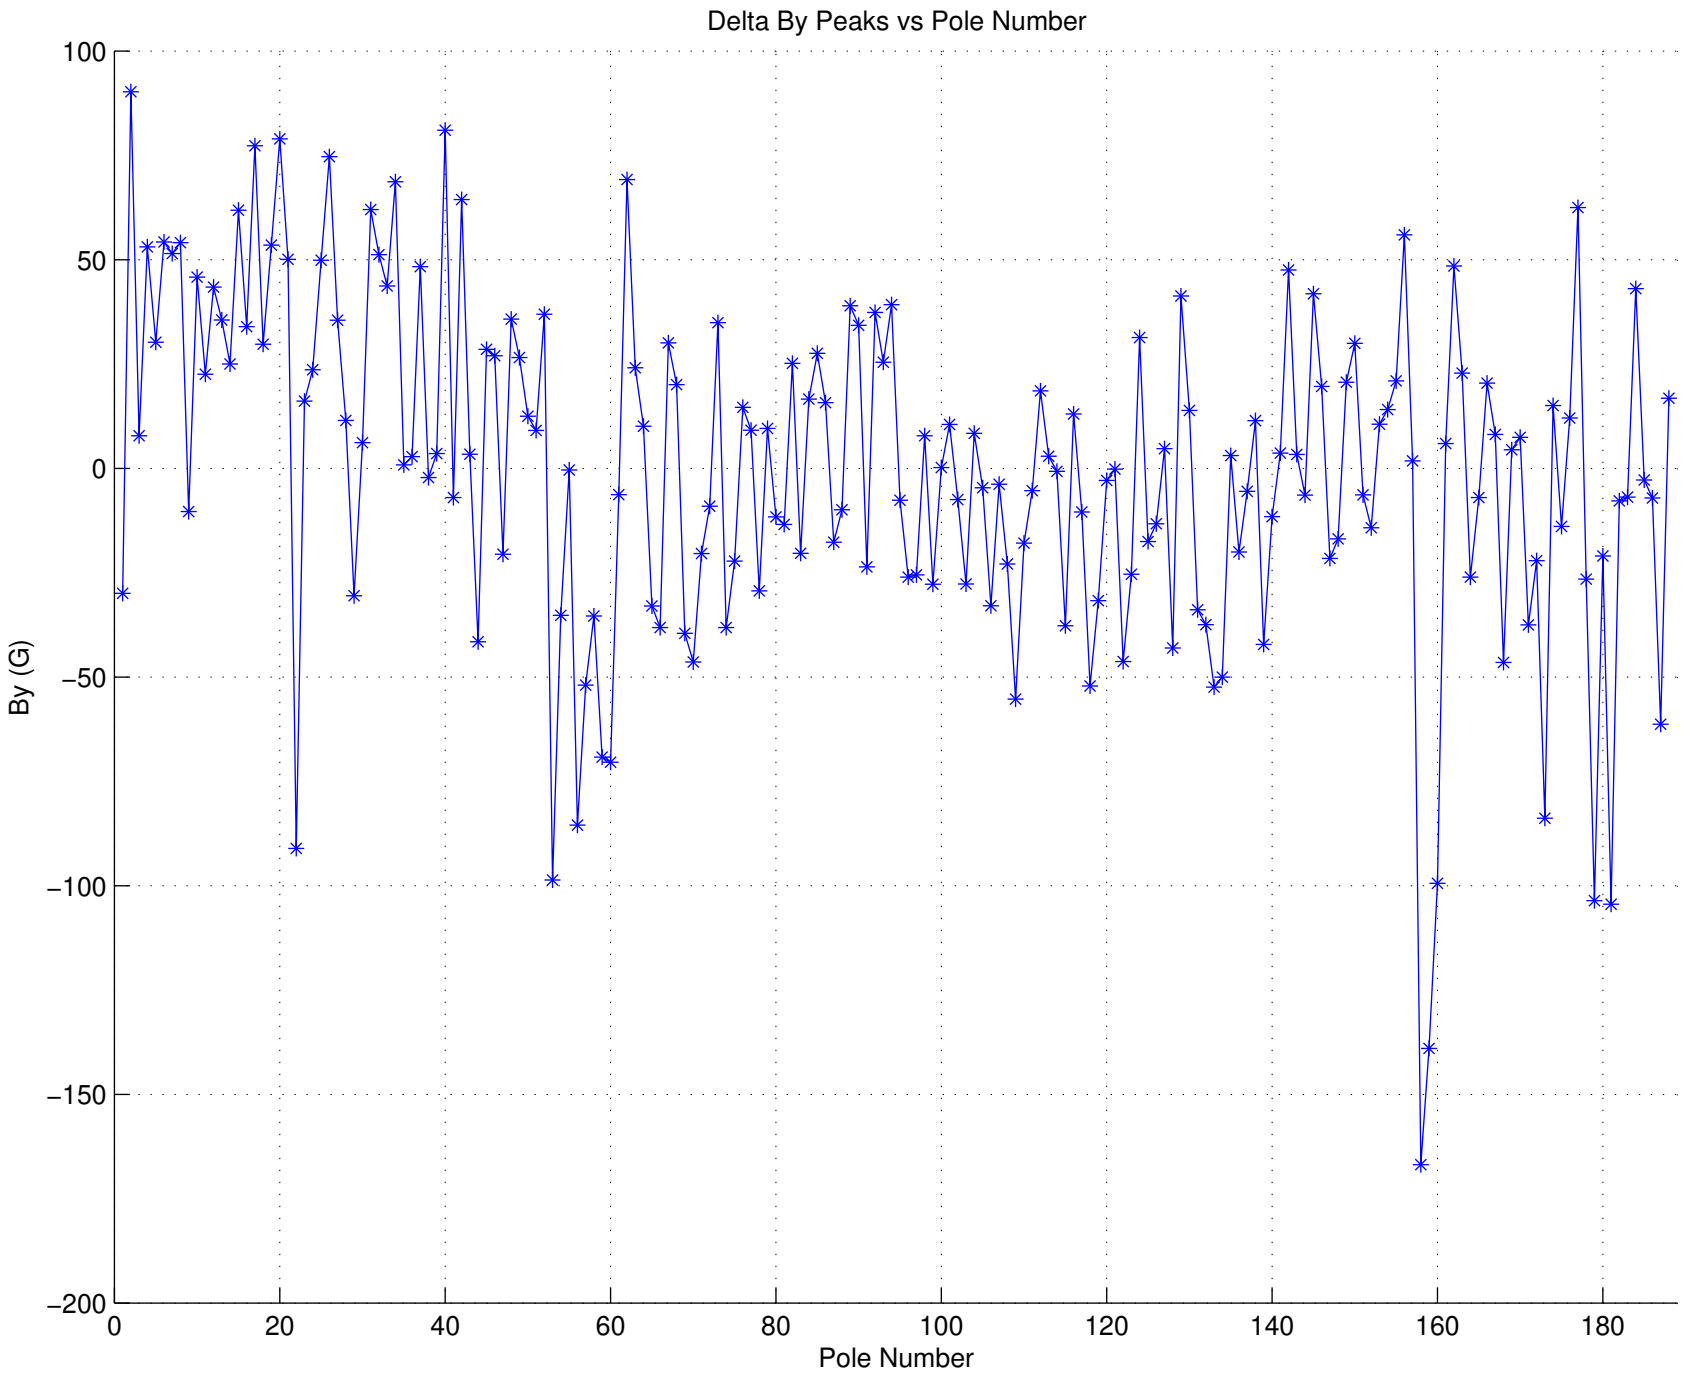
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
50
0
−50
−100
−150
−200
0
20
40
60
80
100
120
140
160
180

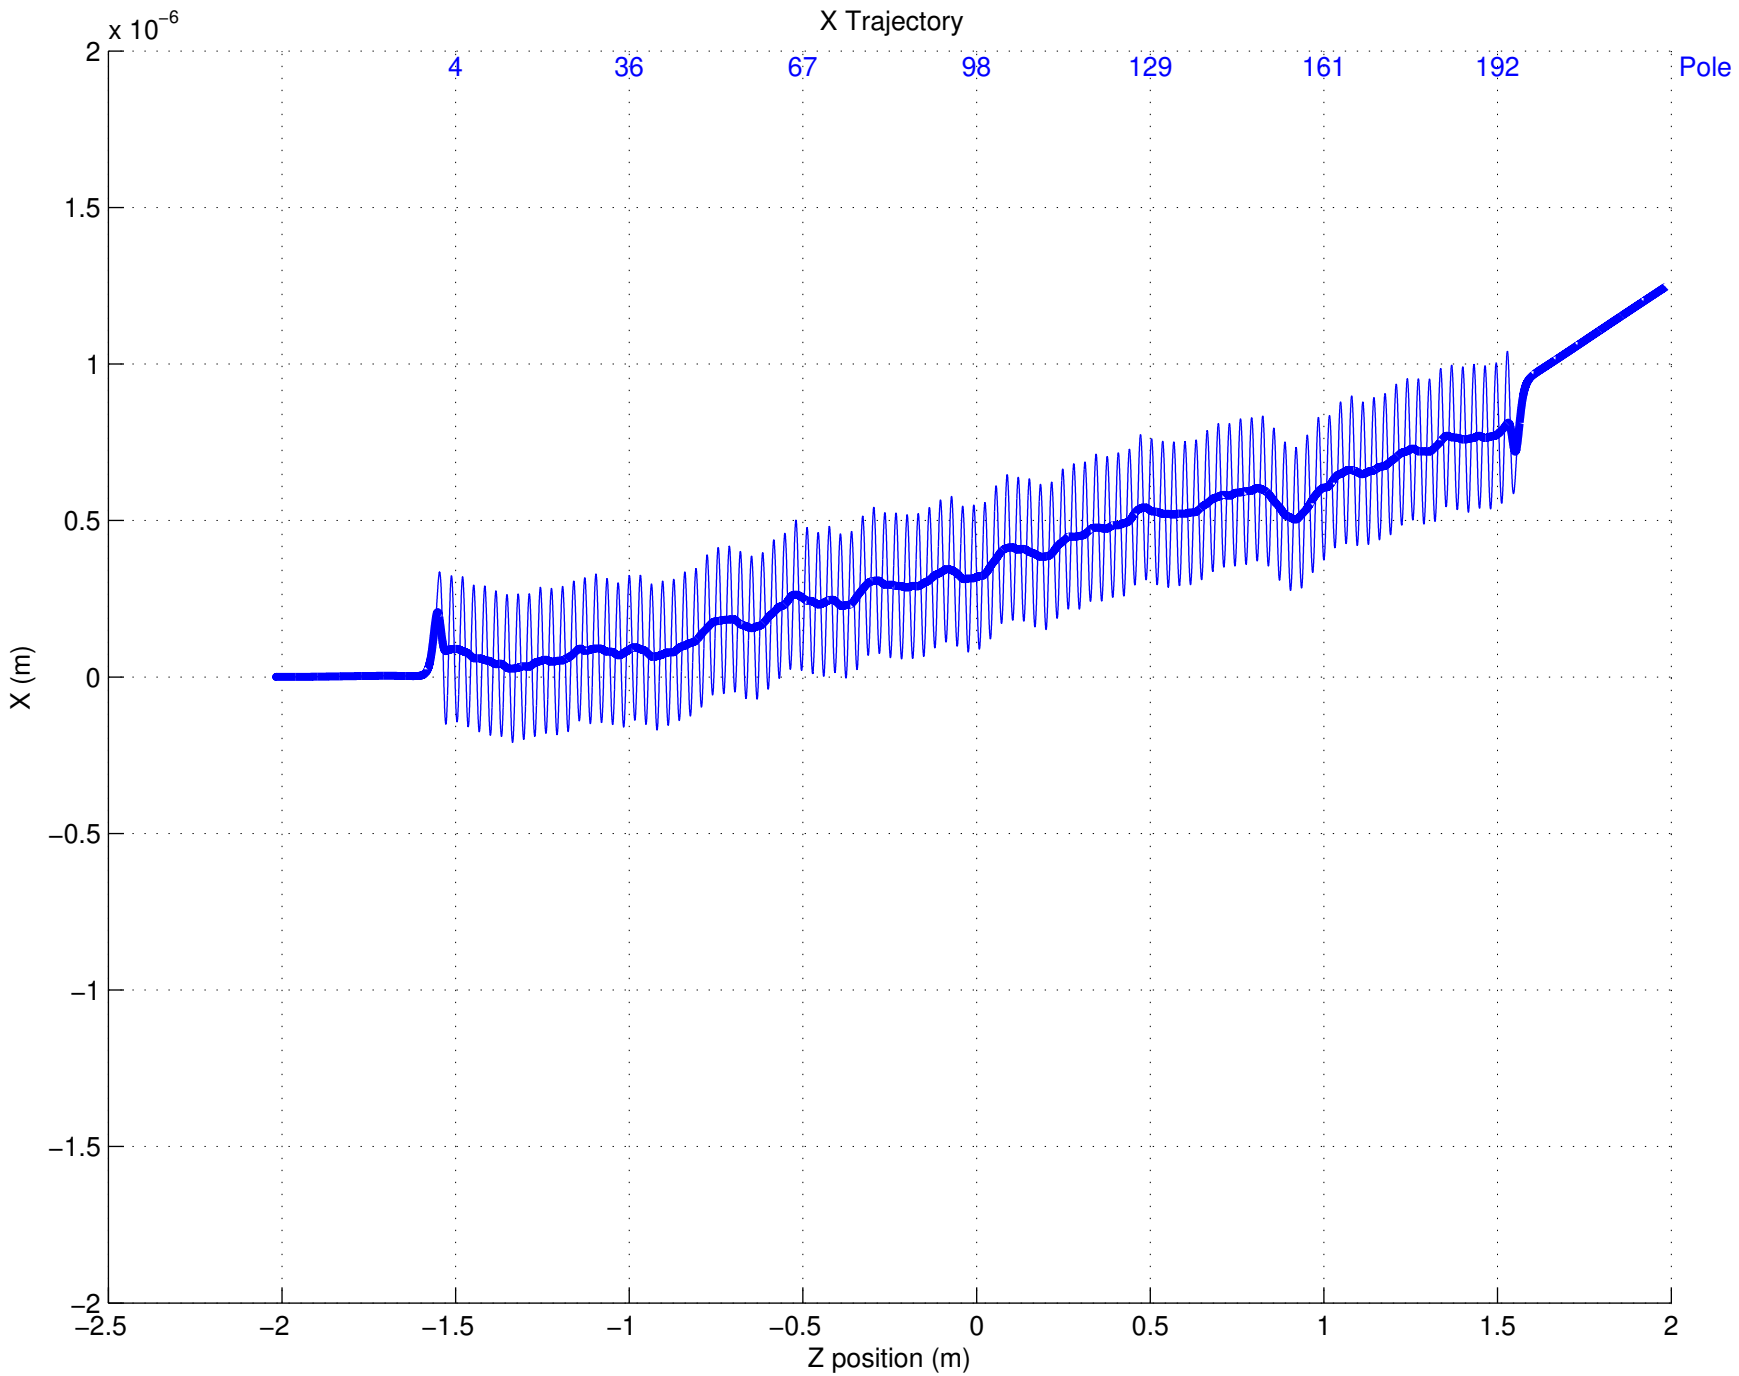
X Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

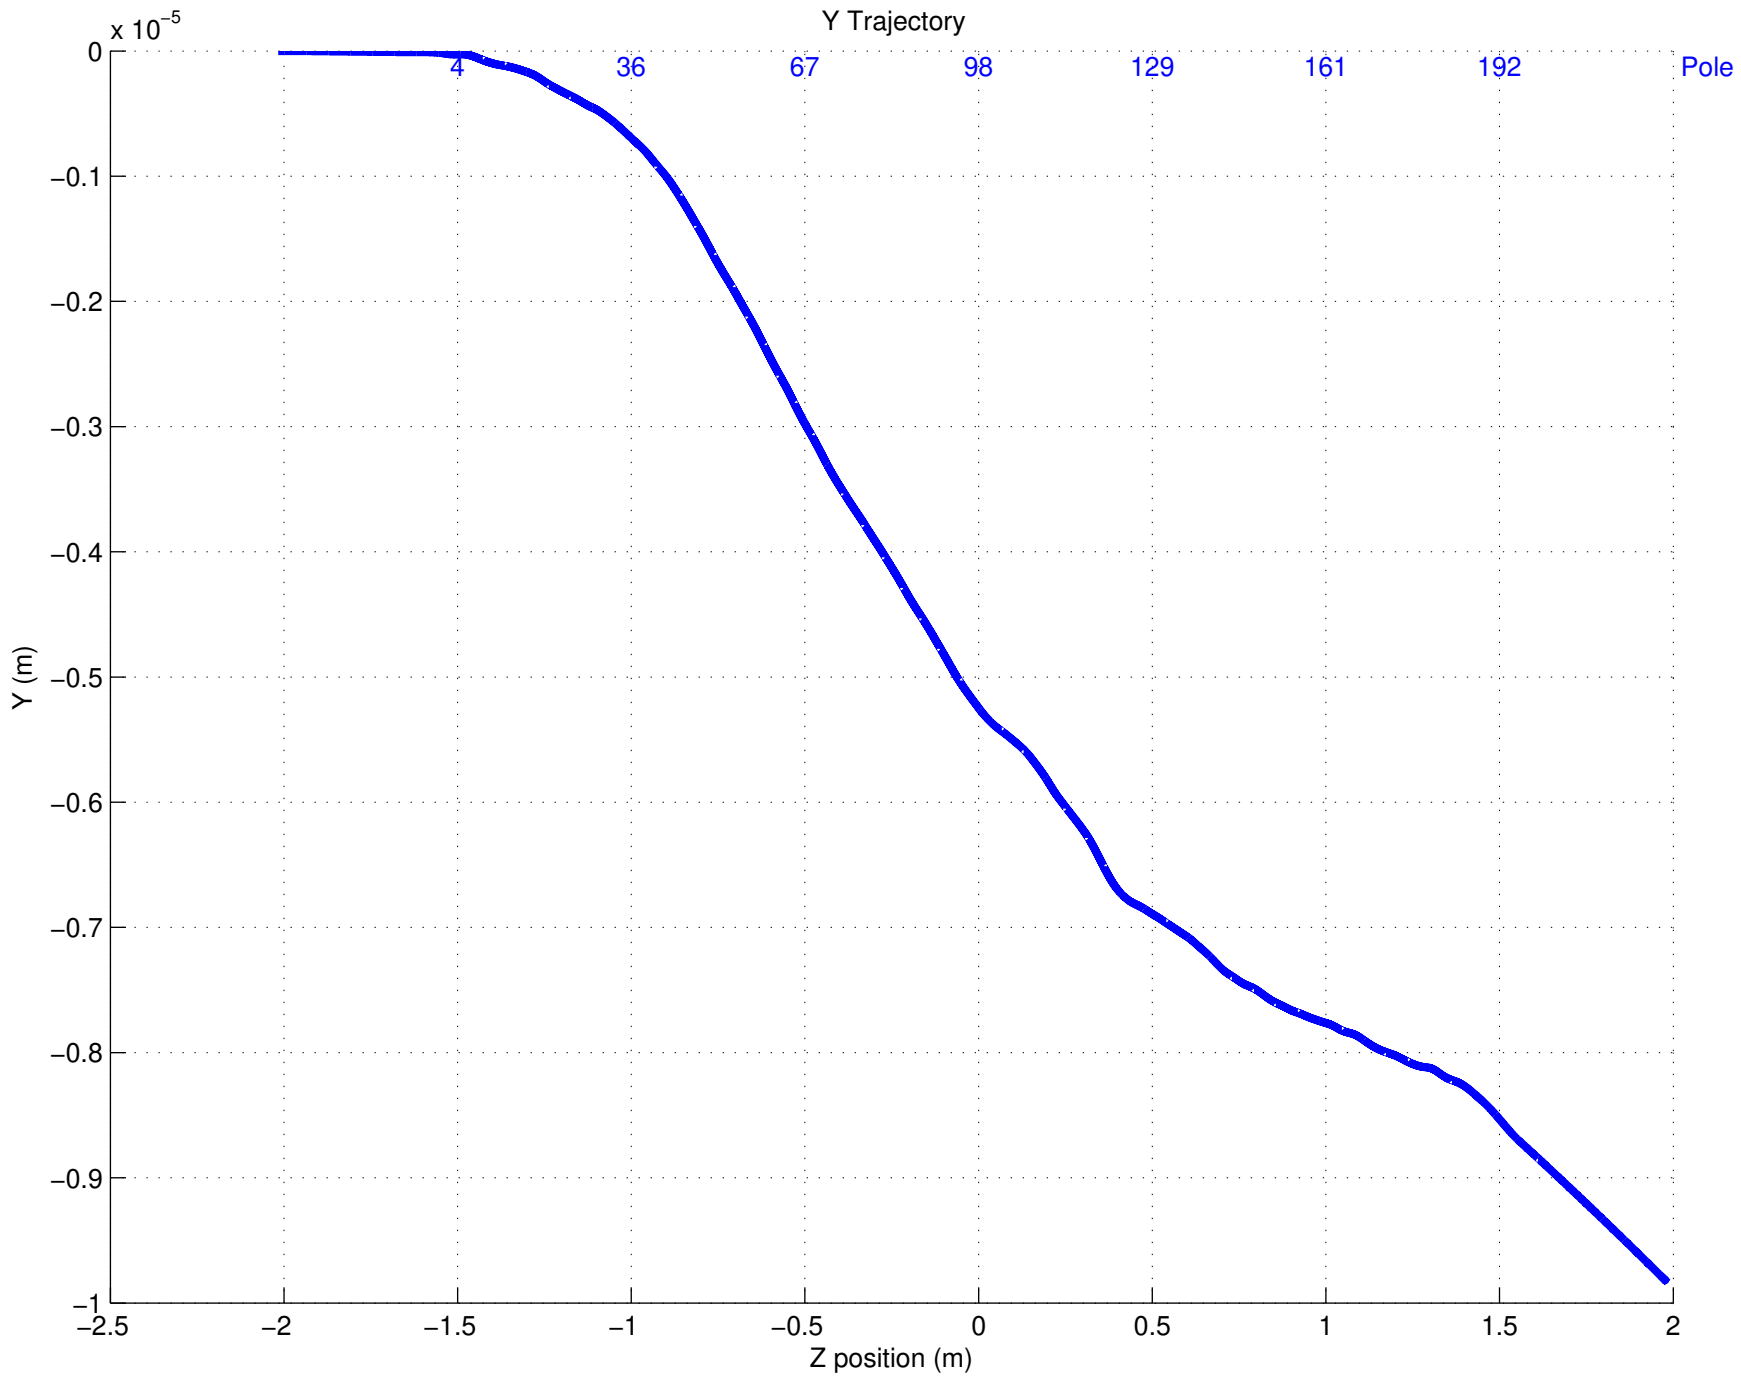
Y Trajectory
x 10^-5
0
−0.1
−0.2
−0.3
−0.4
−0.5
−0.6
−0.7
−0.8
−0.9
−1
Y (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

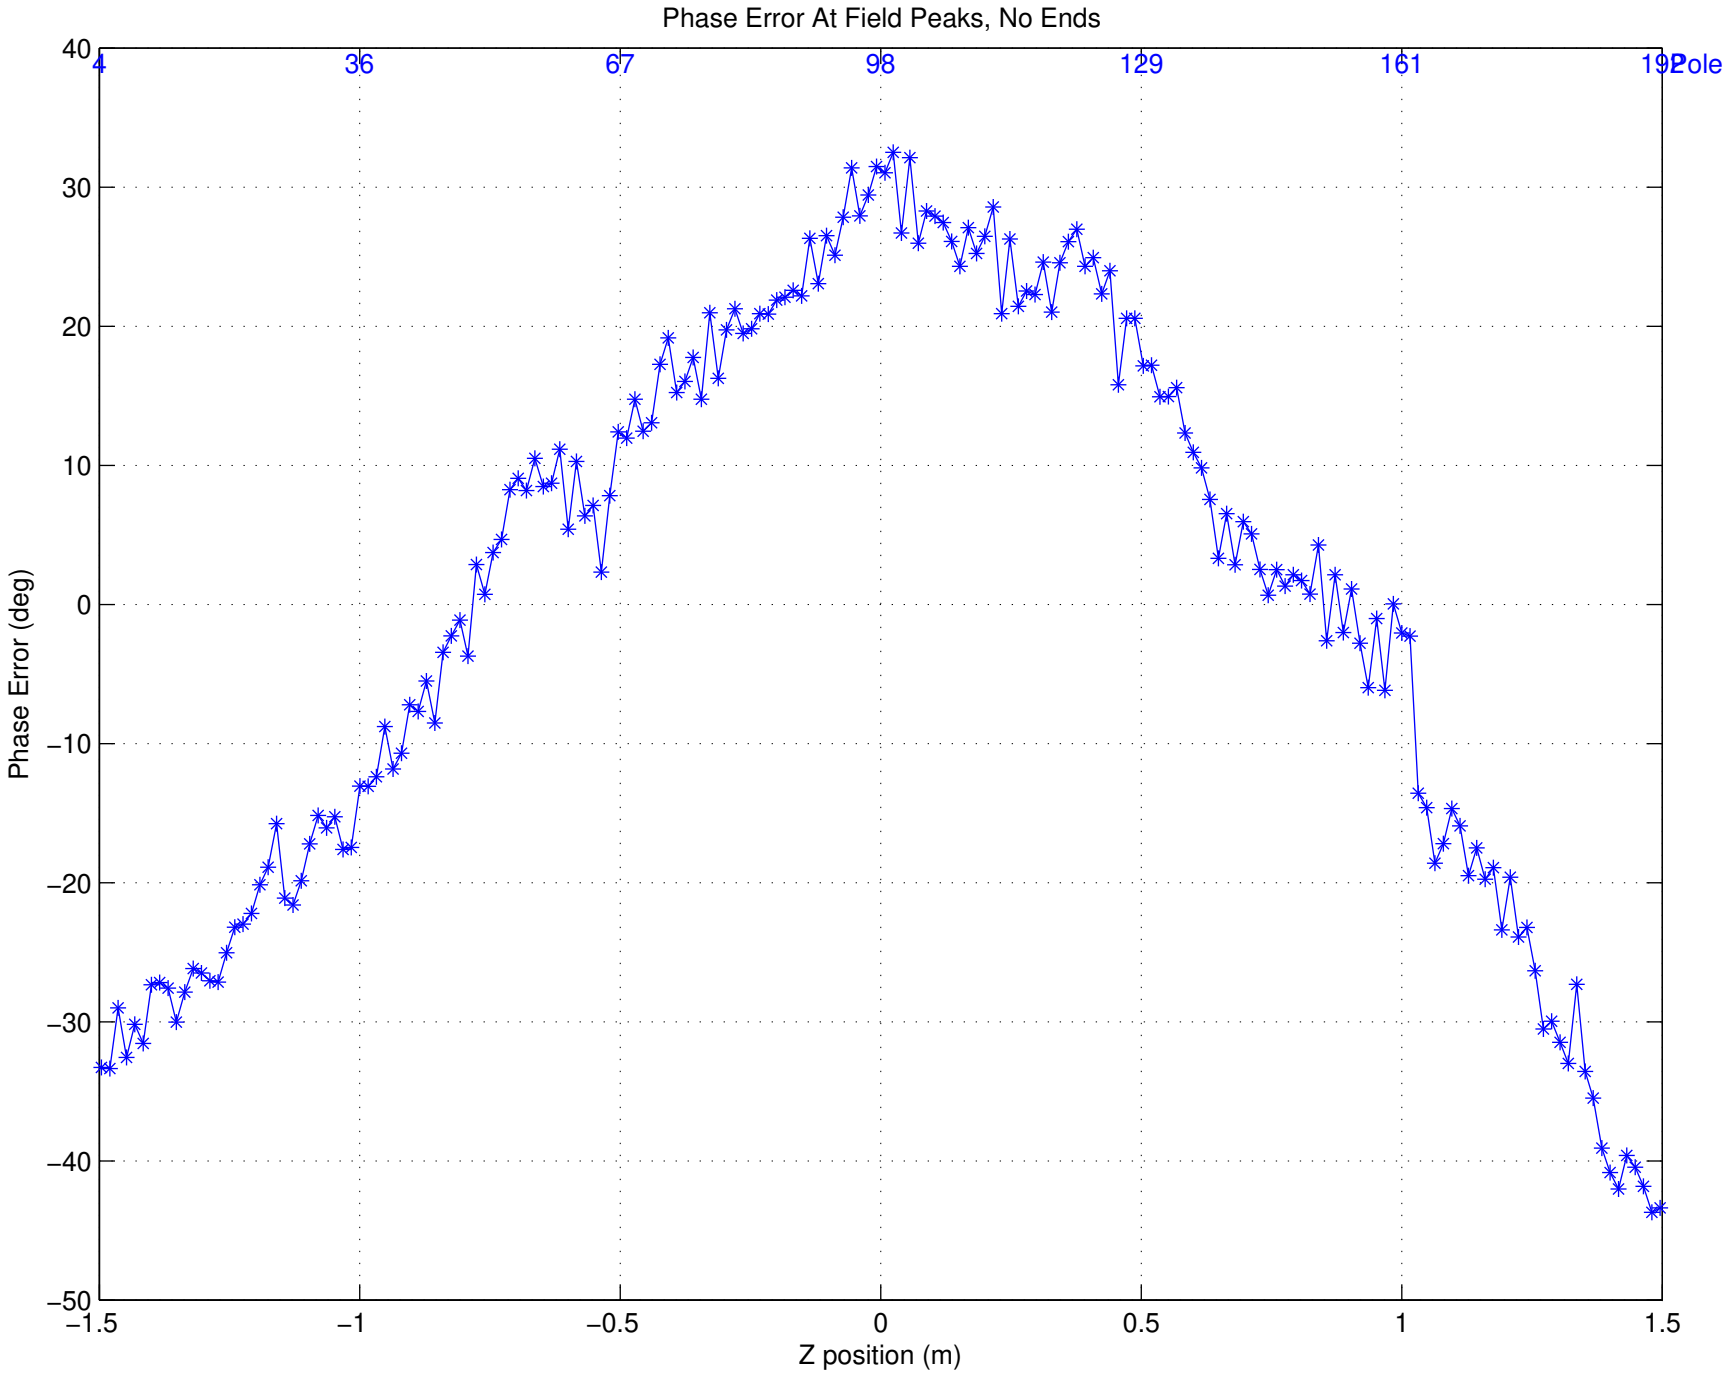

Phase Error: Ave = 0.000000 deg, RMS = 21.189135 deg

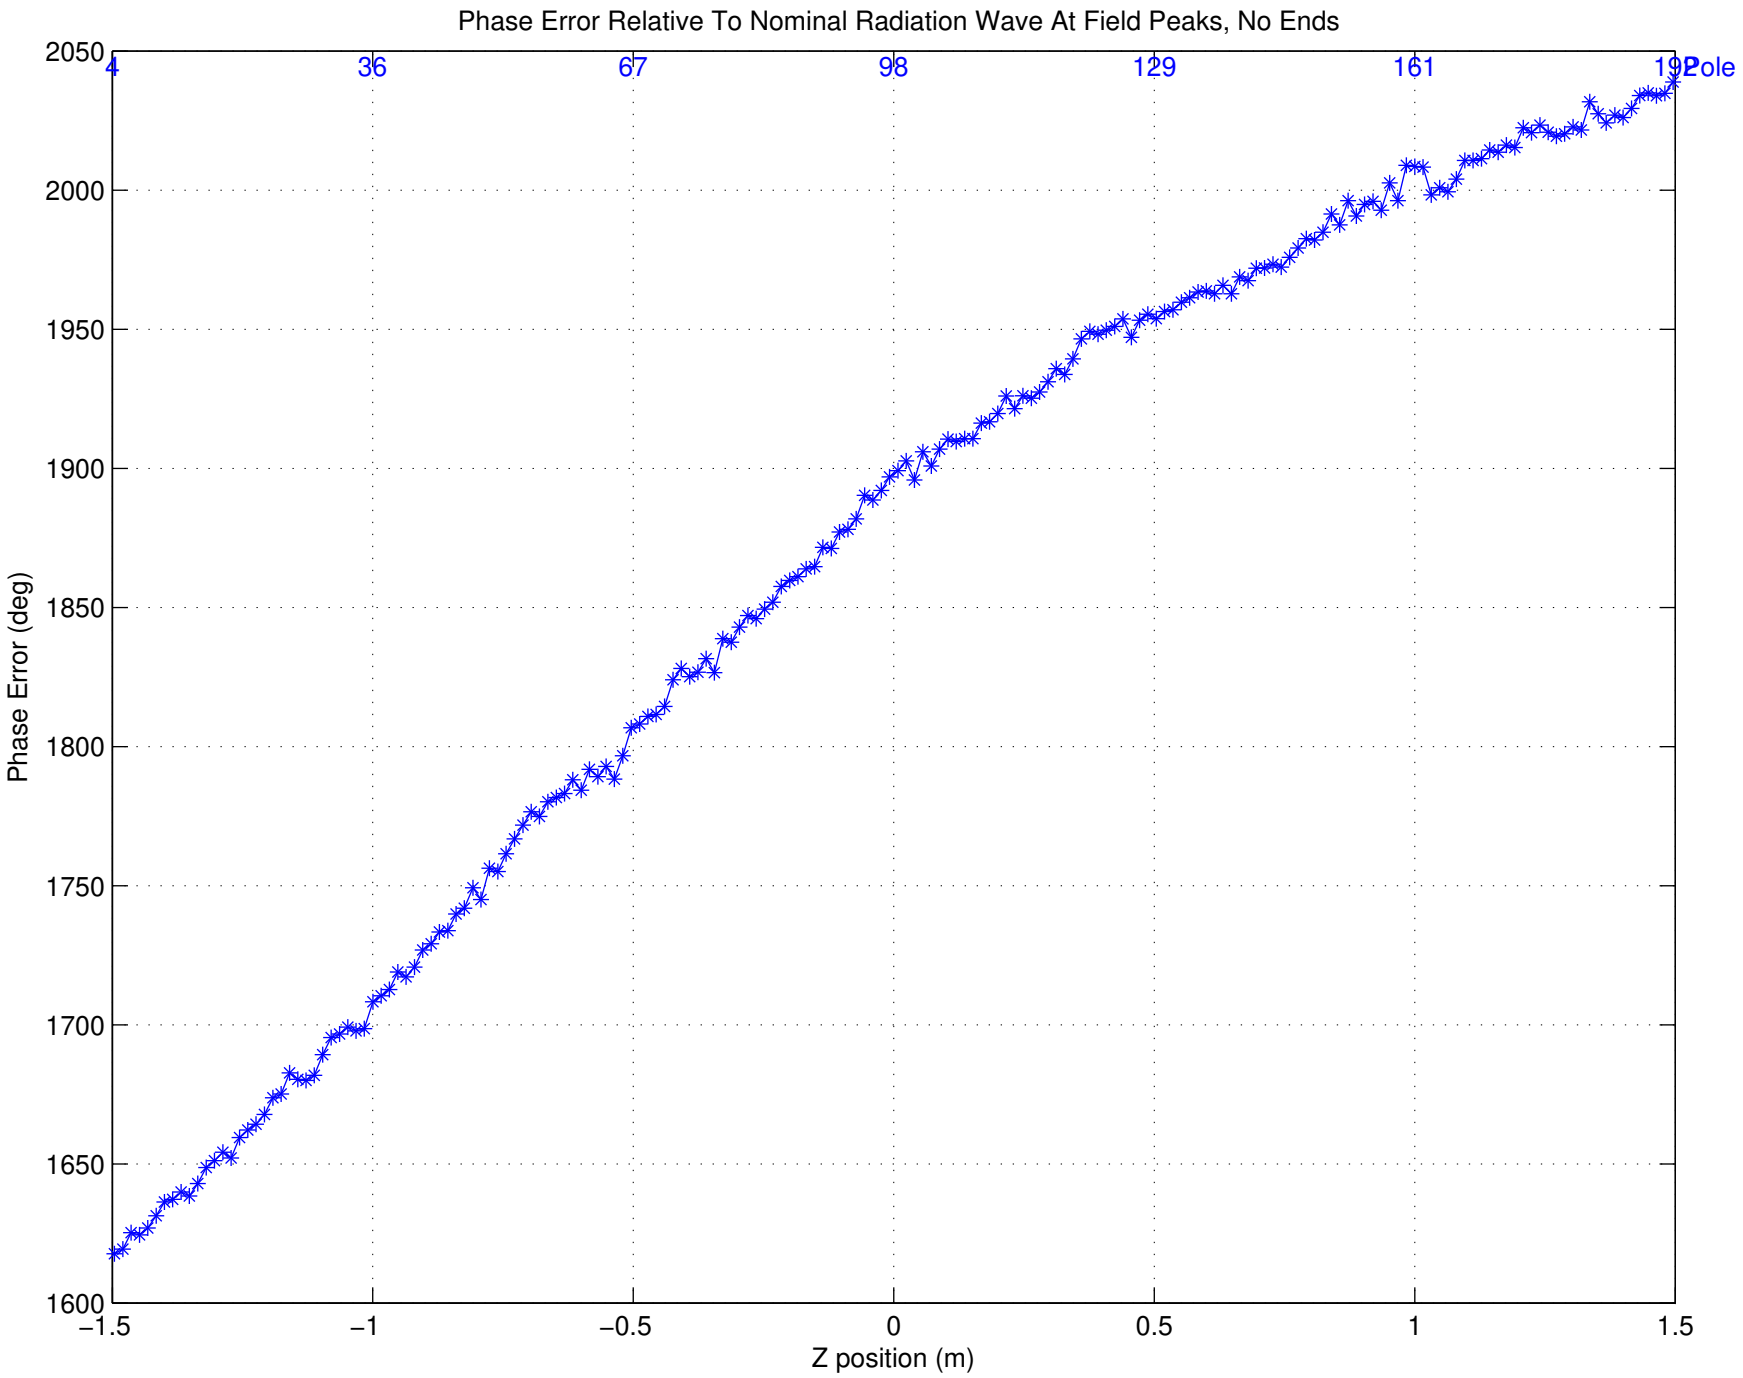
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
4
36
67
98
129
161
192
Pole
2050
2000
1950
1900
1850
1800
1750
1700
1650
1600
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z position (m)