SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 09−12−2014
Time: 13:03:52

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 6
Tuning Stage: Fine Tuning
Run Number: 8
Measurement Type: Z Scans
Operator: YL
Comment: Q3 final tuning; #322 −2, #272 −5, #286 +20
Session first run: 2
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0006\Fine Tuning\Z Scans\Run 008\bscanz.dat

Temperature (C)
DELTA:−−> T1 20.13 −−> T2 20.14 −−> T5 20.03 −−> T3 20.11 −−> Air 20.05 −−> T4 20.11

Axes position (m) X:0.021606 Y:0.000206
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001053 V
Vy_0i = −0.002902 V

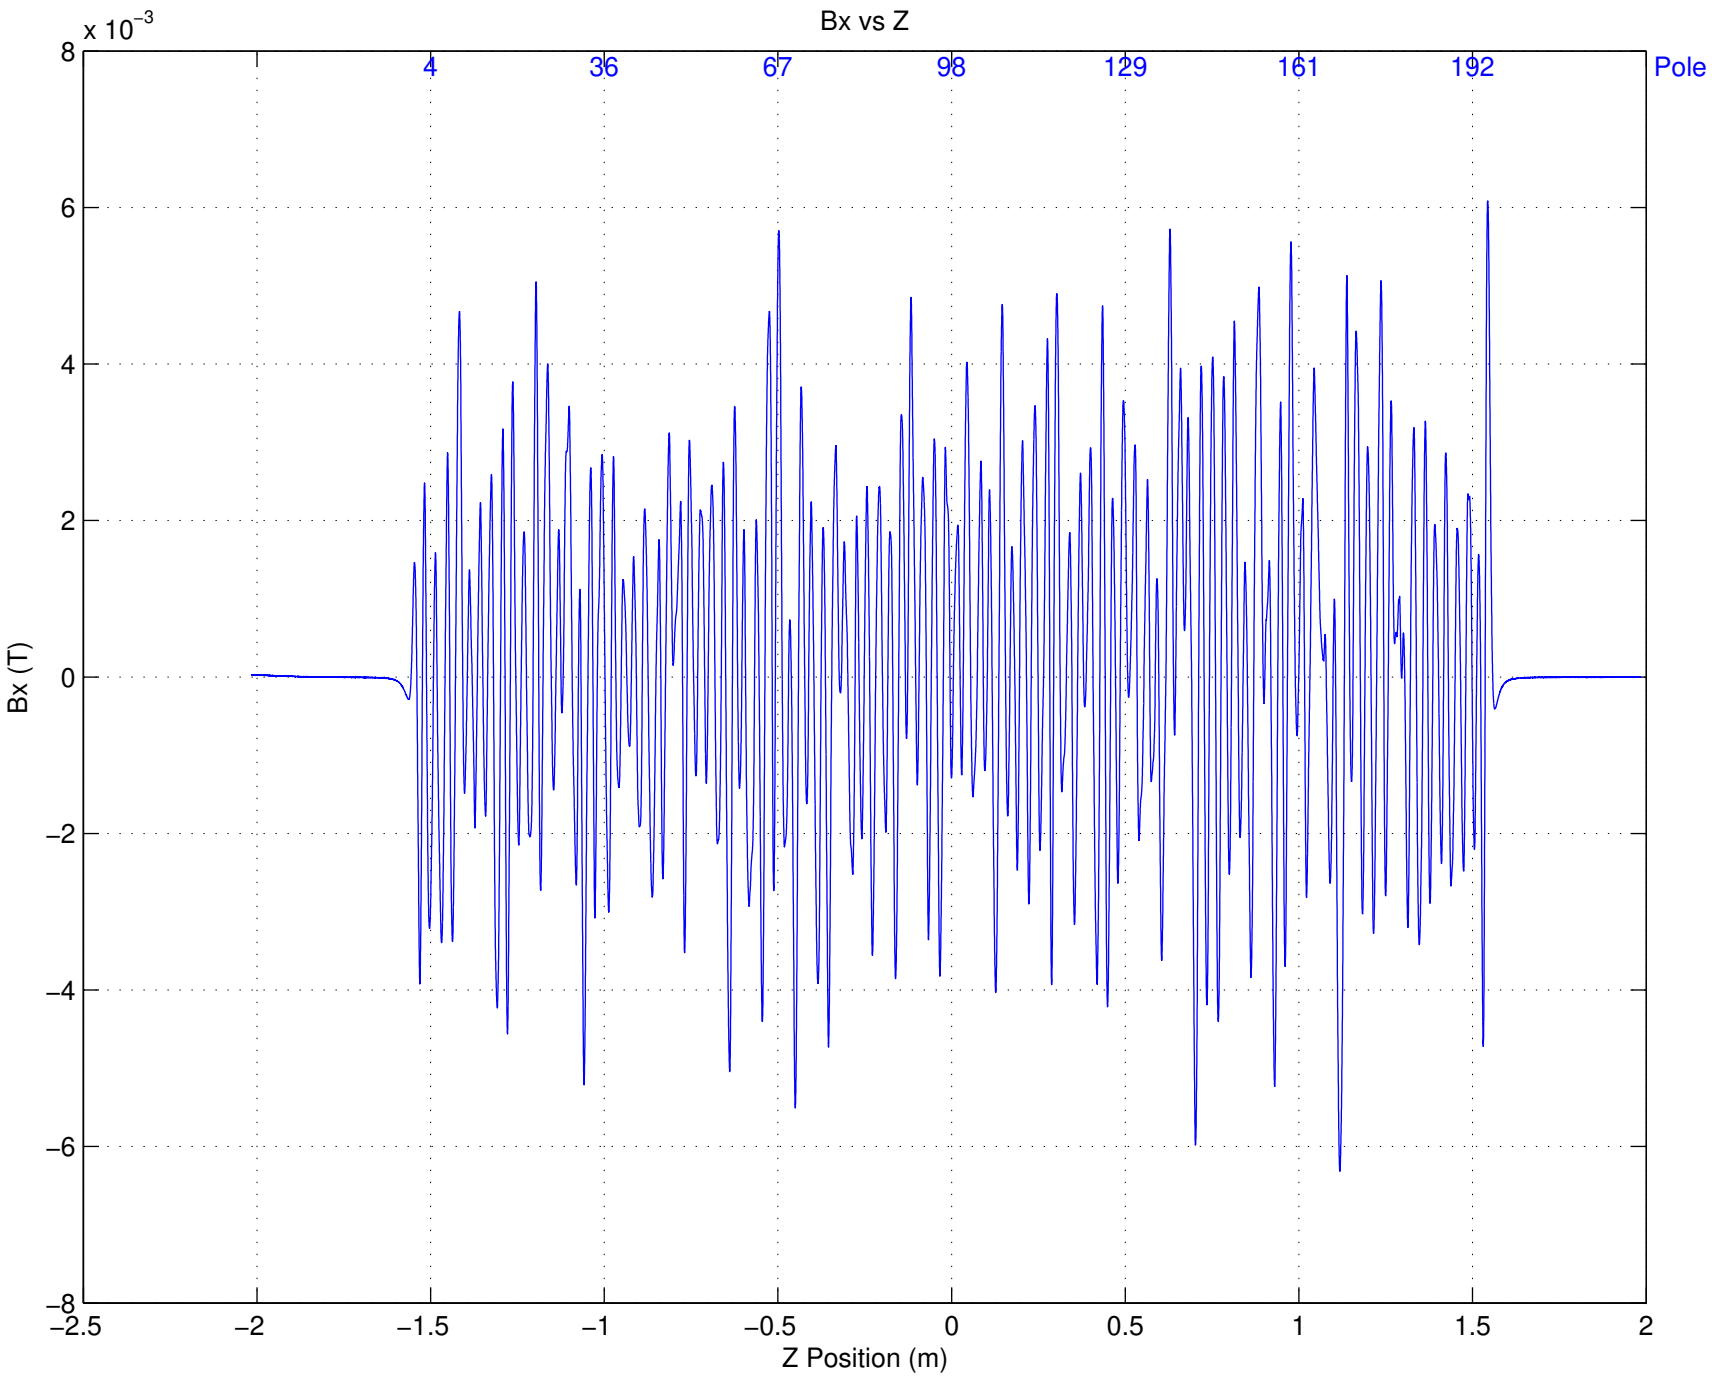
Bx vs Z
x 10^-3
8
6
4
2
0
−2
−4
−6
−8
Bx (T)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

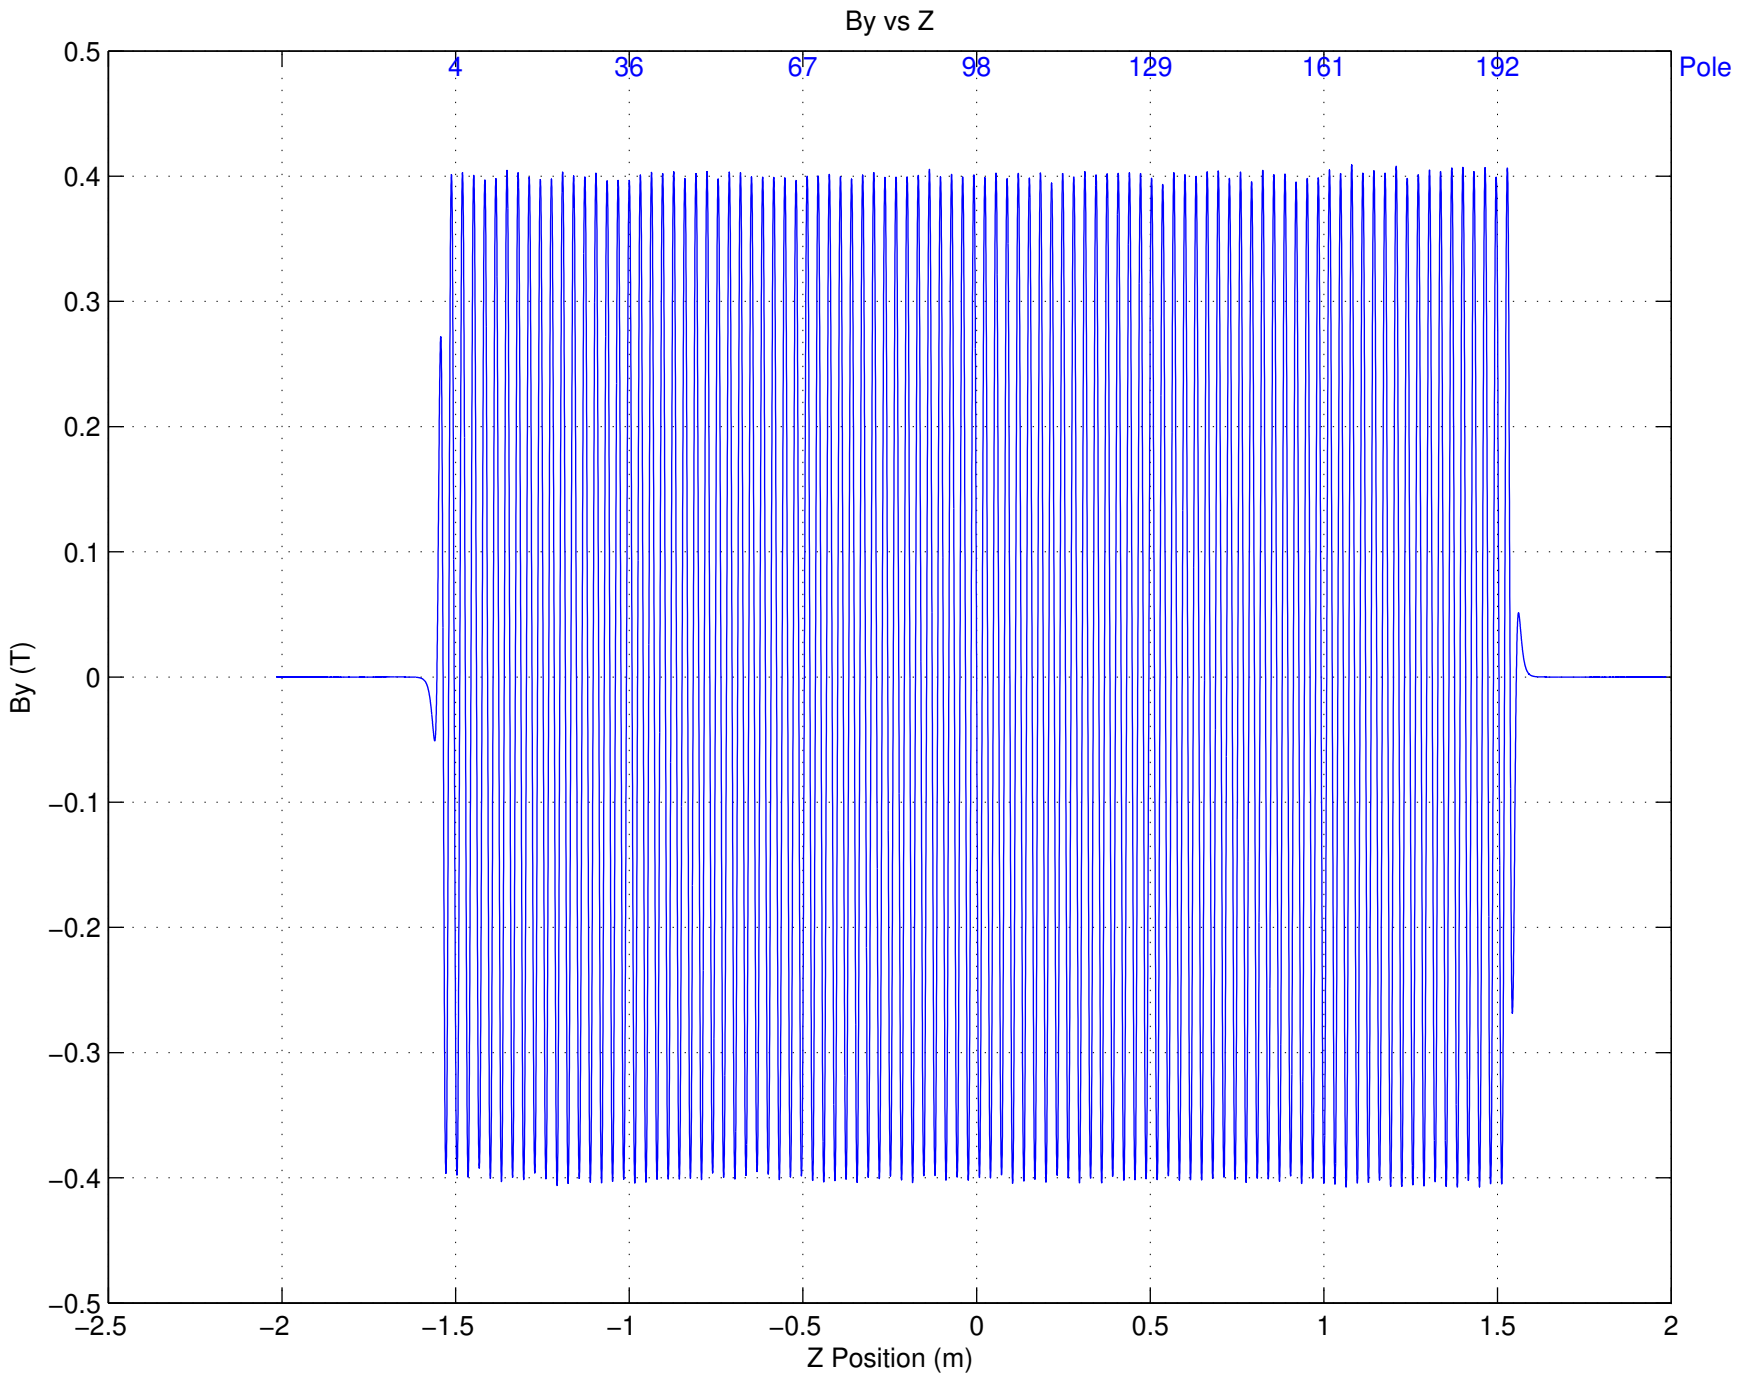
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

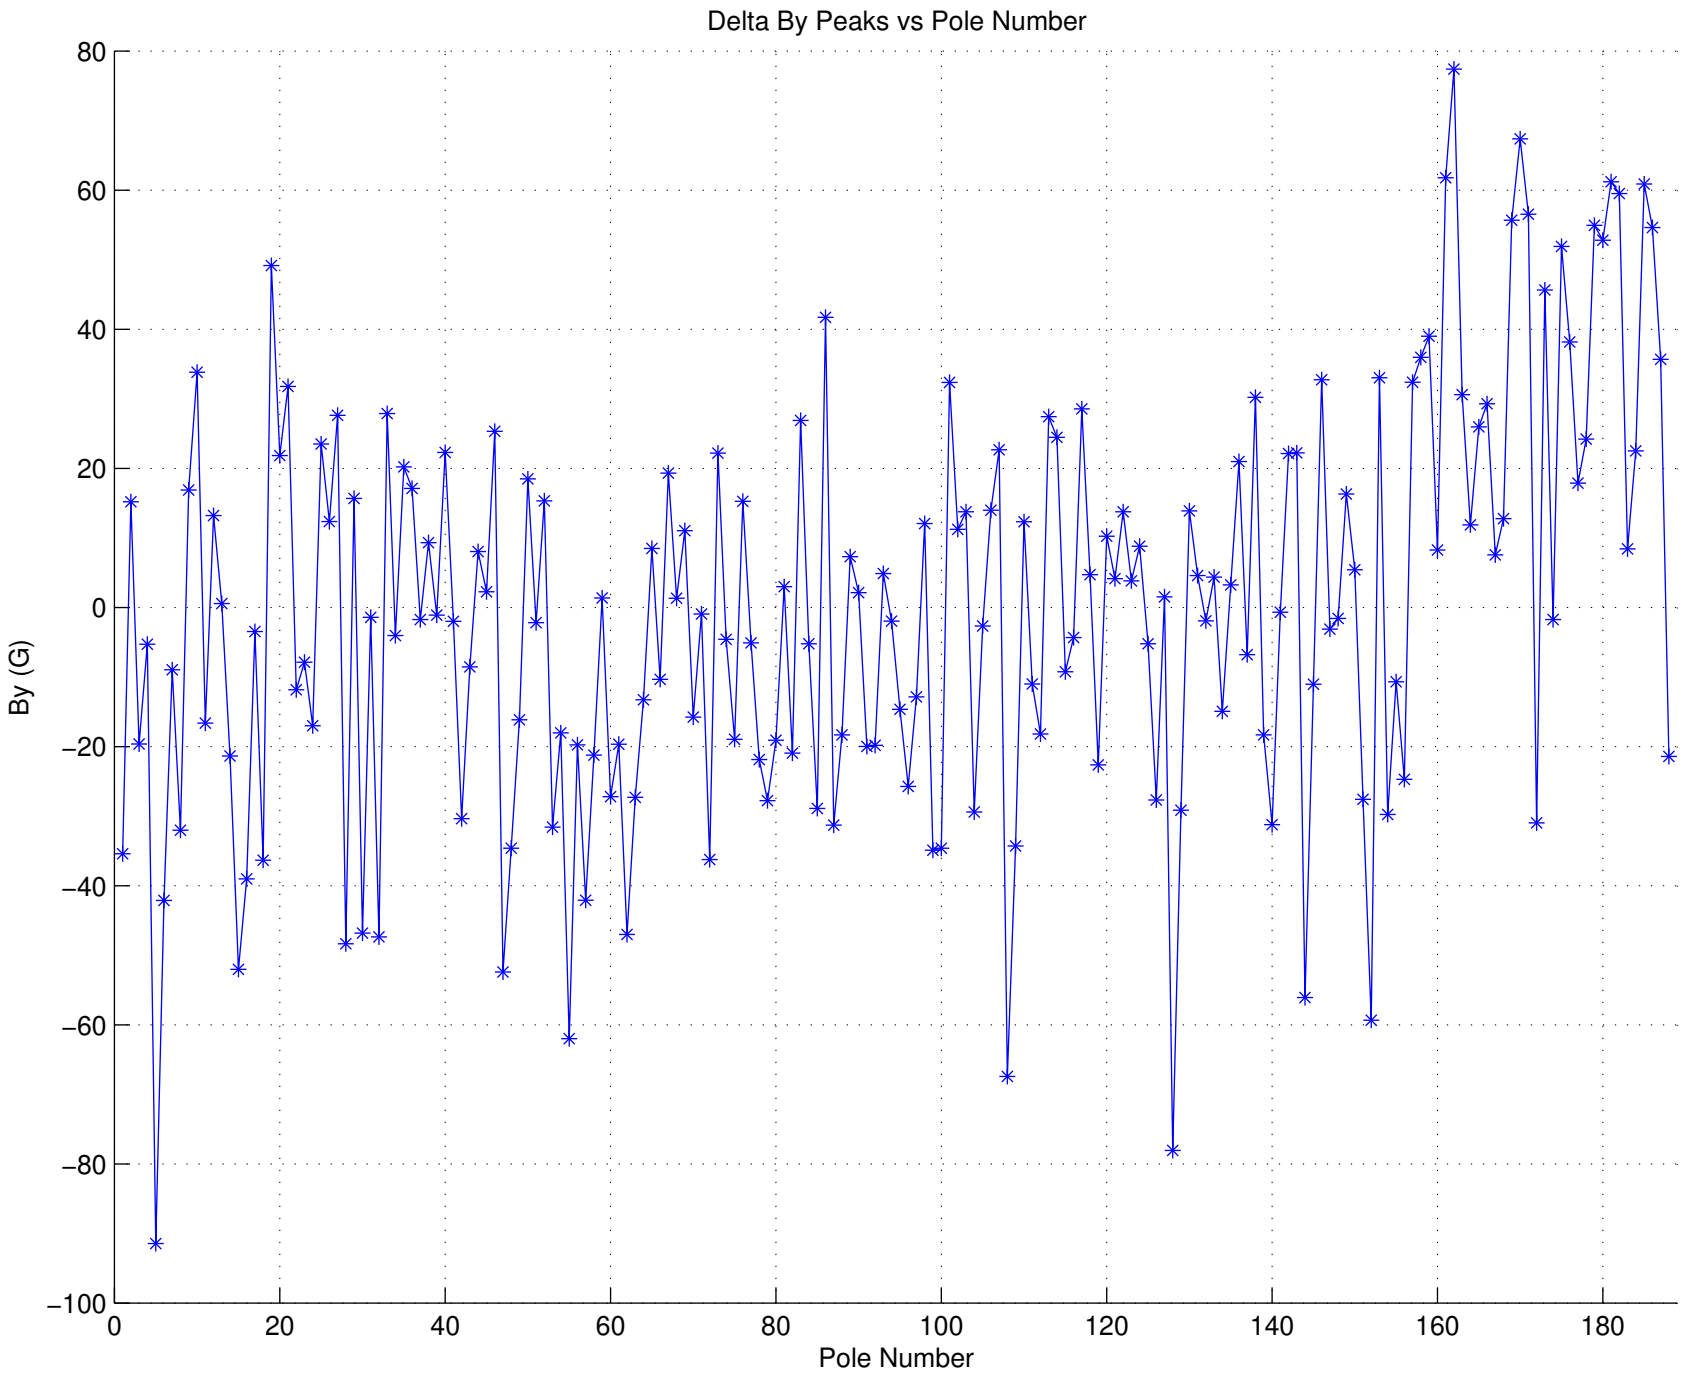
Delta By Peaks vs Pole Number
By (G)
Pole Number
80
60
40
20
0
−20
−40
−60
−80
−100
0
20
40
60
80
100
120
140
160
180

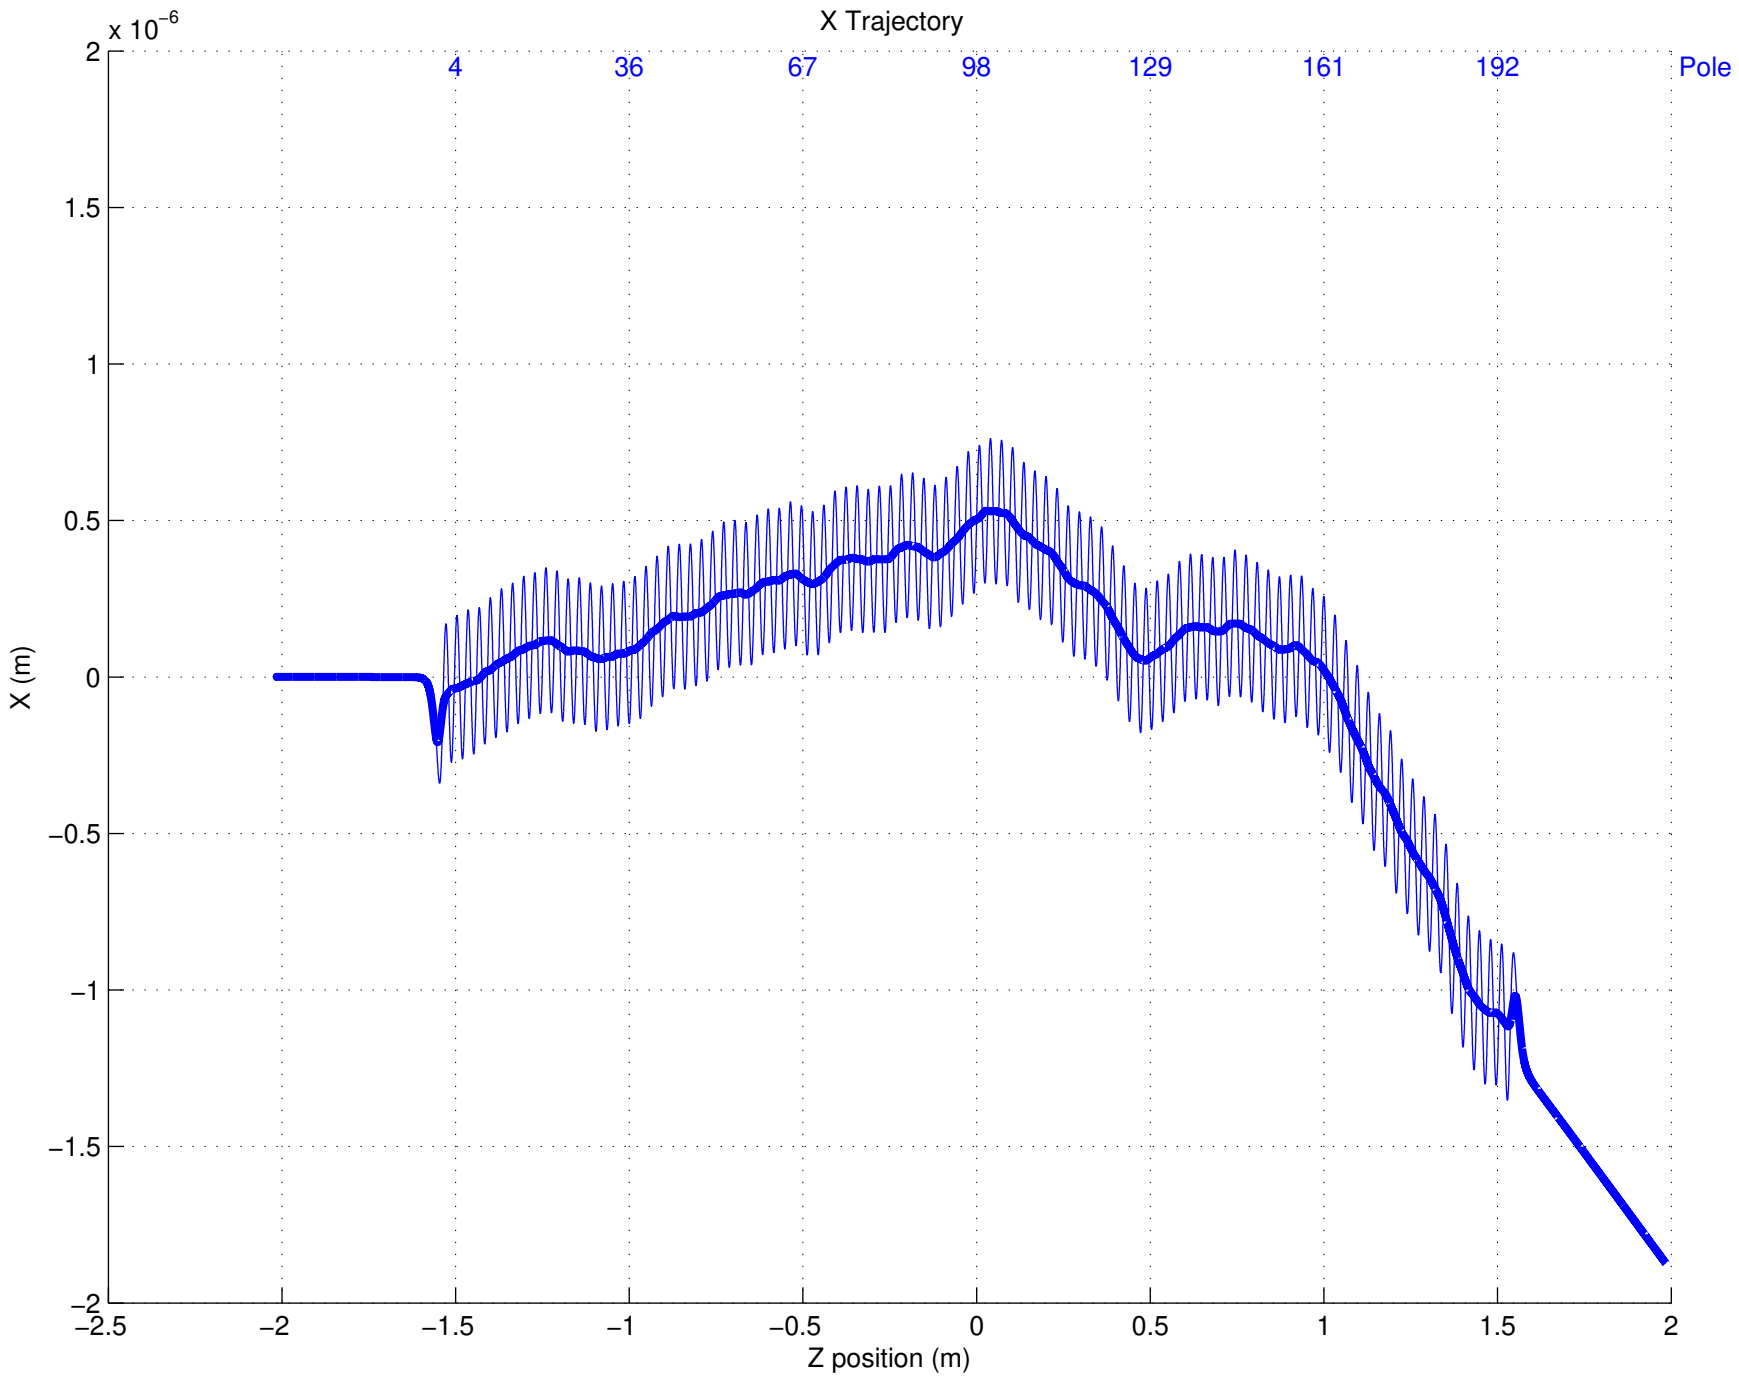
X Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

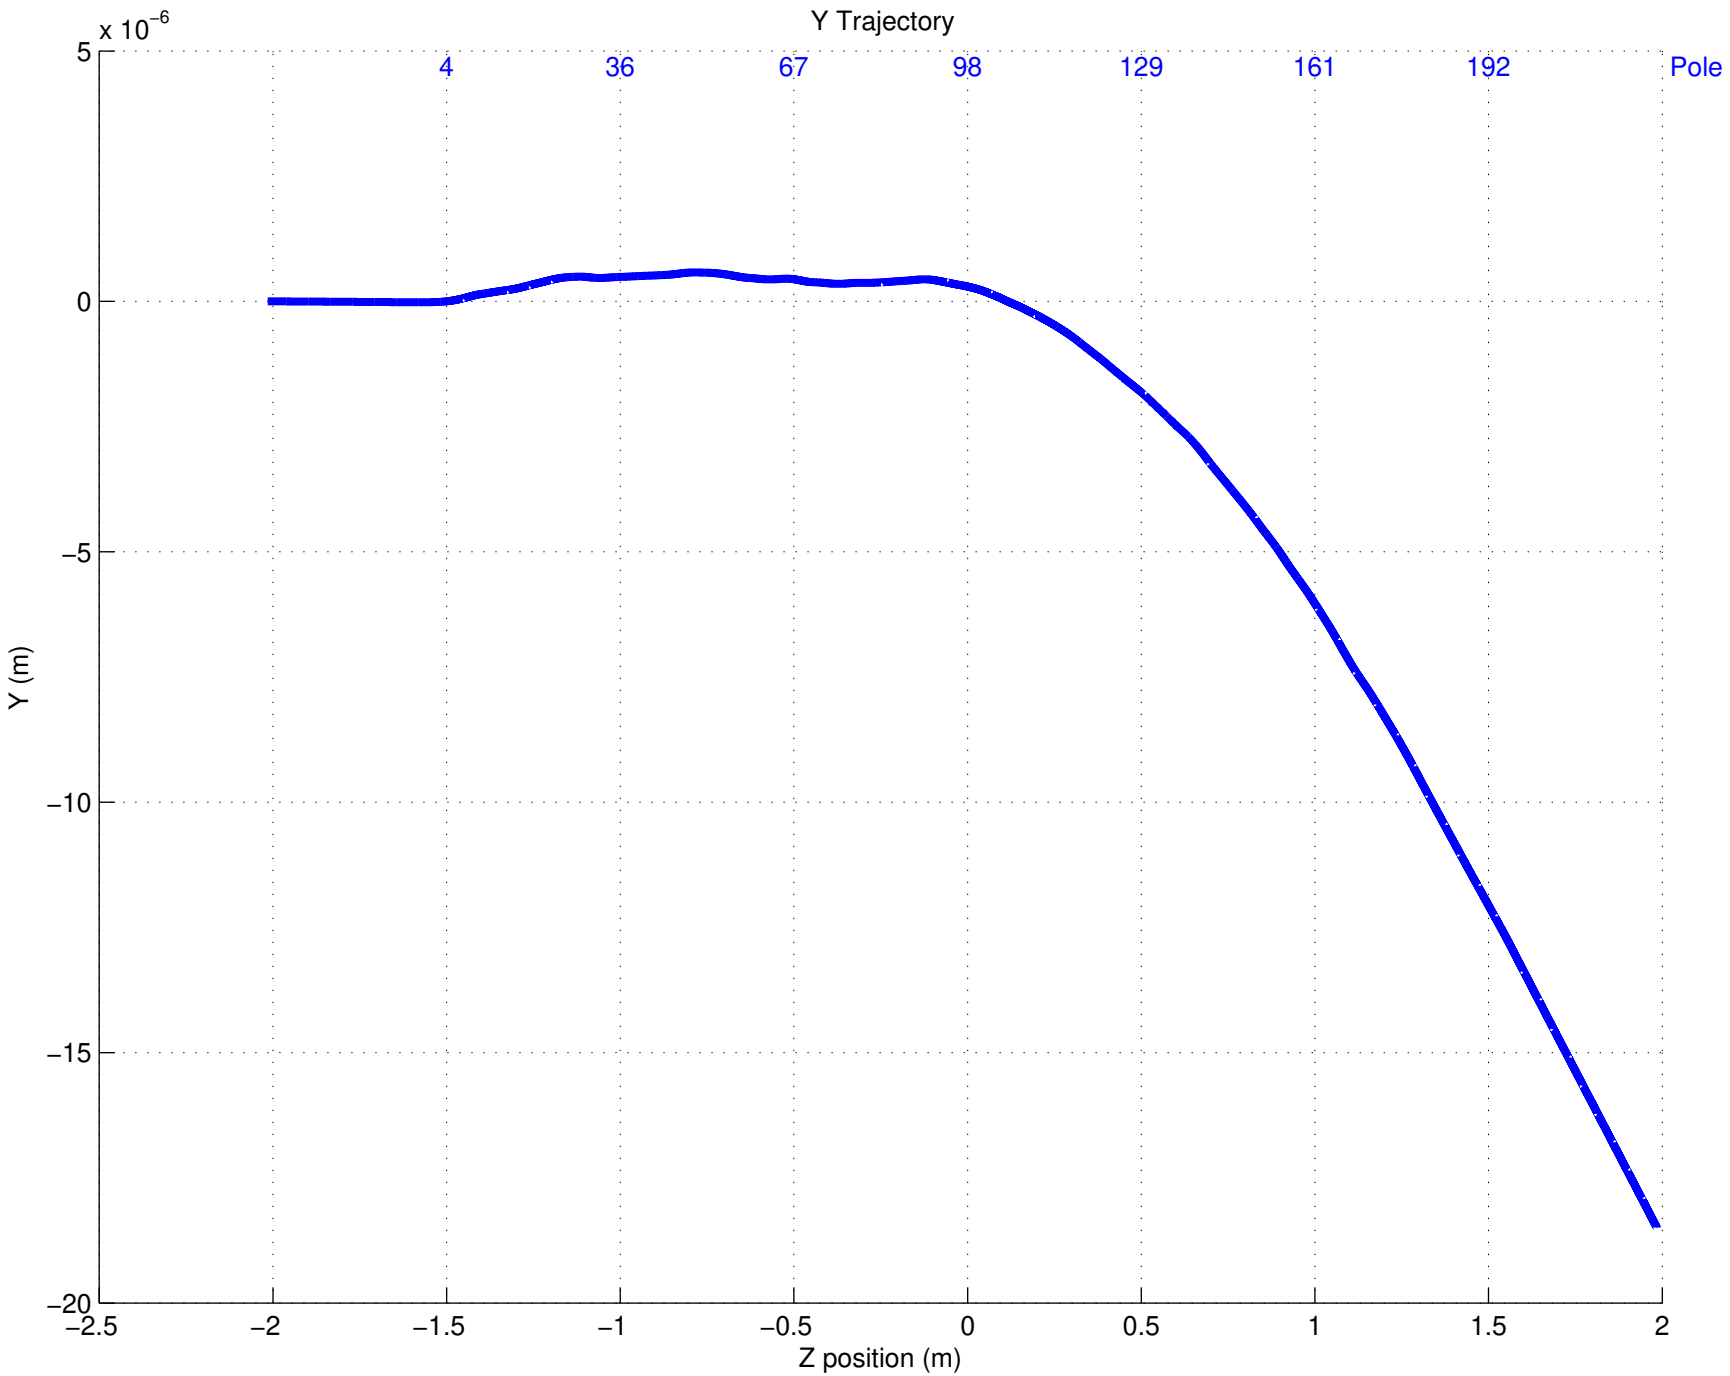
Y Trajectory
x 10^-6
5
0
−5
−10
−15
−20
Y (m)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

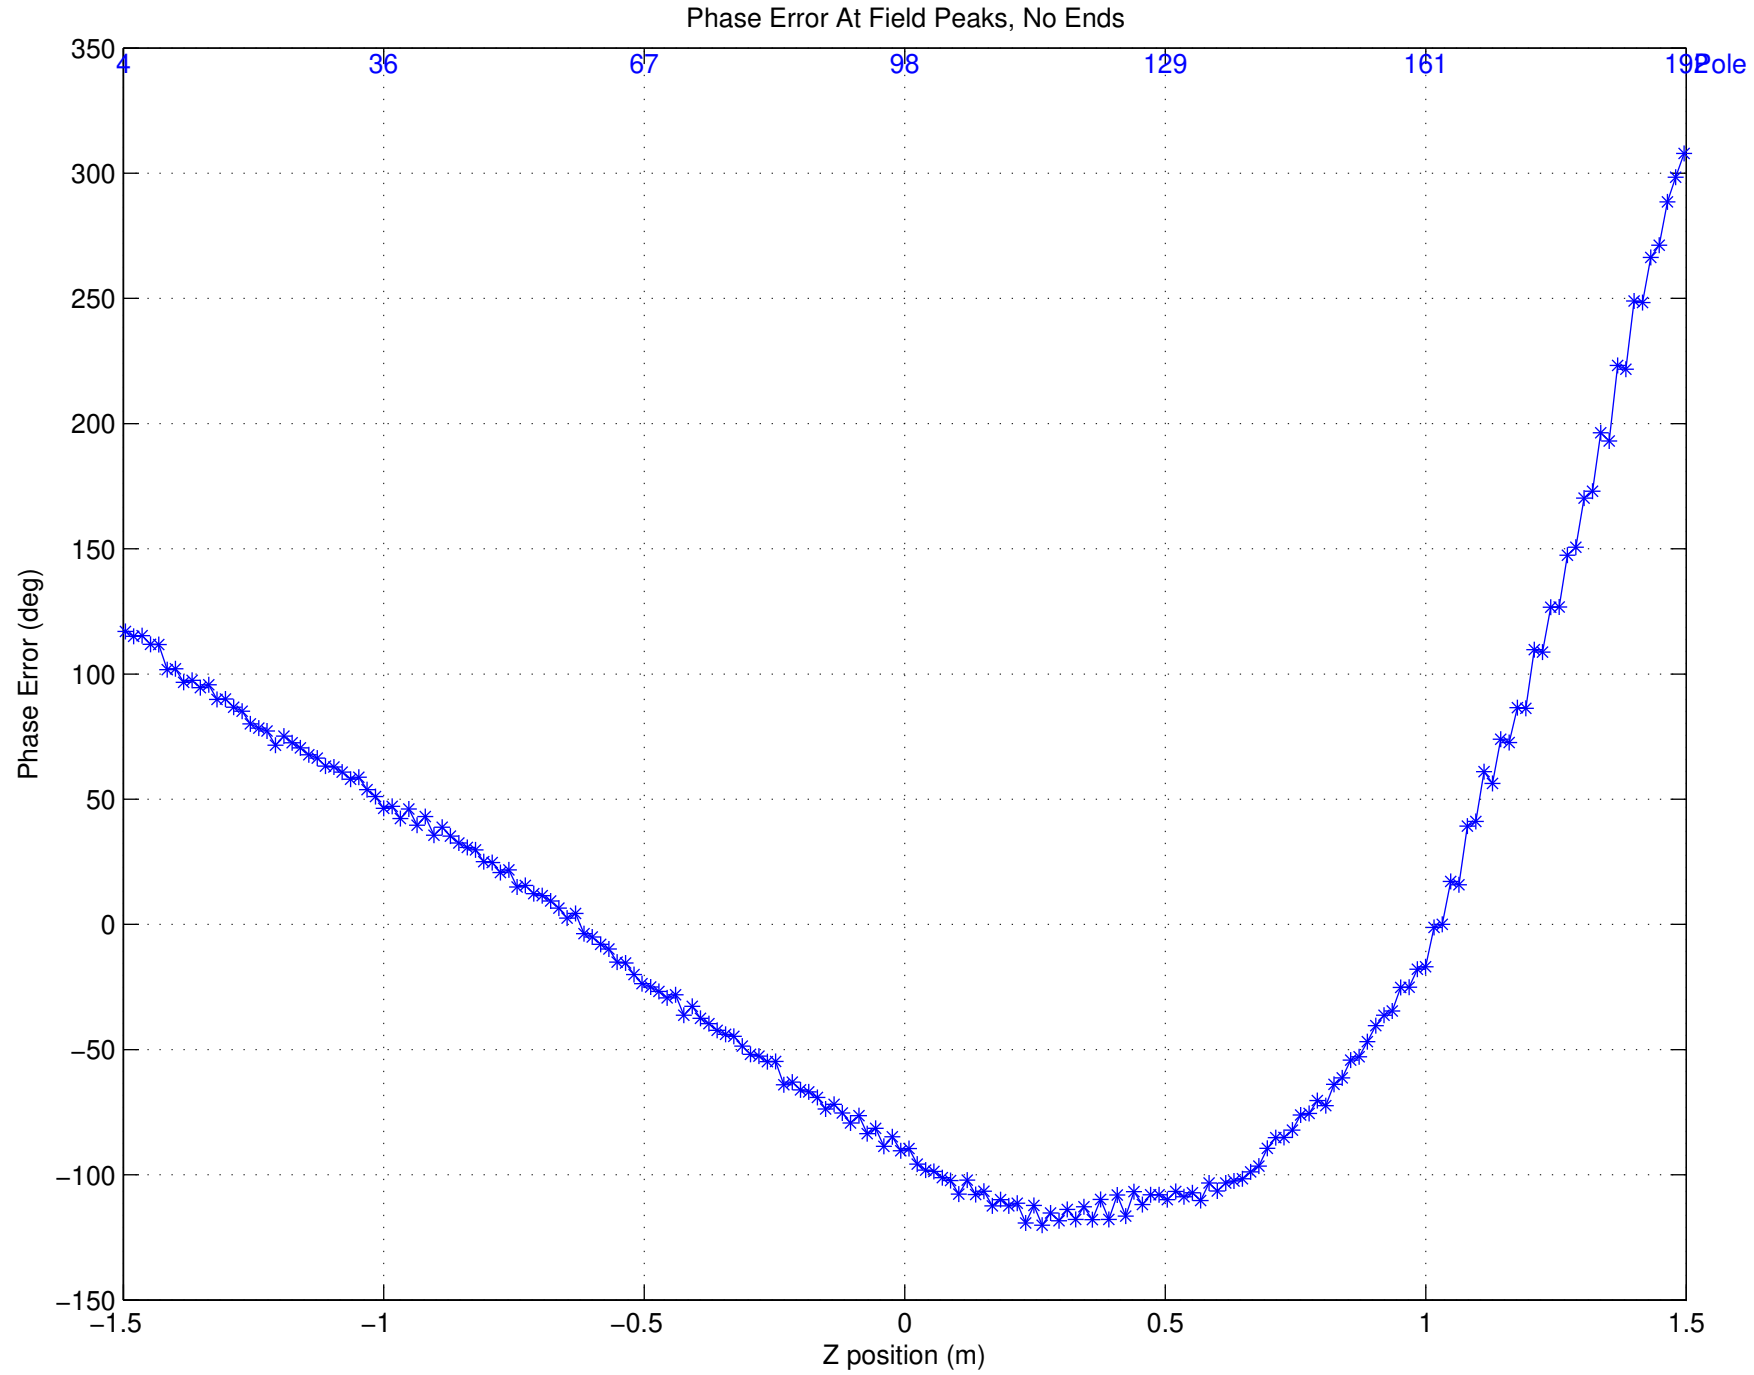

Phase Error: Ave = 0.000000 deg, RMS = 99.378319 deg

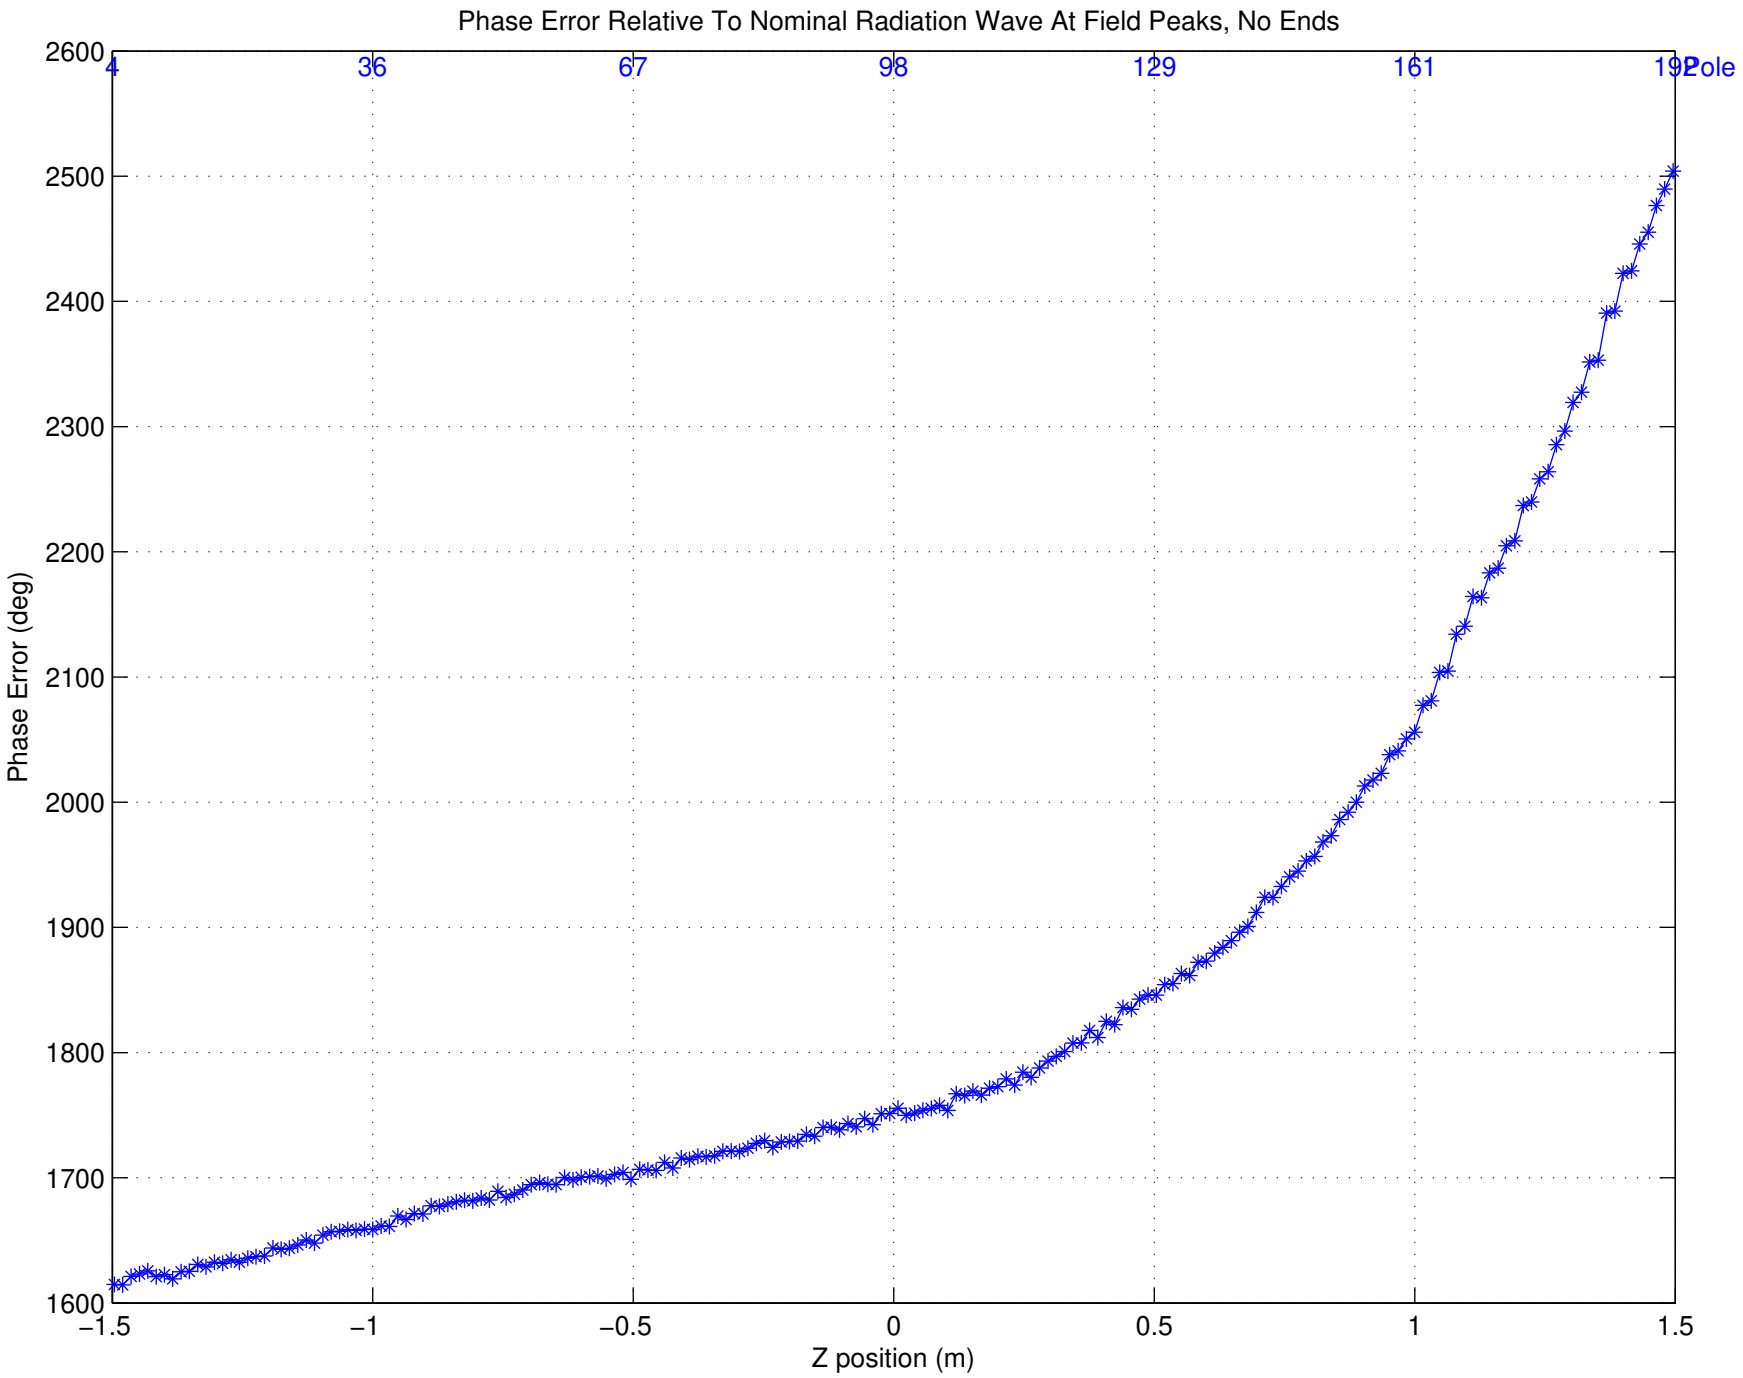
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
4
36
67
98
129
161
192
Pole
2600
2500
2400
2300
2200
2100
2000
1900
1800
1700
1600
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z position (m)