SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 09−18−2014
Time: 11:24:03

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: DELTA
DATASET Number: 7
Tuning Stage: Fine Tuning
Run Number: 12
Measurement Type: Z Scans
Operator: YL
Comment: Q4 tuning; #210+30, #316 −30, #334 −2, #316 −5, #342 −3
Session first run: 3
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\DELTA\DATASET0007\Fine Tuning\Z Scans\Run 012\bscanz.dat

Temperature (C)
DELTA:−−> T1 20.13 −−> T2 20.16 −−> T5 20.03 −−> T3 20.13 −−> Air 20.07 −−> T4 20.13

Axes position (m) X:0.021636 Y:0.000201
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001100 V
Vy_0i = −0.003022 V

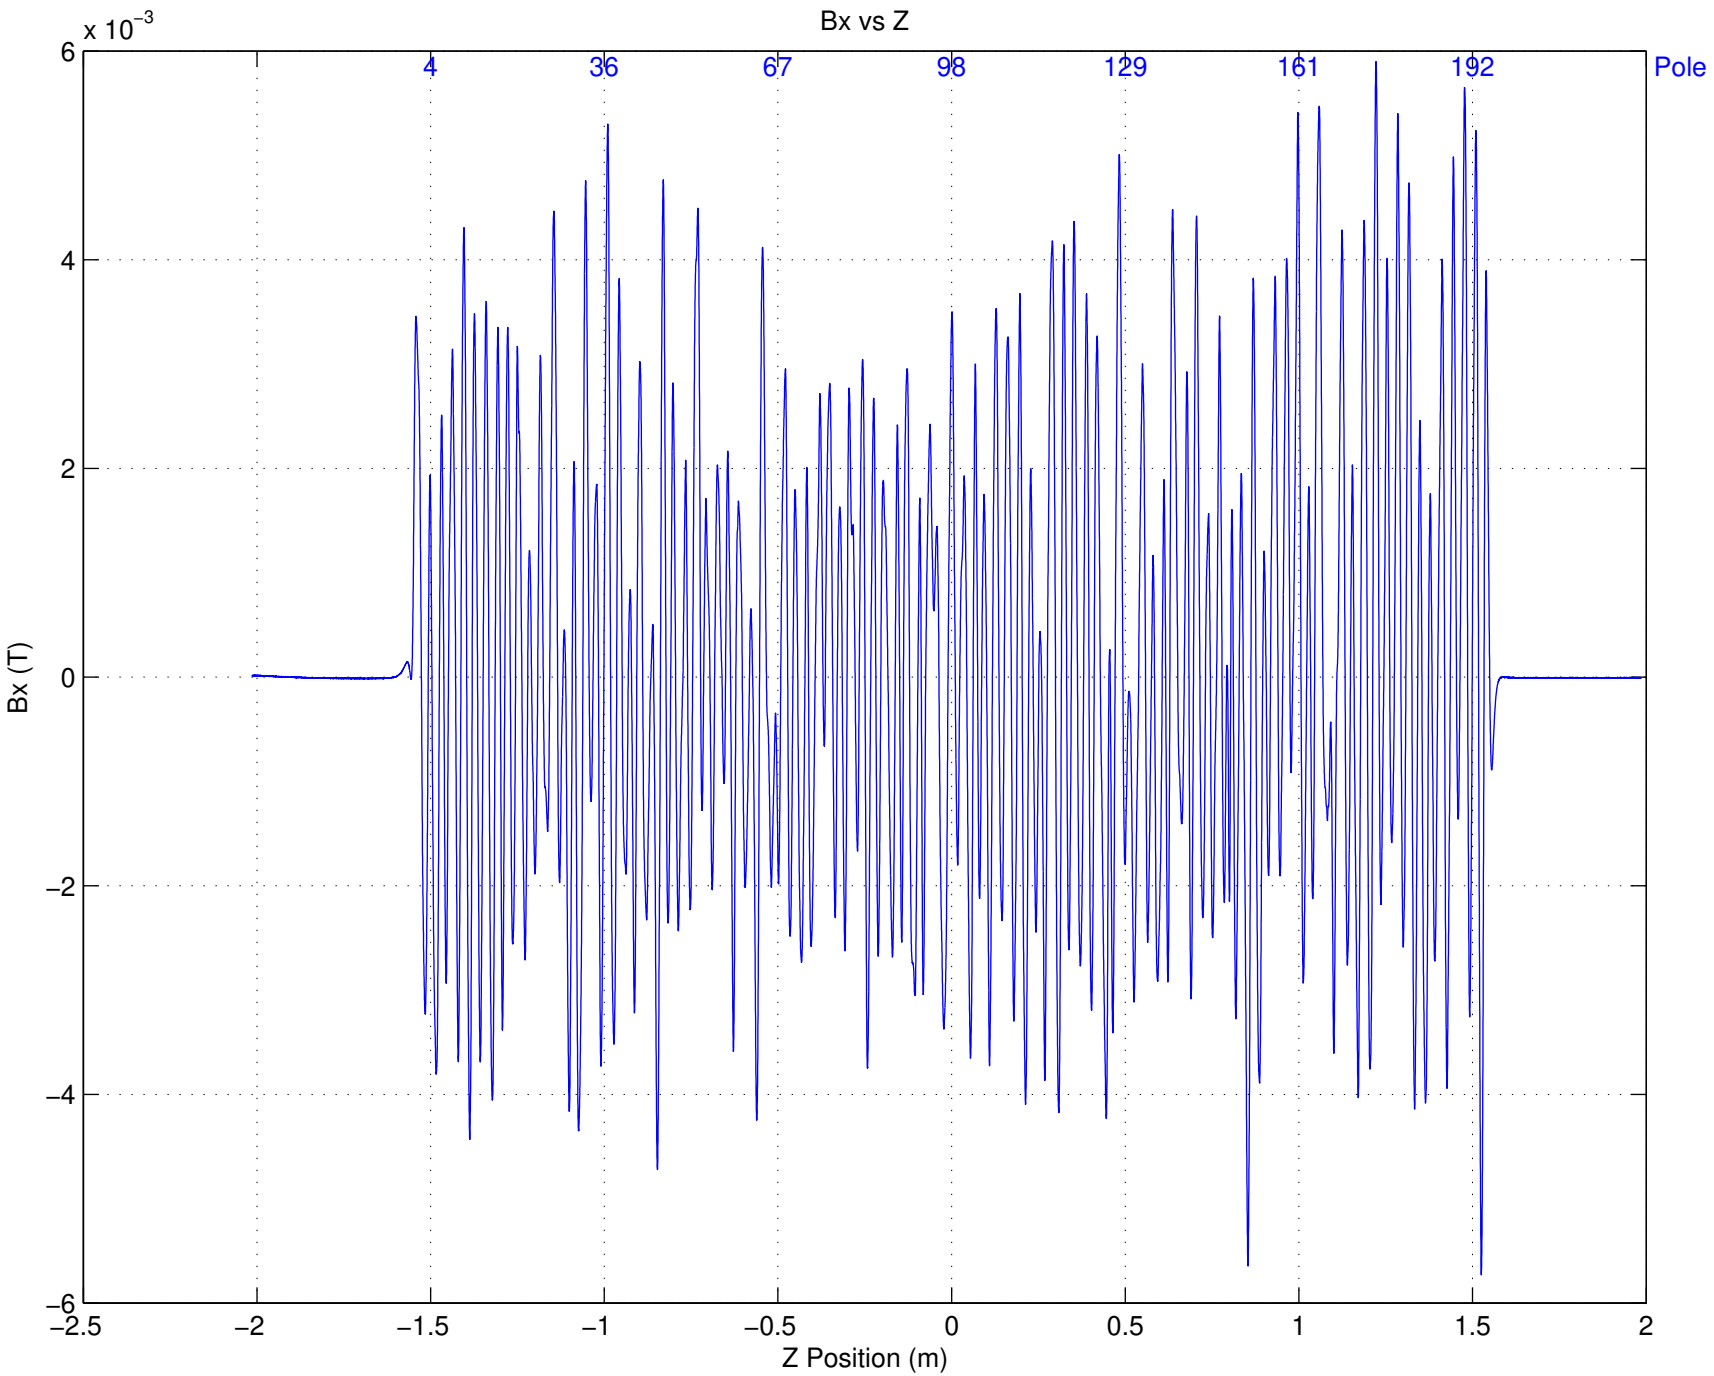
Bx vs Z
x 10^-3
6
4
2
0
−2
−4
−6
Bx (T)
4
36
67
98
129
161
192
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

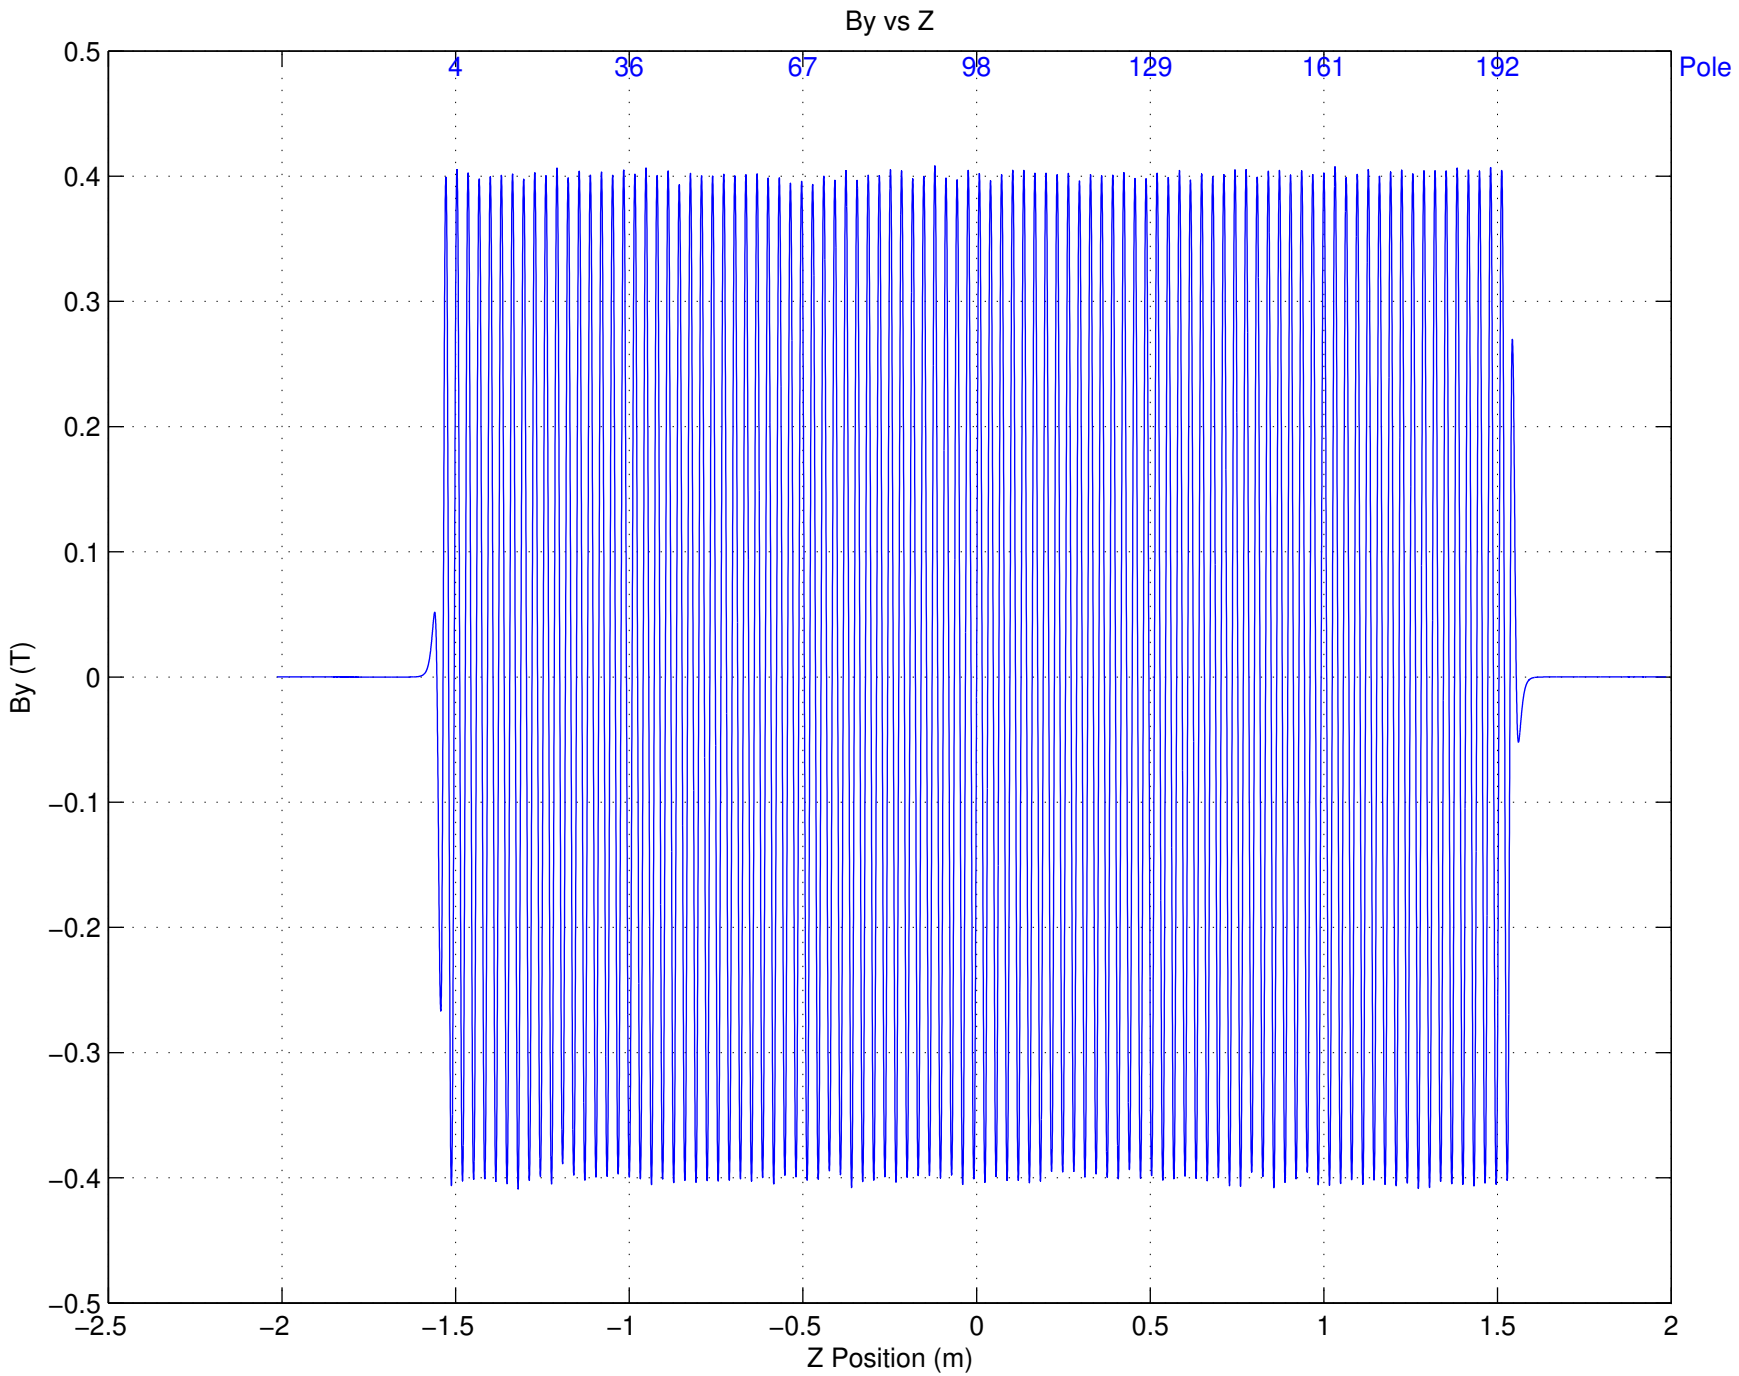
By vs Z
4
36
67
98
129
161
192
Pole
0.5
0.4
0.3
0.2
0.1
0
−0.1
−0.2
−0.3
−0.4
−0.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z Position (m)

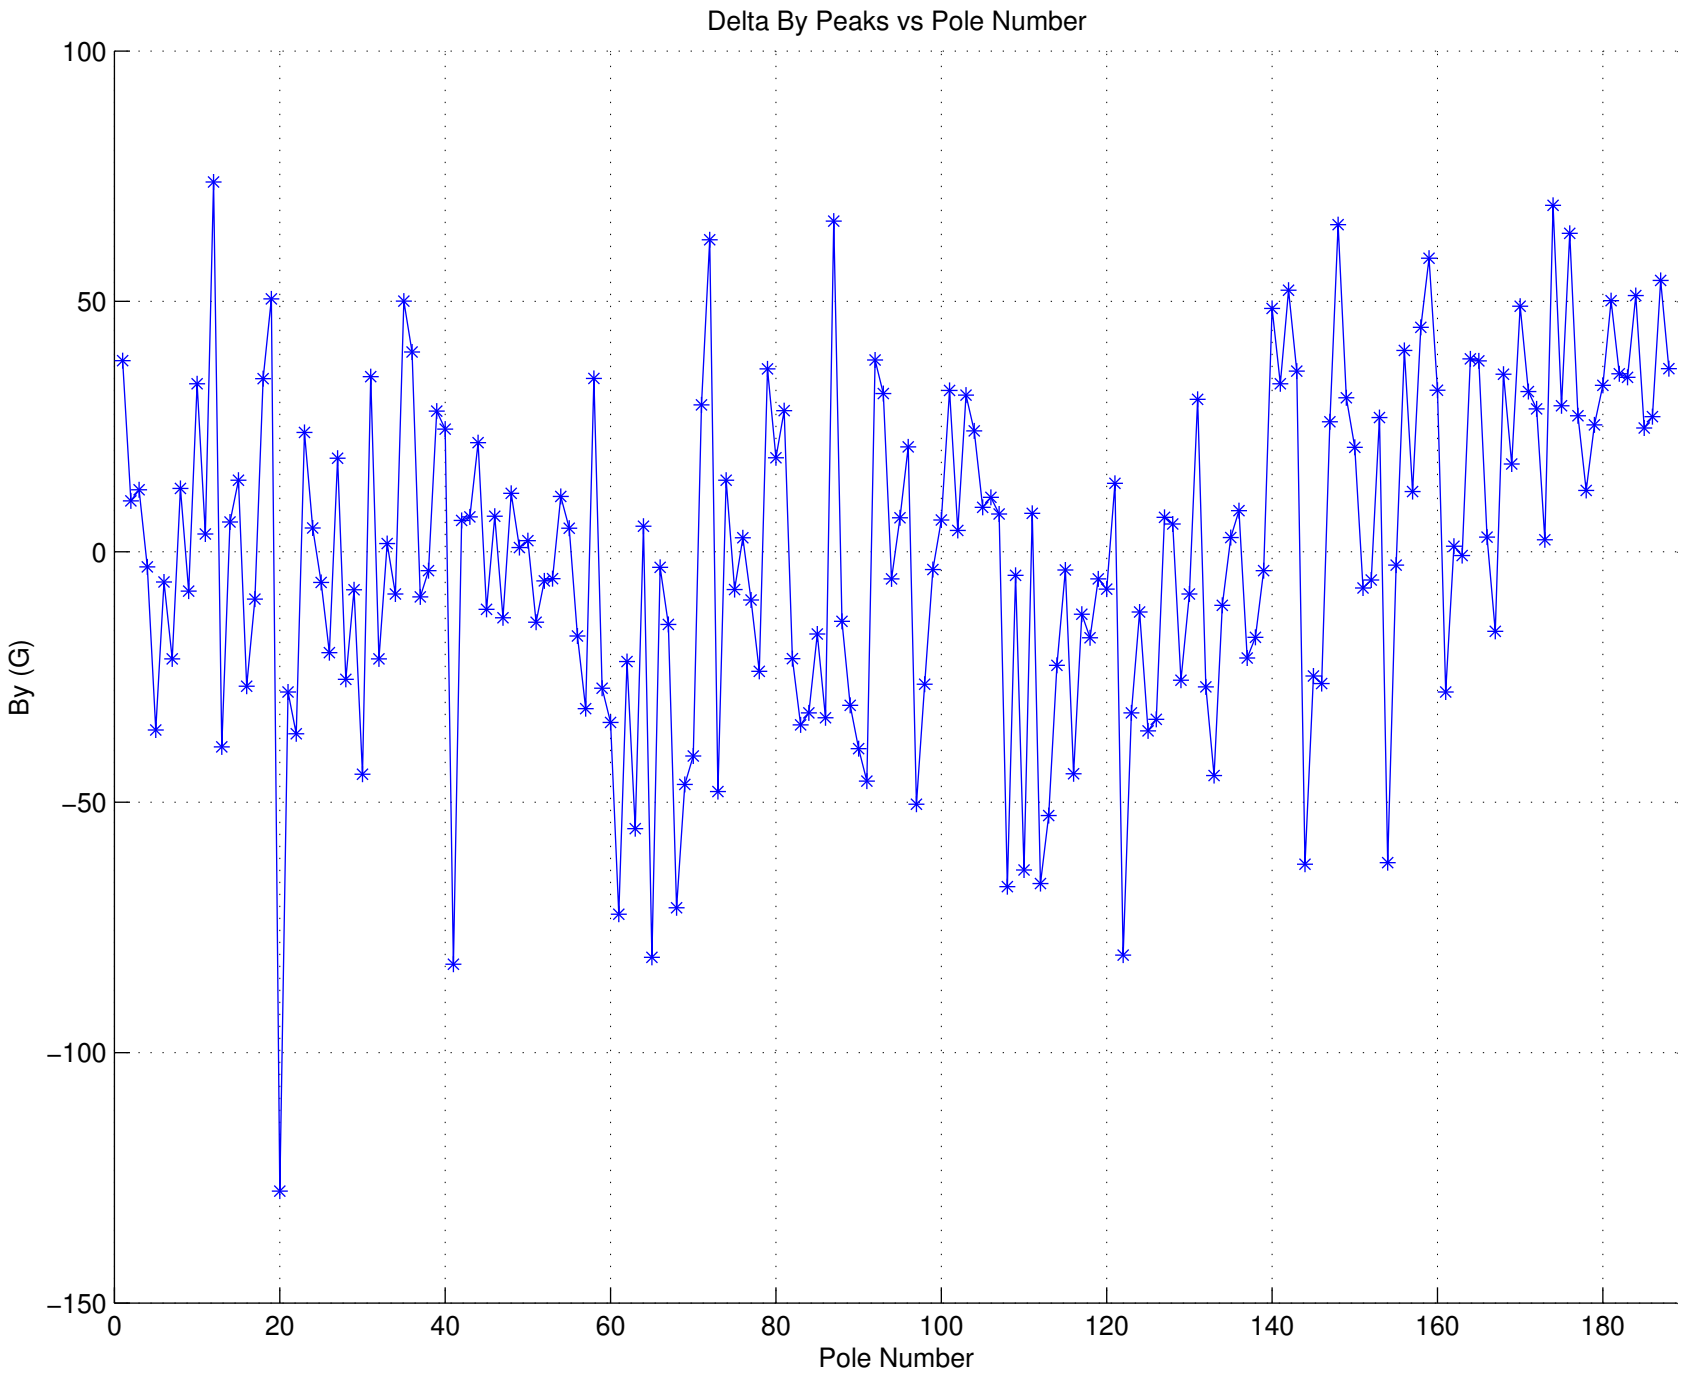
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
50
0
−50
−100
−150
0
20
40
60
80
100
120
140
160
180

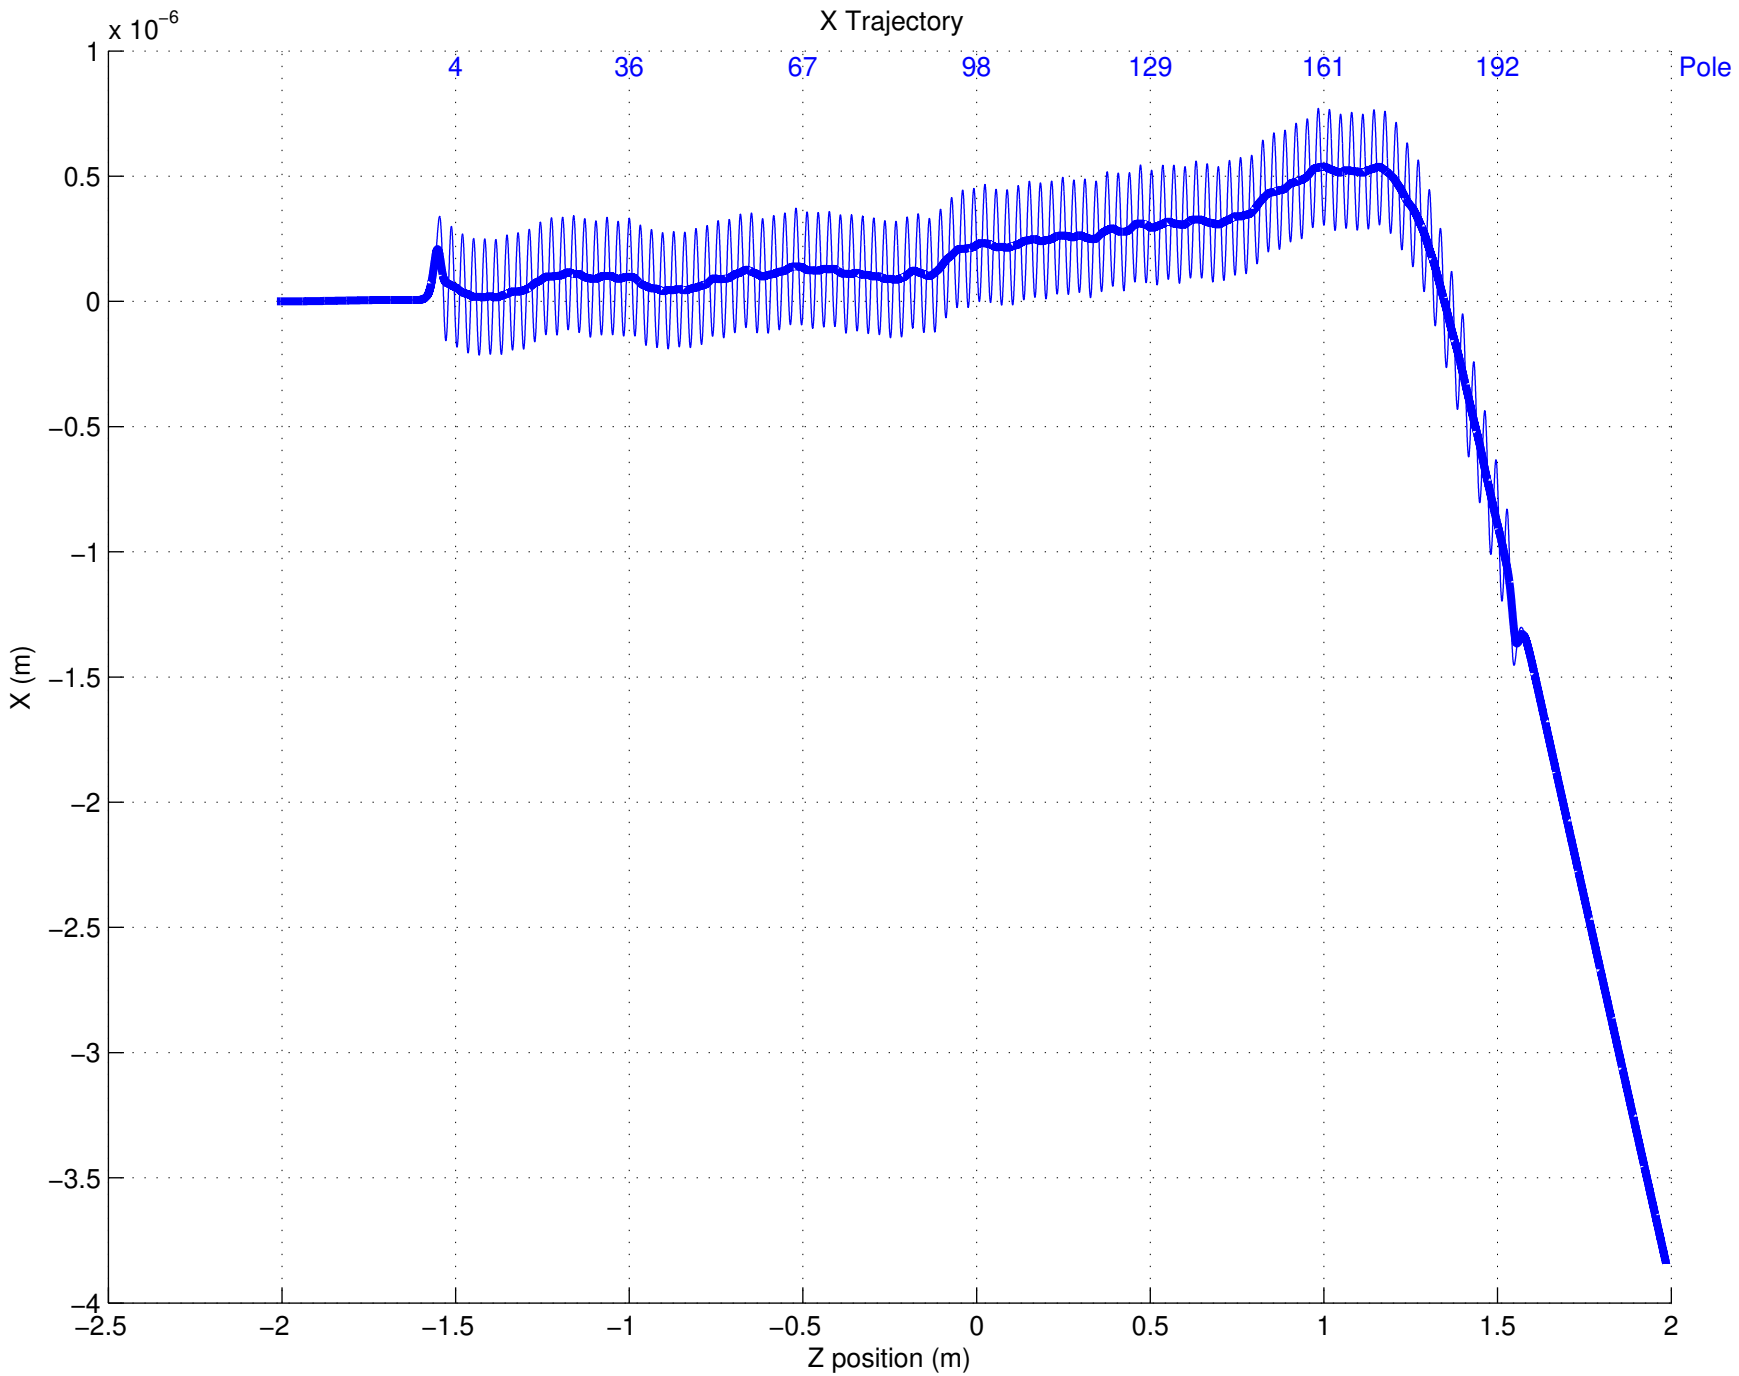
X Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−3.5
−4
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

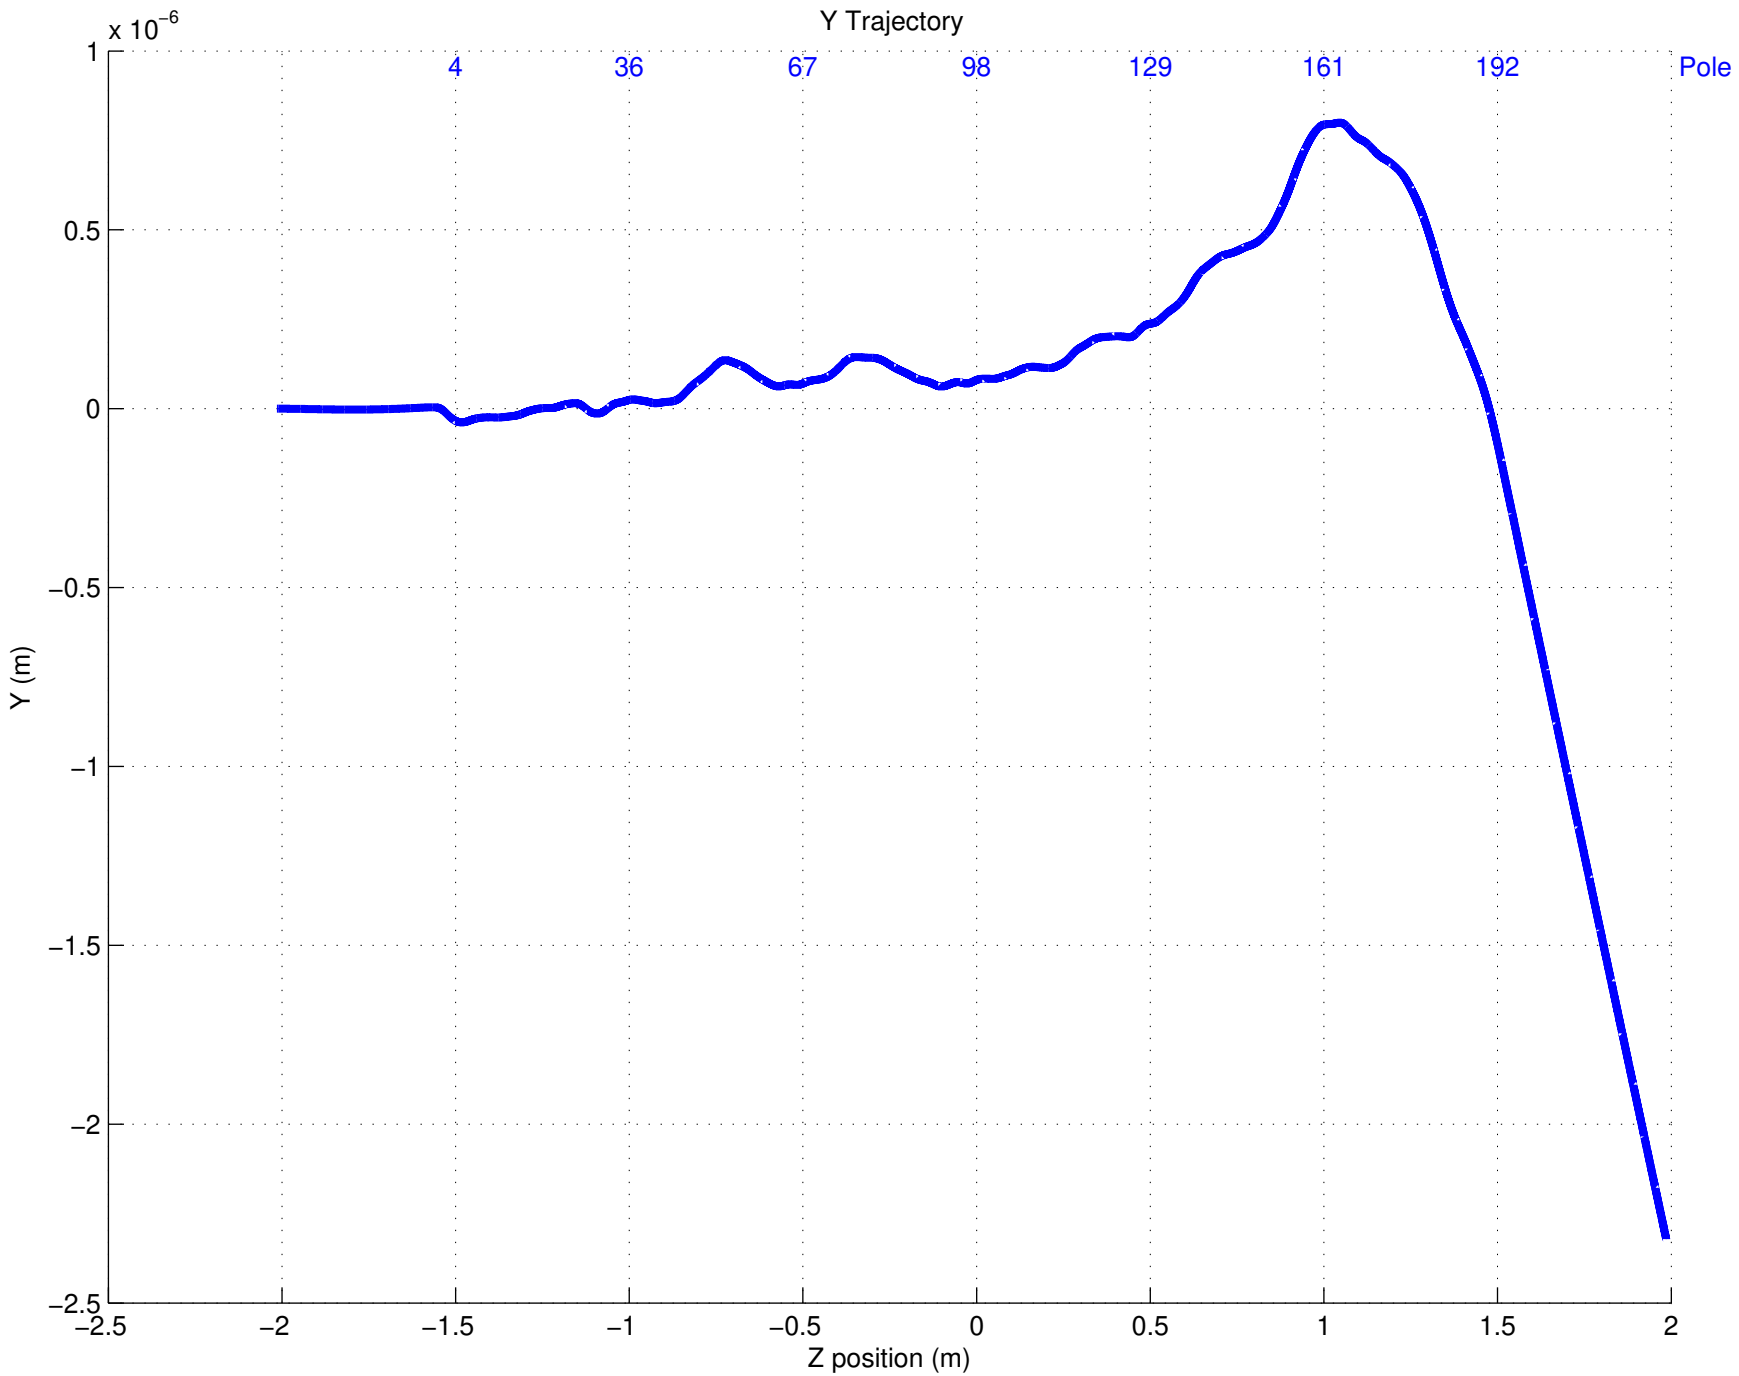
Y Trajectory
x 10^-6
4
36
67
98
129
161
192
Pole
1
0.5
0
−0.5
−1
−1.5
−2
−2.5
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)

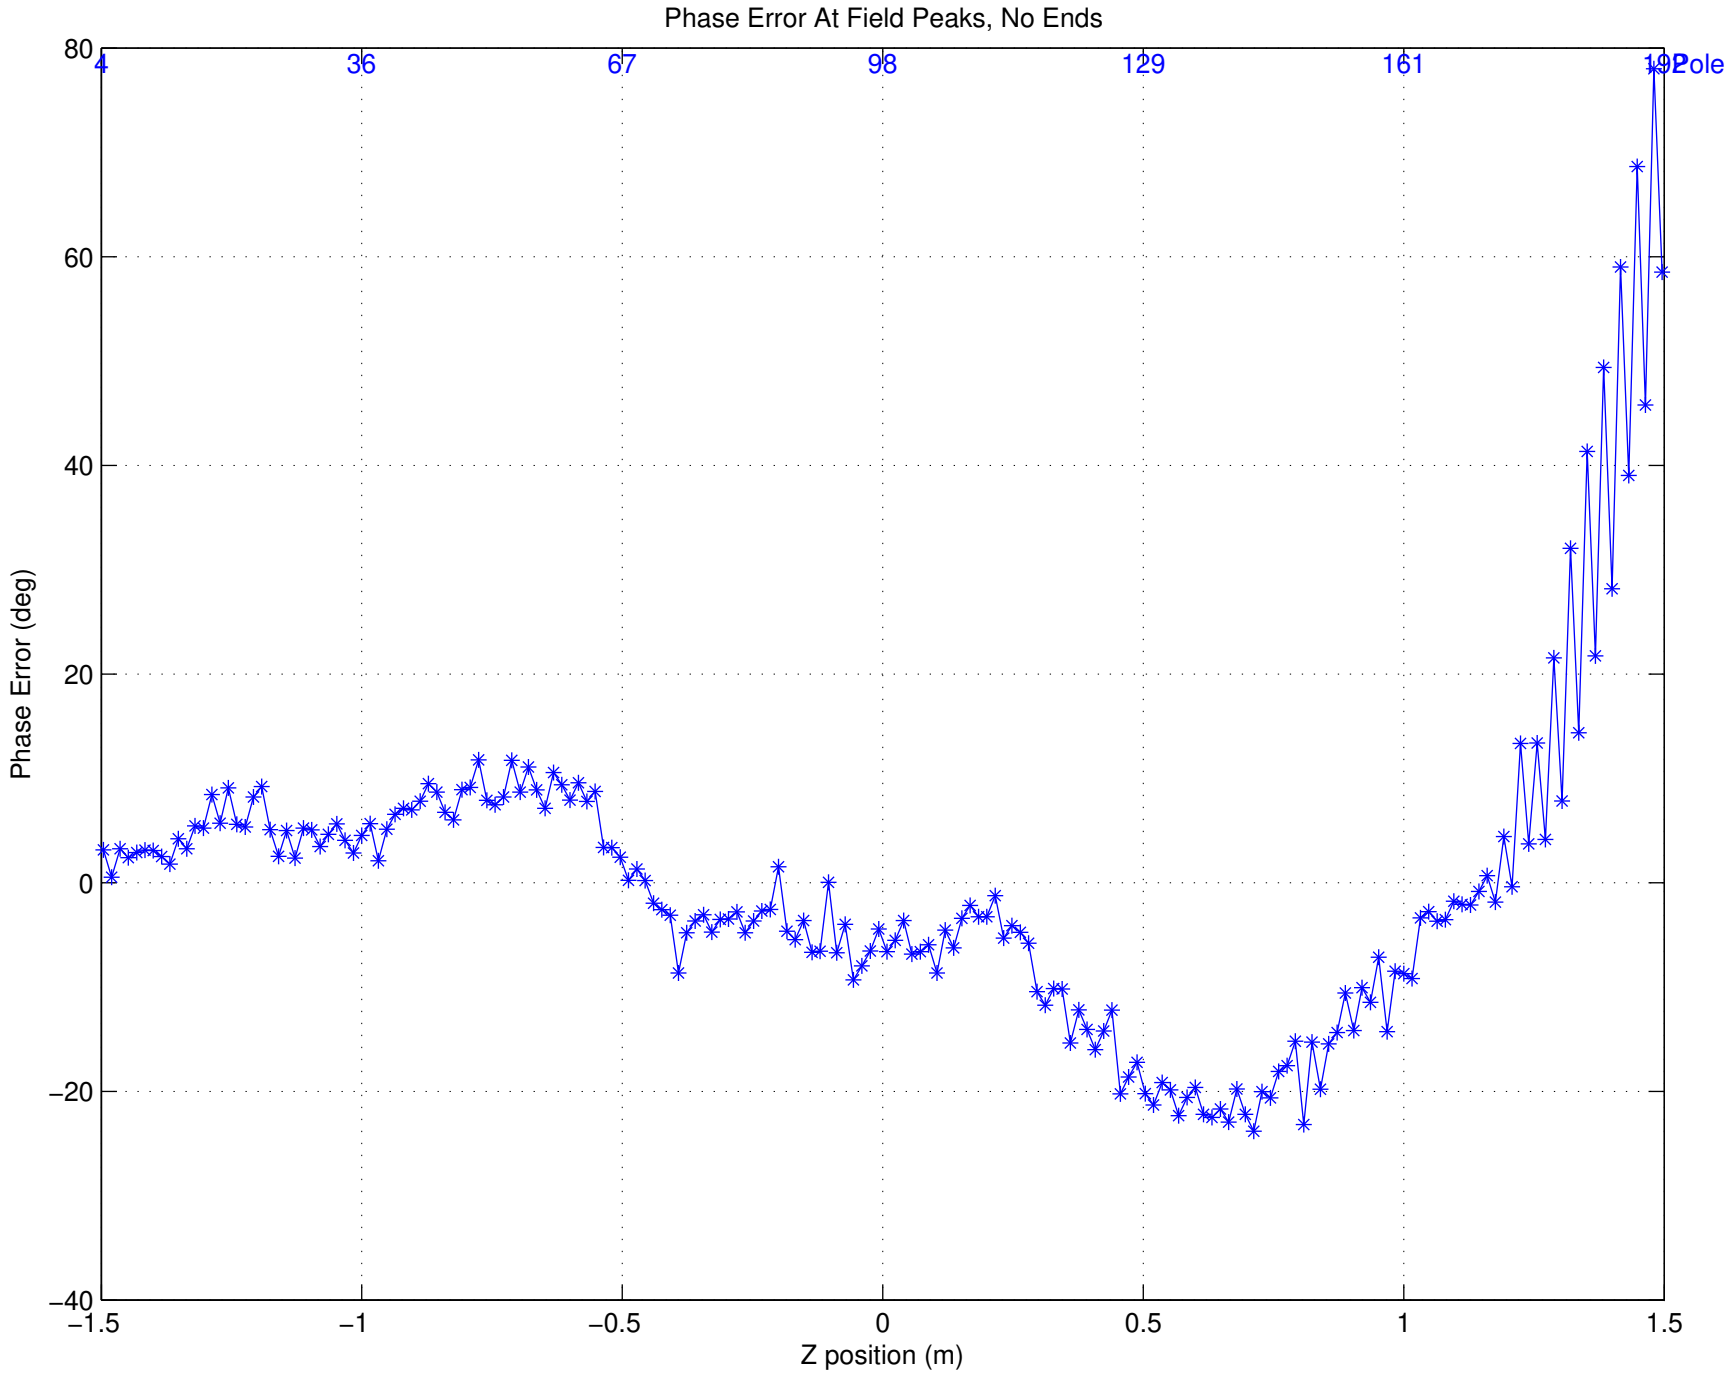

Phase Error: Ave = −0.000000 deg, RMS = 15.735822 deg

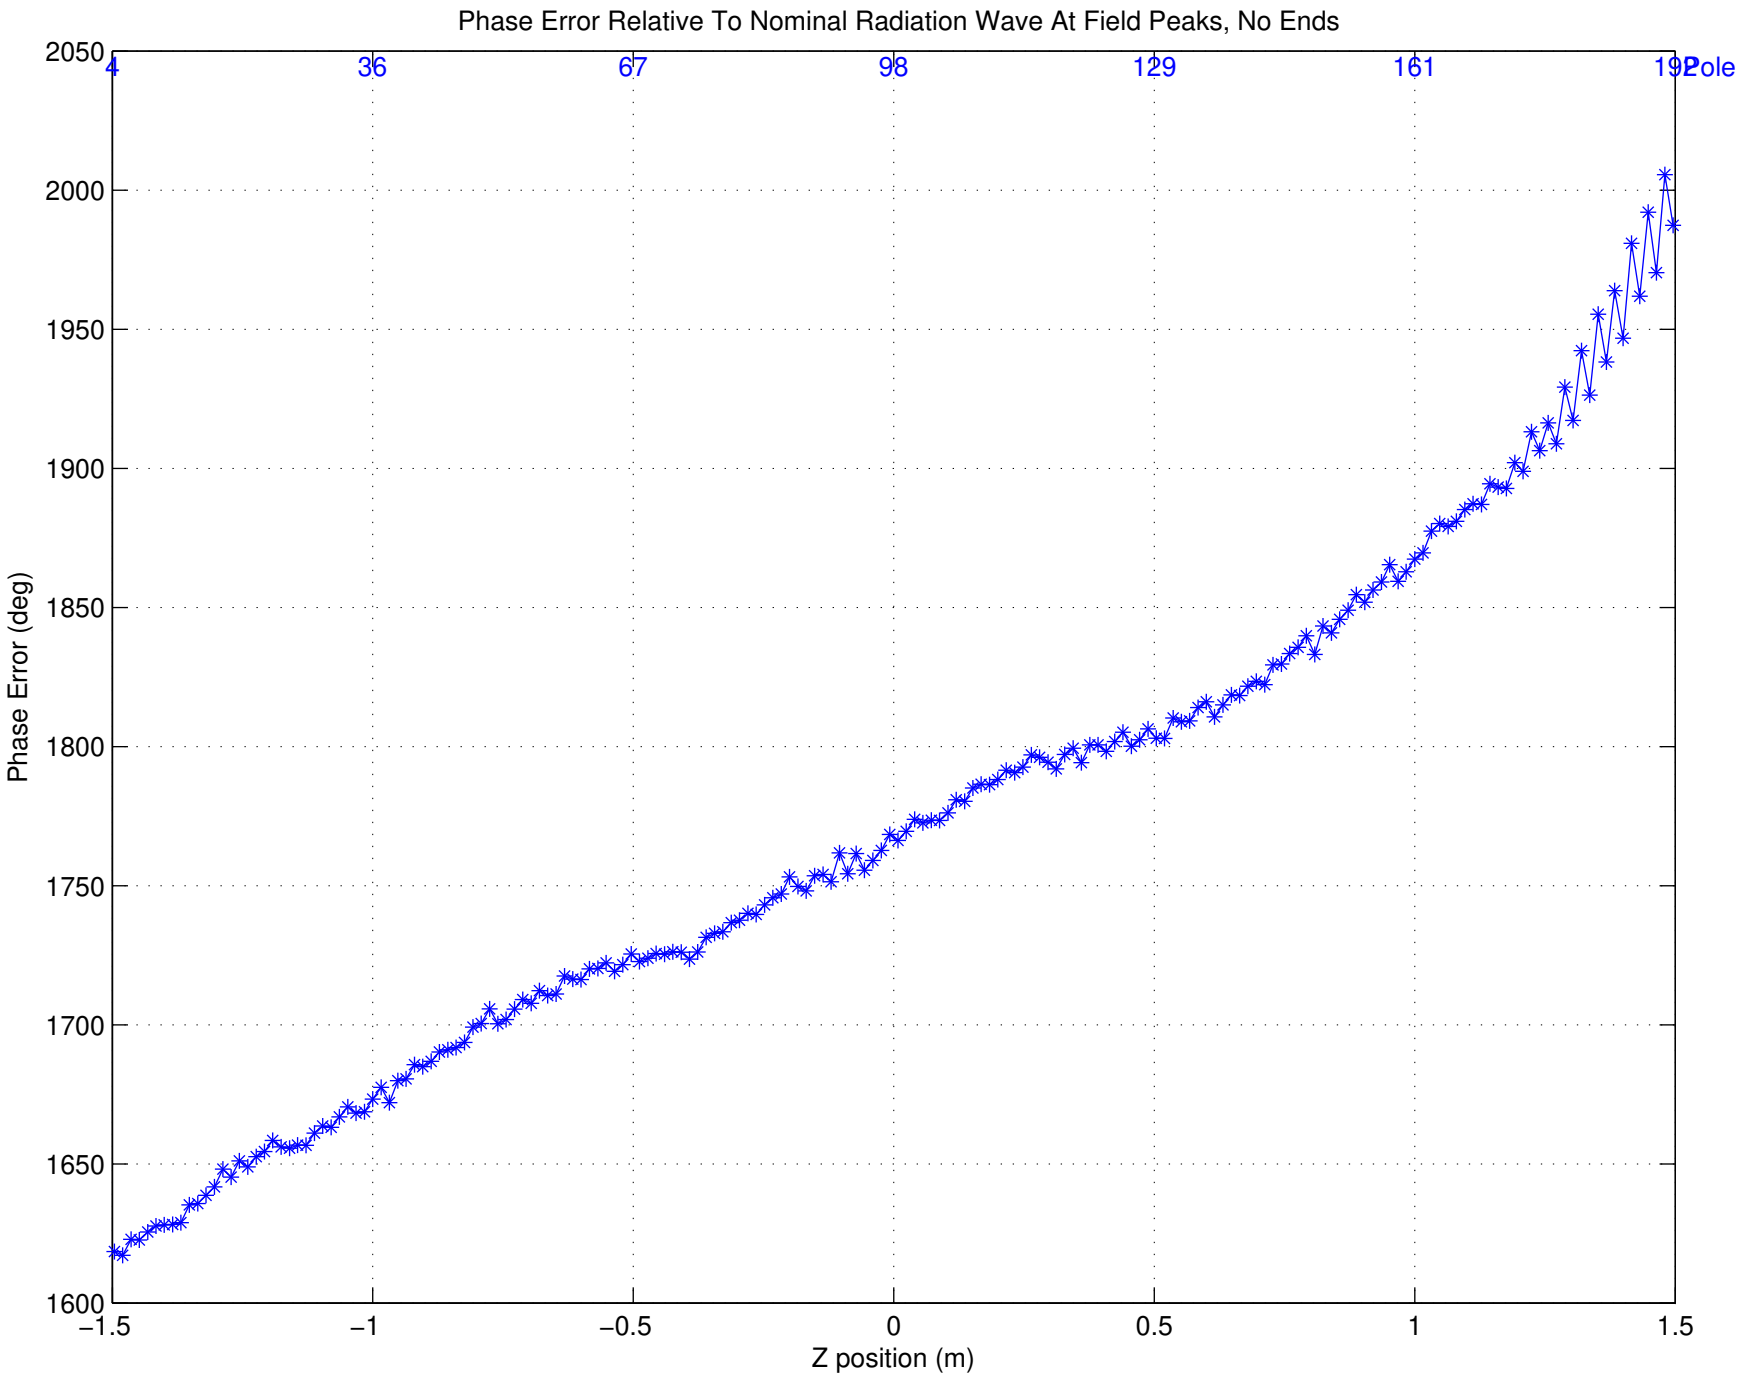
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
4
36
67
98
129
161
192
Pole
2050
2000
1950
1900
1850
1800
1750
1700
1650
1600
Phase Error (deg)
−1.5
−1
−0.5
0
0.5
1
1.5
Z position (m)