SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 06−10−2010
Time: 14:33:22

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−01
DATASET Number: 1
Tuning Stage: Fine Tuning
Run Number: 1
Measurement Type: Z Scans
Operator: YL
Comment: find first pole position
Session first run: 1
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−01\DATASET0001\Fine Tuning\Z Scans\Run 001\bscanz.dat

Temperature (C)
L143−112000−01:−−> T5 19.97 −−> T2 19.98 −−> T1 19.99 −−> T3 19.97 −−> Air 20.08 −−> T4 19.96

Axes position (m) X:0.026000 Y:0.000300
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001245 V
Vy_0i = −0.002918 V

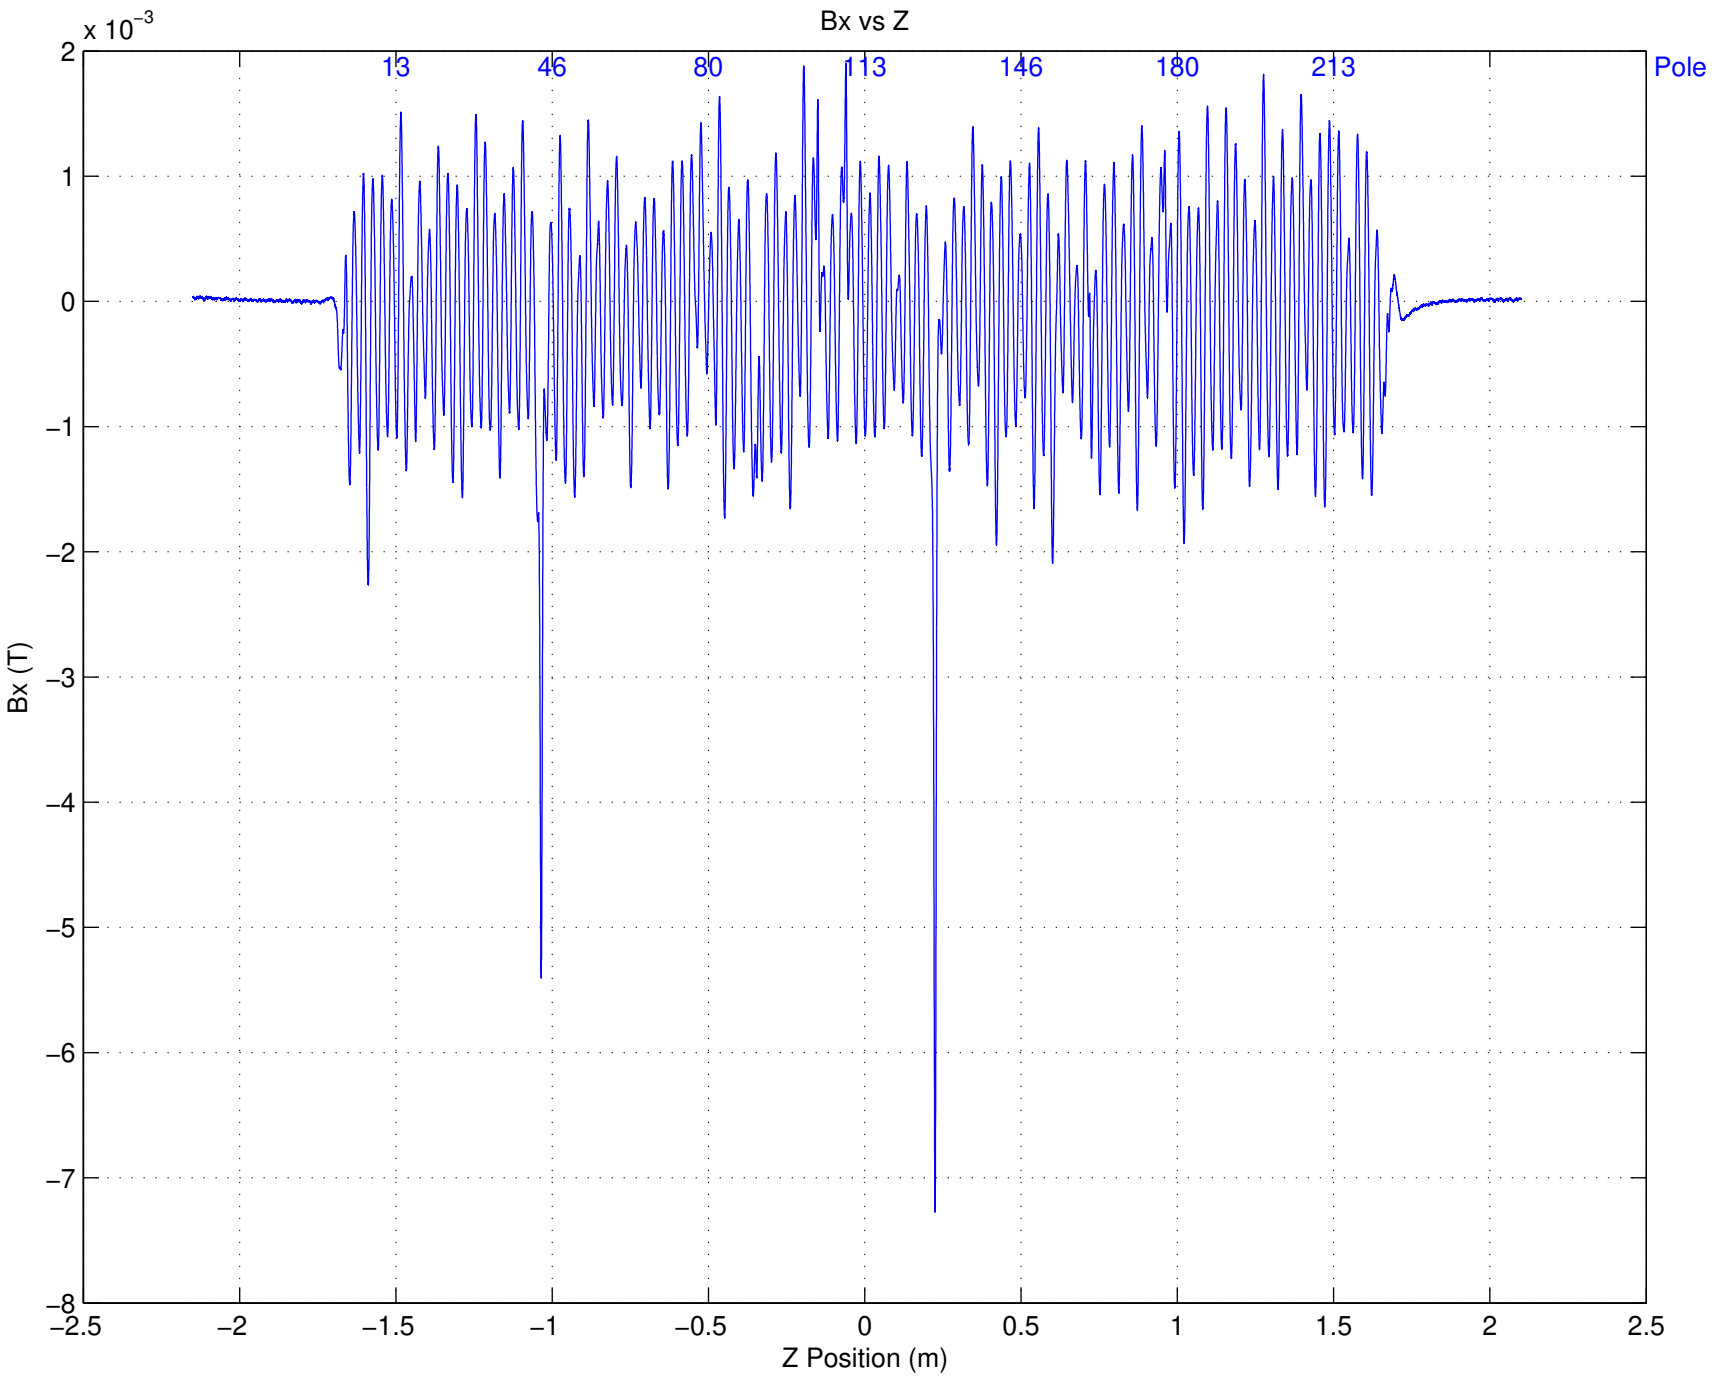
Bx vs Z
x 10^-3
2
1
0
−1
−2
−3
−4
−5
−6
−7
−8
13
46
80
113
146
180
213
Pole
Bx (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

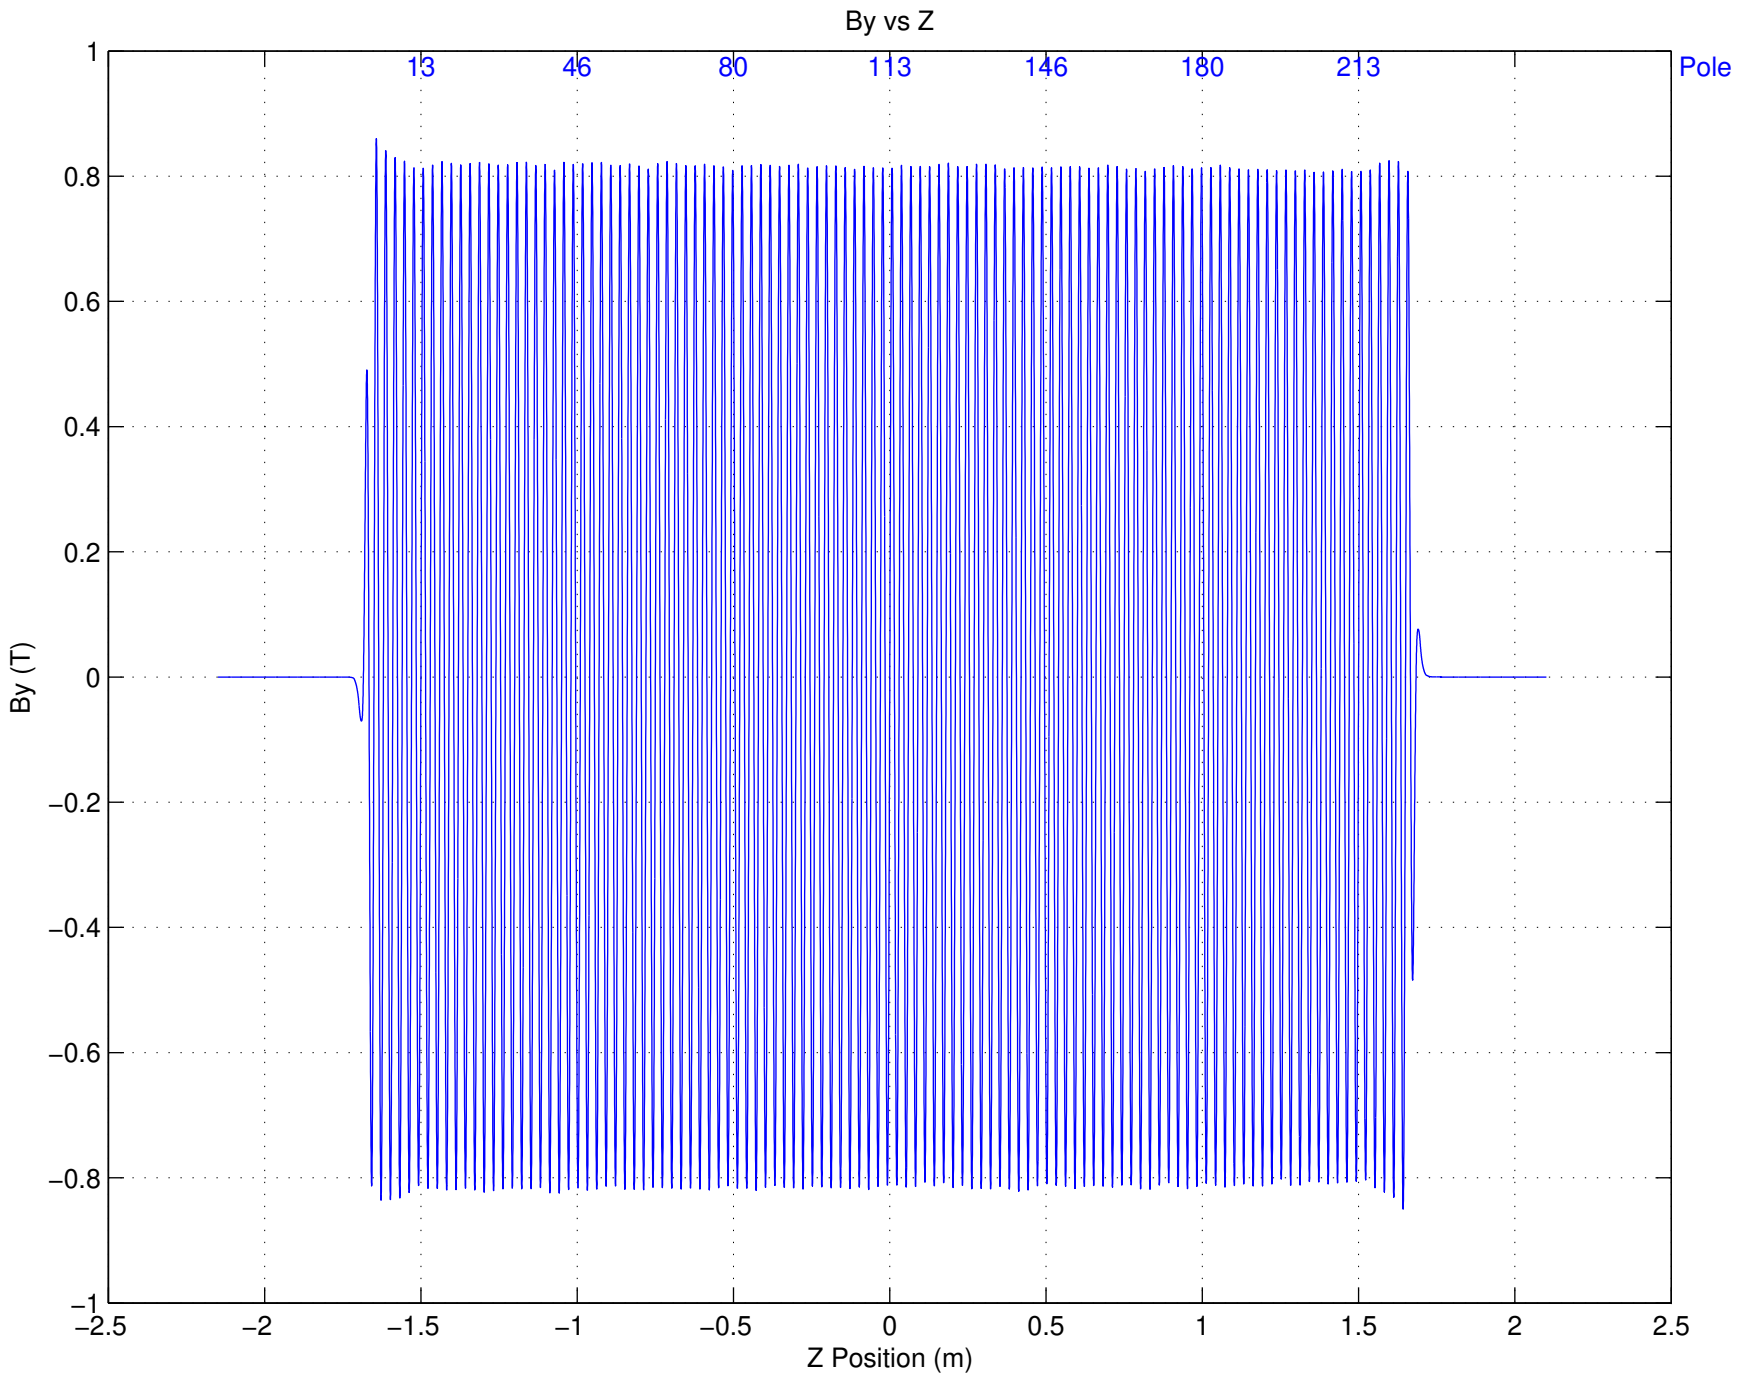
By vs Z
13
46
80
113
146
180
213
Pole
1
0.8
0.6
0.4
0.2
0
−0.2
−0.4
−0.6
−0.8
−1
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

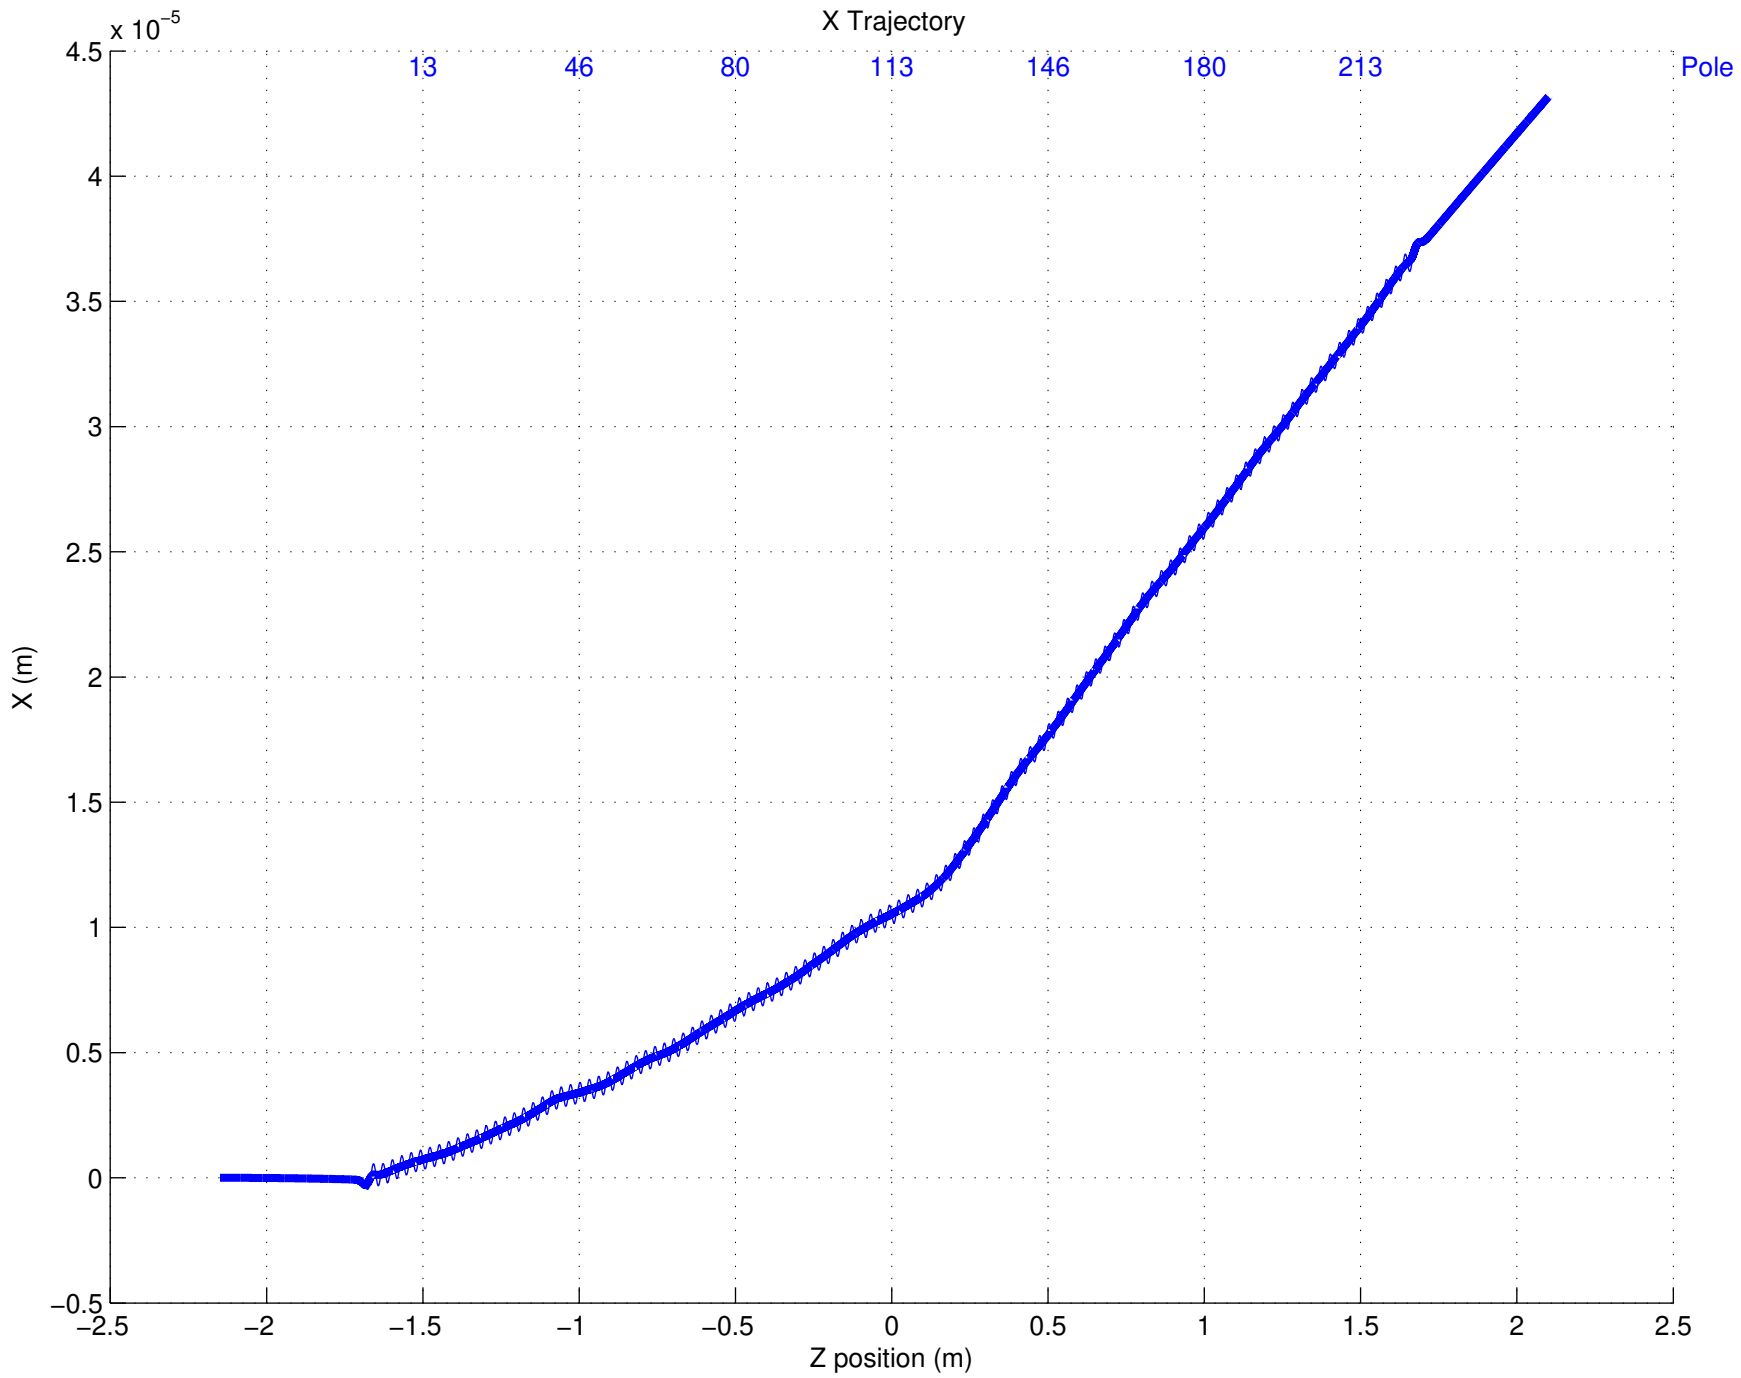
X Trajectory
x 10^-5
13
46
80
113
146
180
213
Pole
4.5
4
3.5
3
2.5
2
1.5
1
0.5
0
−0.5
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

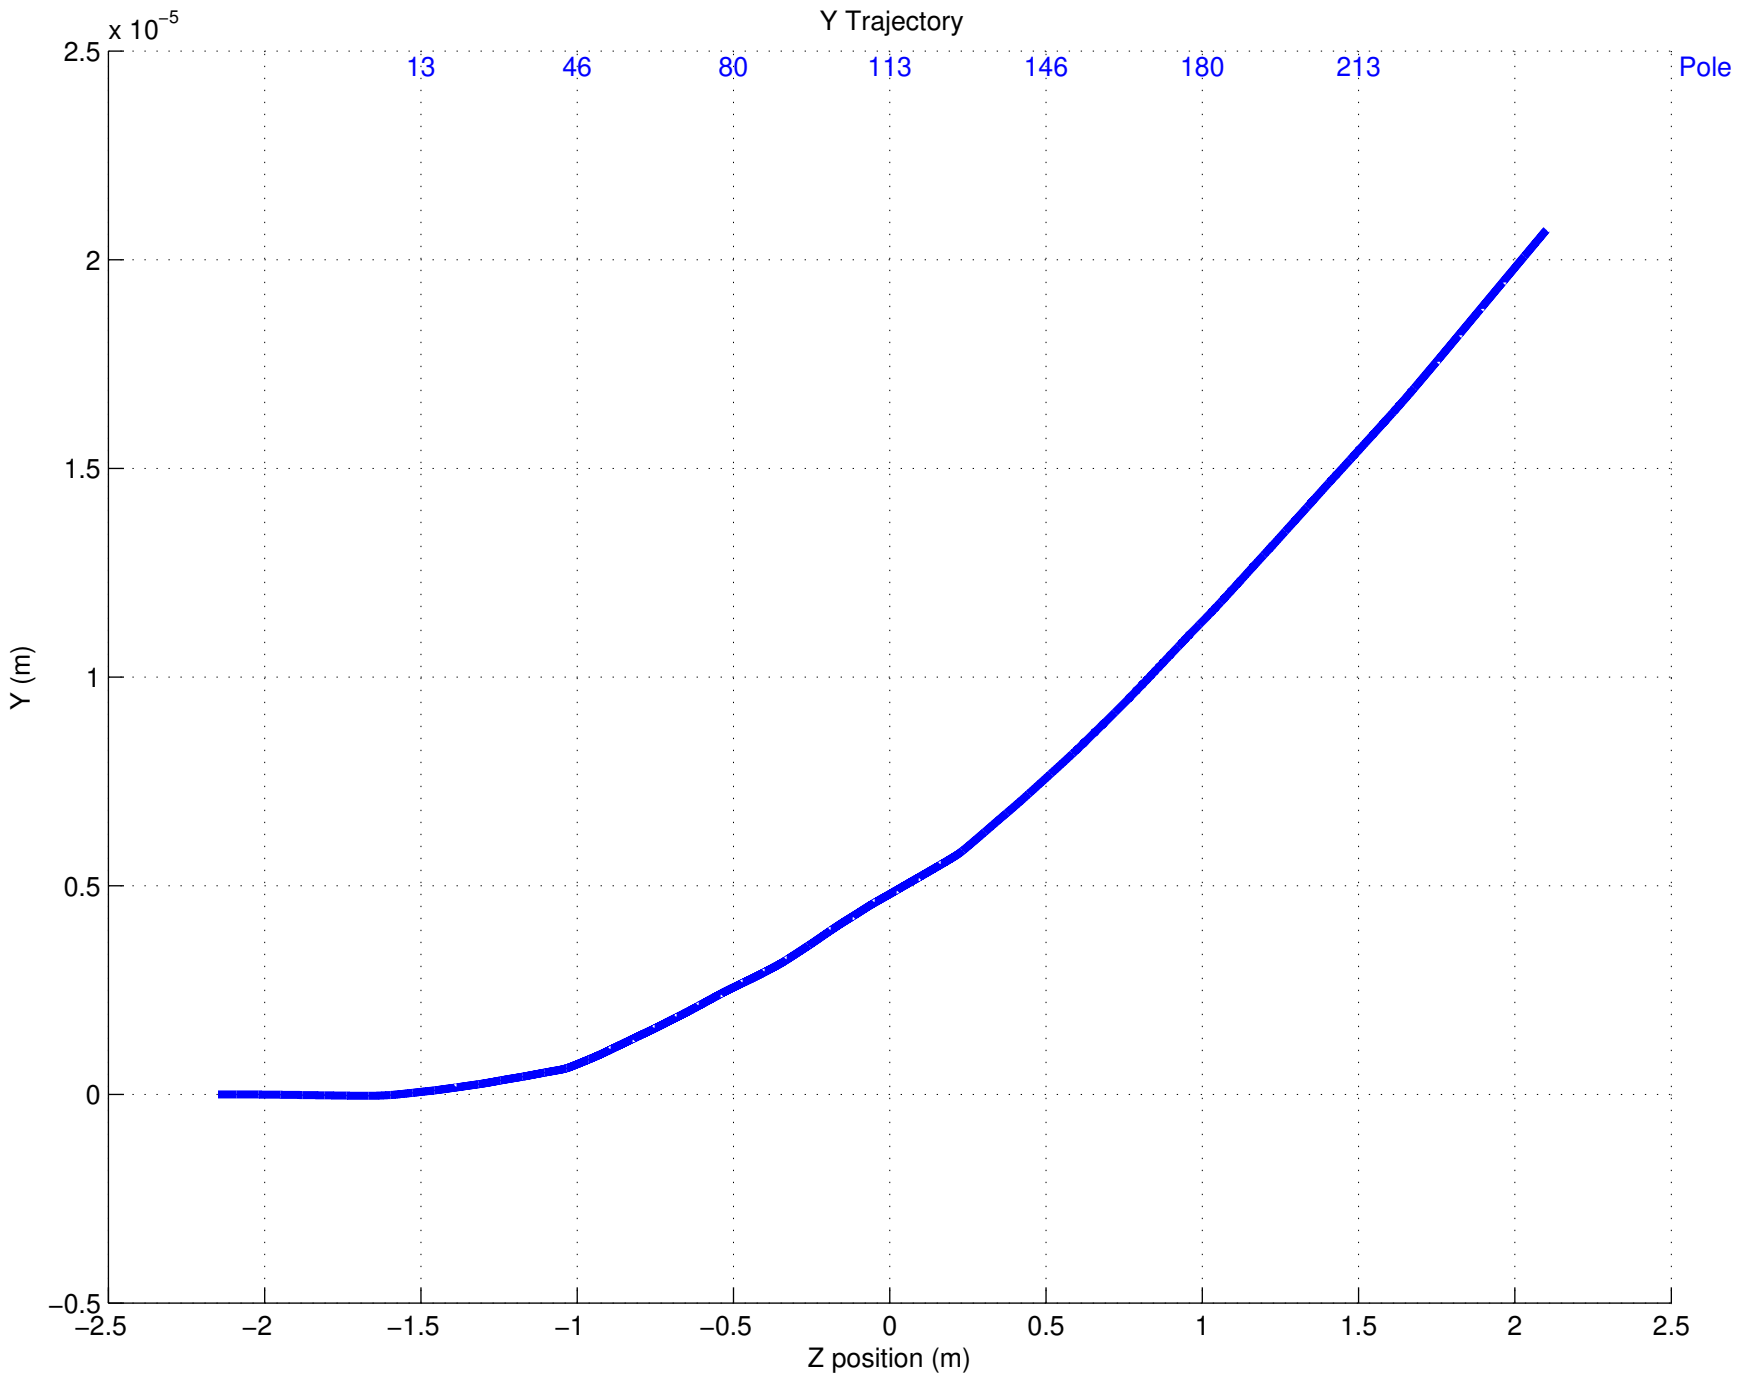
Y Trajectory
x 10^-5
13
46
80
113
146
180
213
Pole
2.5
2
1.5
1
0.5
0
−0.5
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

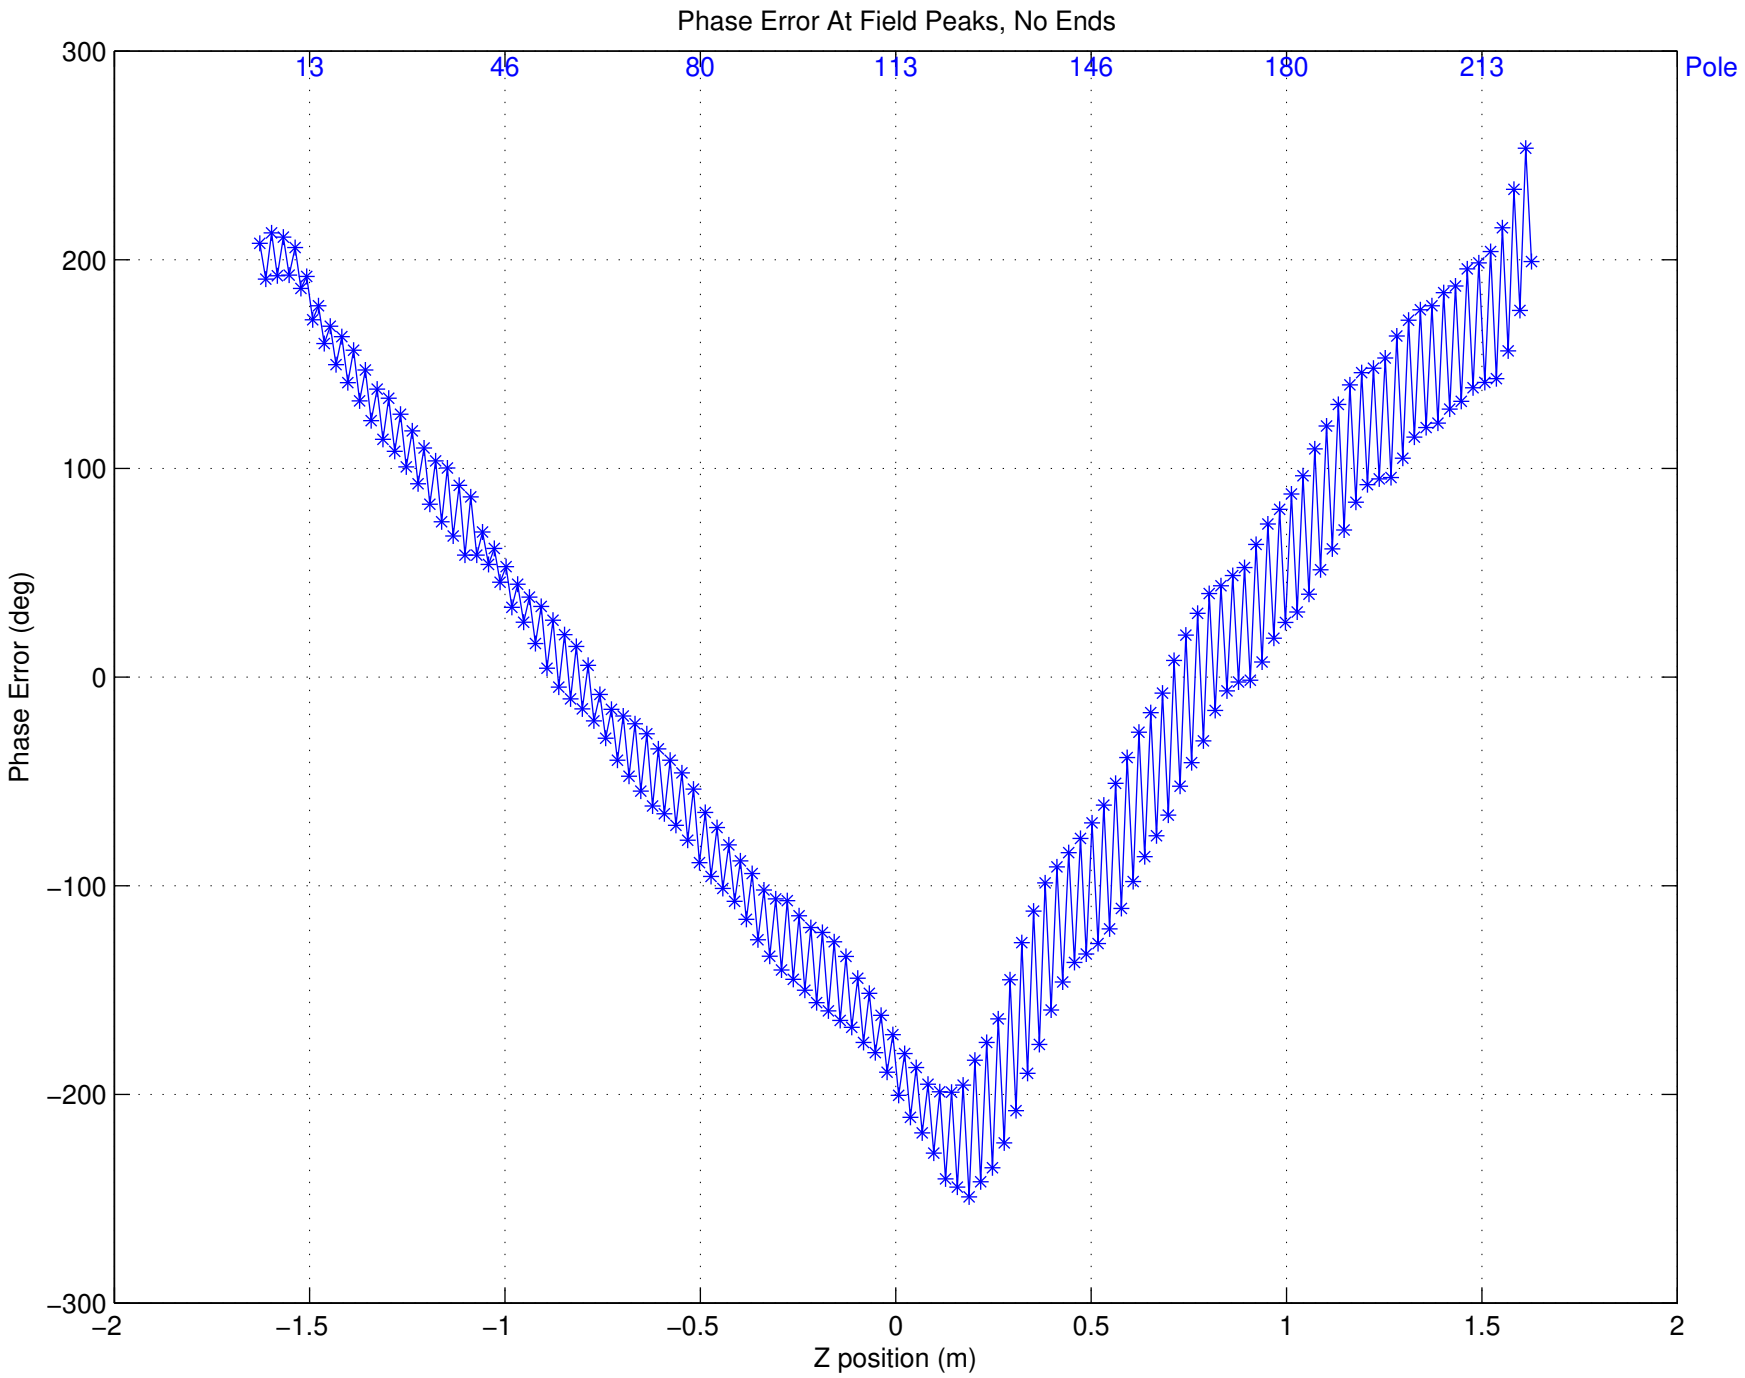

Phase Error: Ave = −0.000000 deg, RMS = 128.814144 deg

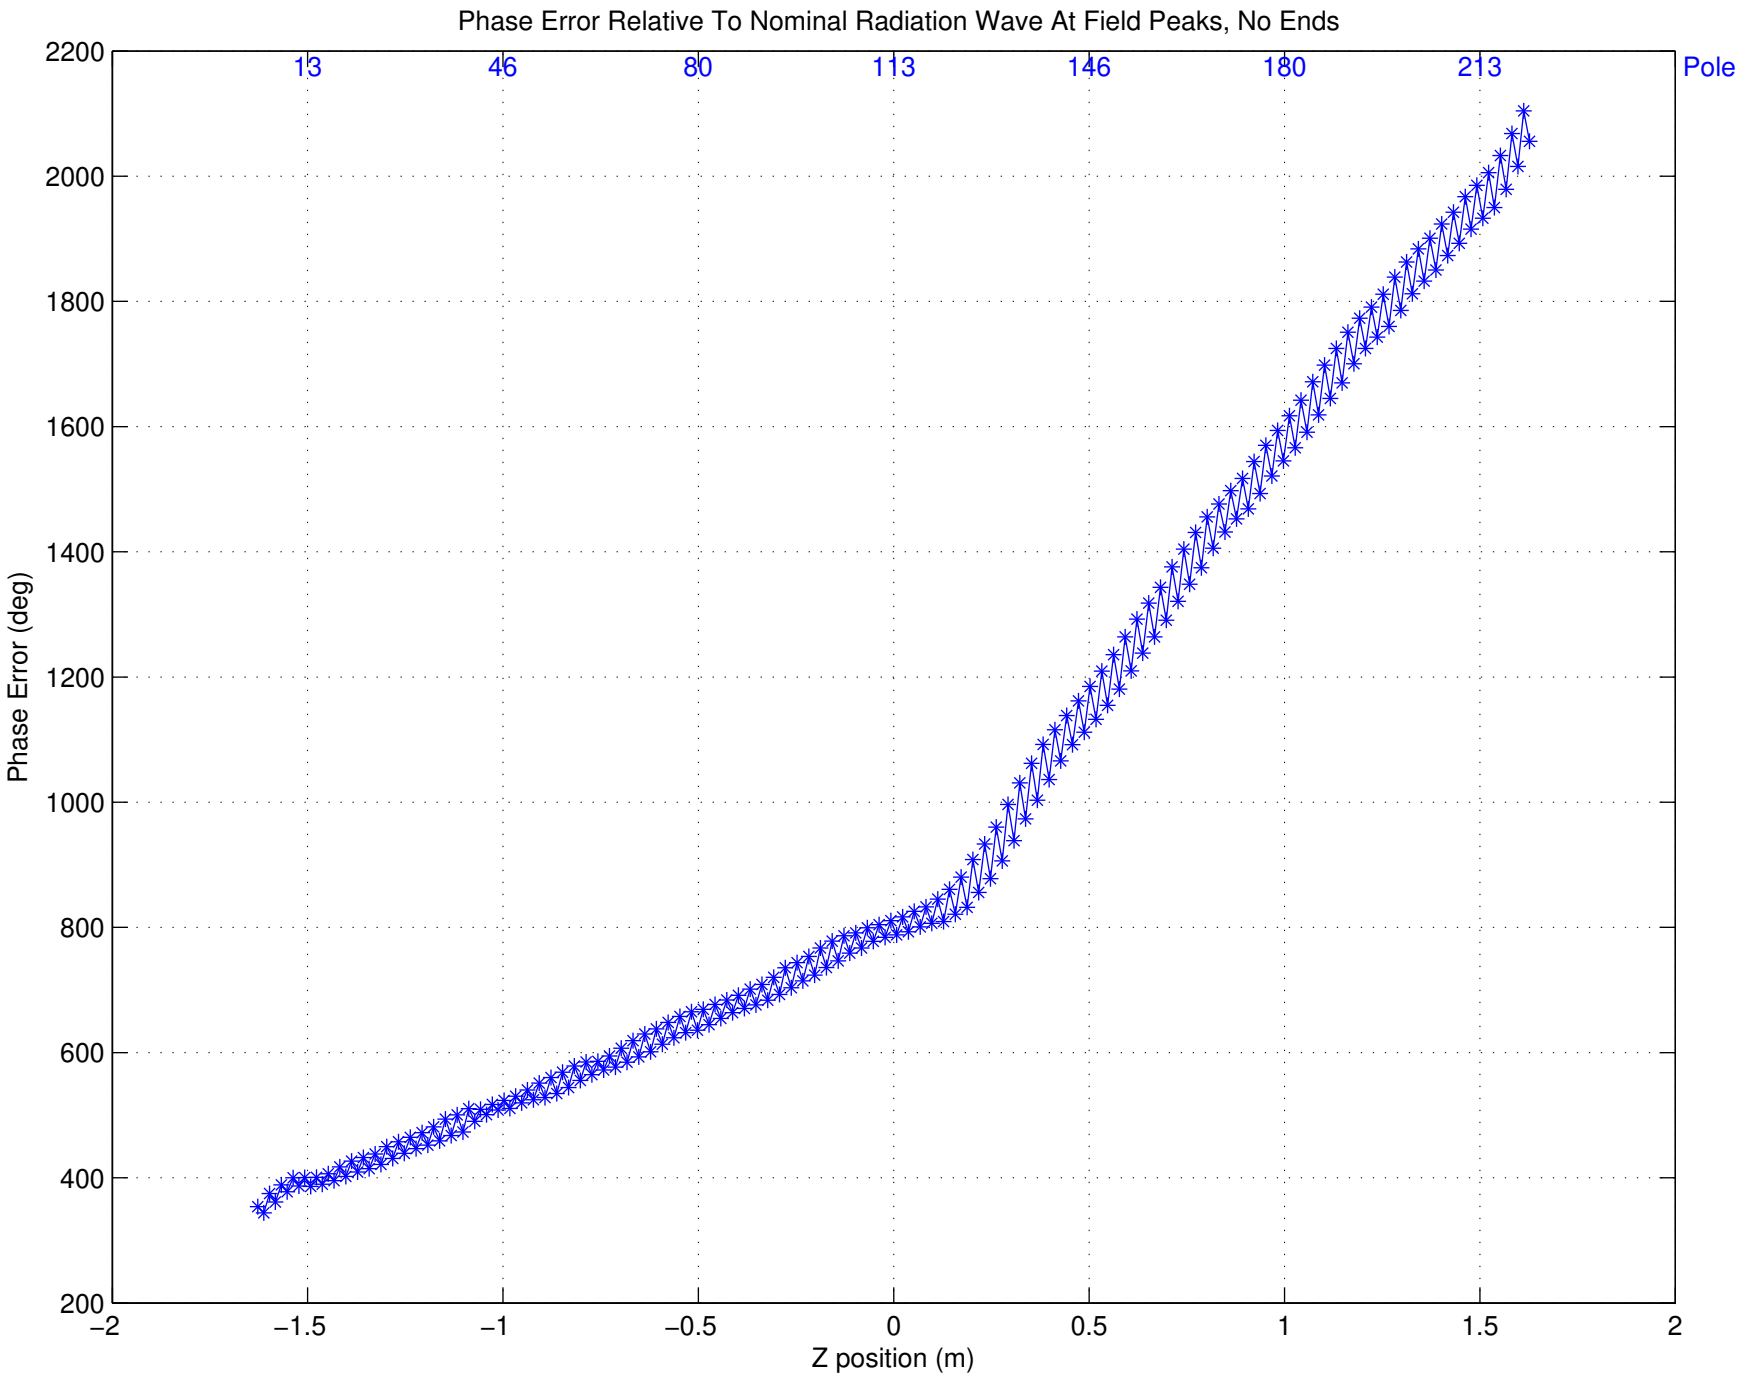
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
2200
2000
1800
1600
1400
1200
1000
800
600
400
200
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)