SLAC Magnetic Measurements

Planar Insertion Device Analysis

Parameters:
INPUT-FILE-DIR =s:\magdata\LCLS\Undulator\L143-112000-04\DATASET0005\Tuning\Z Scans\Run 009\
INPUT-FILE-NAME =x+00000-y+000-bscanz.dat
INPUT-FILE-TYPE =ZVXYBXYH
CORR-REQUIRED =0
GAMMA =26689
NOM-LAMBDA-U =0.03
NOM-K-VALUE =3.5
NOM-LAMBDA-R =1.5004e-10
NUM-POLES =226
NUM-END-POLES =4
CELL-LENGTH =3.656

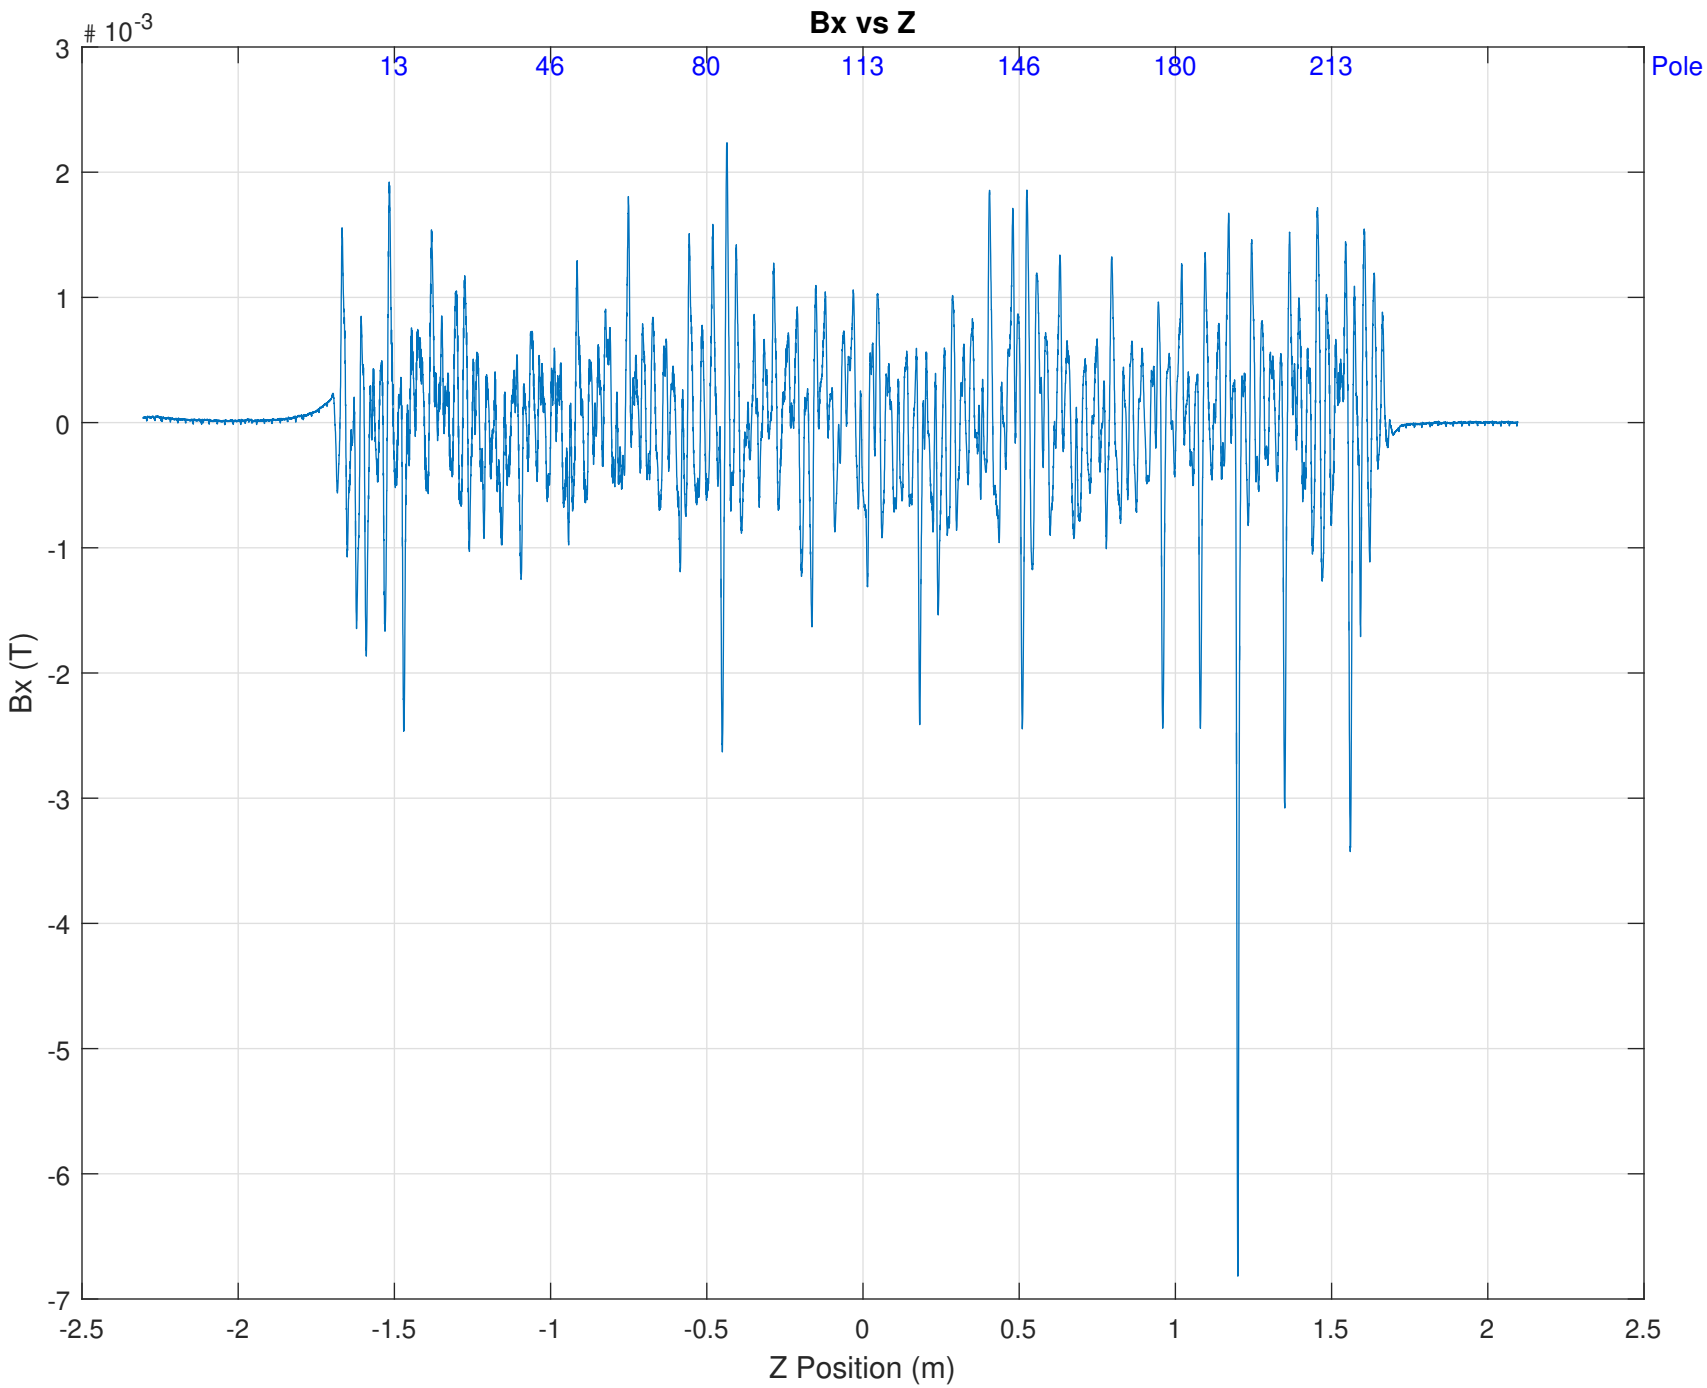
Bx vs Z
# 10^-3
3
2
1
0
-1
-2
-3
-4
-5
-6
-7
13
46
80
113
146
180
213
Pole
Bx (T)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

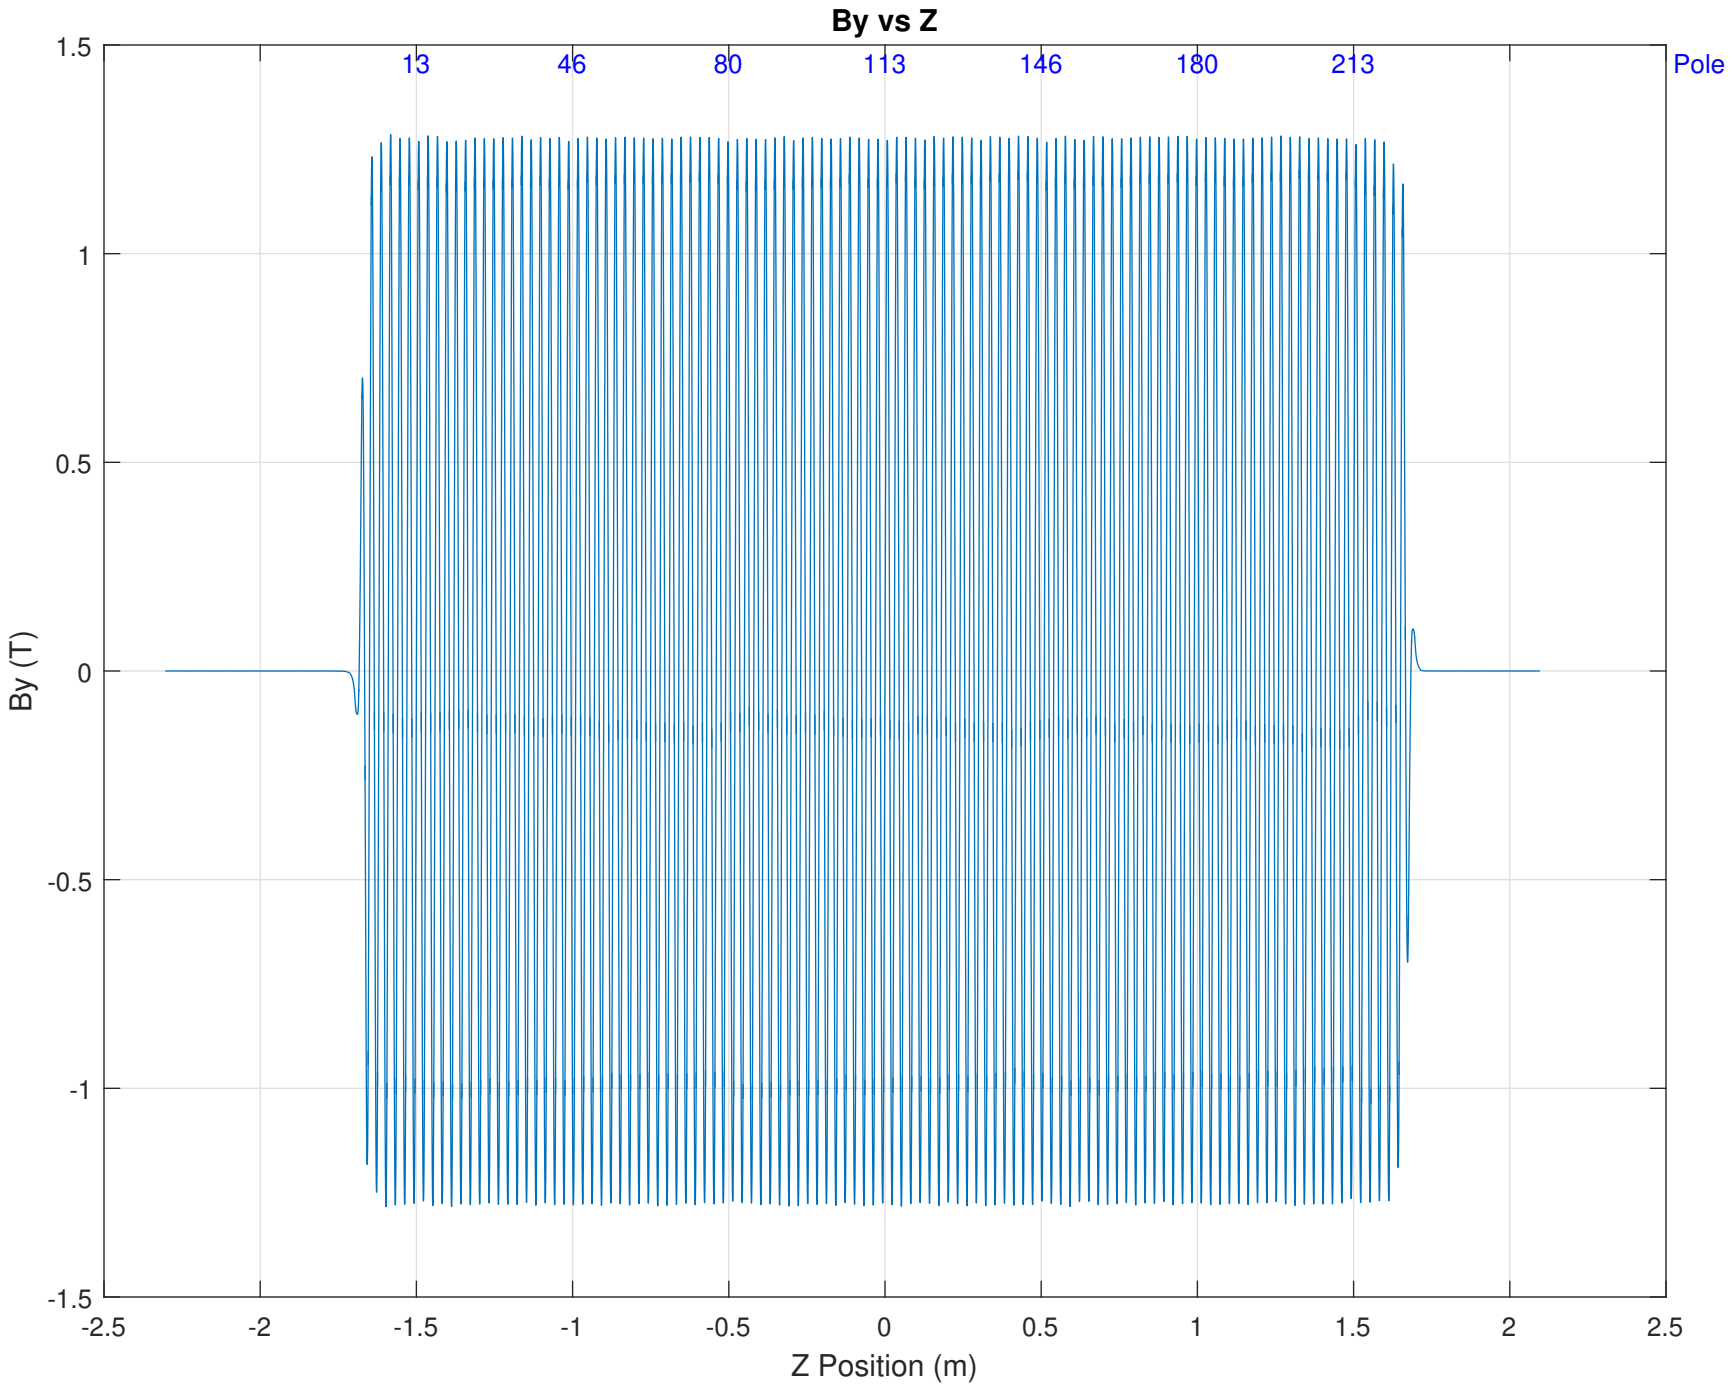
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
-0.5
-1
-1.5
By (T)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

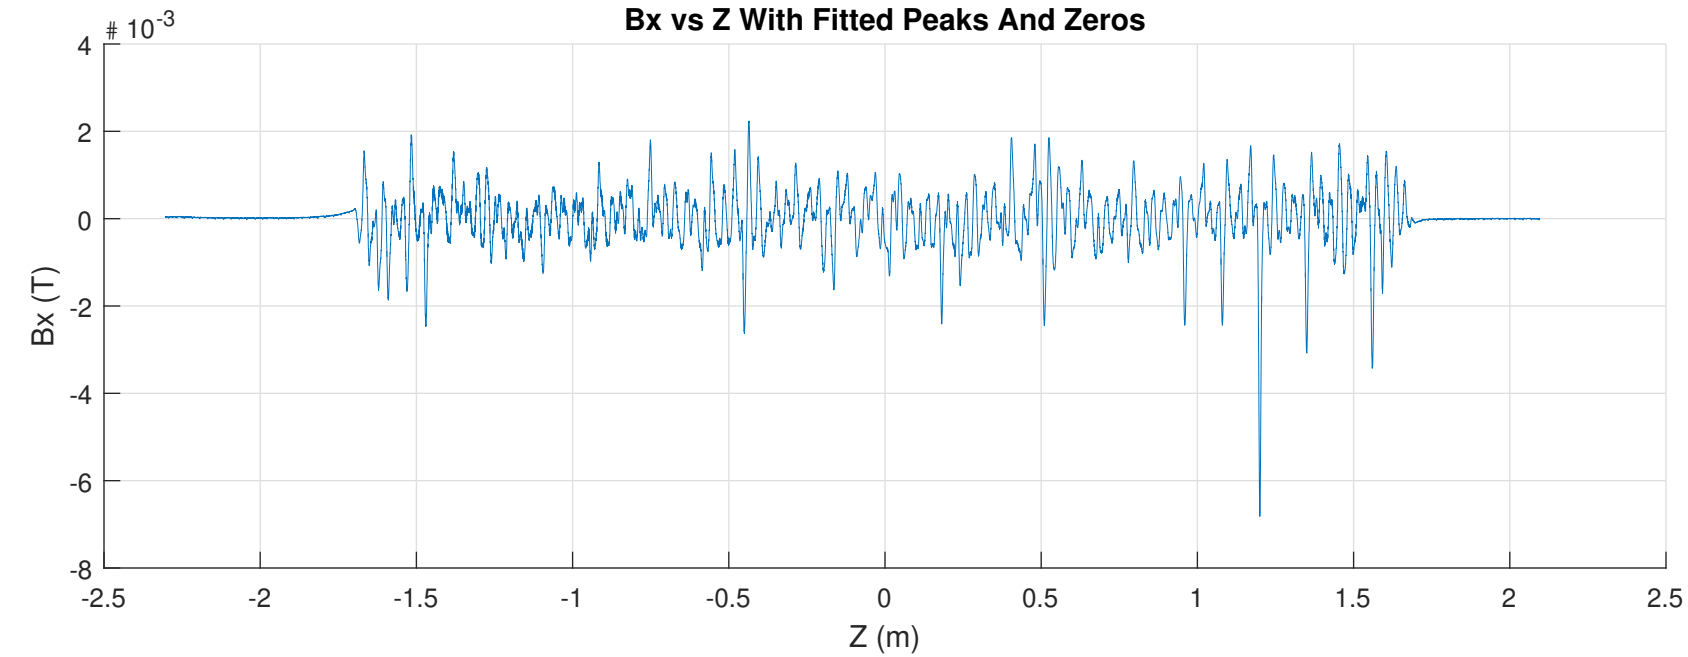
Bx vs Z With Fitted Peaks And Zeros
# 10^-3
Bx (T)
Z (m)

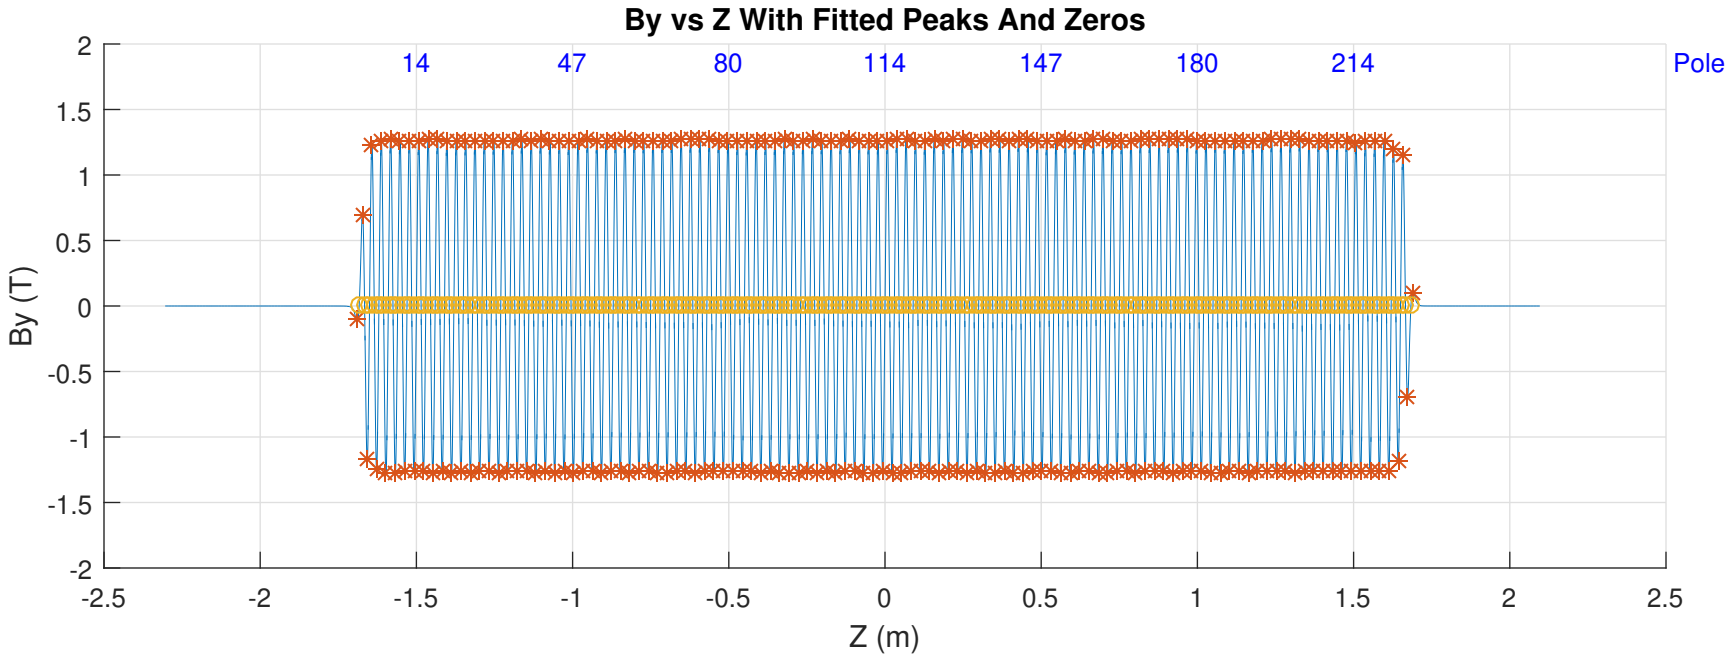
By vs Z With Fitted Peaks And Zeros
14
47
80
114
147
180
214
Pole
By (T)
Z (m)

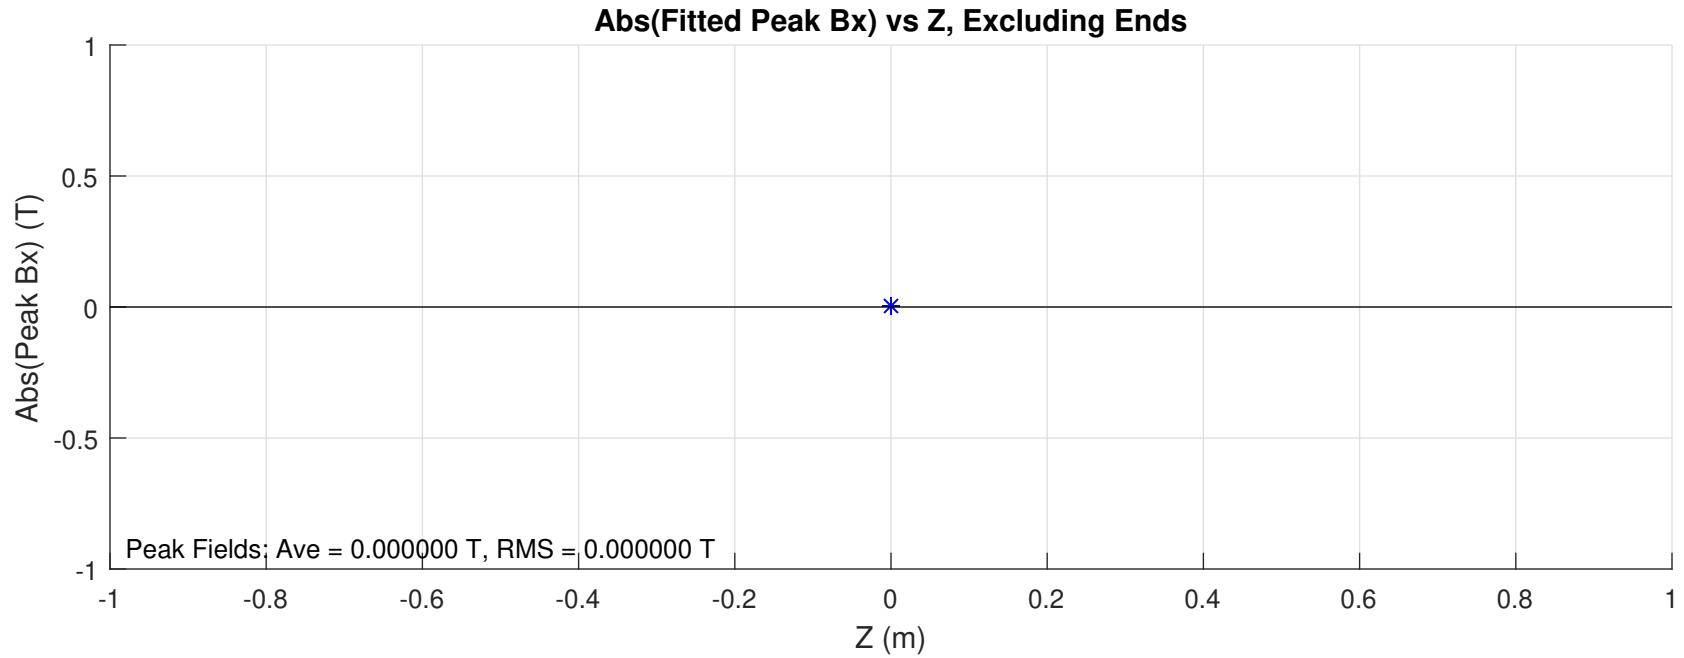
Abs(Fitted Peak Bx) vs Z, Excluding Ends
Abs(Peak Bx) (T)
Z (m)
Peak Fields: Ave = 0.000000 T, RMS = 0.000000 T
1
0.5
0
-0.5
-1
-1
-0.8
-0.6
-0.4
-0.2
0
0.2
0.4
0.6
0.8
1

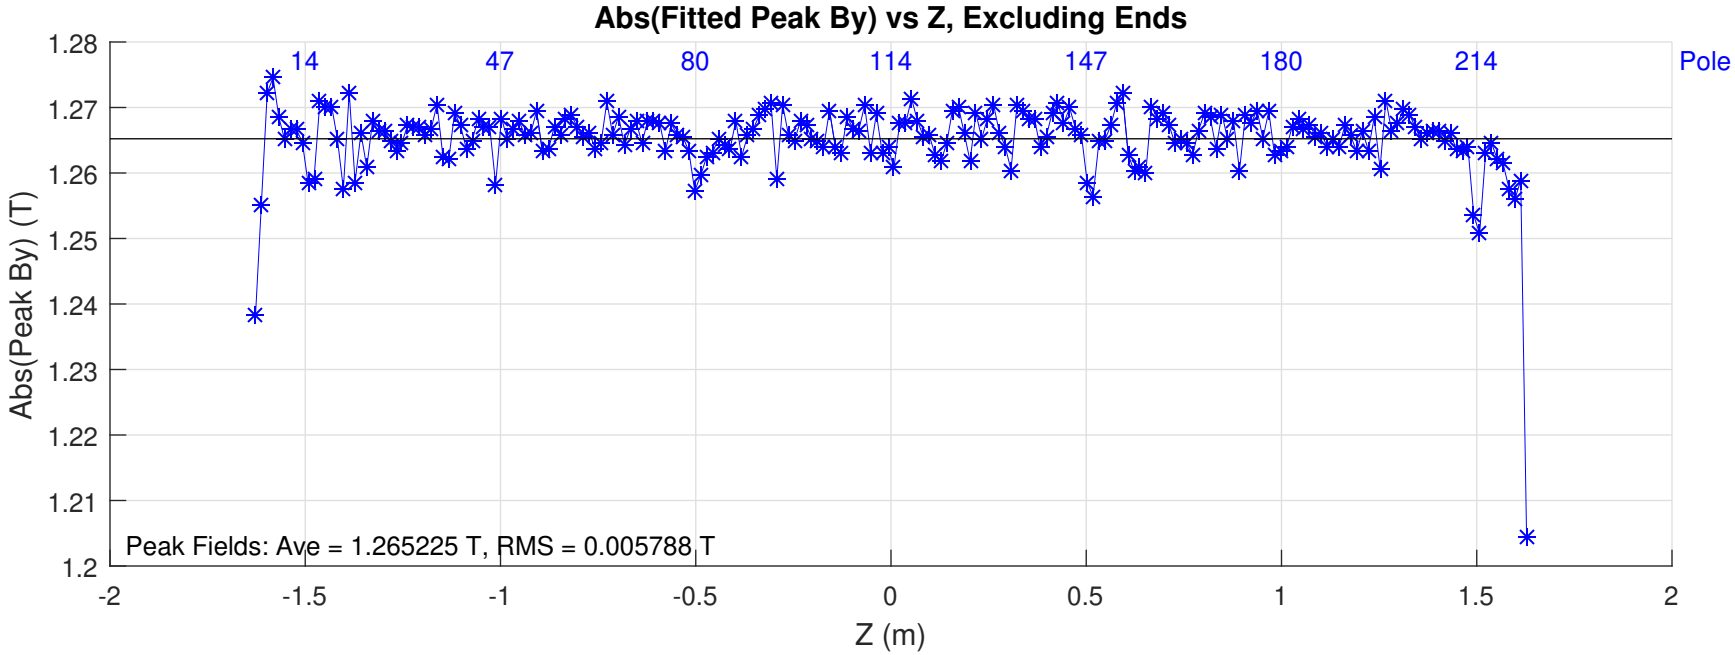
Abs(Fitted Peak By) vs Z, Excluding Ends
Abs(Peak By) (T)
Z (m)
Peak Fields: Ave = 1.265225 T, RMS = 0.005788 T
14
47
80
114
147
180
214
Pole
1.28
1.27
1.26
1.25
1.24
1.23
1.22
1.21
1.2
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2

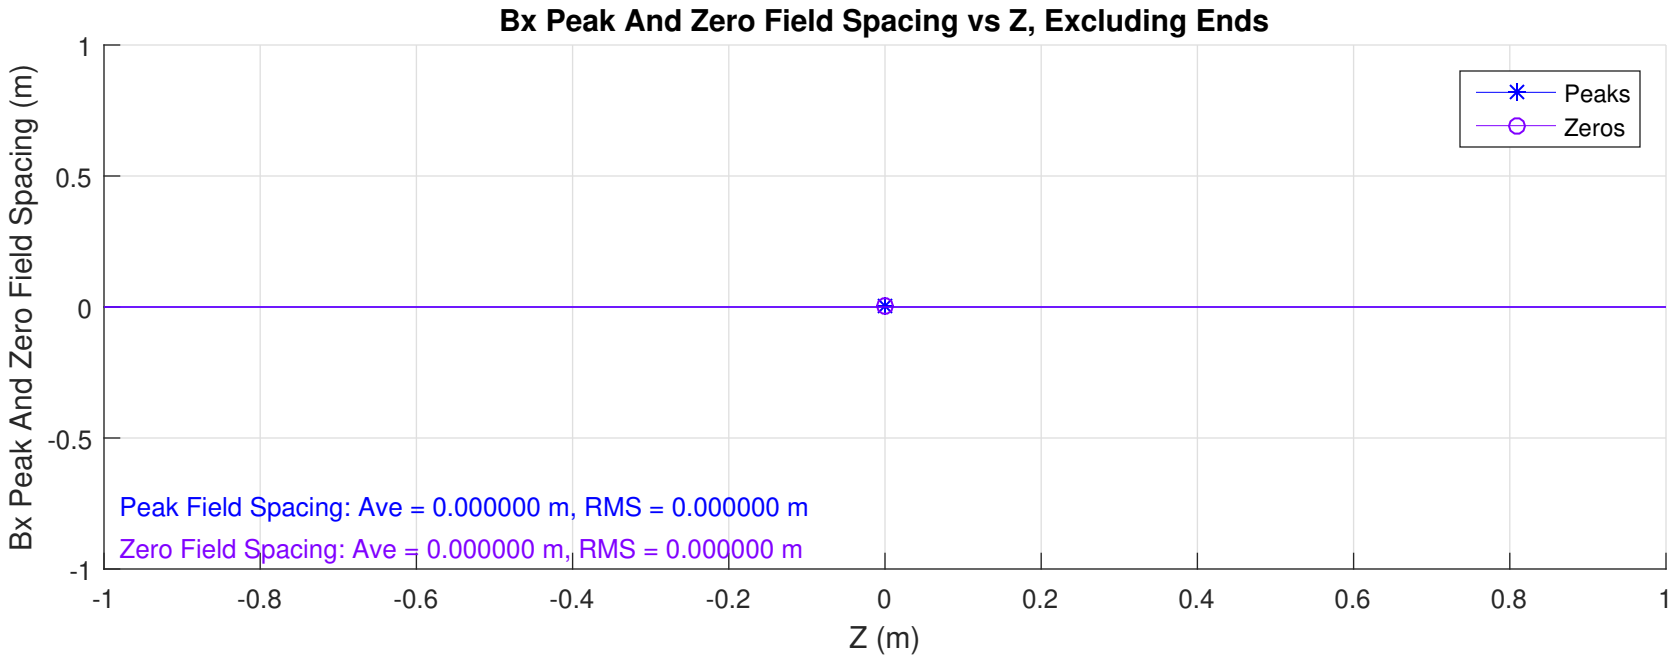
Bx Peak And Zero Field Spacing vs Z, Excluding Ends
Bx Peak And Zero Field Spacing (m)
Z (m)
Peaks
Zeros
Peak Field Spacing: Ave = 0.000000 m, RMS = 0.000000 m
Zero Field Spacing: Ave = 0.000000 m, RMS = 0.000000 m

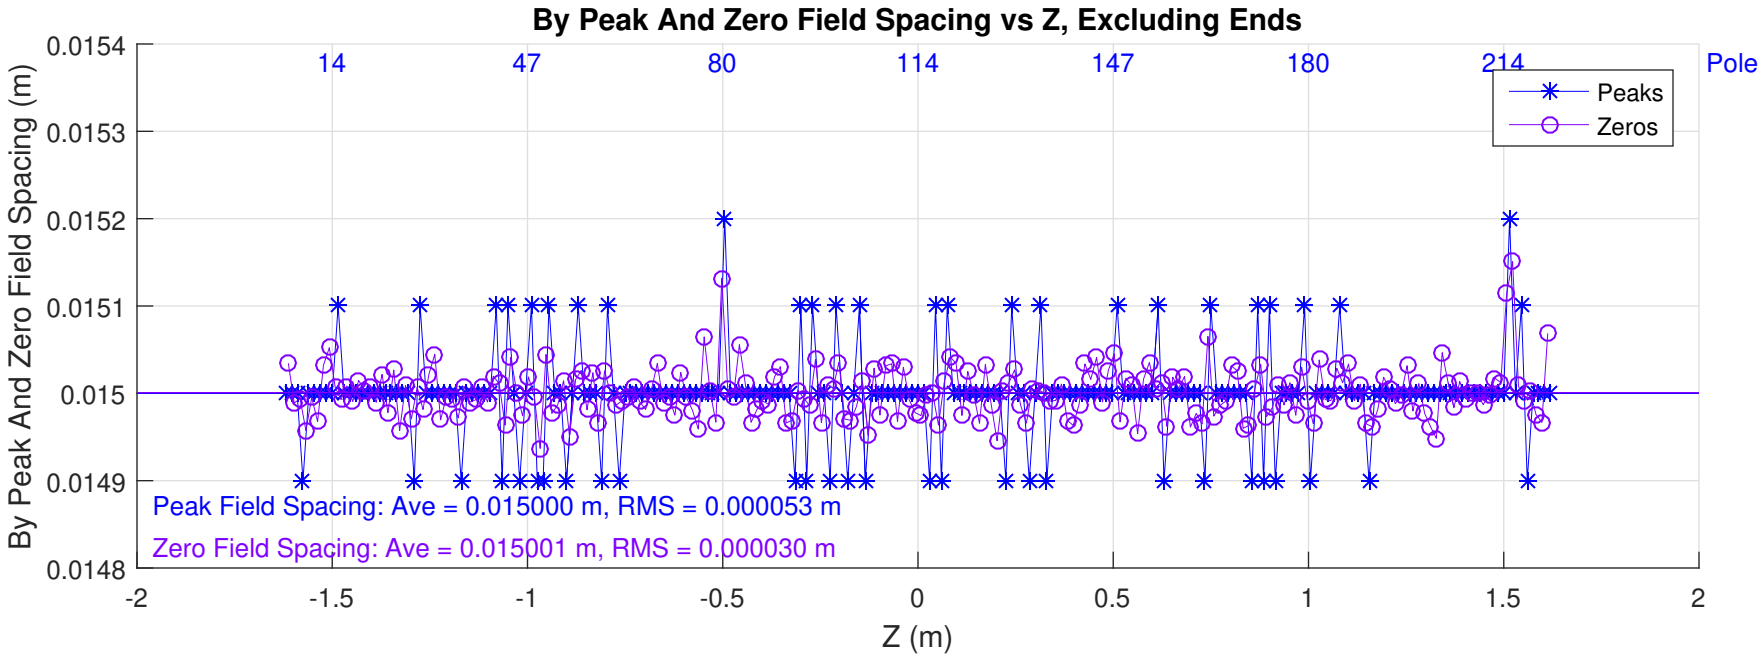
By Peak And Zero Field Spacing vs Z, Excluding Ends
By Peak And Zero Field Spacing (m)
Z (m)
14
47
80
114
147
180
214
Pole
Peaks
Zeros
Peak Field Spacing: Ave = 0.015000 m, RMS = 0.000053 m
Zero Field Spacing: Ave = 0.015001 m, RMS = 0.000030 m

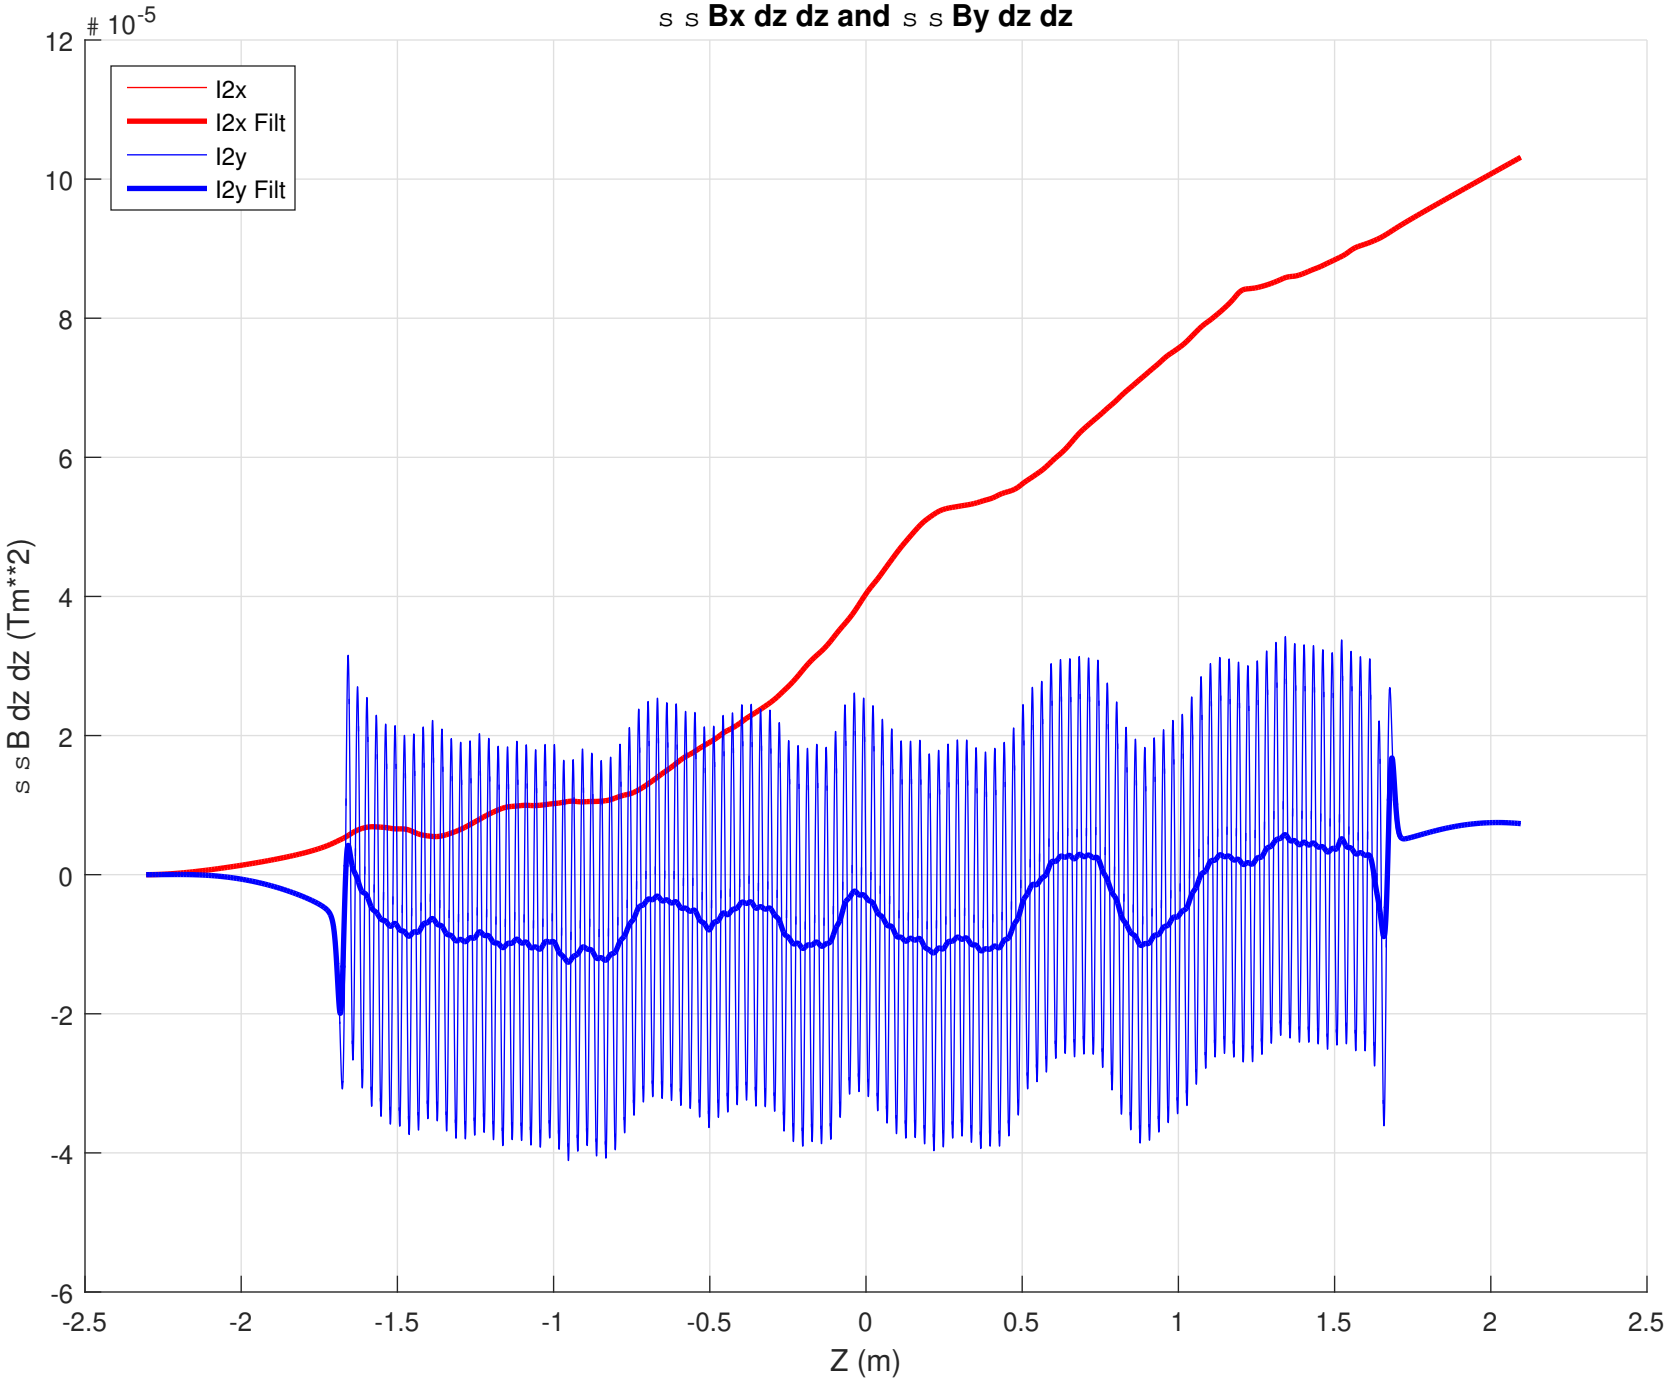
∫∫ Bx dz dz and ∫∫ By dz dz
# 10^-5
I2x
I2x Filt
I2y
I2y Filt
∫∫B dz dz (Tm**2)
Z (m)
12
10
8
6
4
2
0
-2
-4
-6
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5

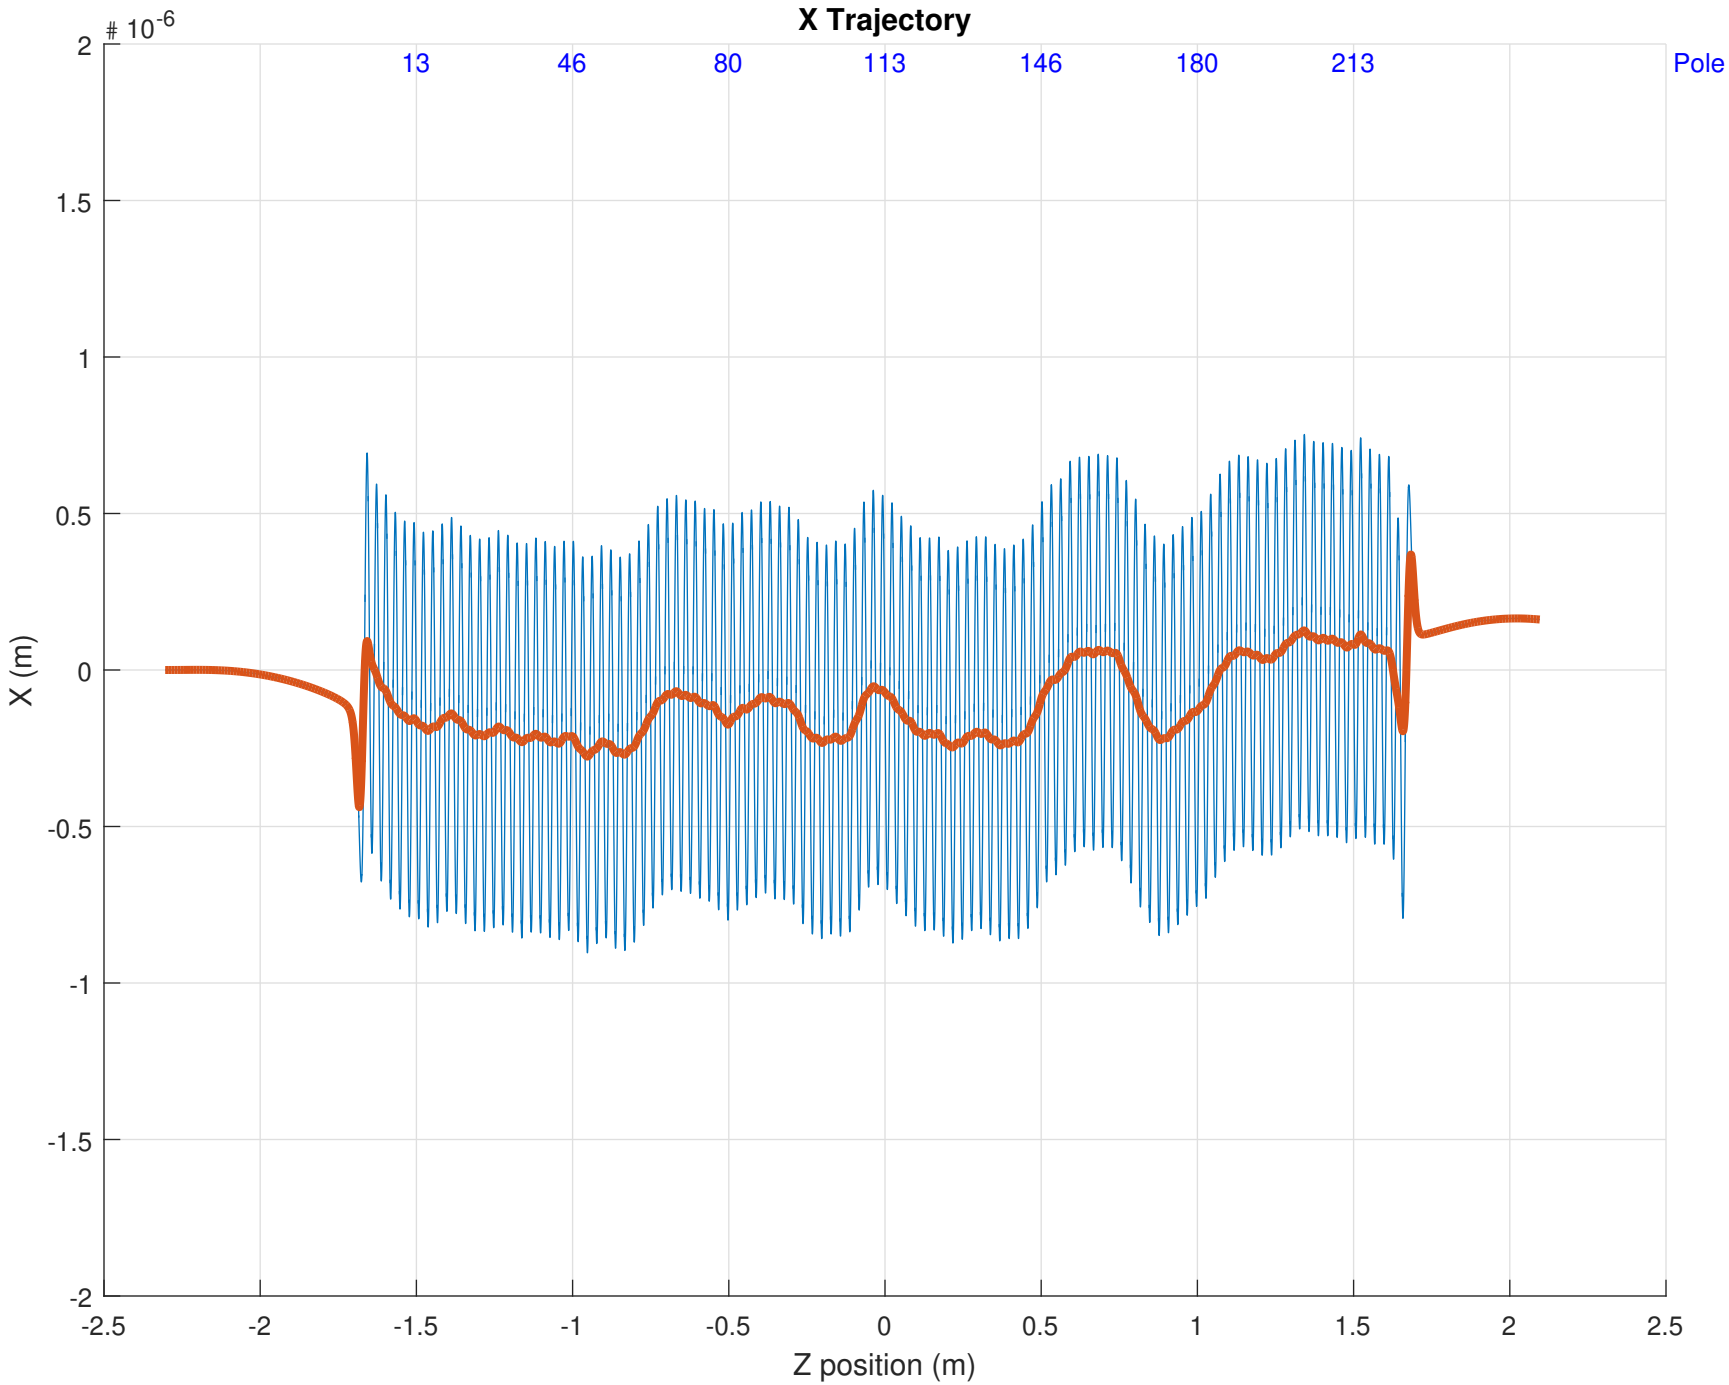
X Trajectory
# 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
X (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z position (m)

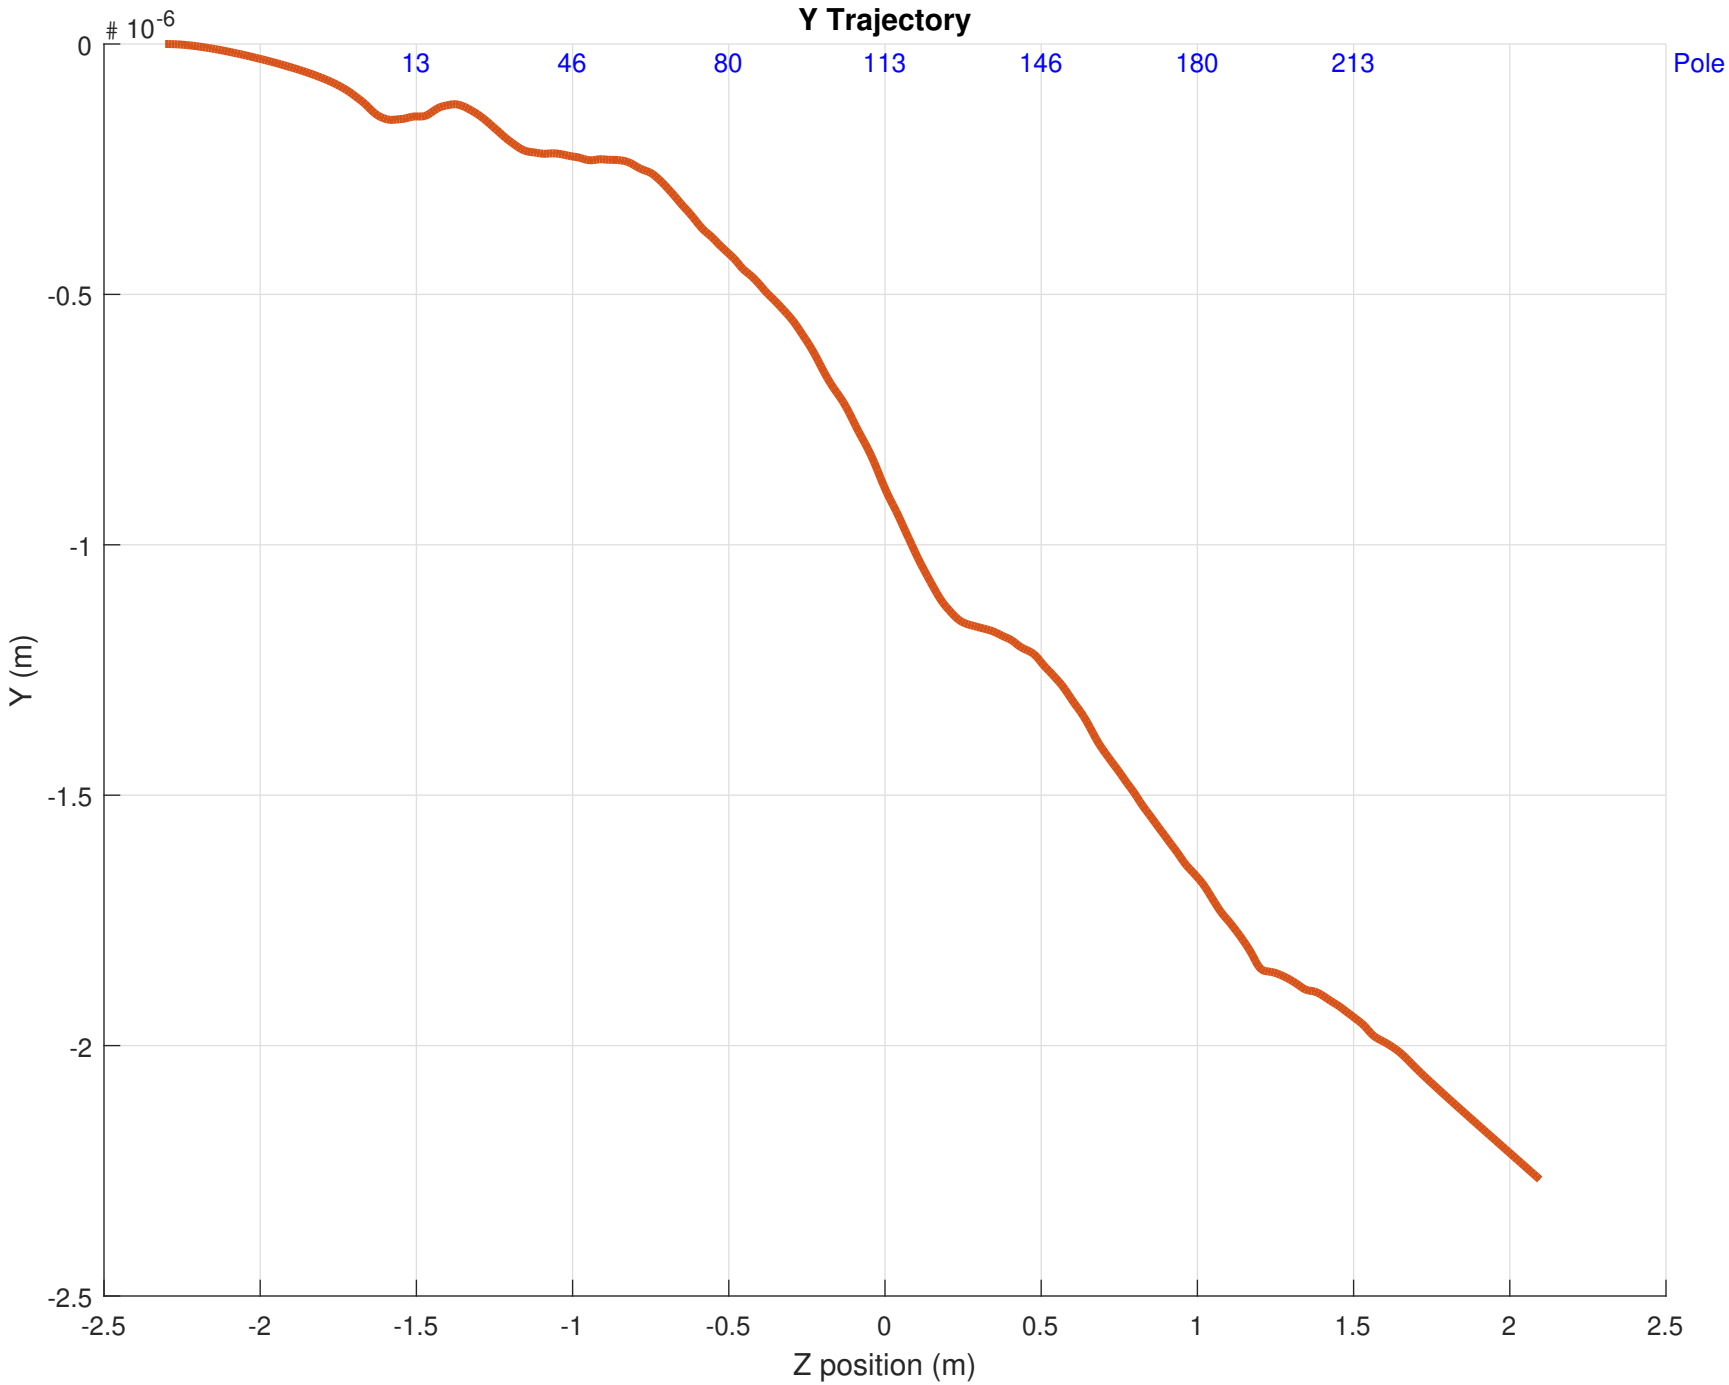
Y Trajectory
# 10^-6
0
-0.5
-1
-1.5
-2
-2.5
13
46
80
113
146
180
213
Pole
Y (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z position (m)

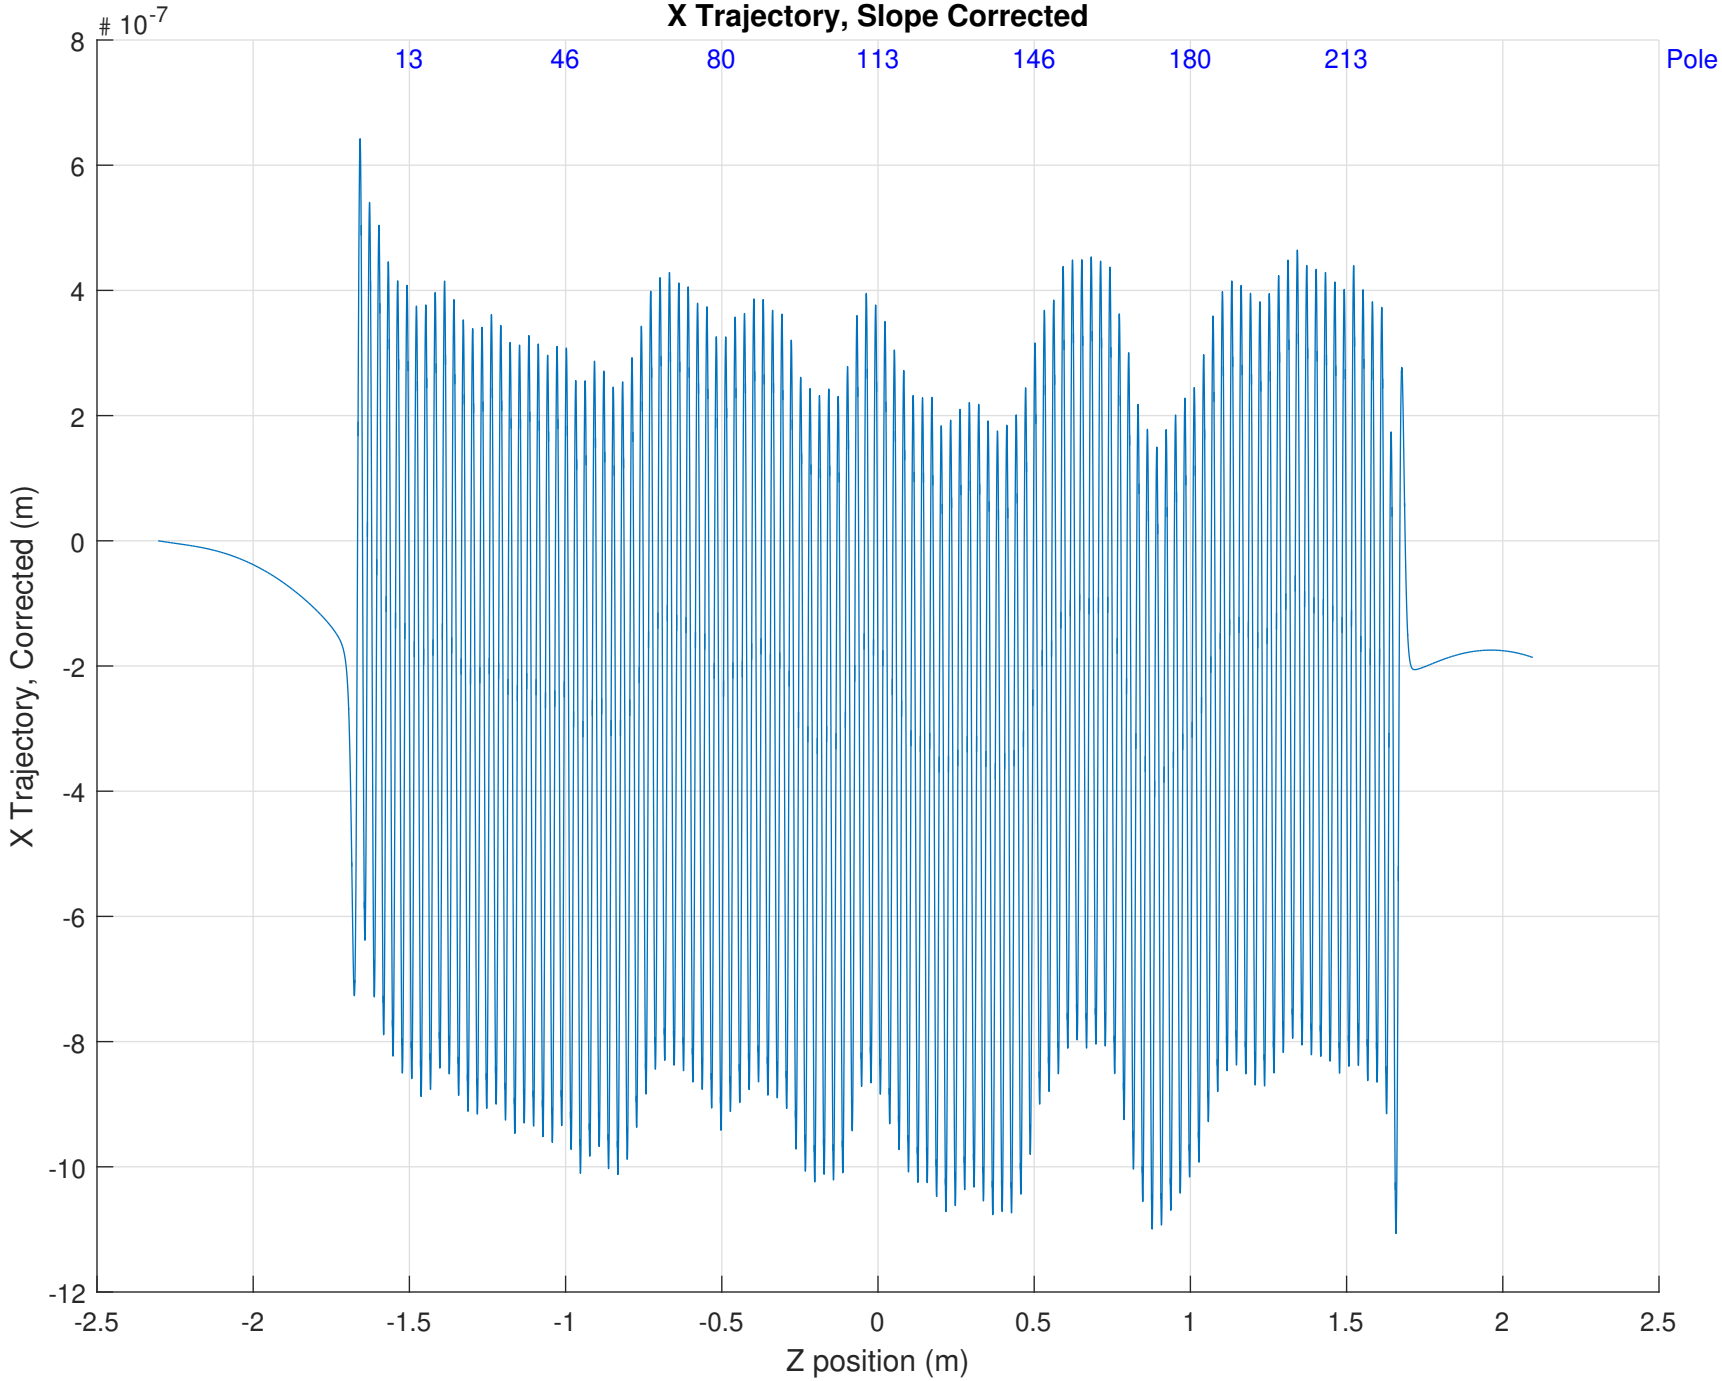
X Trajectory, Slope Corrected
# 10^-7
13
46
80
113
146
180
213
Pole
8
6
4
2
0
-2
-4
-6
-8
-10
-12
X Trajectory, Corrected (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z position (m)

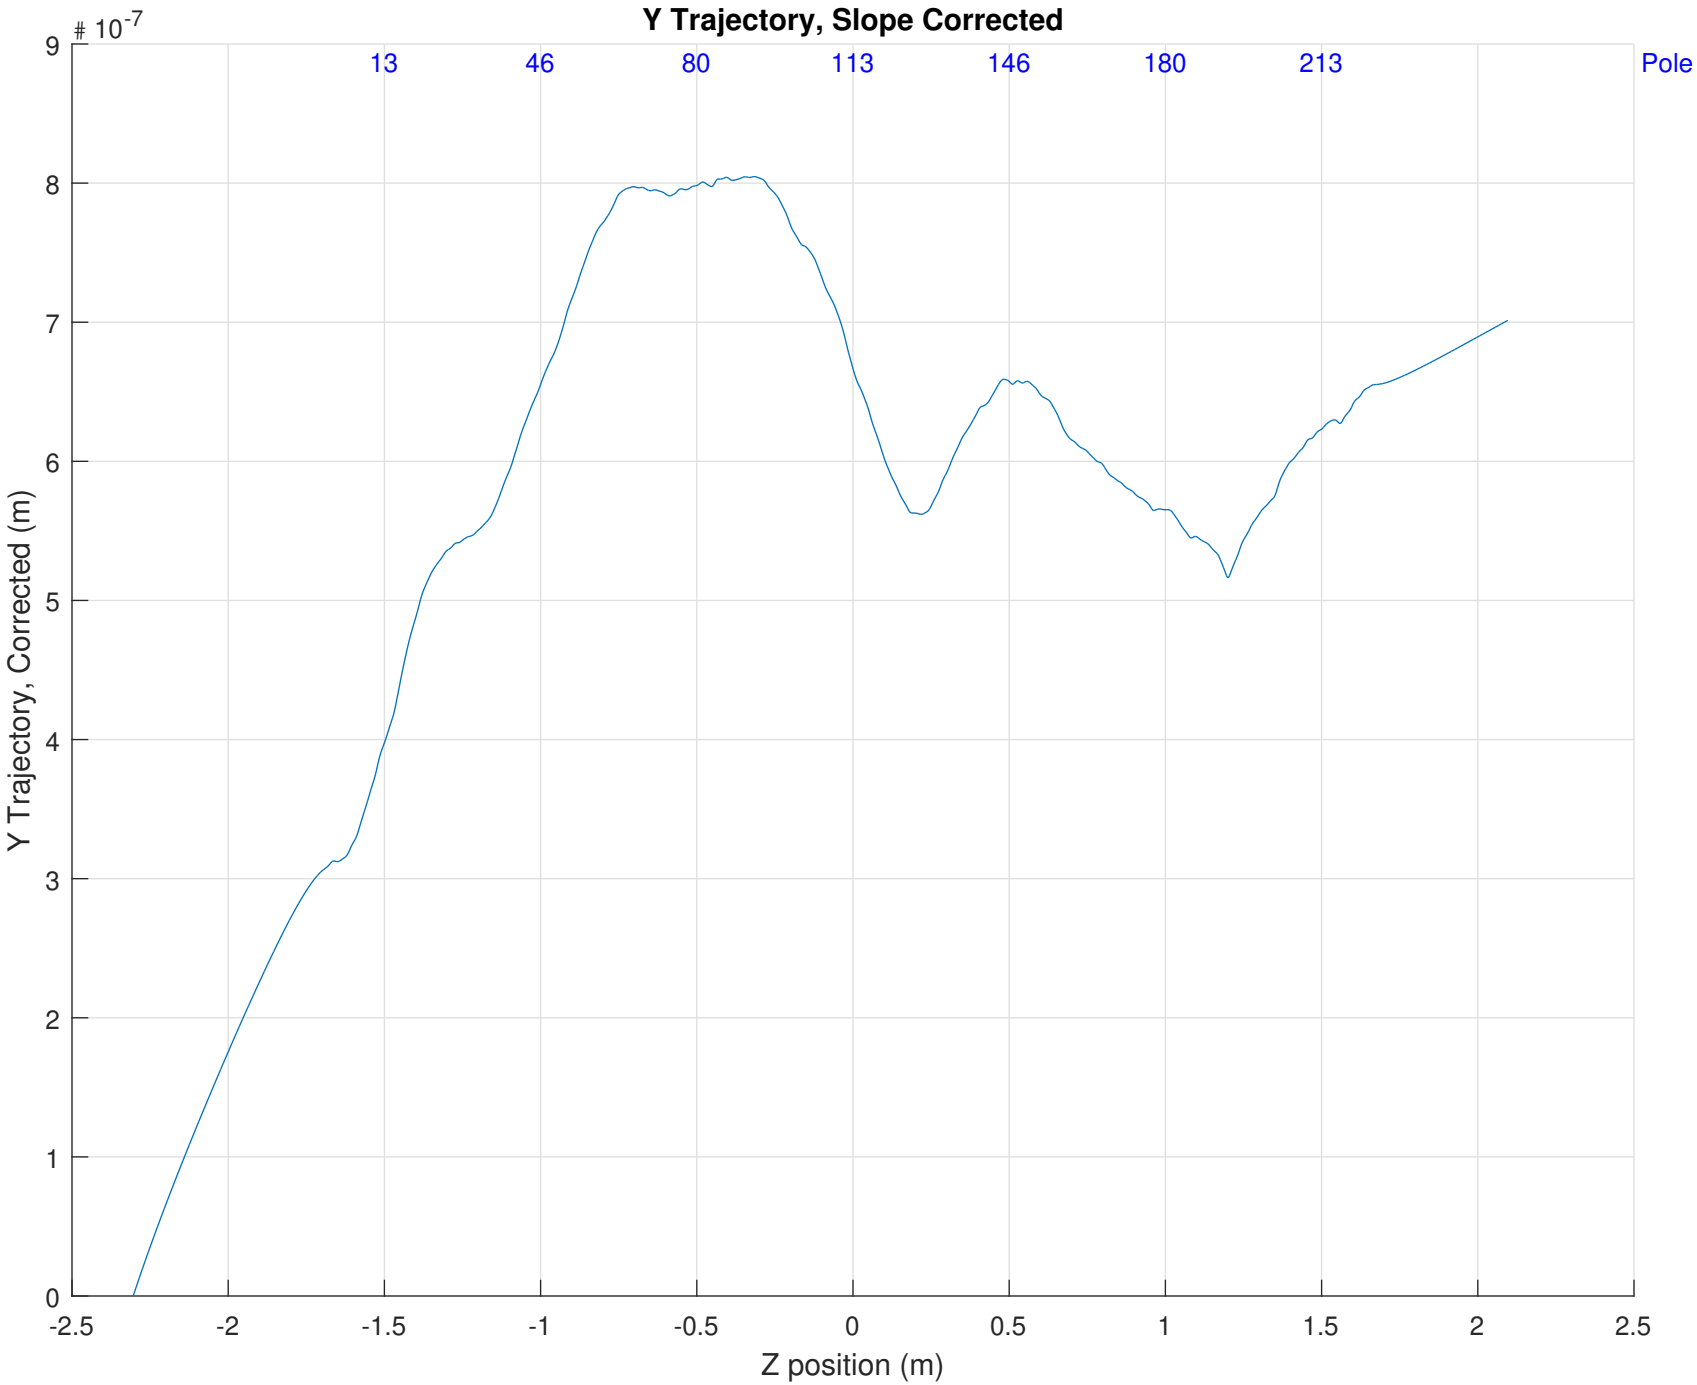
Y Trajectory, Slope Corrected
# 10-7
9
8
7
6
5
4
3
2
1
0
13
46
80
113
146
180
213
Pole
Y Trajectory, Corrected (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z position (m)

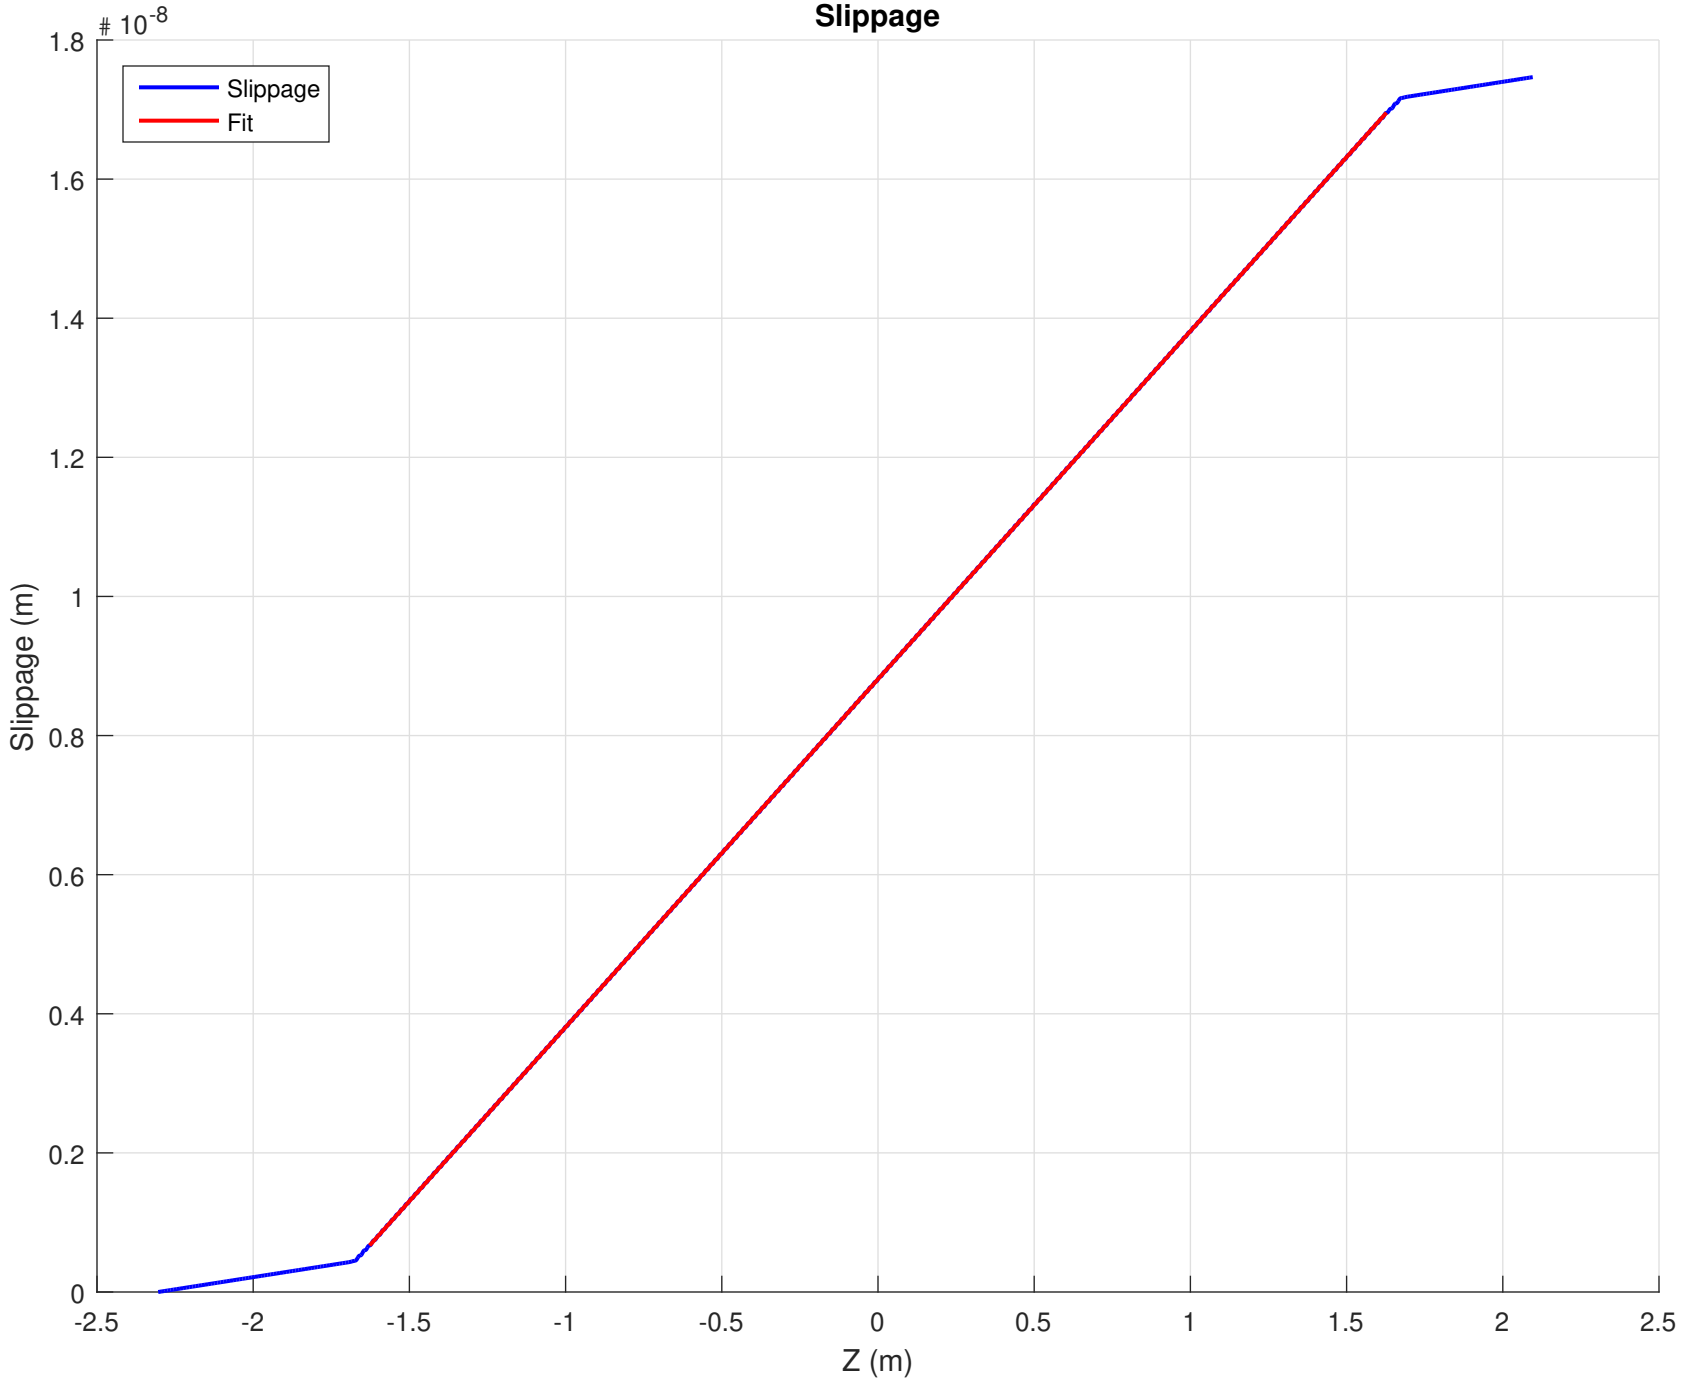
Slippage
# 10^-8
Slippage
Fit
1.8
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0
Slippage (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z (m)

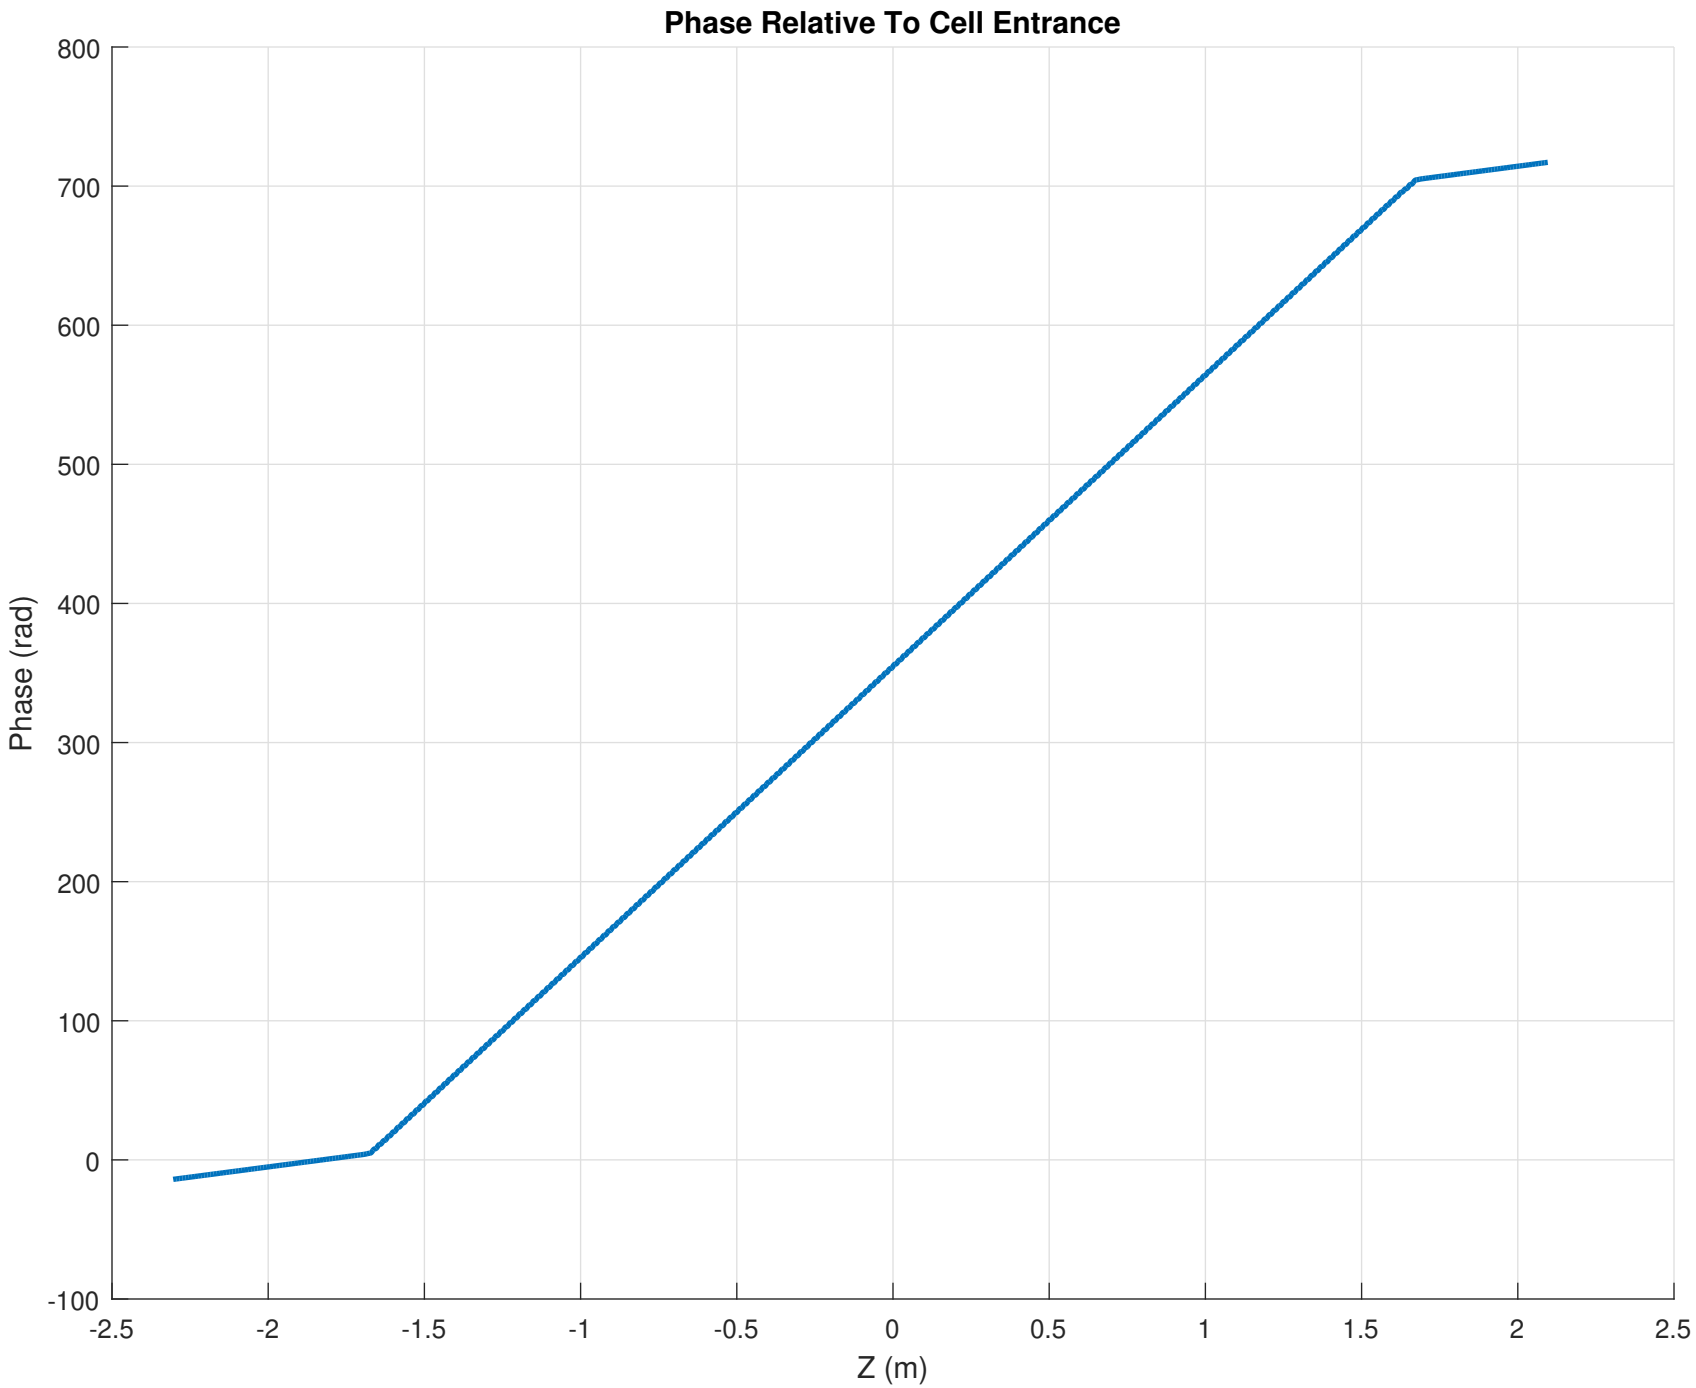
Phase Relative To Cell Entrance
800
700
600
500
400
300
200
100
0
-100
Phase (rad)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
2.5
Z (m)

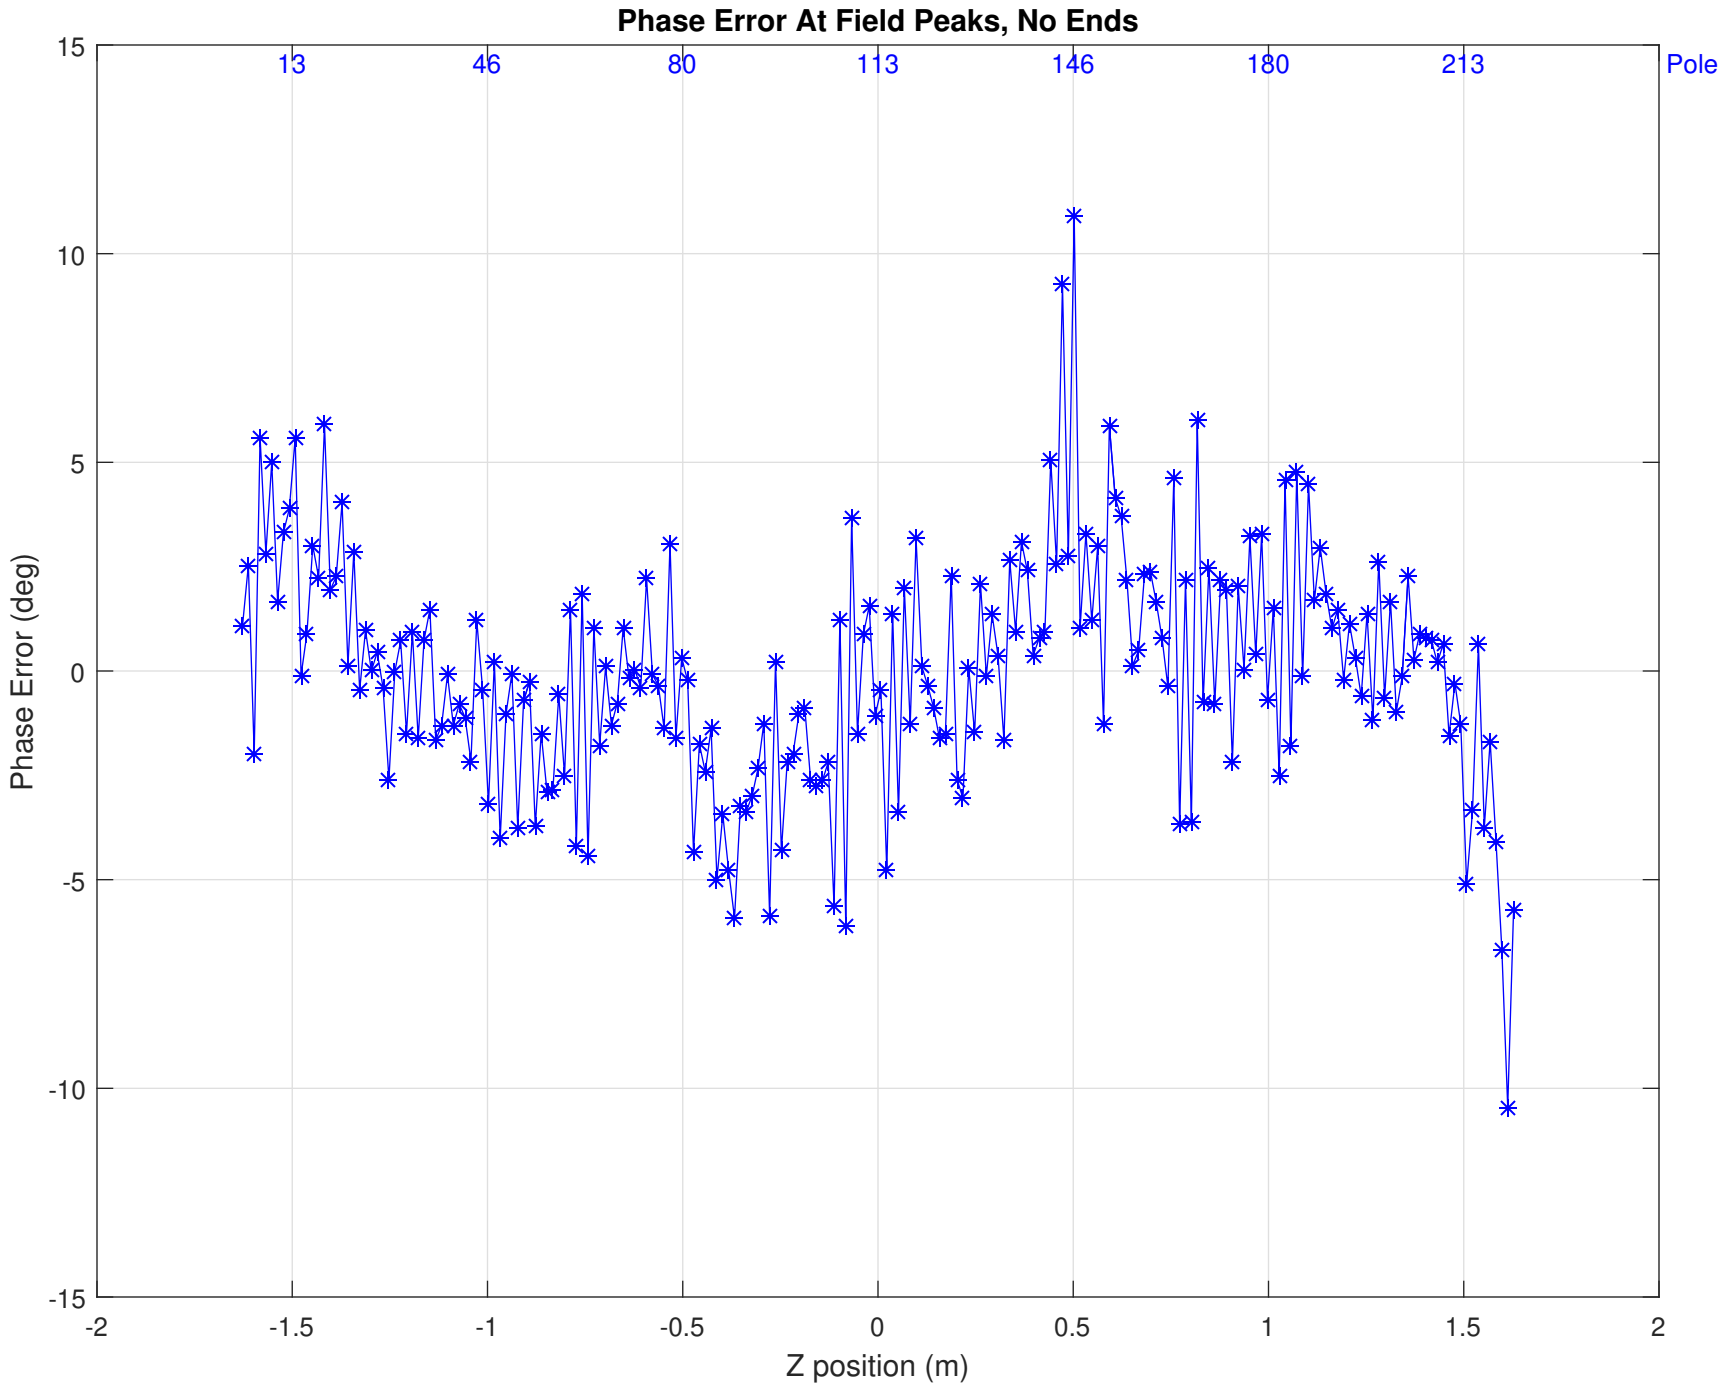


Phase Error: Ave = 0.000000 deg, RMS = 2.820517 deg

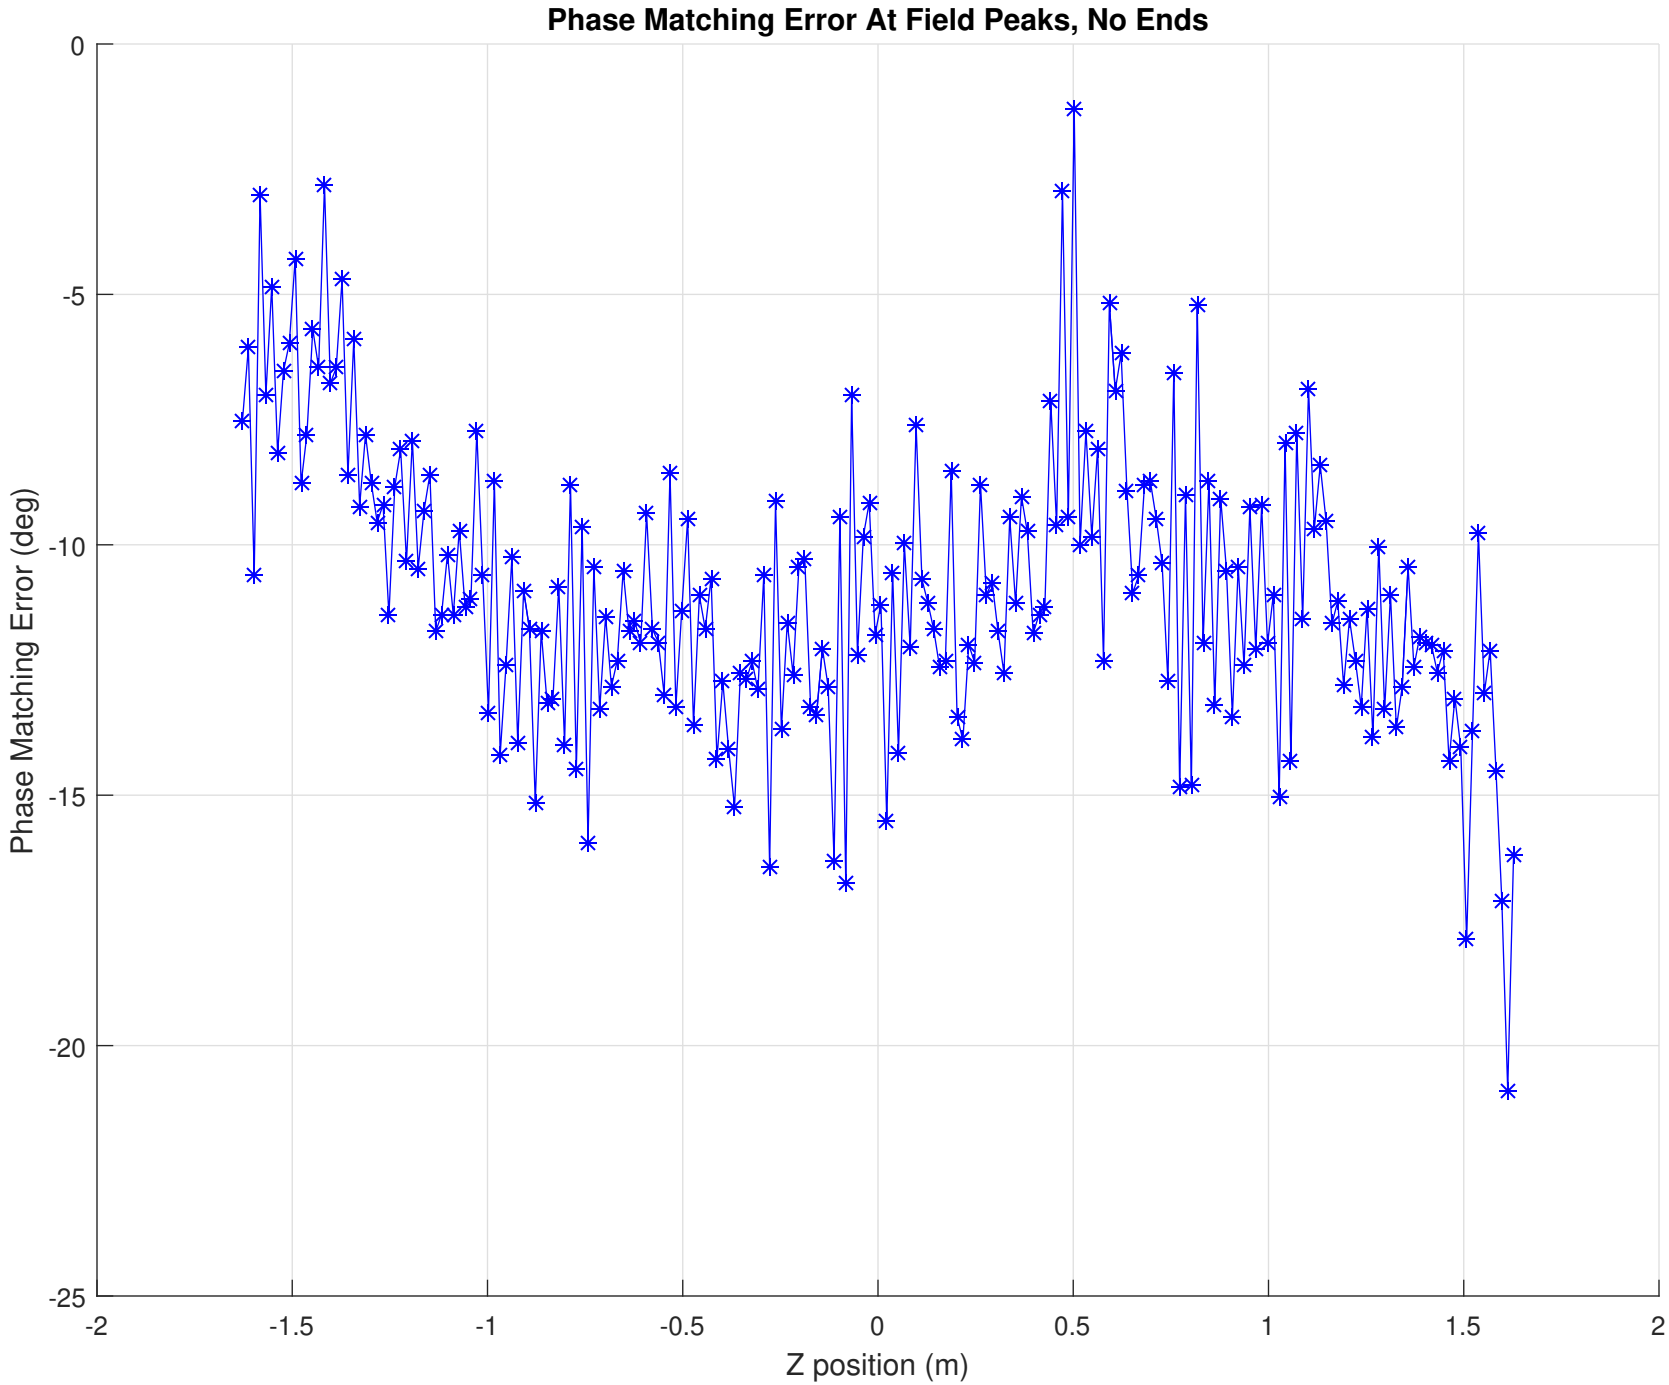


Phase Match Error: Ave = -10.828145 deg, RMS = 2.870942 deg