SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 07−18−2011
Time: 10:37:43

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−13
DATASET Number: 37
Tuning Stage: Fine Tuning
Run Number: 8
Measurement Type: Z Scans
Operator: YL
Comment: find Y at min K; after probe re−calibration
Session first run: 8
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−13\DATASET0037\Fine Tuning\Z Scans\Run 008\bscanz.dat

Temperature (C)
L143−112000−13:−−> T1 19.99 −−> T2 19.99 −−> T5 19.95 −−> T3 19.99 −−> Air 20.02 −−> T4 19.97

Axes position (m) X:0.029801 Y:0.000207
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001156 V
Vy_0i = −0.002975 V

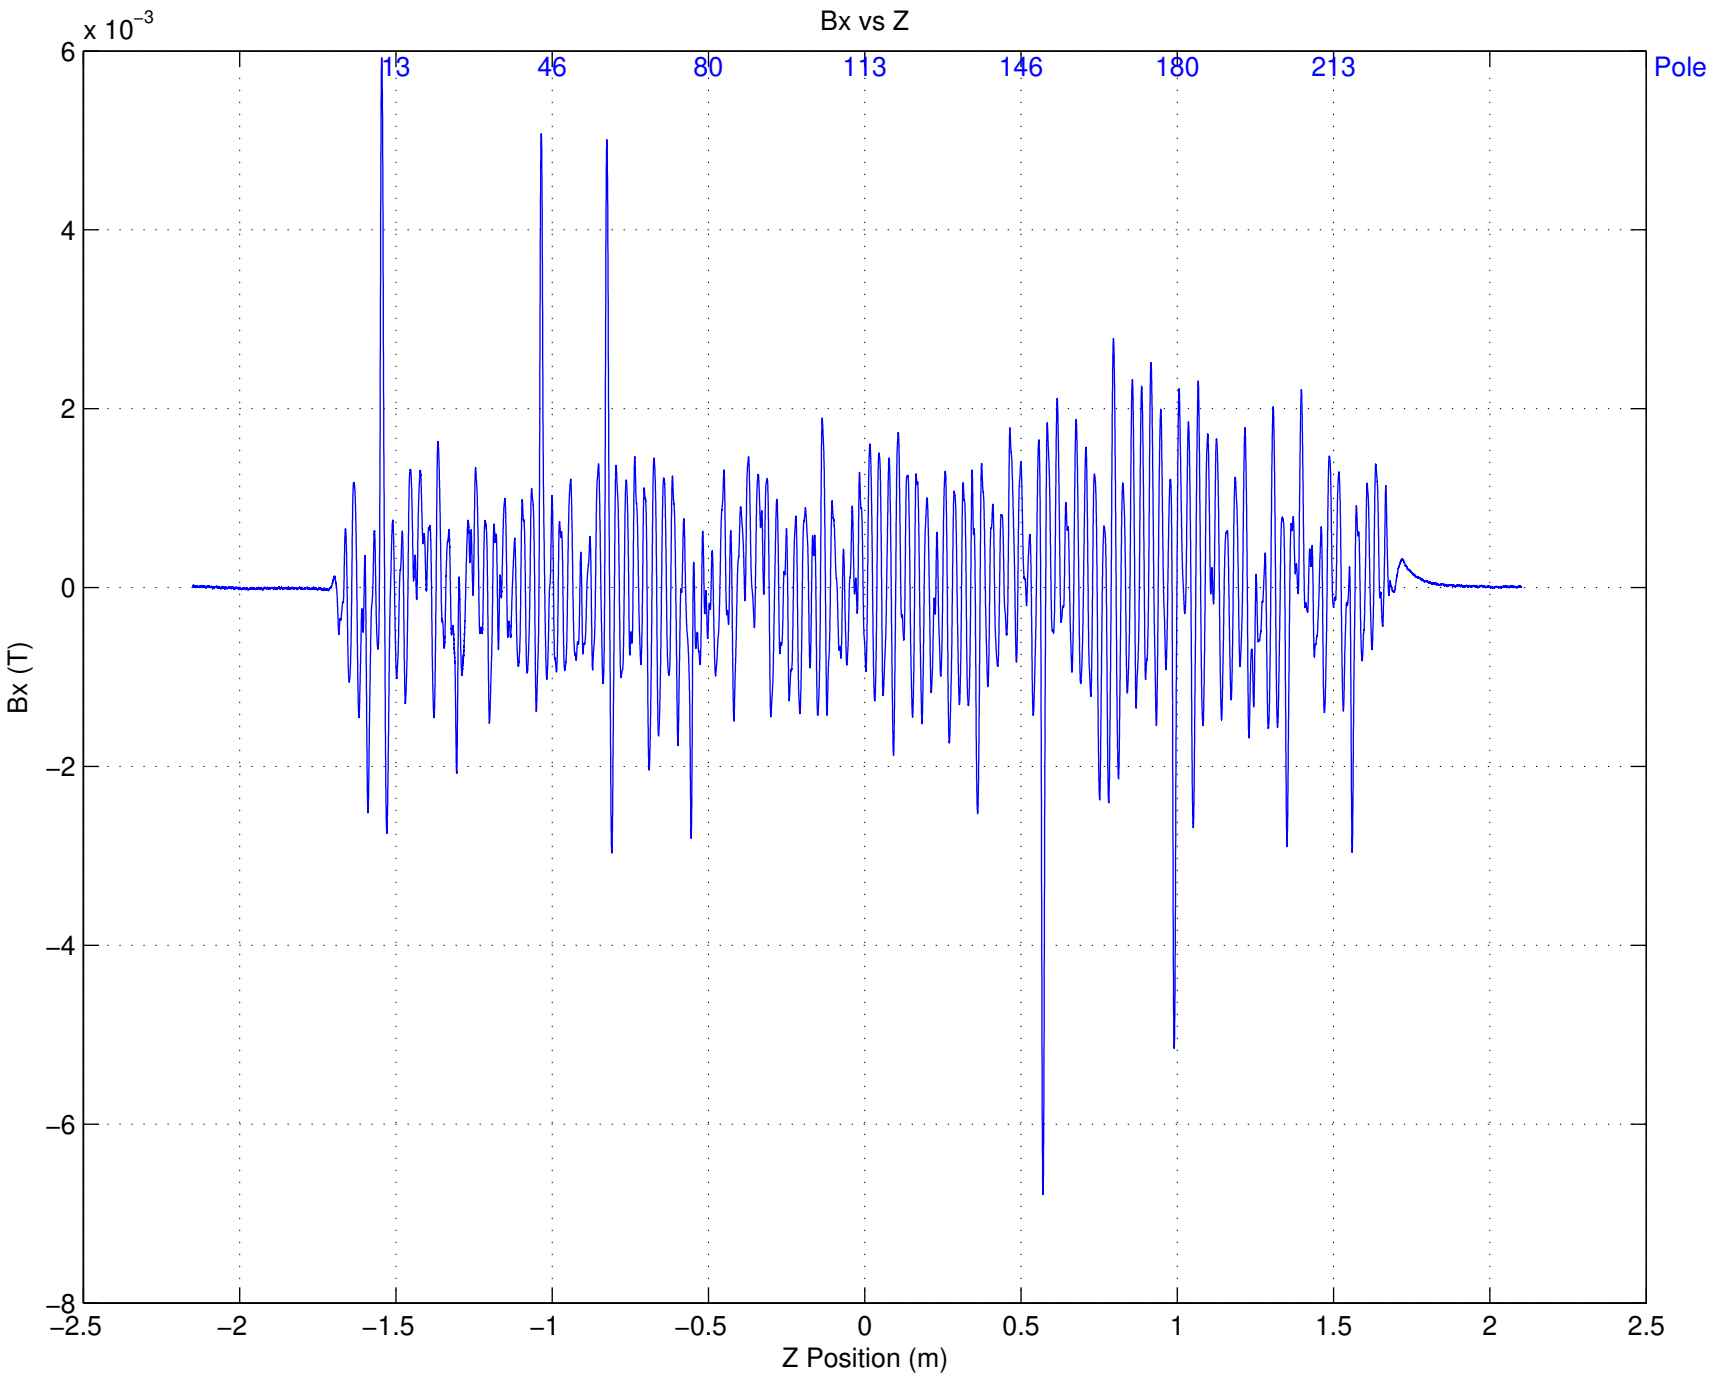
Bx vs Z
x 10^-3
6
4
2
0
−2
−4
−6
−8
Bx (T)
13
46
80
113
146
180
213
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

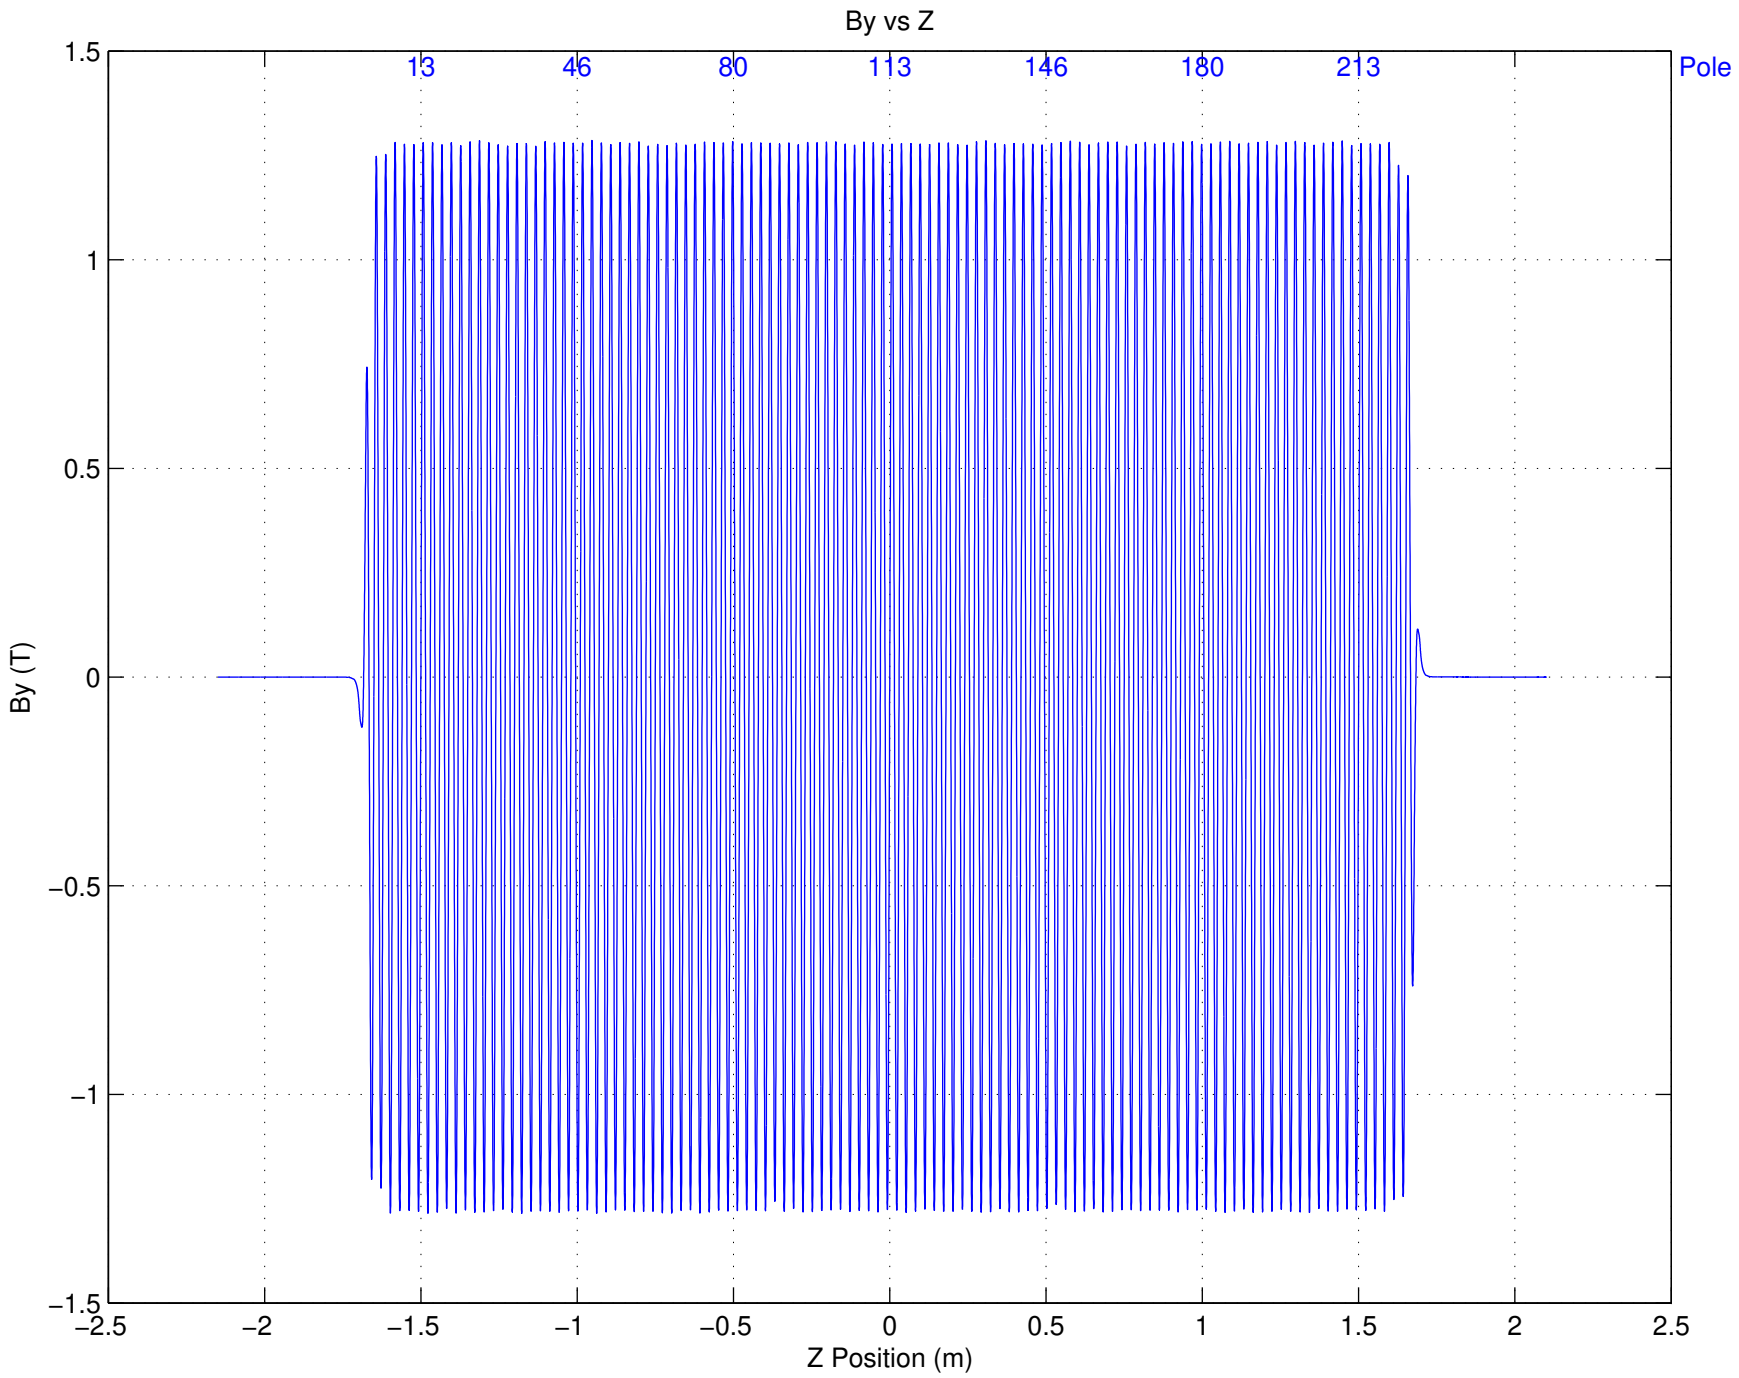
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

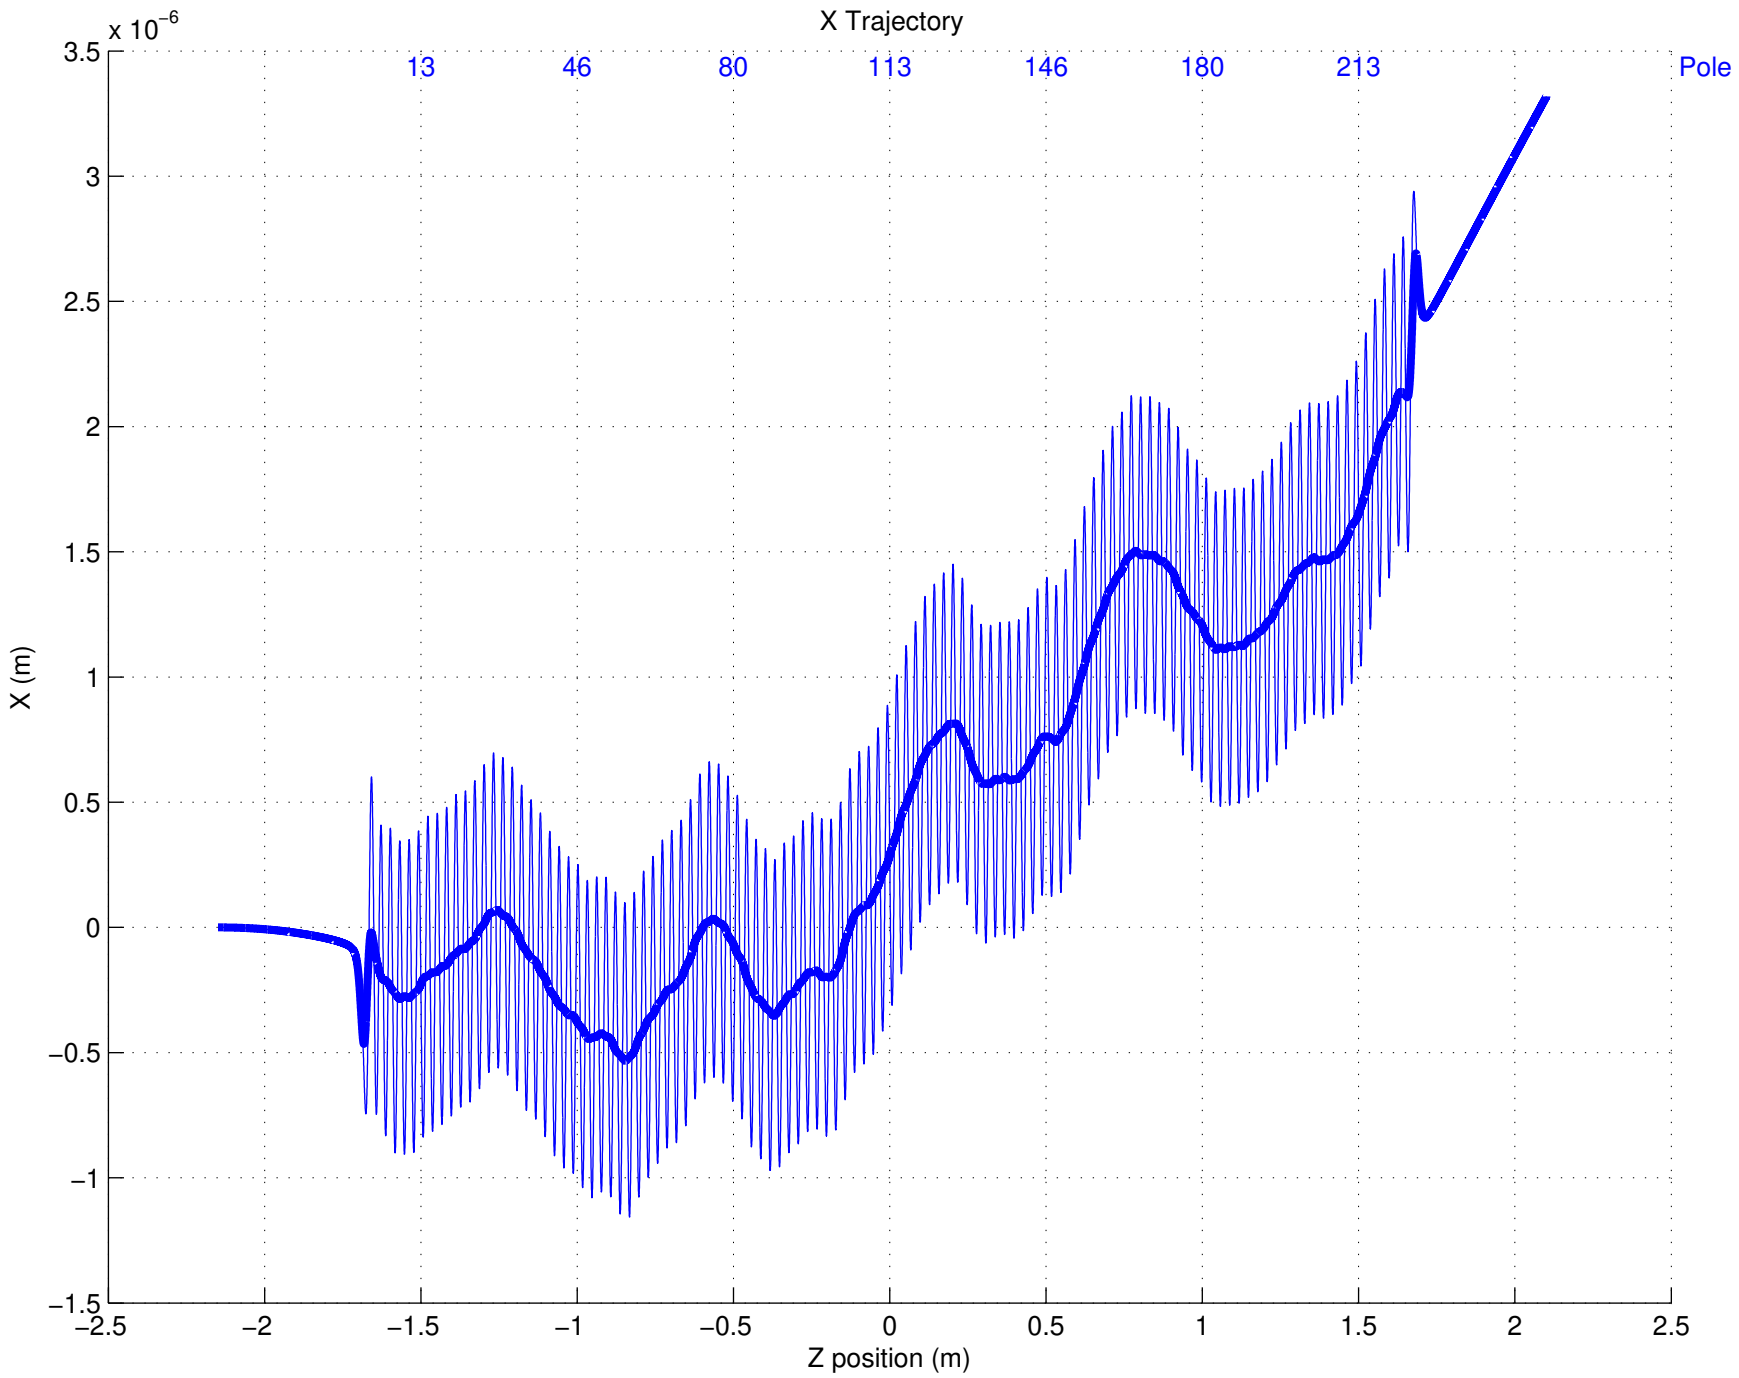
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
3.5
3
2.5
2
1.5
1
0.5
0
−0.5
−1
−1.5
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

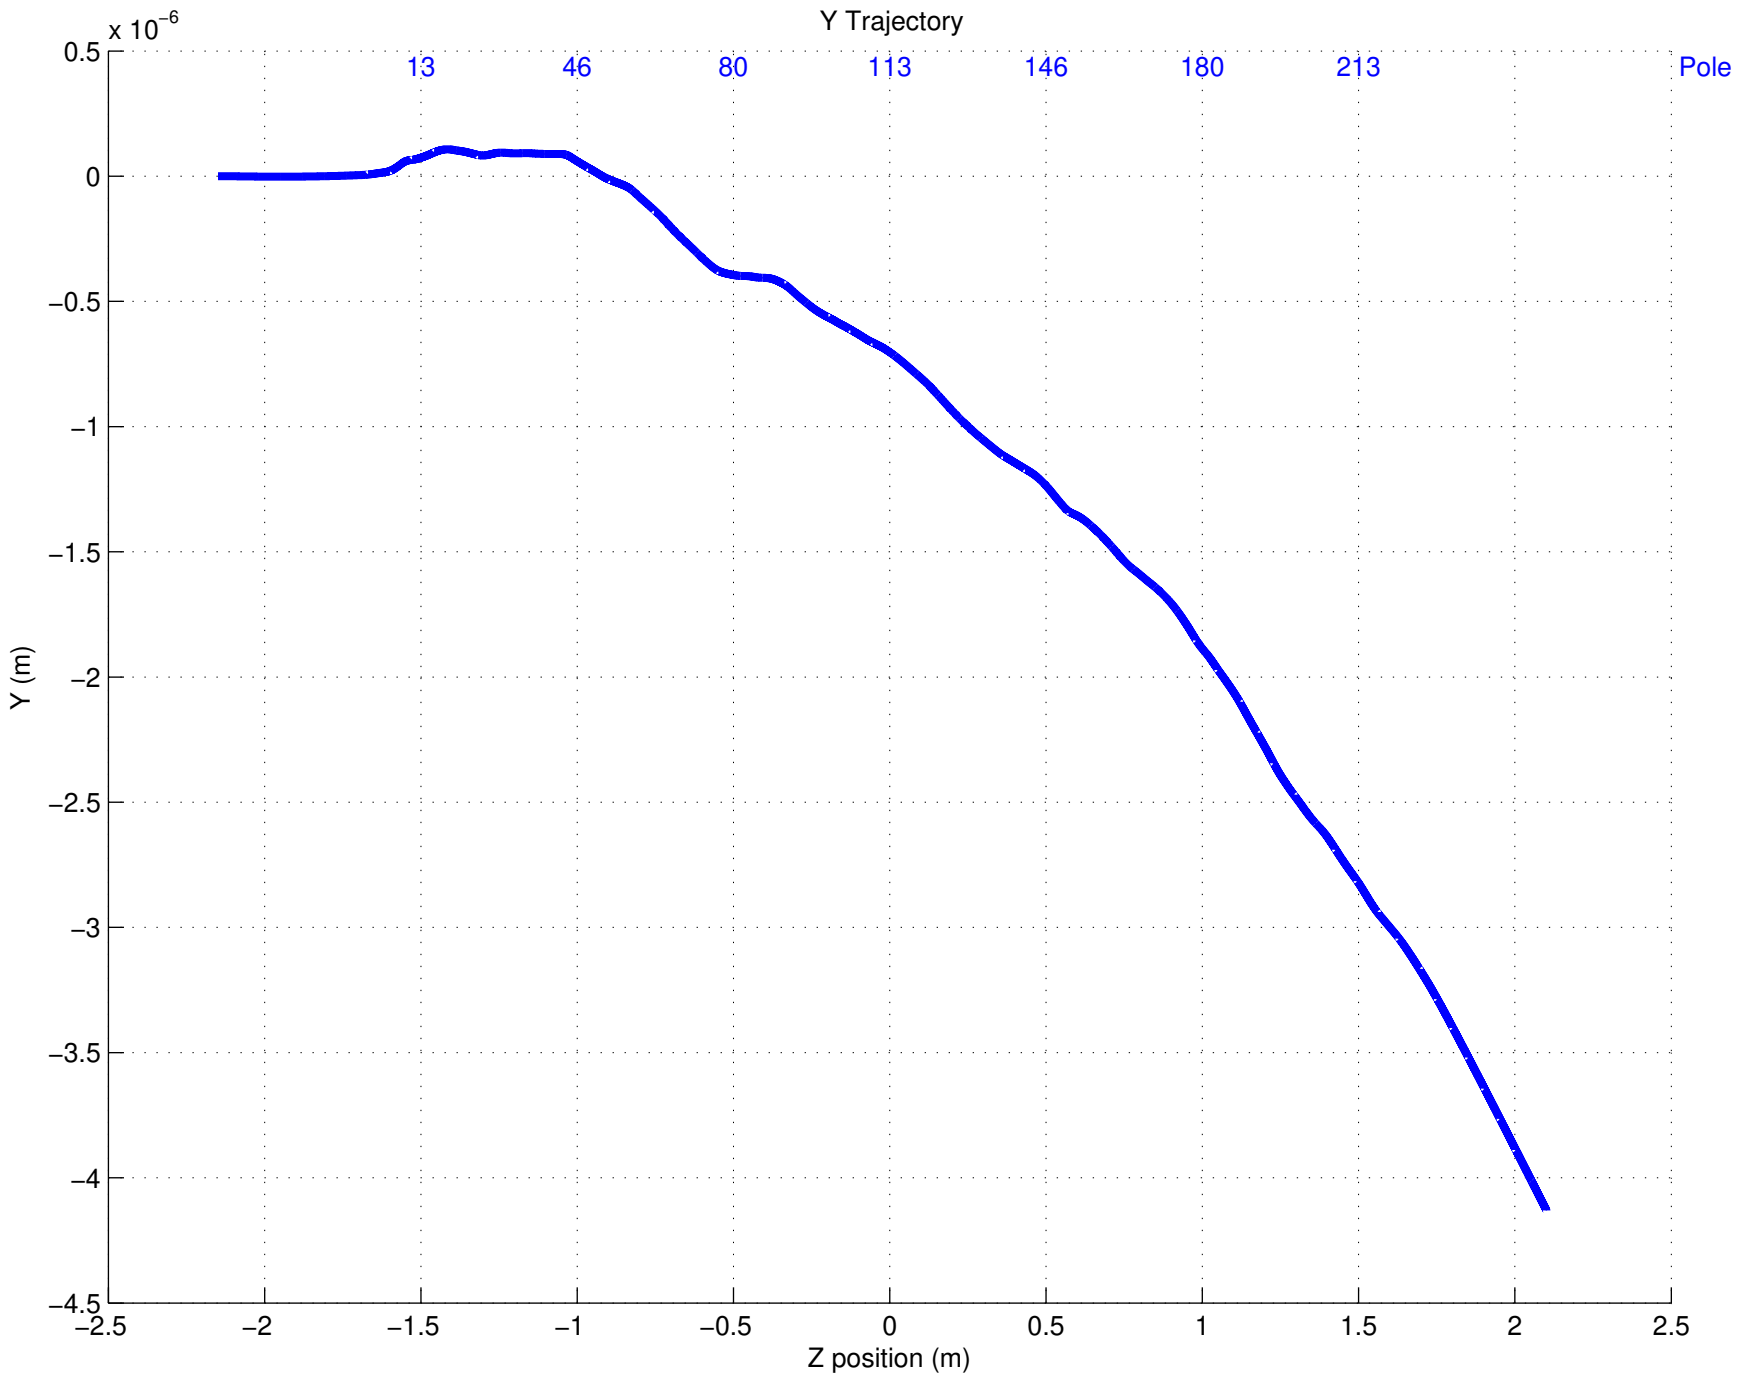
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−3.5
−4
−4.5
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

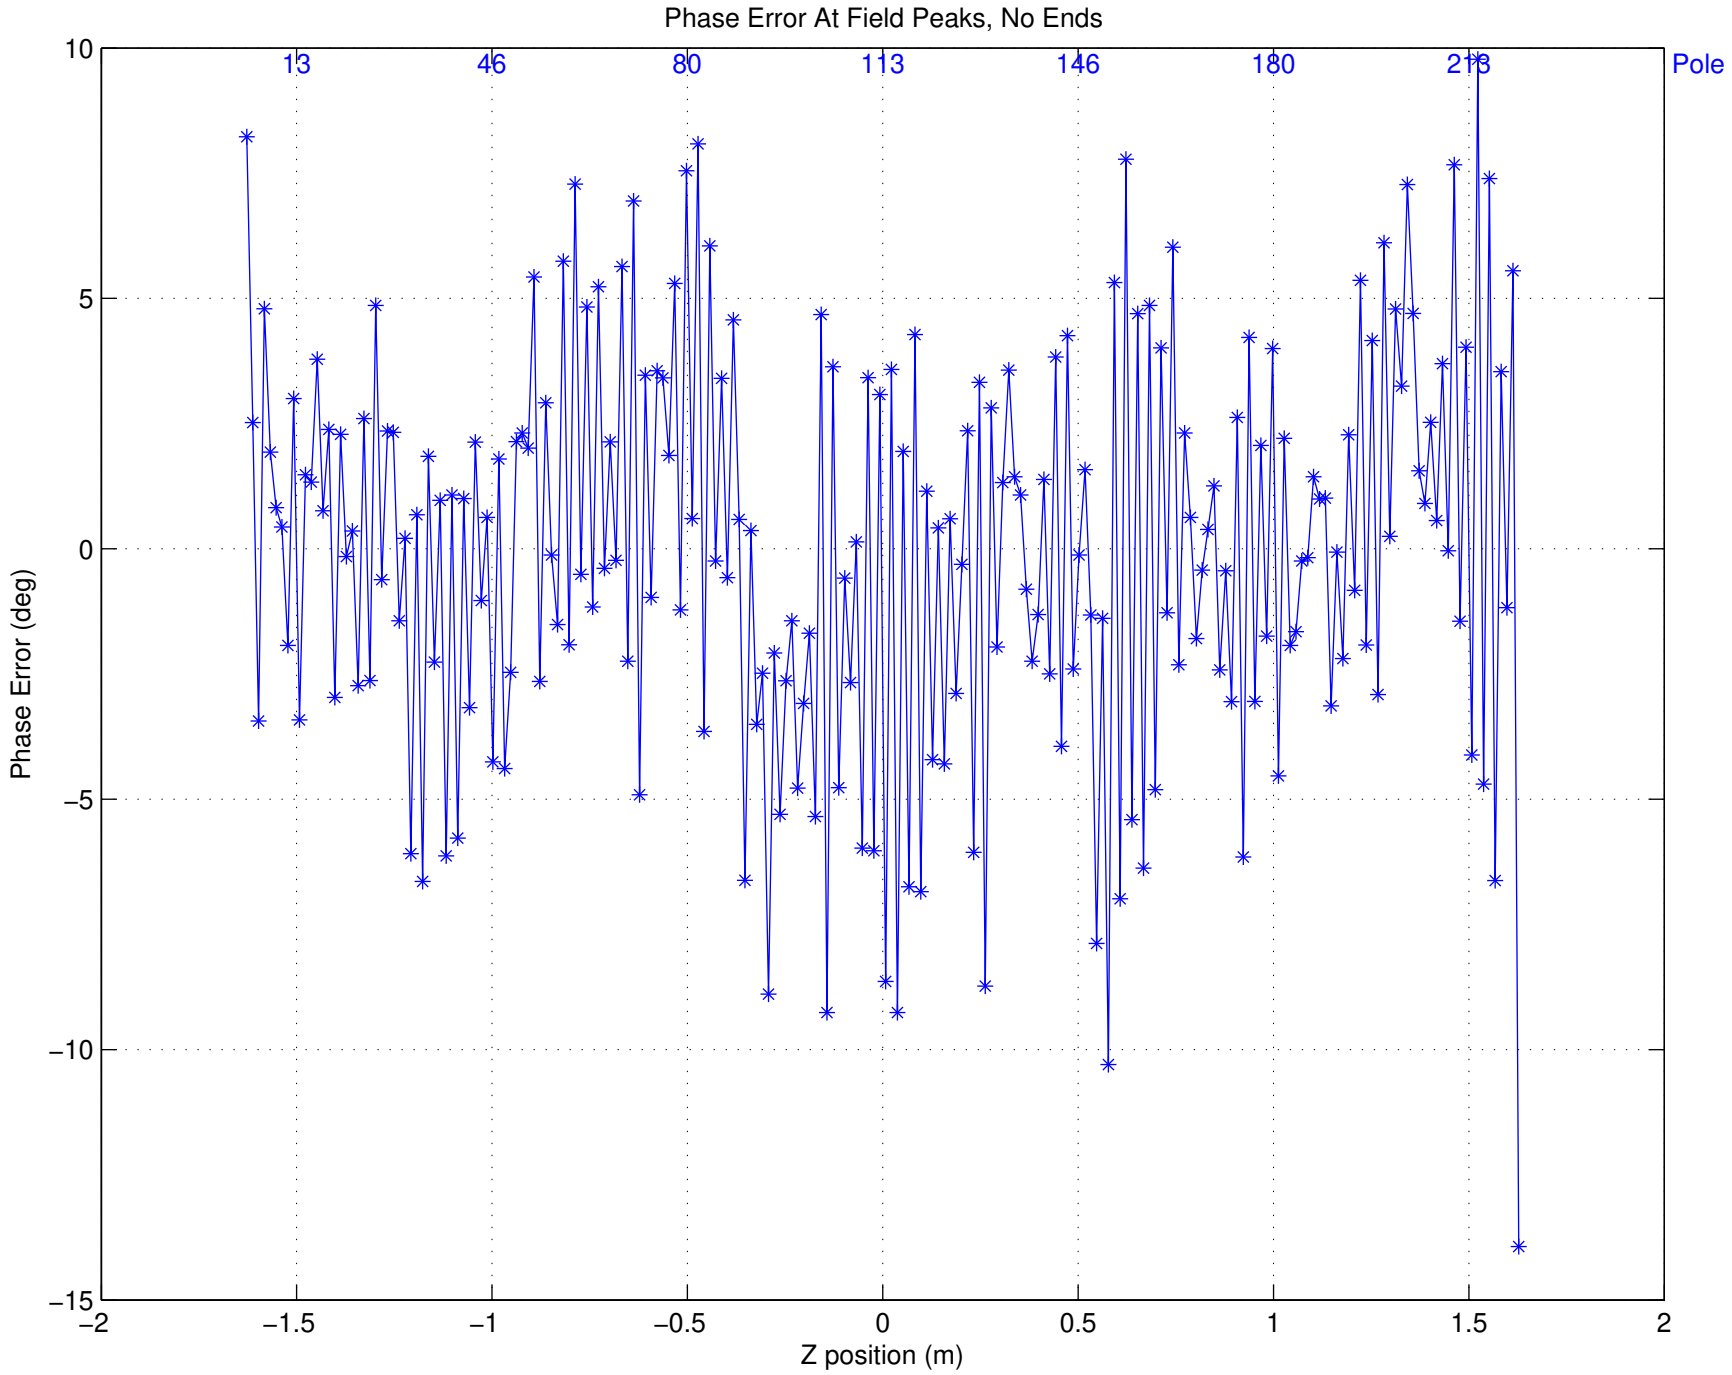

Phase Error: Ave = 0.000000 deg, RMS = 4.058081 deg

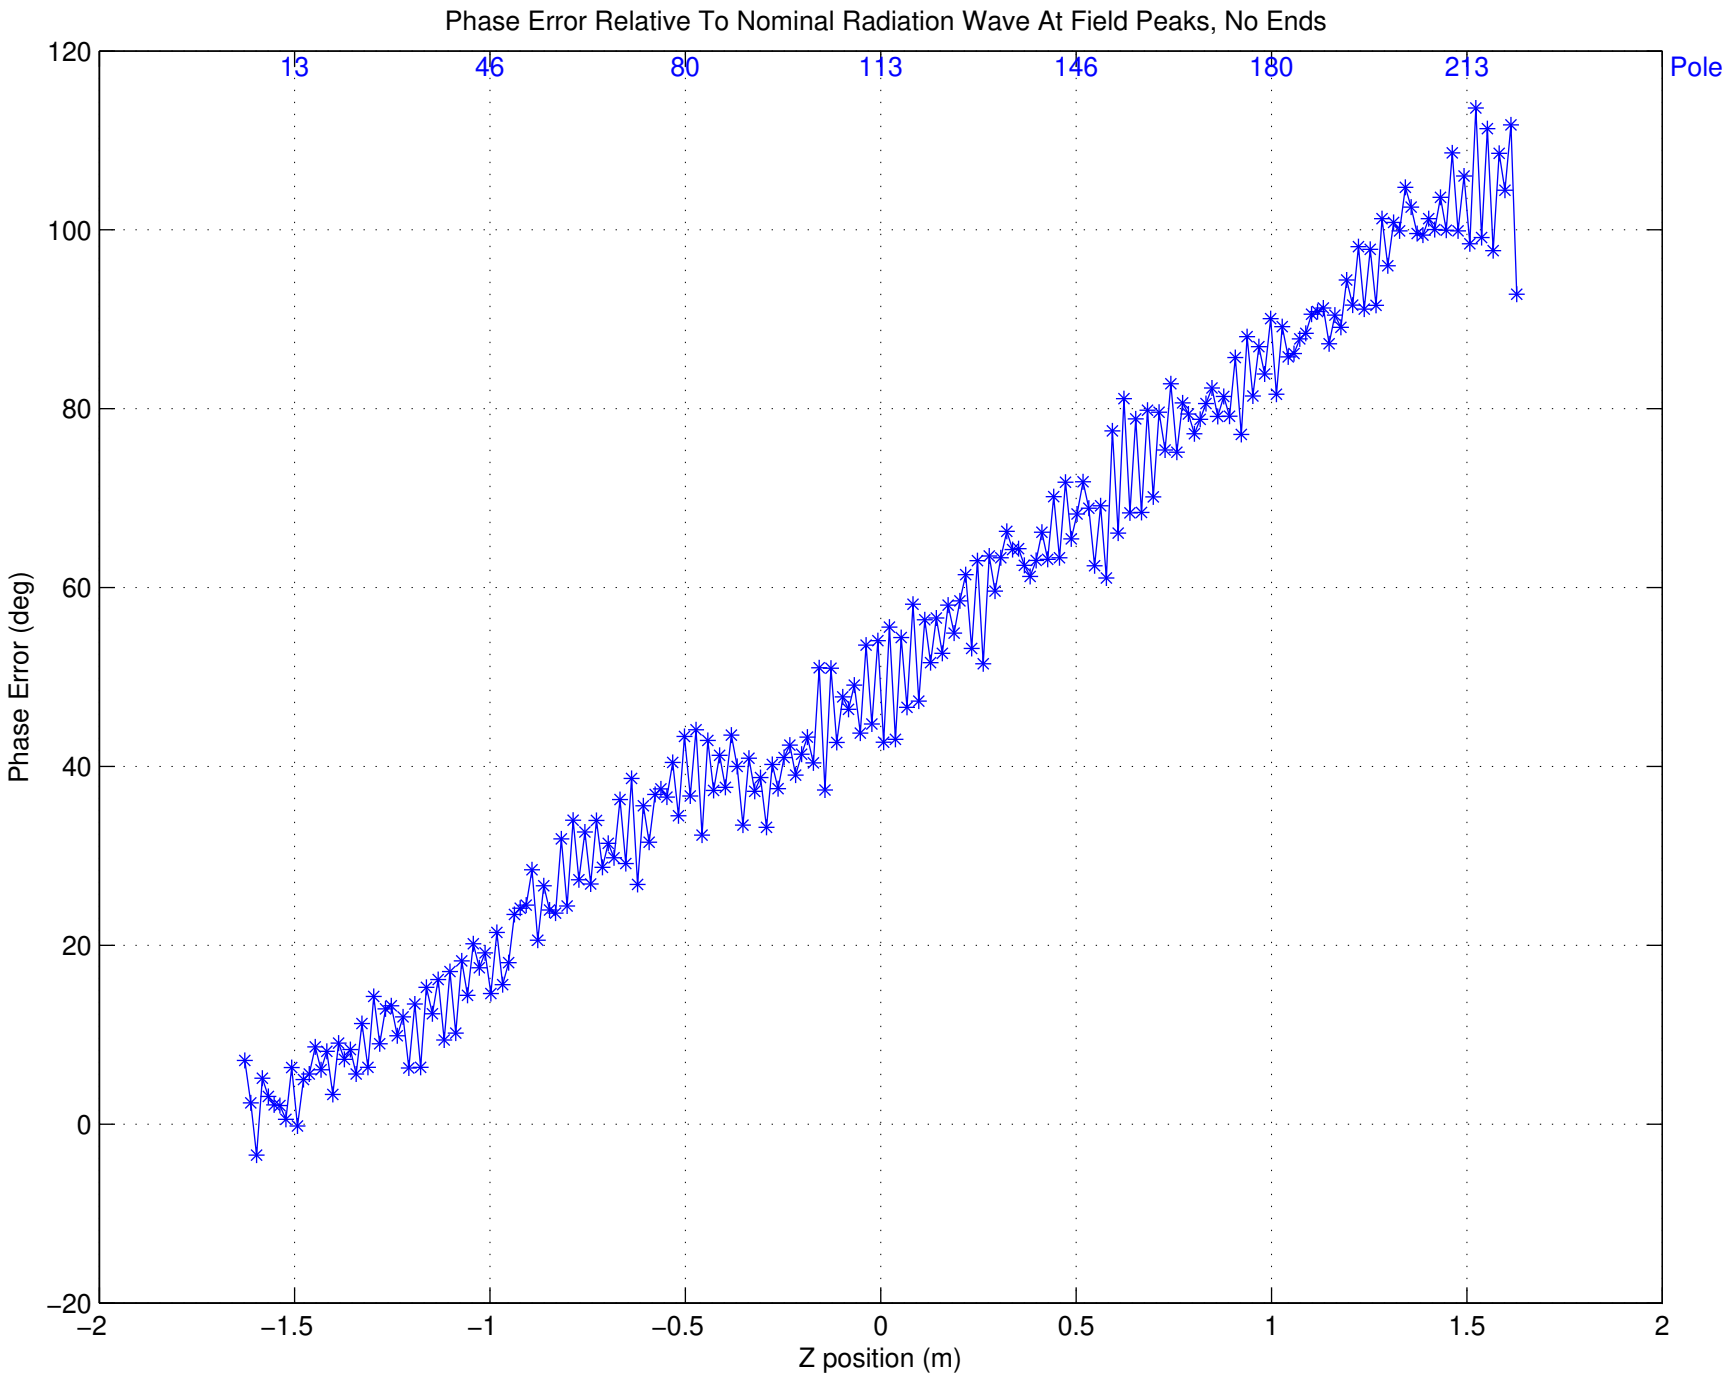
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
120
100
80
60
40
20
0
−20
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)