SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 07−26−2012
Time: 16:48:34

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−15
DATASET Number: 6
Tuning Stage: Fine Tuning
Run Number: 9
Measurement Type: Z Scans
Operator: YL
Comment: at min K; after first gap correction
Session first run: 8
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143−112000−15\DATASET0006\Fine Tuning\Z Scans\Run 009\bscanz.dat

Temperature (C)
L143−112000−15:−−> T1 19.92 −−> T2 19.90 −−> T5 19.87 −−> T3 19.91 −−> Air 20.02 −−> T4 19.90

Axes position (m) X:0.029720 Y:0.000360
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001019 V
Vy_0i = −0.003042 V

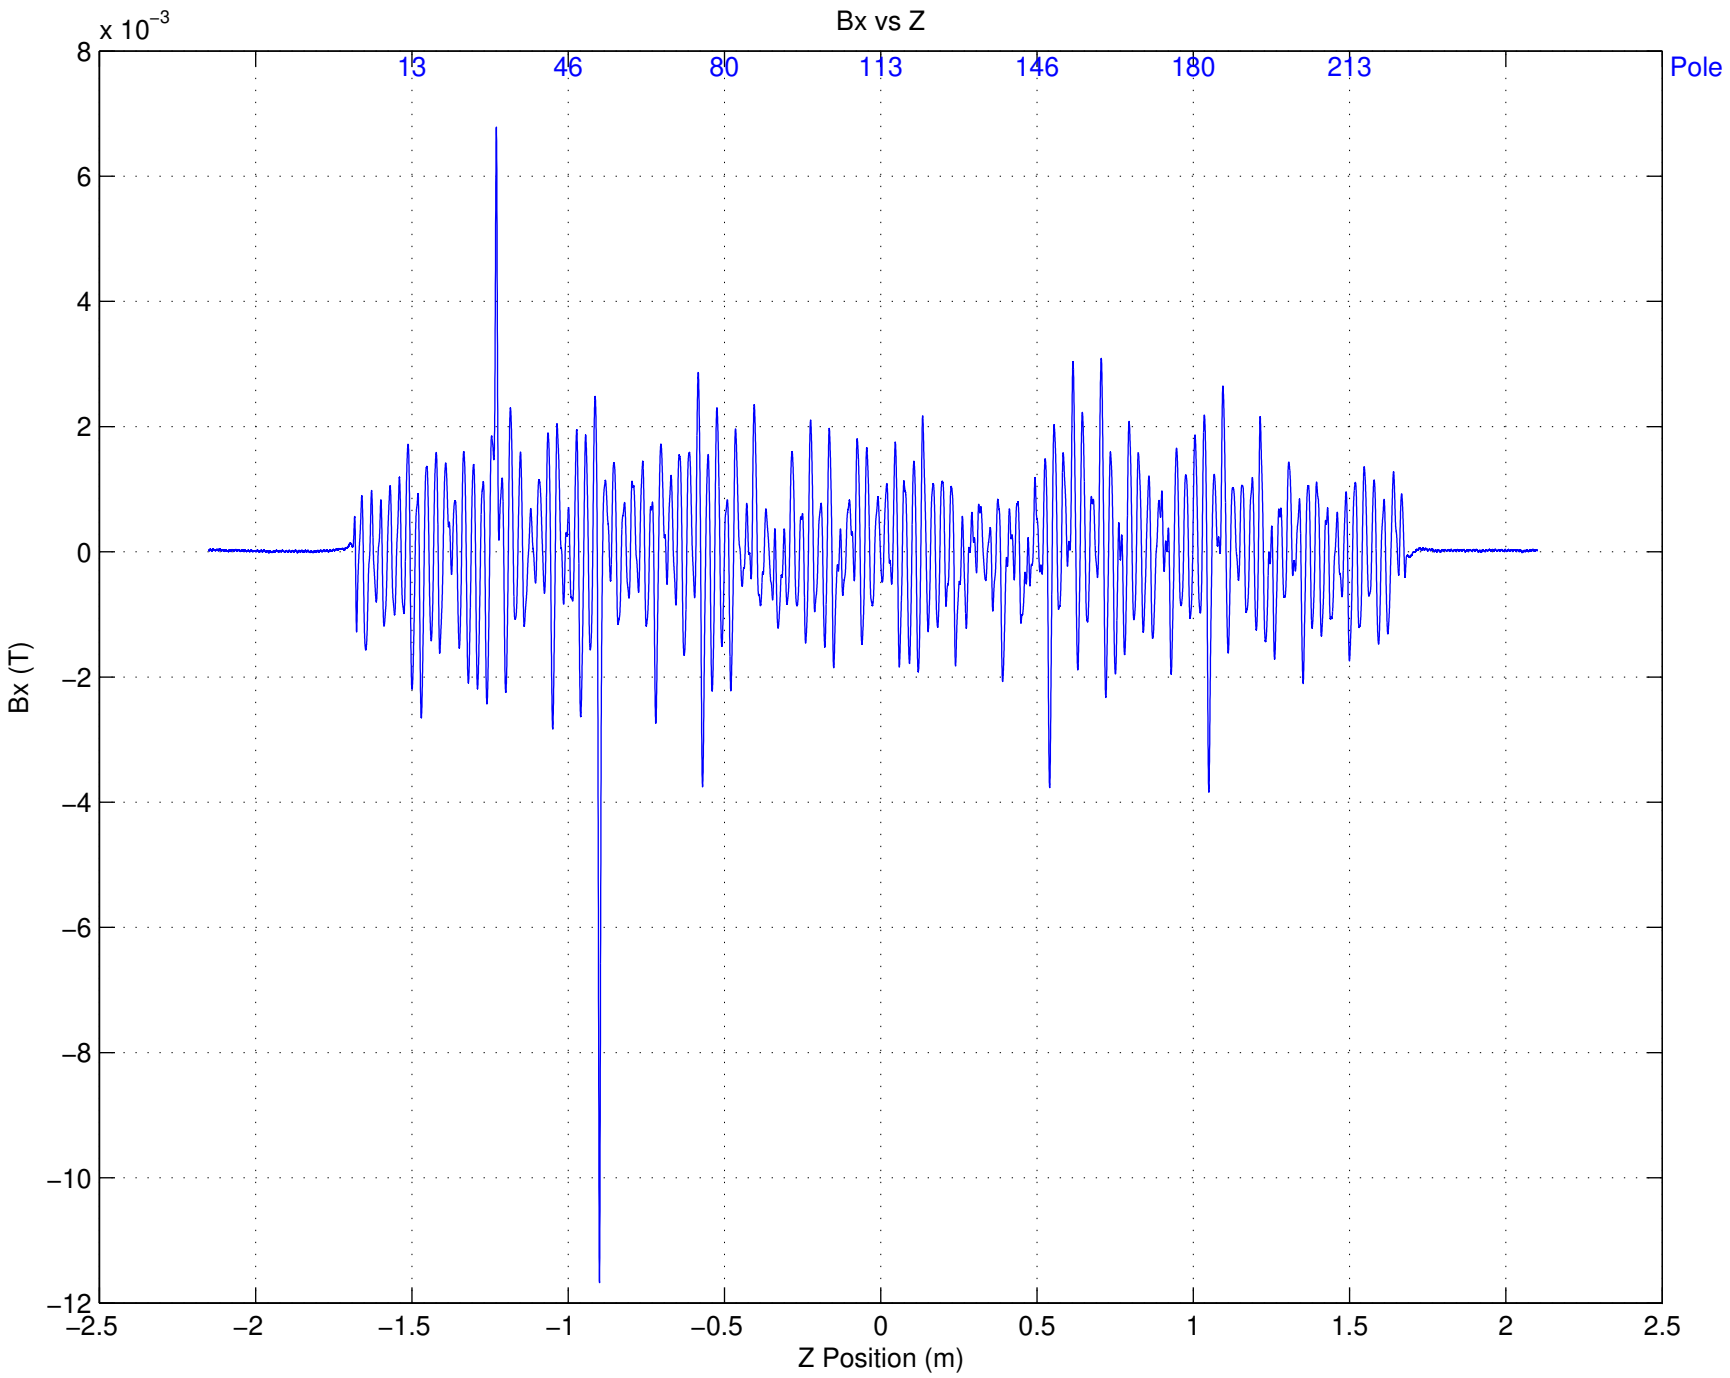
Bx vs Z
x 10^-3
8
6
4
2
0
−2
−4
−6
−8
−10
−12
Bx (T)
13
46
80
113
146
180
213
Pole
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

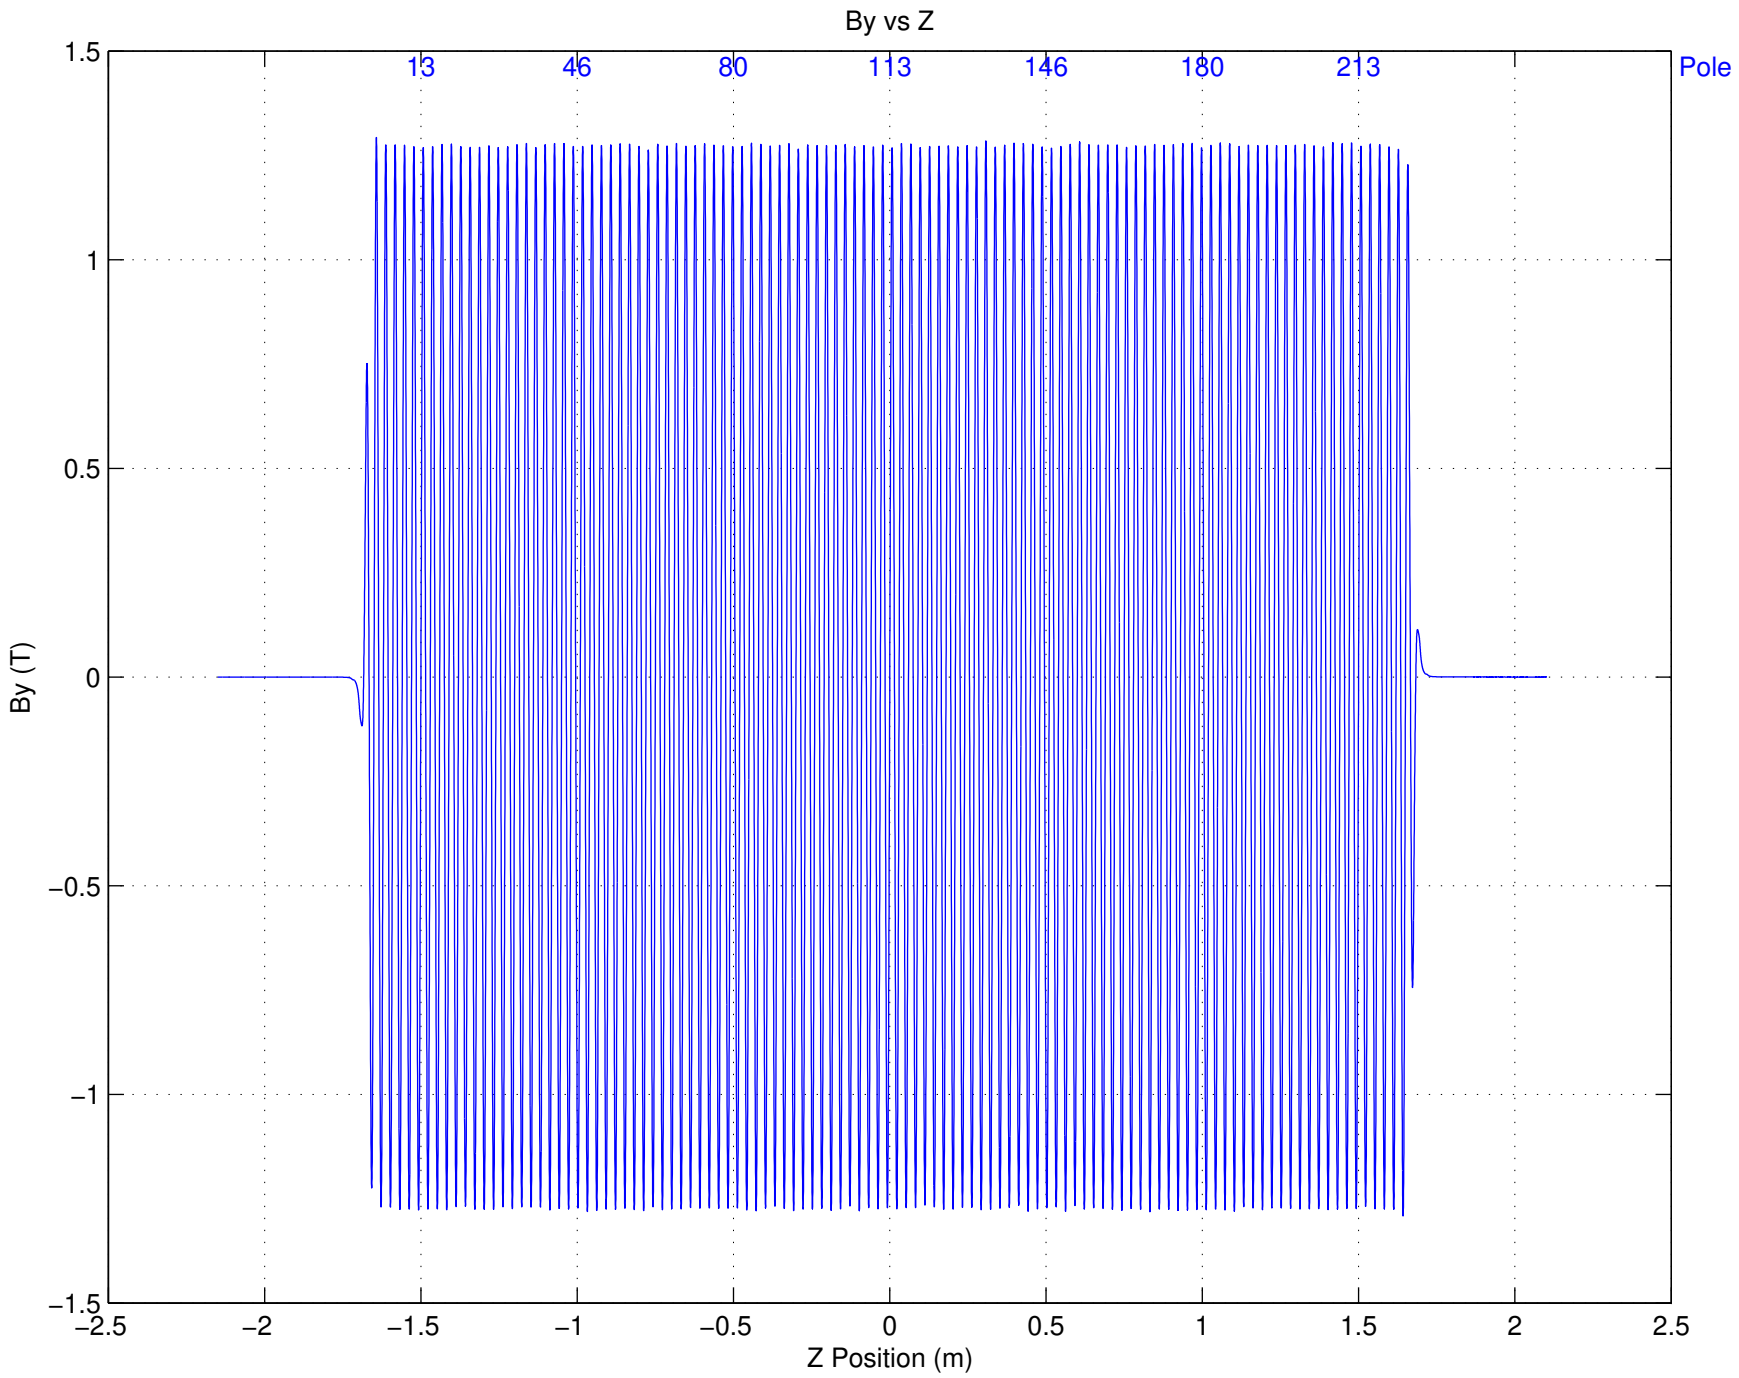
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

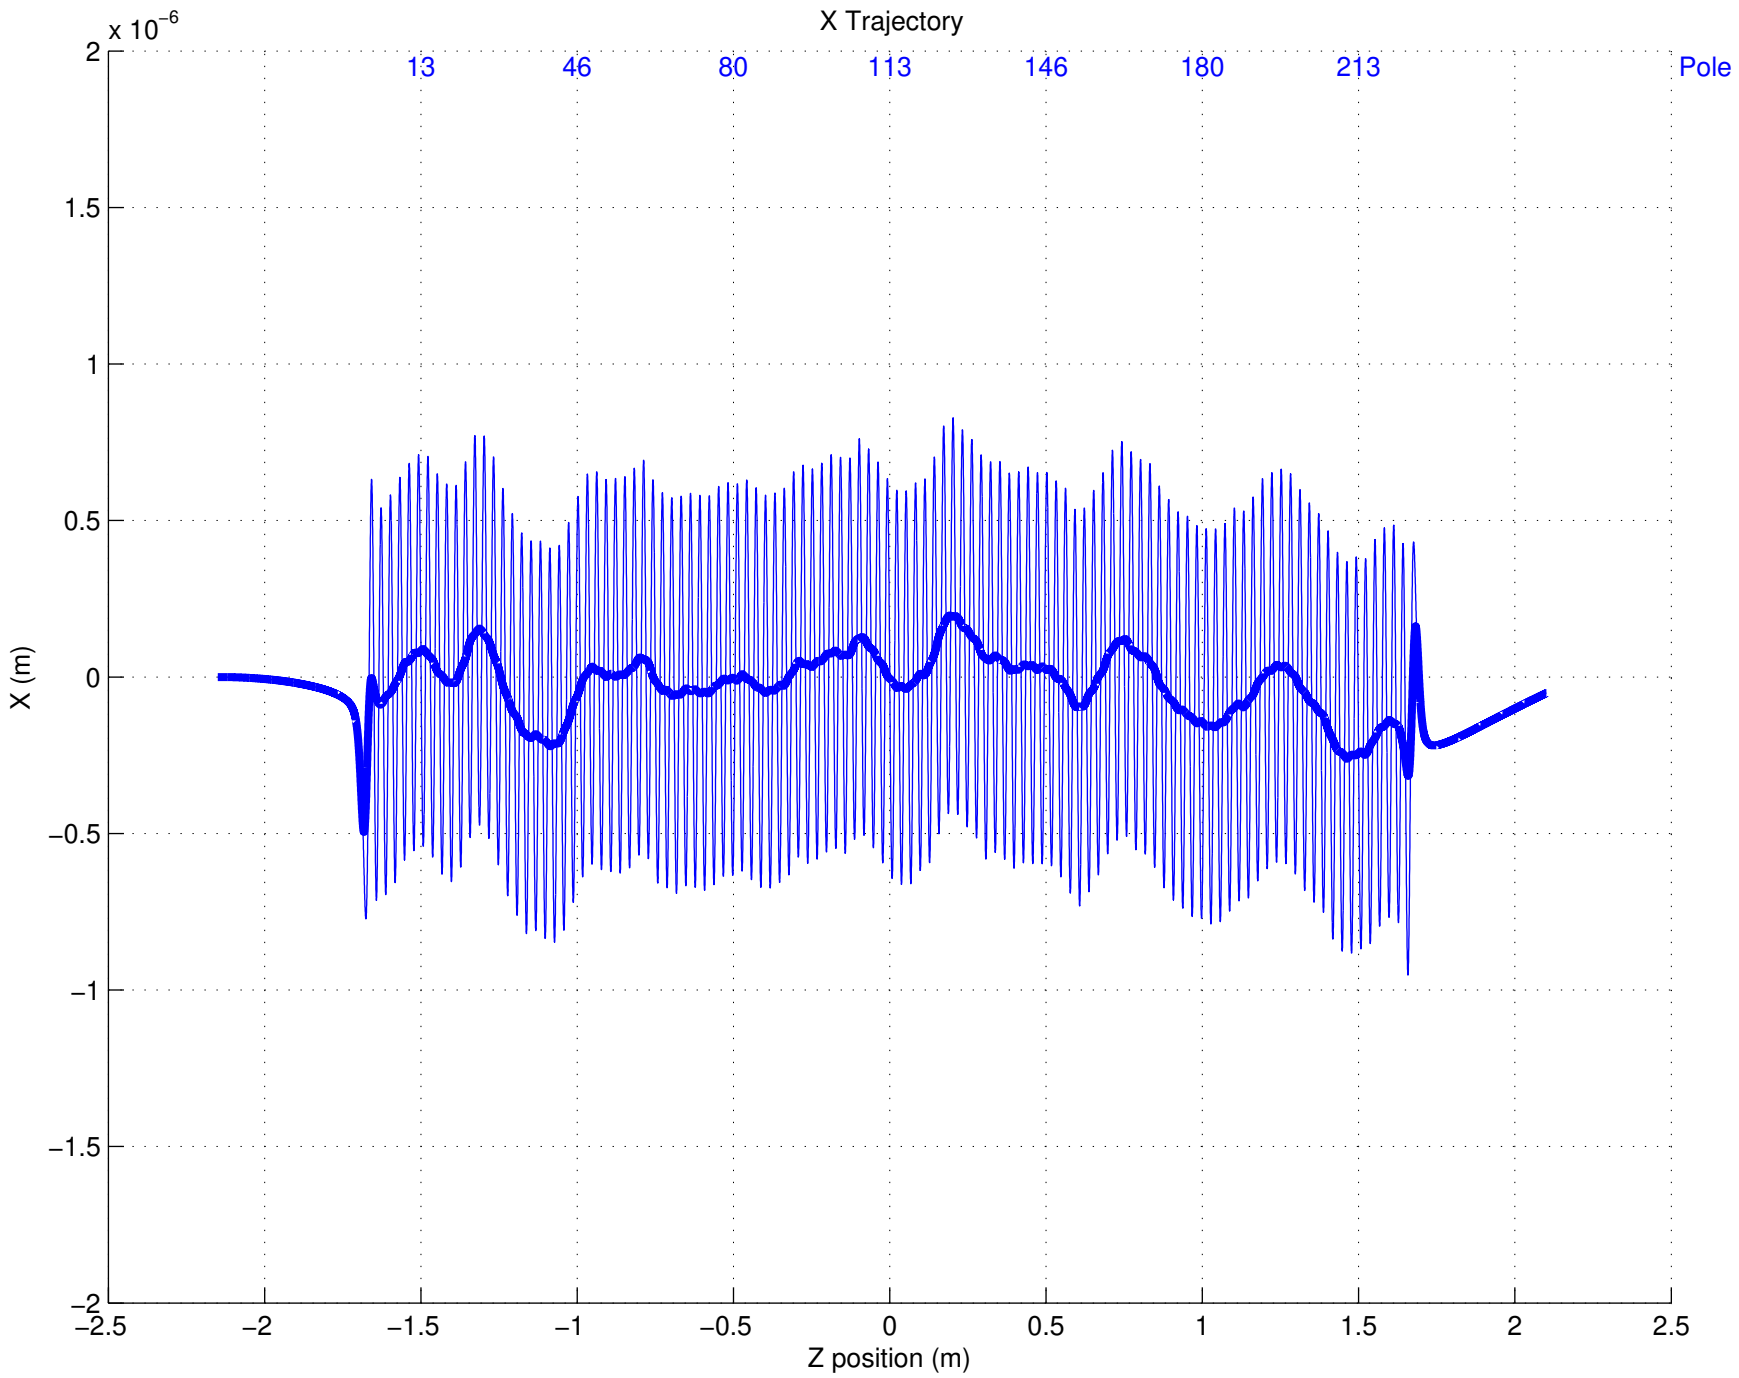
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

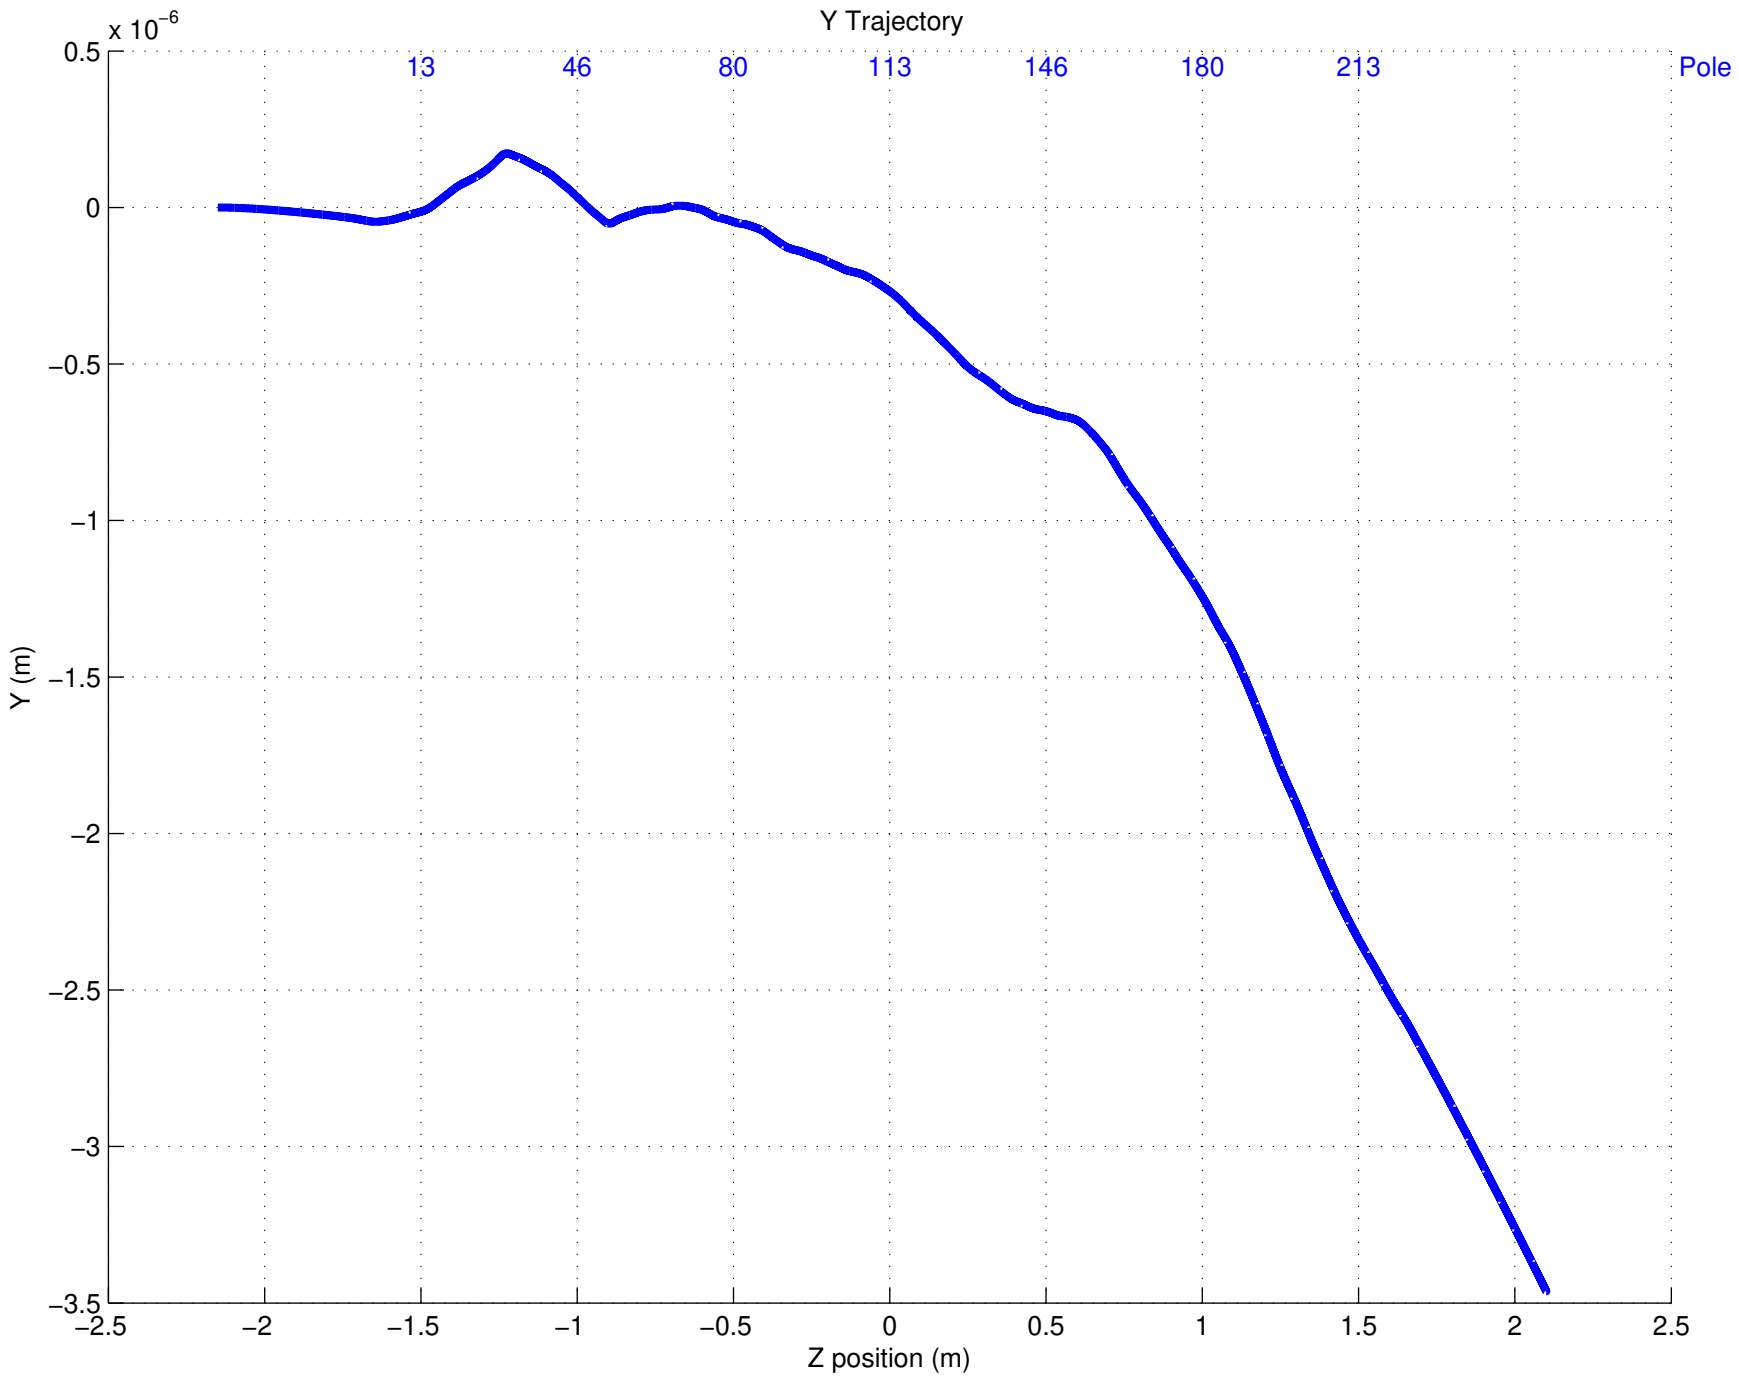
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
0.5
0
−0.5
−1
−1.5
−2
−2.5
−3
−3.5
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

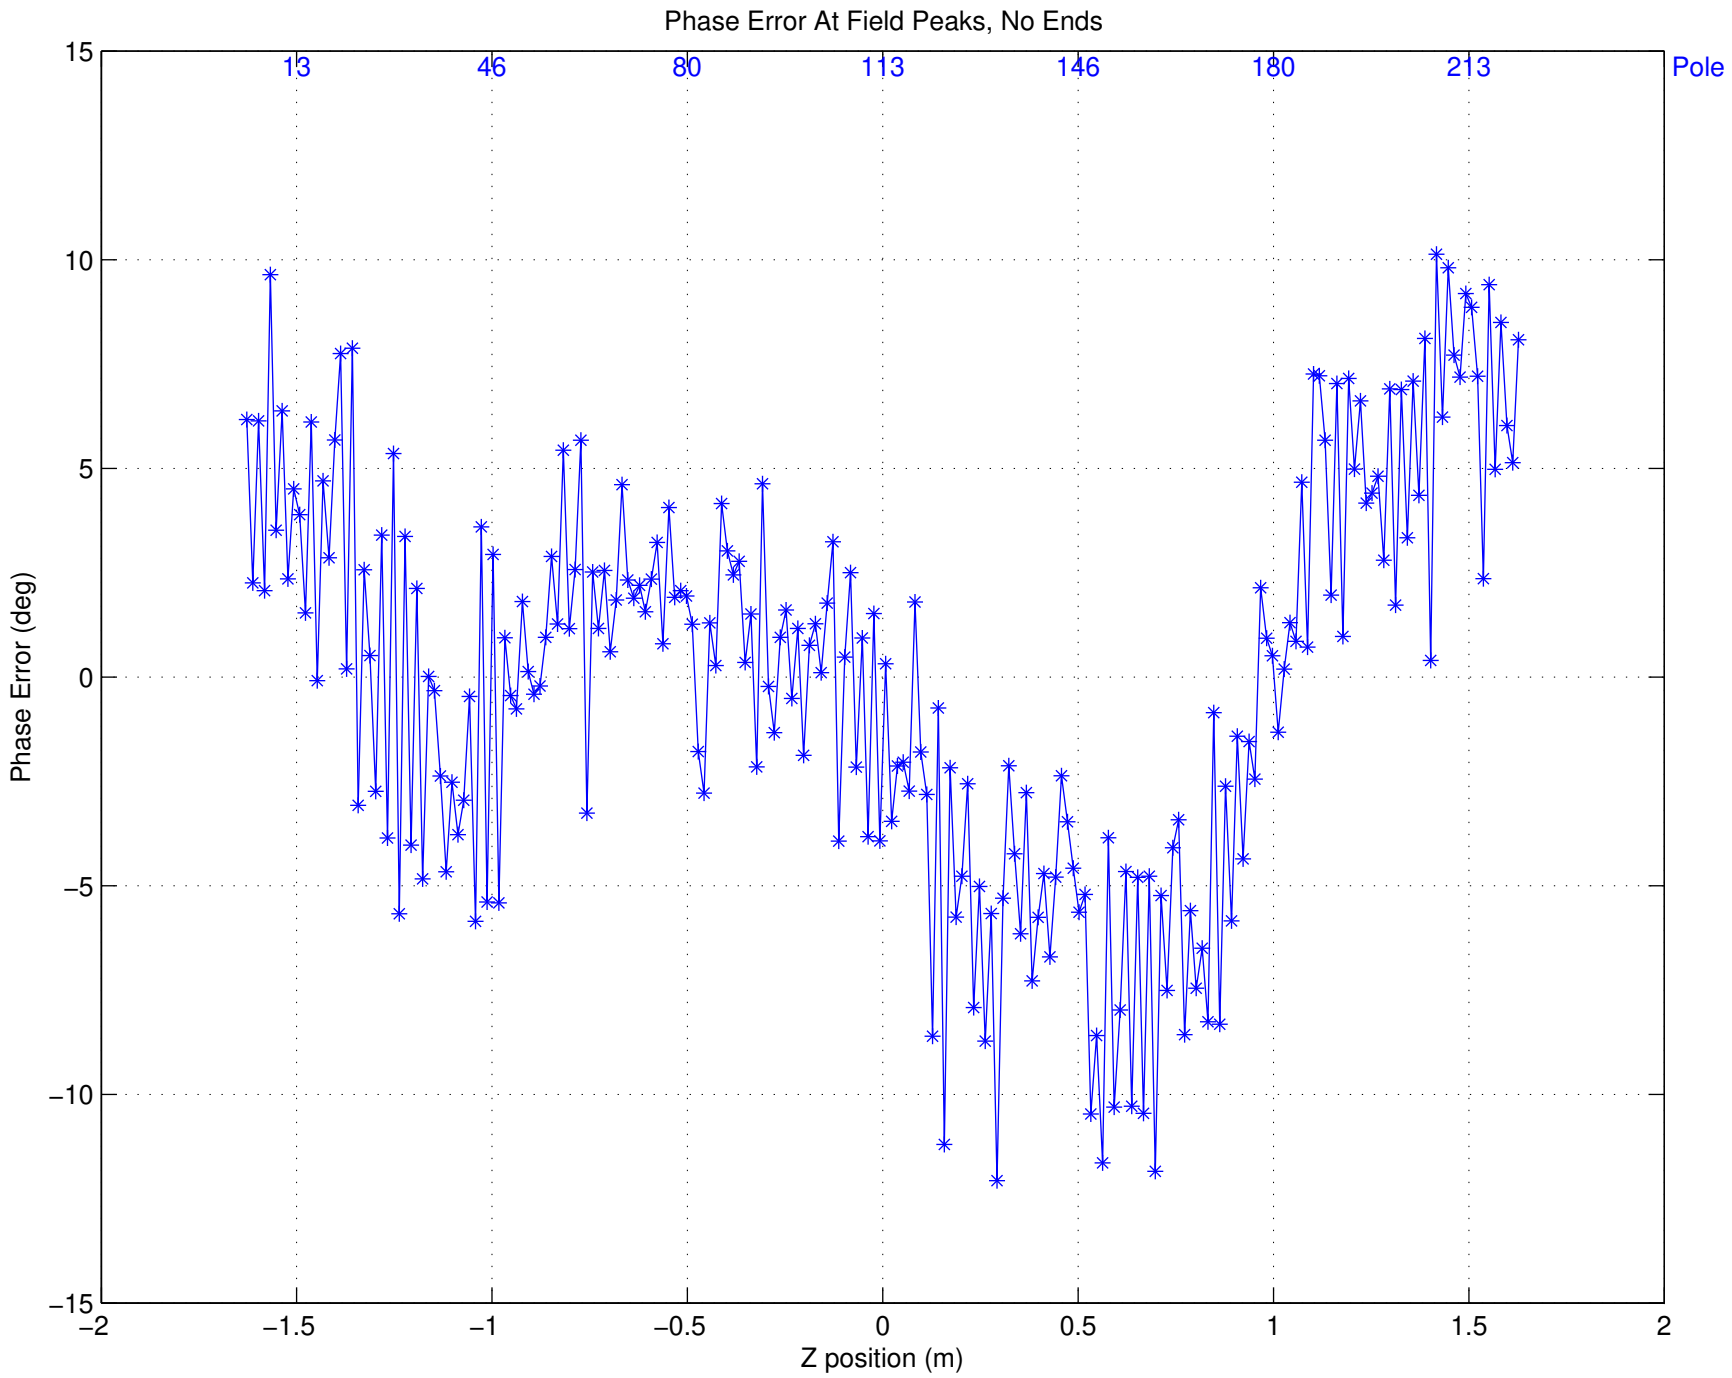

Phase Error: Ave = 0.000000 deg, RMS = 4.899711 deg

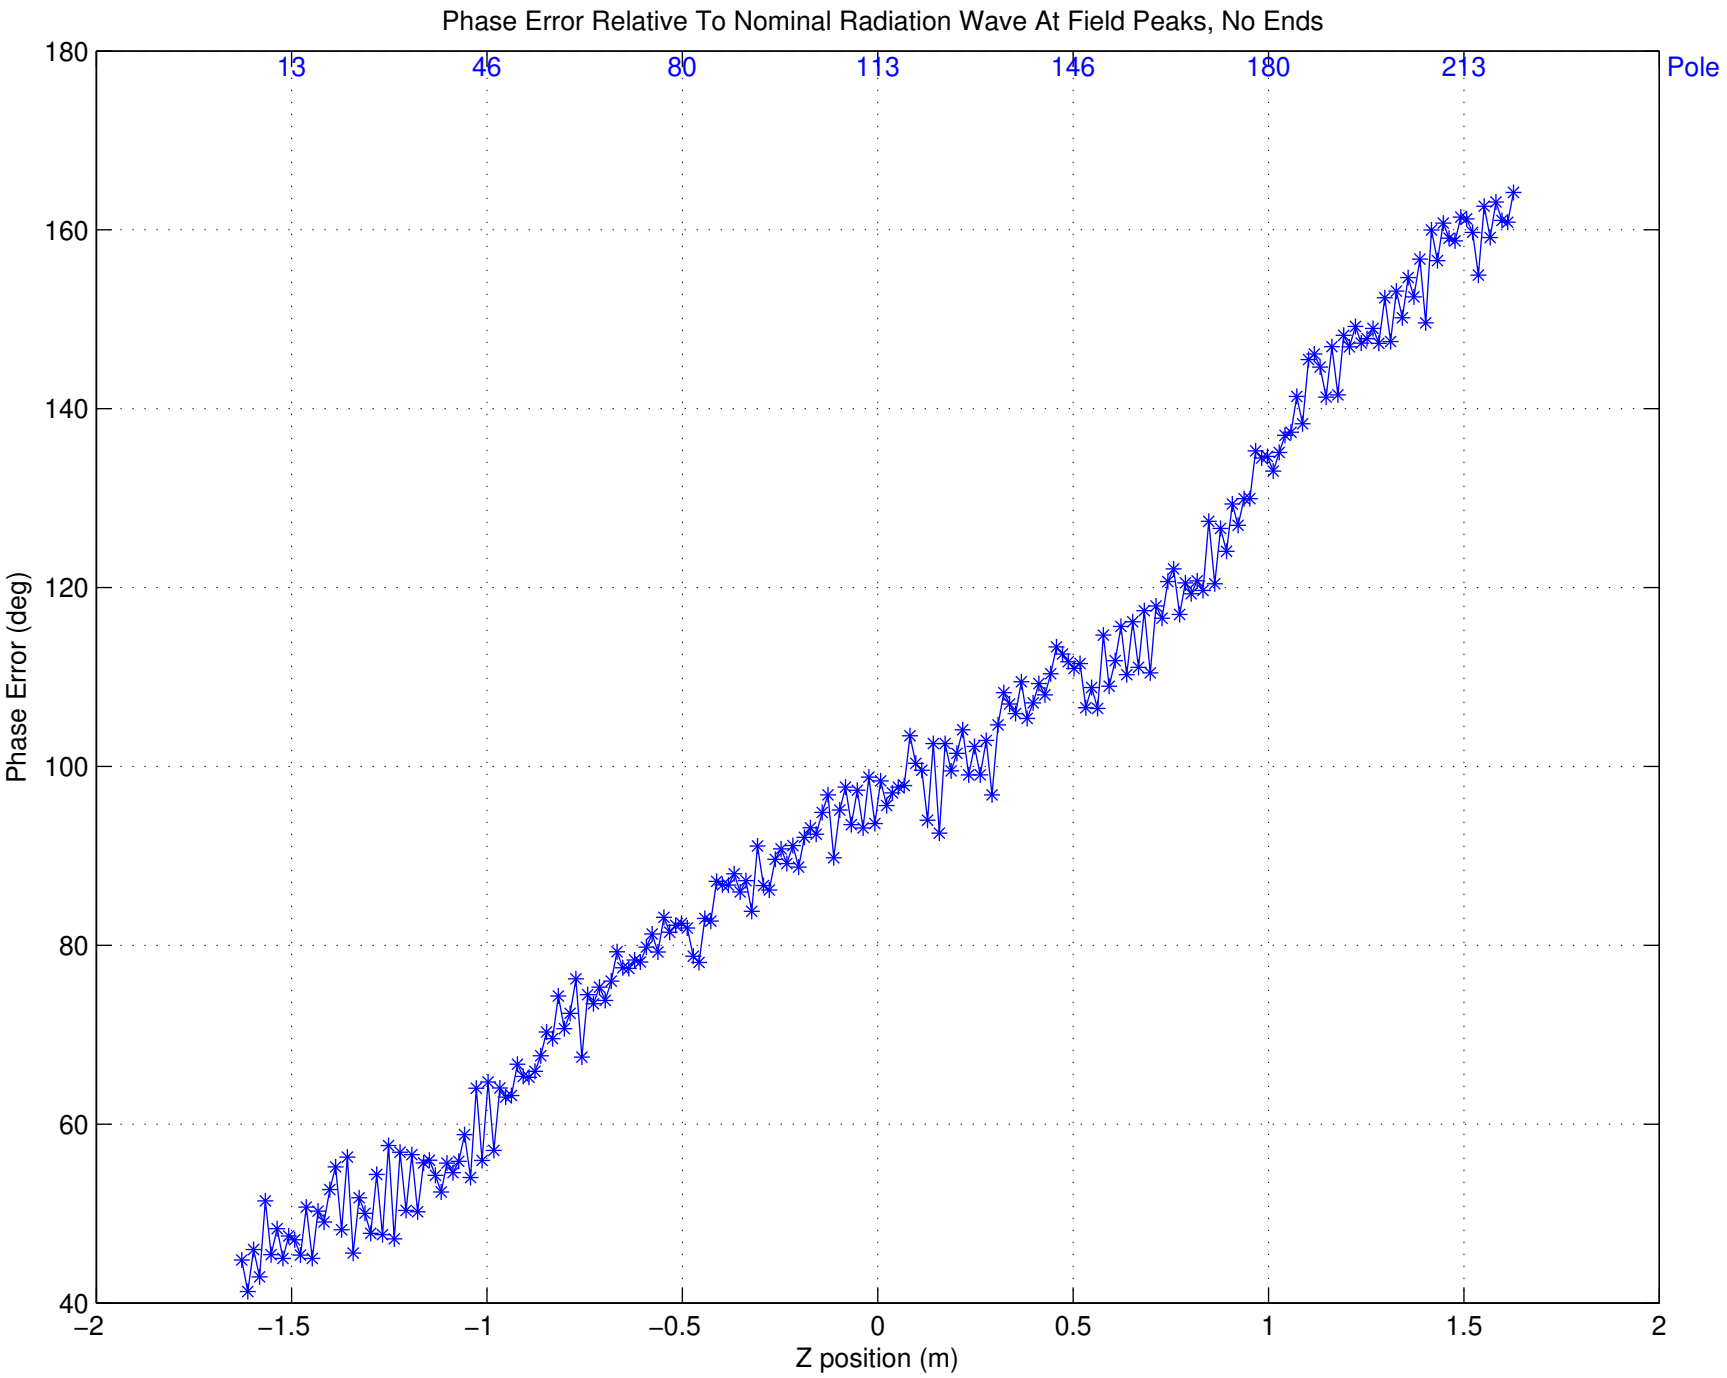
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
180
160
140
120
100
80
60
40
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)