SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 09−20−2013
Time: 13:49:33

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143−112000−39
DATASET Number: 8
Tuning Stage: Fine Tuning
Run Number: 3
Measurement Type: Z Scans
Operator: YL
Comment: tuning
Session first run: 3
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: c:\magdata\LCLS\Undulator\L143−112000−39\DATASET0008\Fine Tuning\Z Scans\Run 003\bscanz.dat

Temperature (C)
L143−112000−39:−−> T1 20.01 −−> T2 20.00 −−> T5 19.94 −−> T3 20.00 −−> Air 20.00 −−> T4 19.98

Axes position (m) X:0.029509 Y:0.000185
Initial Hall Probe Zero Measurements:
Vx_0i = 0.000838 V
Vy_0i = −0.003201 V

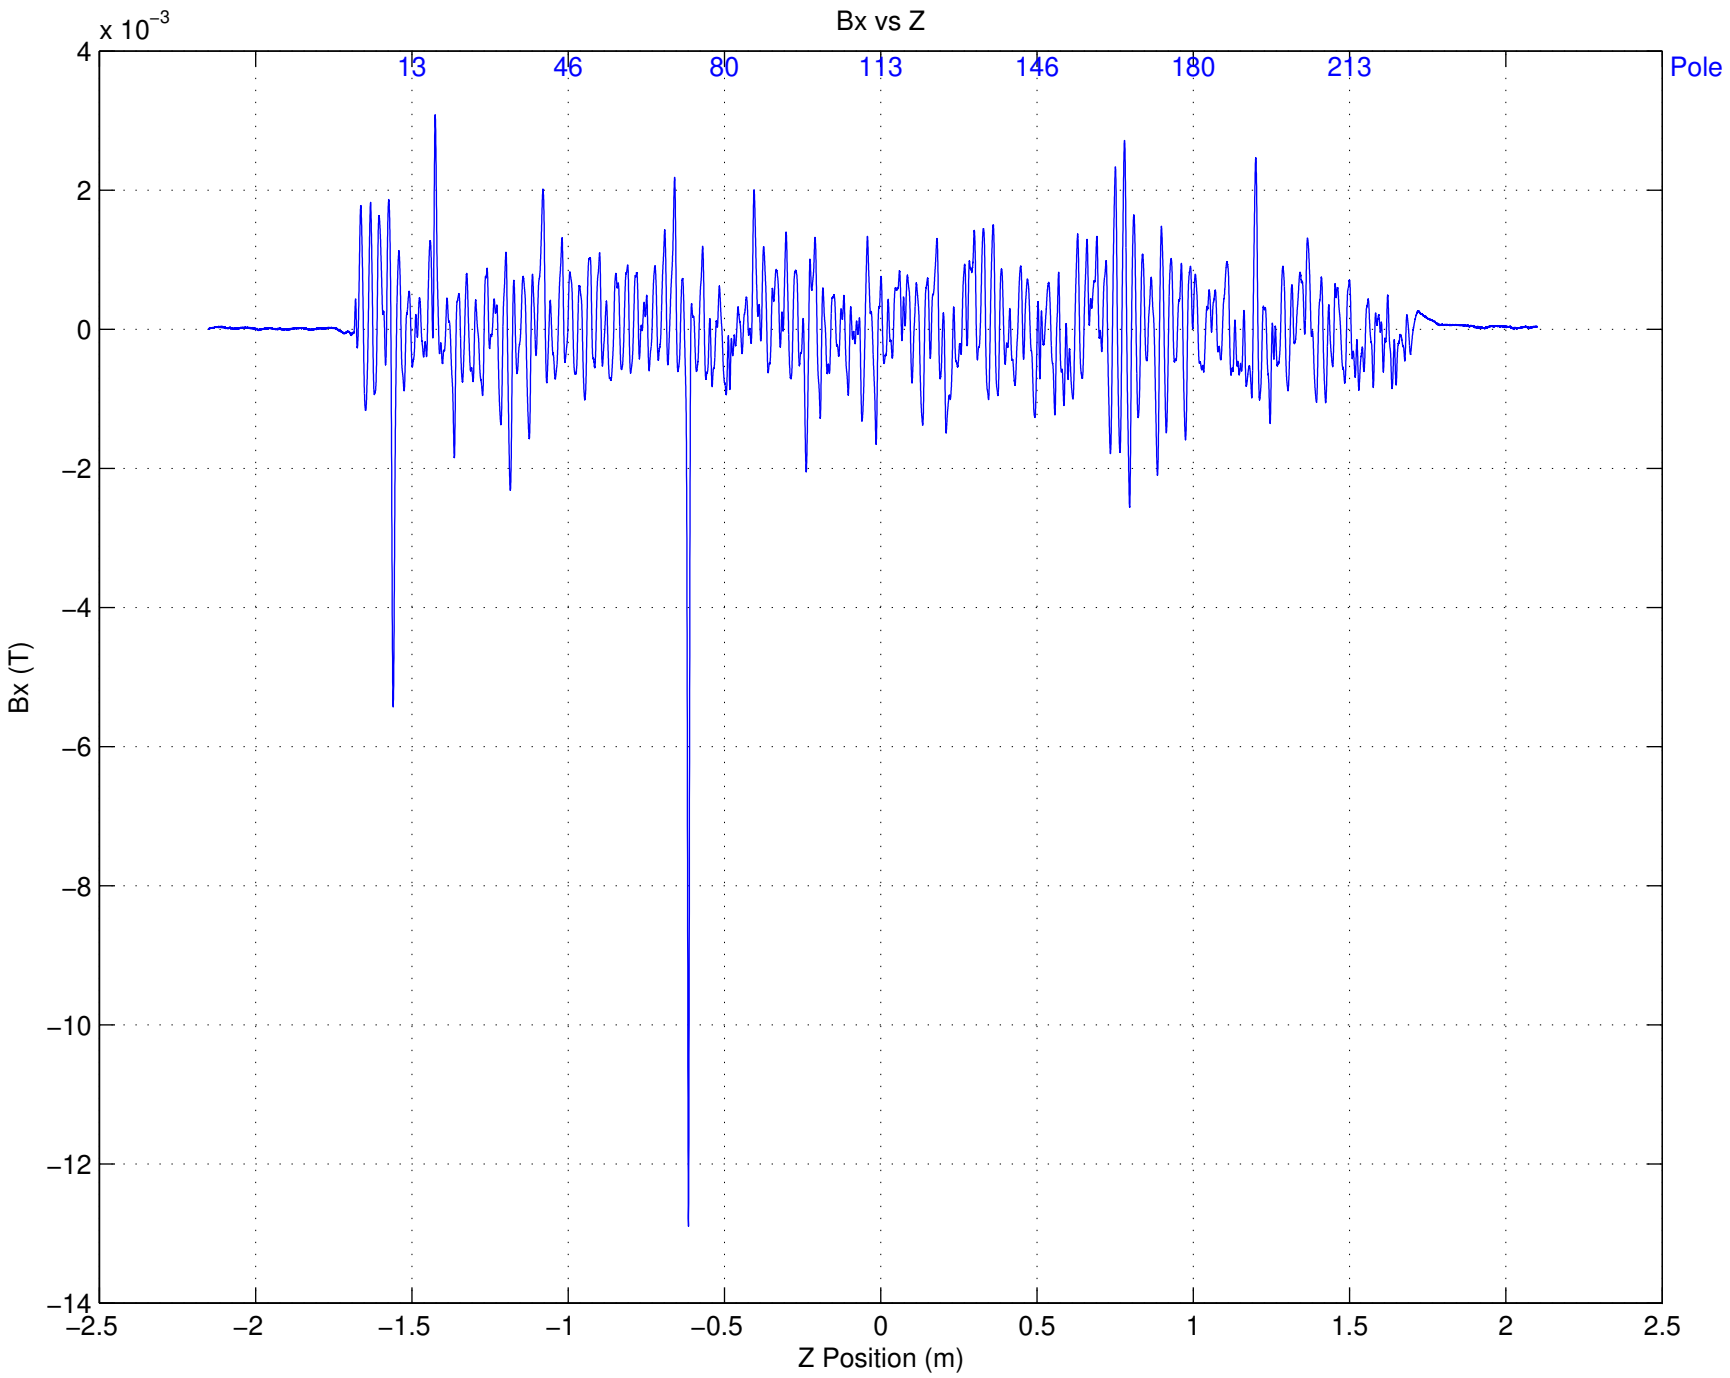
Bx vs Z
x 10^-3
13
46
80
113
146
180
213
Pole
4
2
0
−2
−4
−6
−8
−10
−12
−14
Bx (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

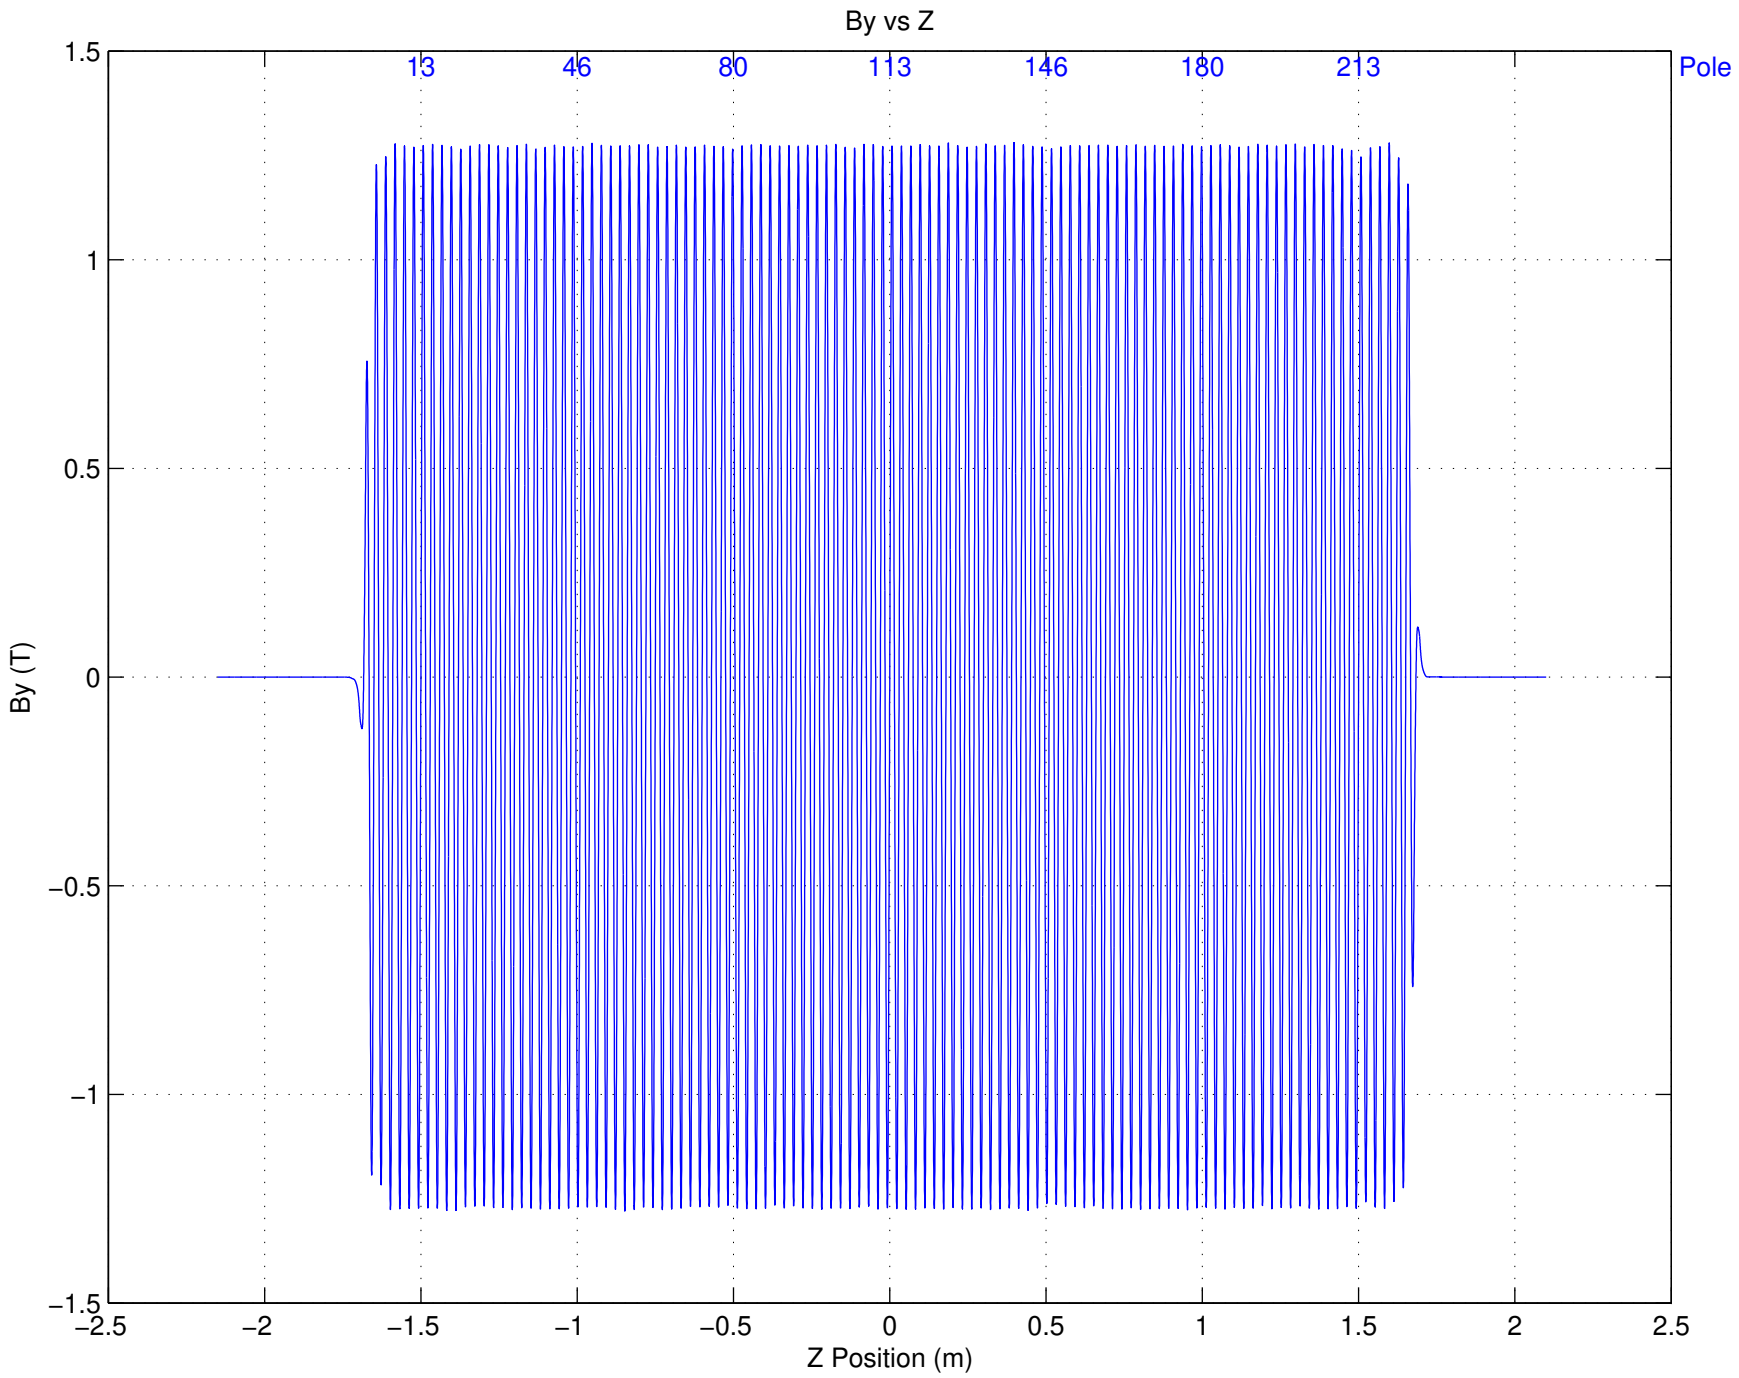
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z Position (m)

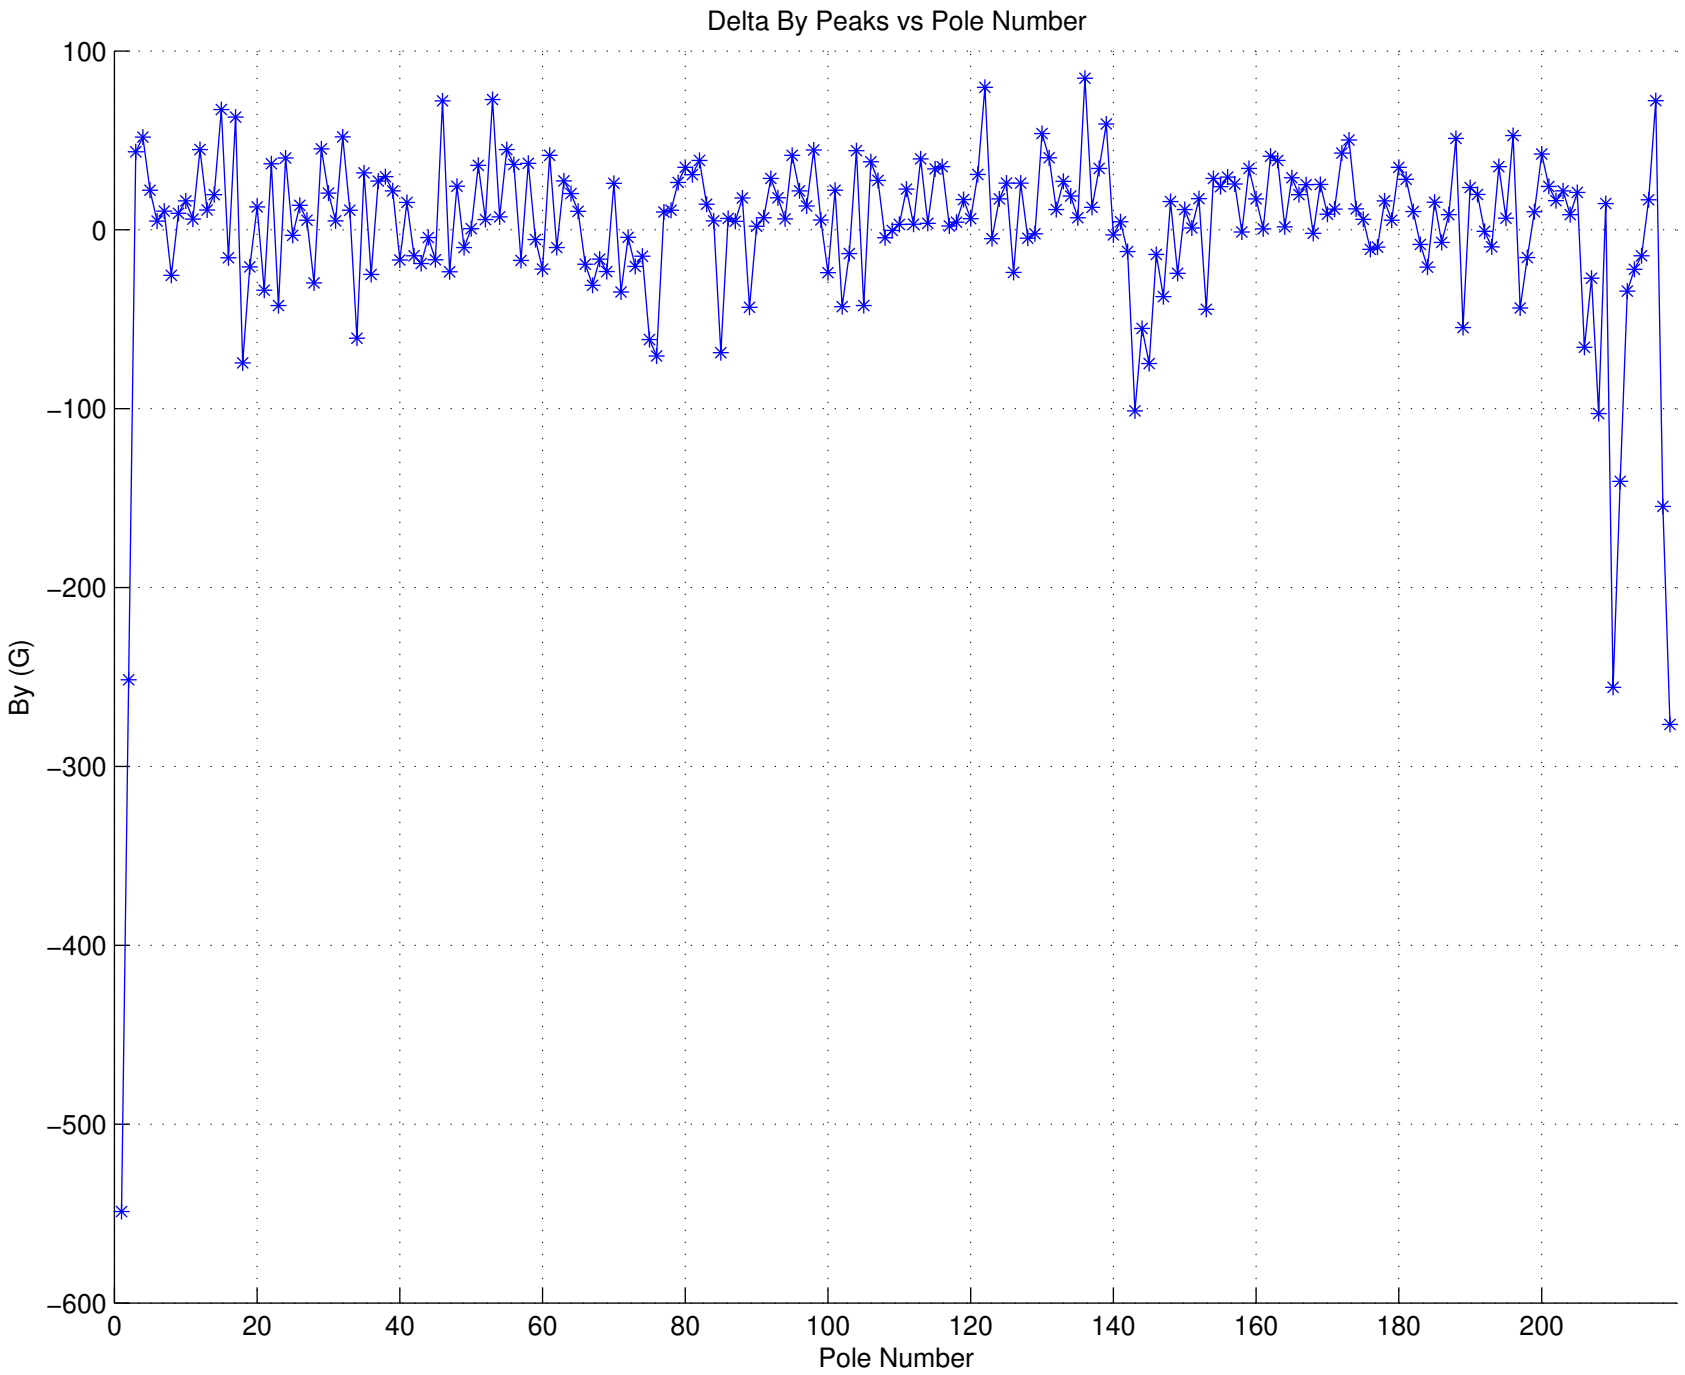
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
0
−100
−200
−300
−400
−500
−600
0
20
40
60
80
100
120
140
160
180
200

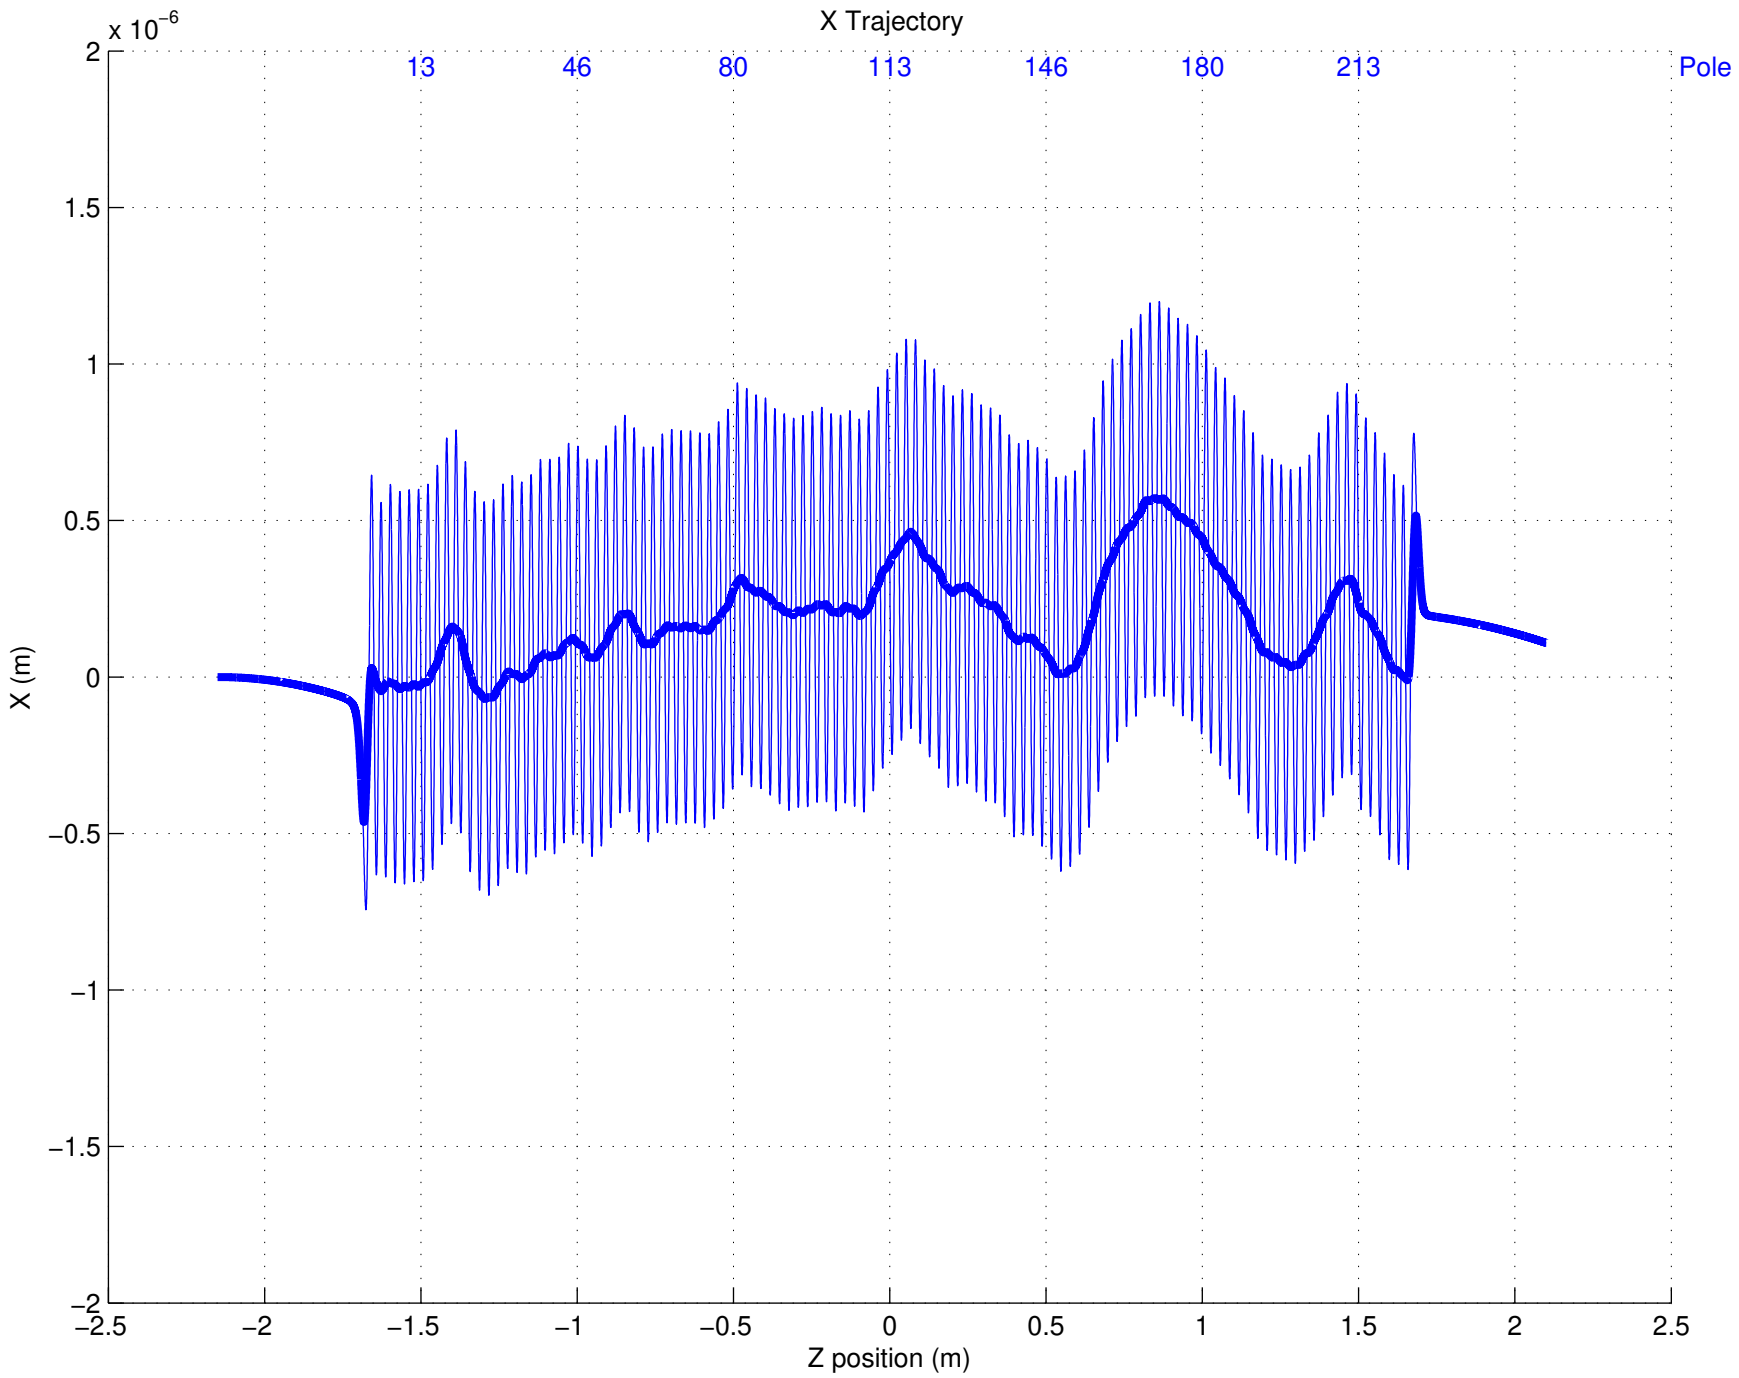
X Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
X (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

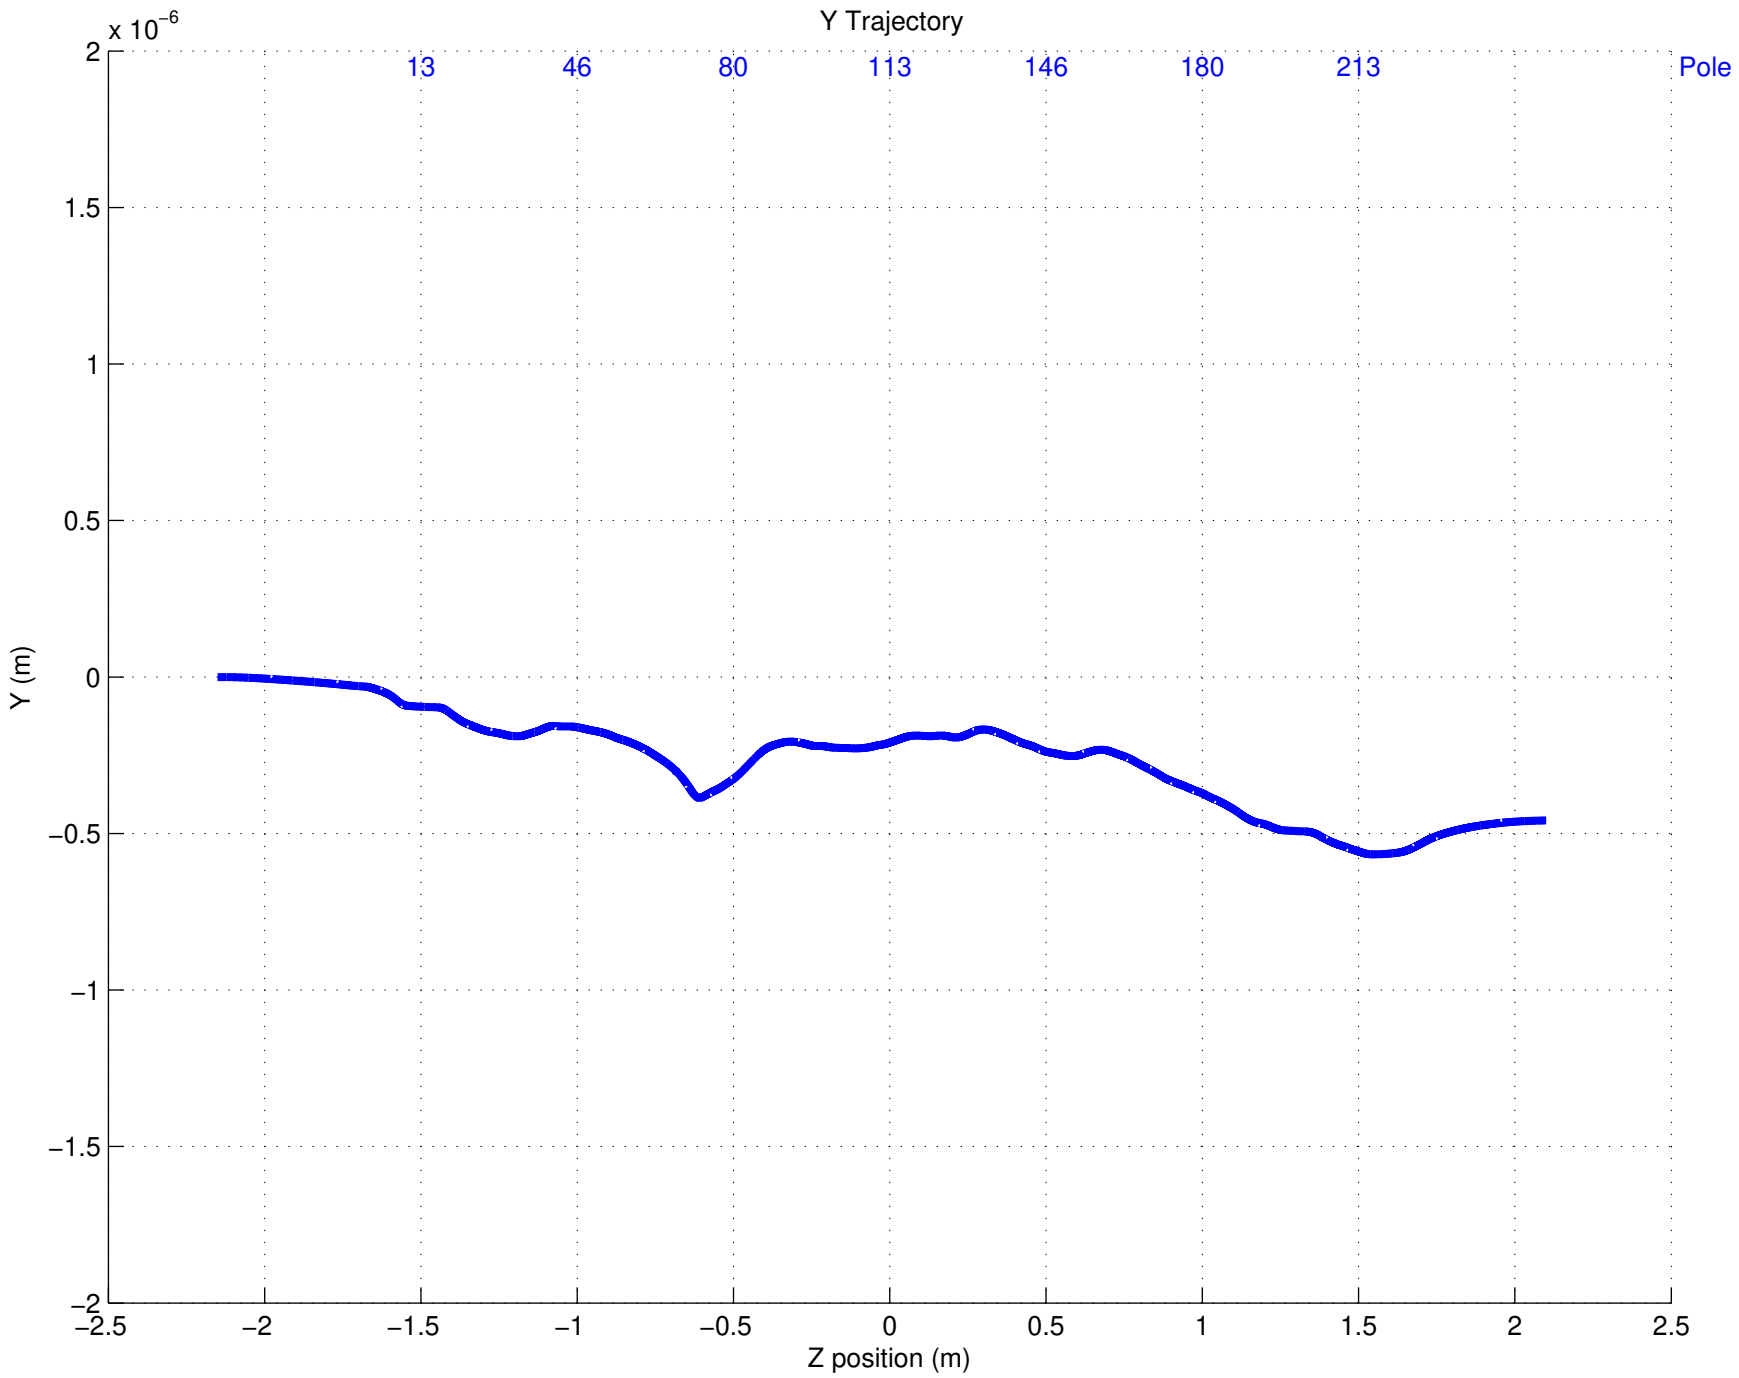
Y Trajectory
x 10^-6
13
46
80
113
146
180
213
Pole
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Y (m)
−2.5
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
2.5
Z position (m)

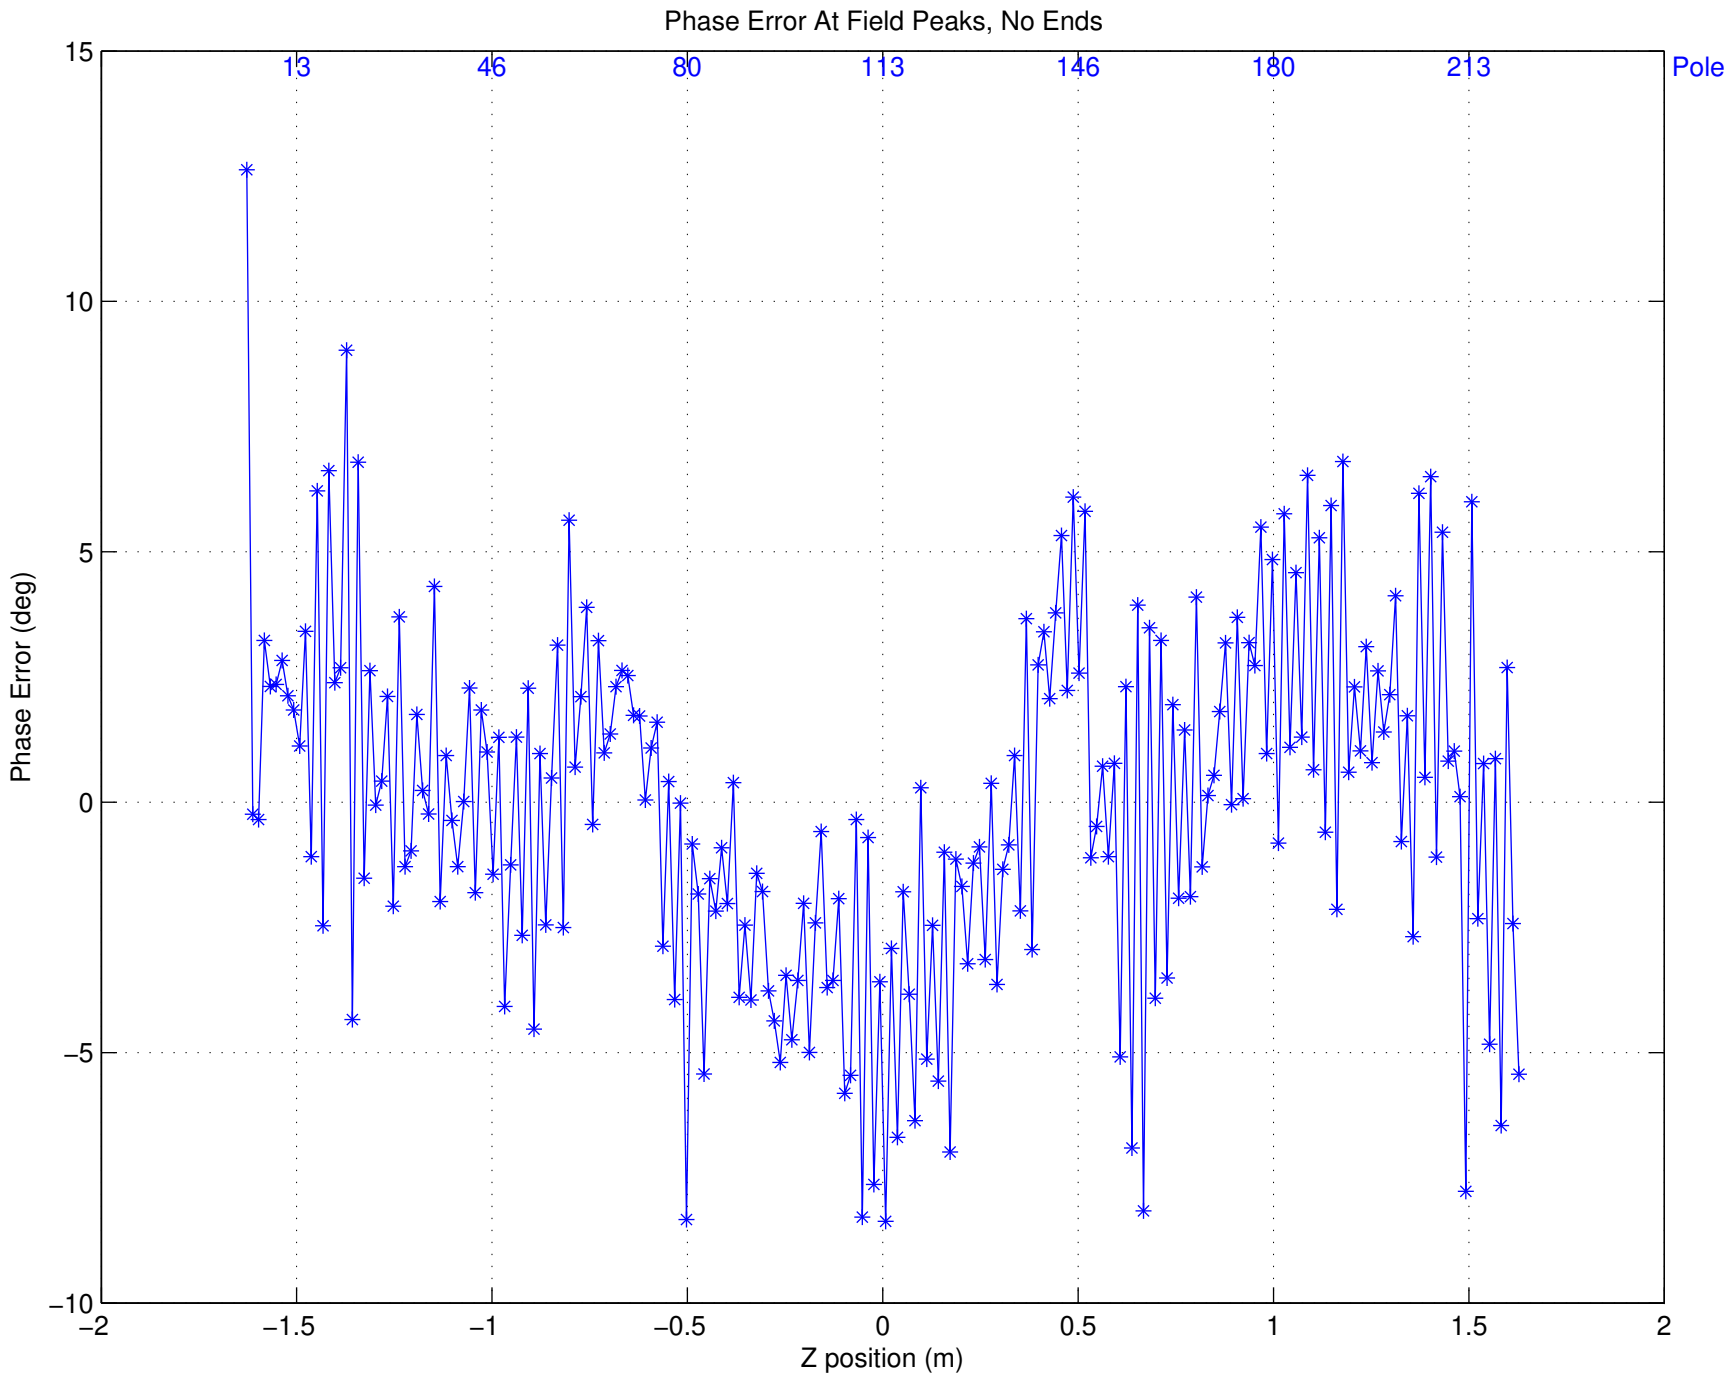

Phase Error: Ave = −0.000000 deg, RMS = 3.541342 deg

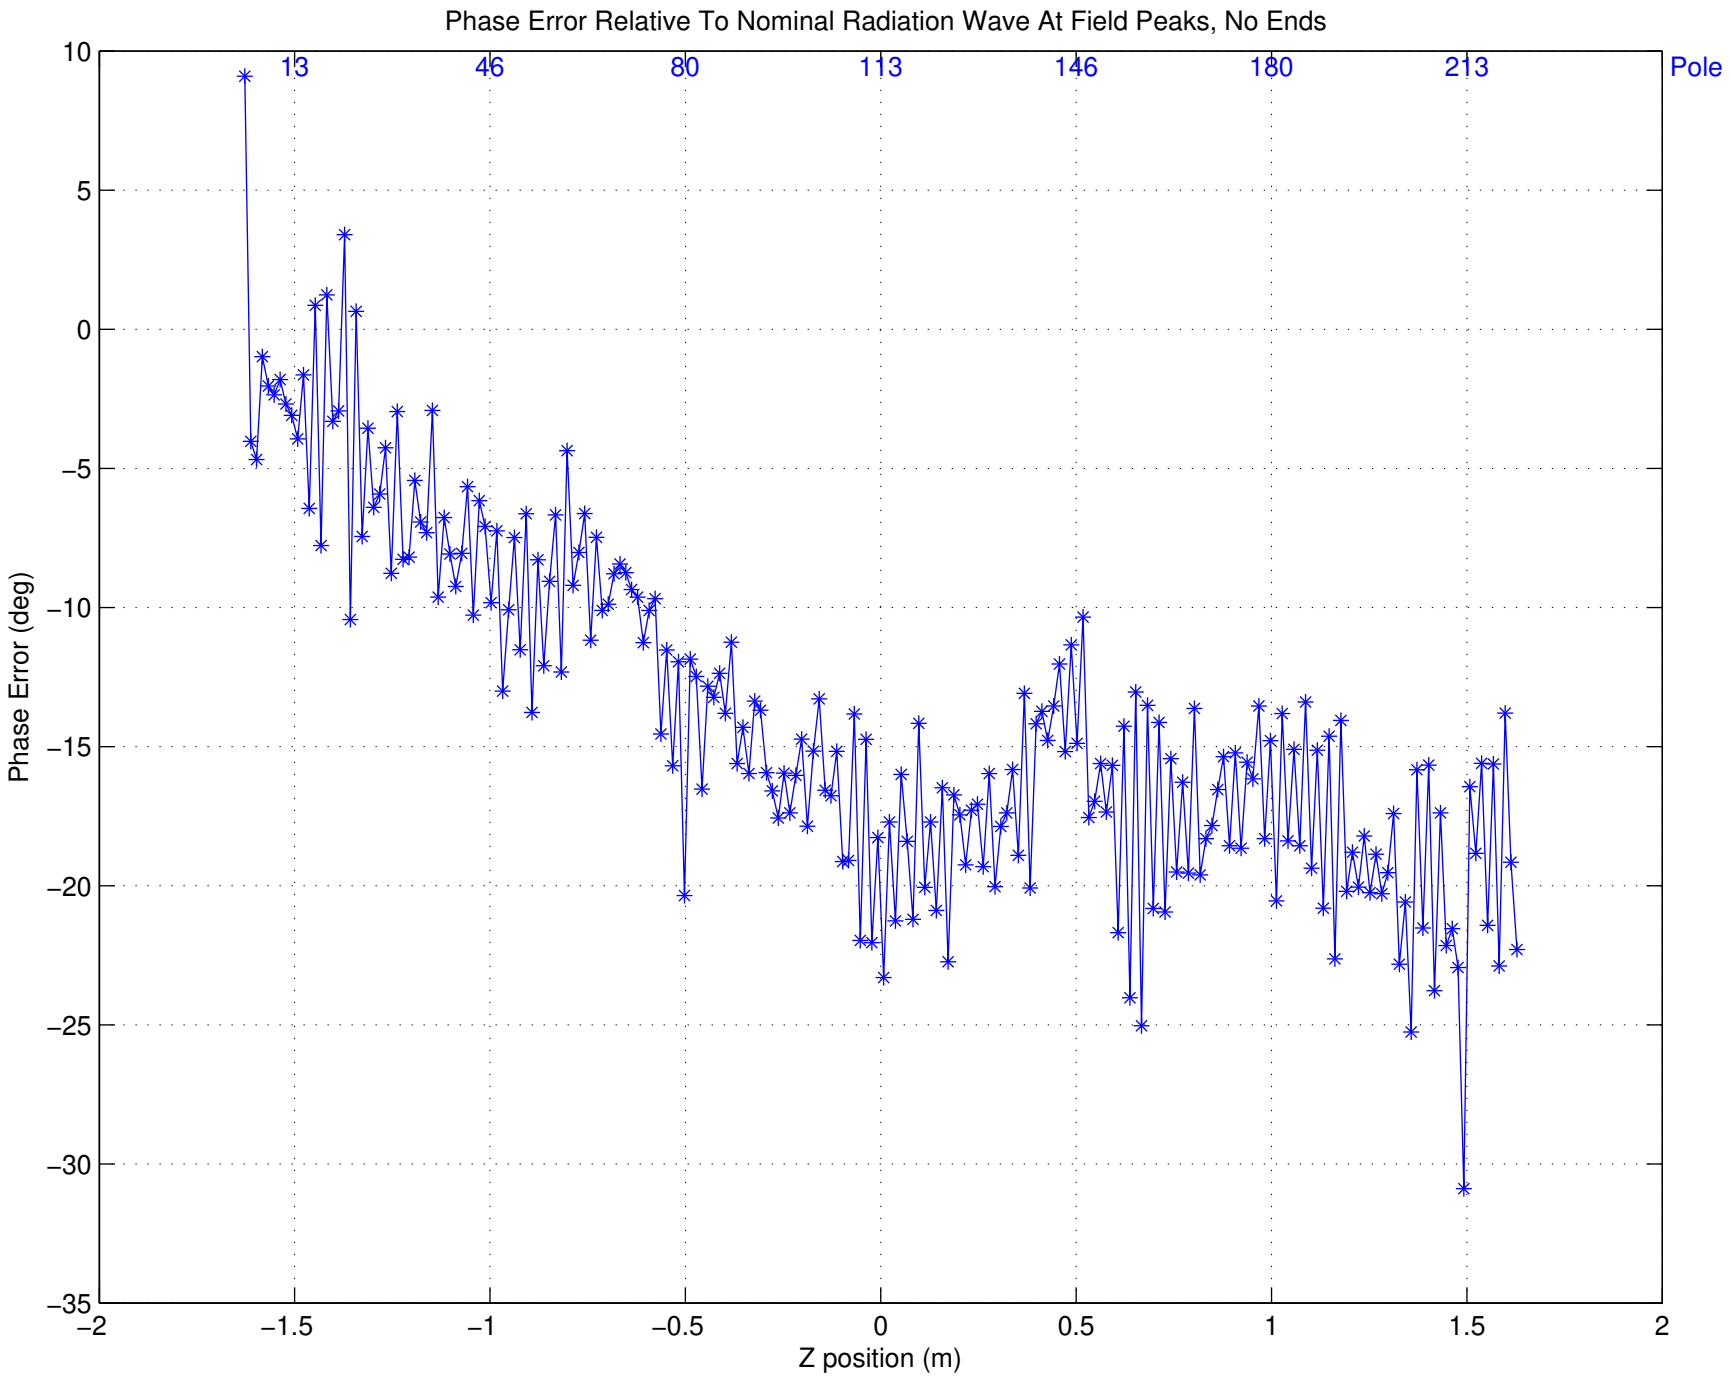
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
10
5
0
−5
−10
−15
−20
−25
−30
−35
Phase Error (deg)
−2
−1.5
−1
−0.5
0
0.5
1
1.5
2
Z position (m)