


## **CBXFEL Magnet Fiducialization Report C-MAGNET DIPOLE ASSEMBLY - 7mm Gap**

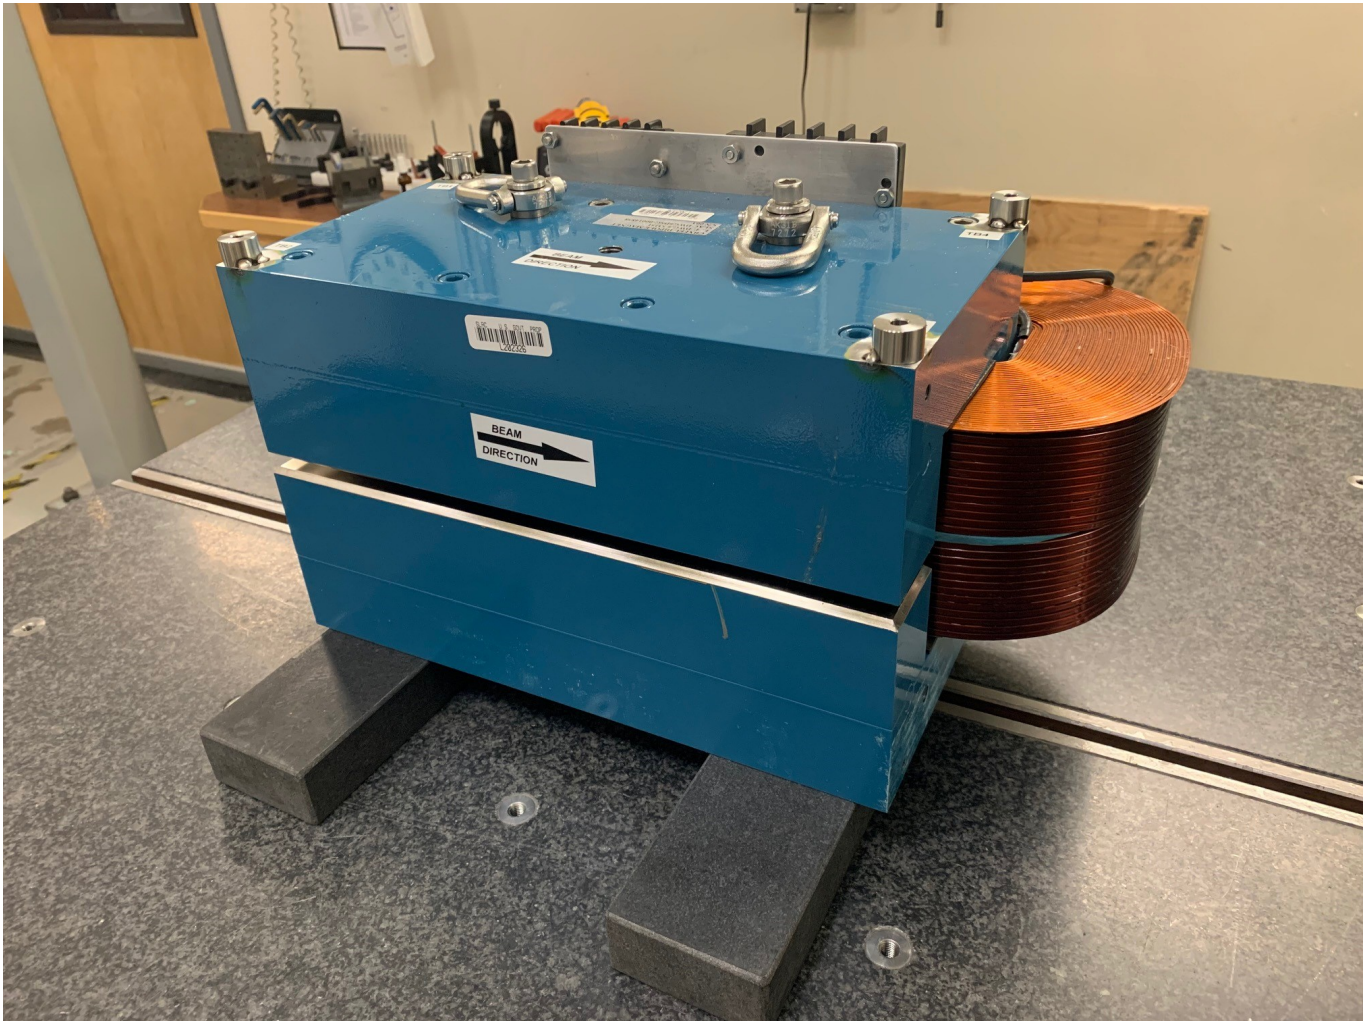

Inspector : K. Caban  
Engineer :T. TAN  
Drawing No. : DSG-000014858 R00  
Barcode # : 2325  
Mfg. S/N : 002

## Coordinate System Setup

### Spatial Alignment

Constructed using the Midplane of Upper (+Y) and Lower (-Y) Pole with the Midplane of the 2 Poles sets Y Zero and the Y+ Direction points towards the Tooling Balls/Terminal Strip.

### Planar Alignment

Constructed using the Upstream (-Z) and Downstream (+Z) Ends of the poles. The Midplane from both ends sets Z Zero and +Z points towards TB 3/4 Side.

### Coordinate Origins

X Origin - Symmetry Plane between side poles planes (planes parallel to the Coils)


Y Origin - Symmetry Plane between the Poles (7mm/0.2756" Gap Symmetry)

Z Origin - Symmetry plane between Up Stream and Down Stream end surfaces

**Barcode # : 2325**

**MFG S/N: 002**

## Tooling Ball Locations

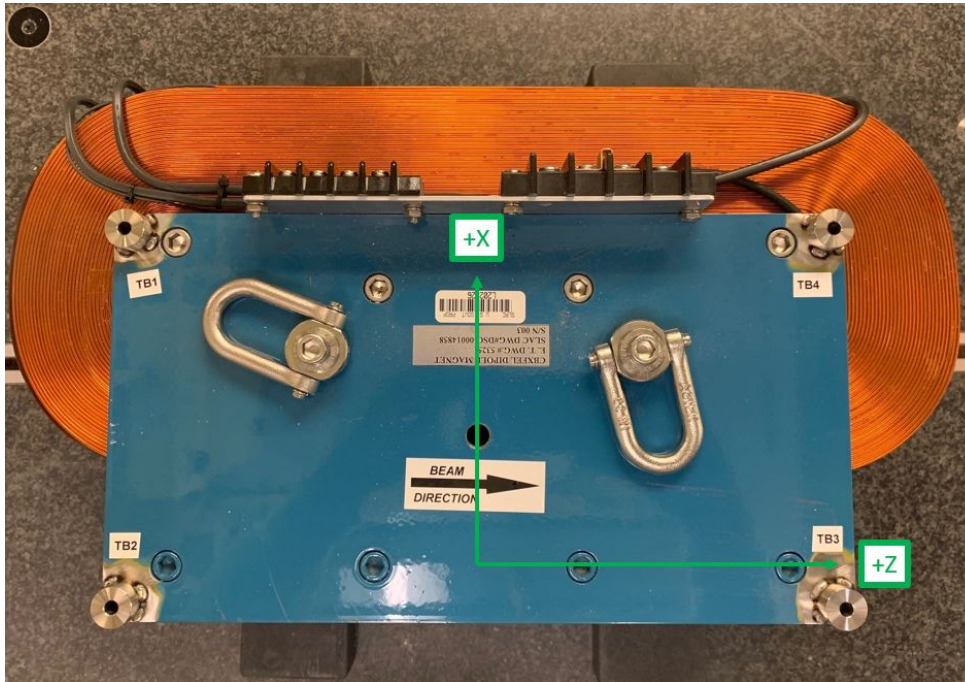


Tooling Ball	X Coord.	Y Coord.	Z Coord.
TB 1	6.2976	5.8869	-6.6208
TB 2	-0.6146	5.8872	-6.6194
TB 3	-0.6082	5.8881	6.6226
TB 4	6.3056	5.8870	6.6210
TB A	6.2979	5.1994	-6.6221
TB B	-0.6169	5.1997	-6.6197
TB C	-0.6118	5.2006	6.6246
TB D	6.3043	5.1995	6.6222

Tooling Ball Locations (1-4) are 1 inch above Tooling Ball Plane  
 Tooling Ball Locations (A-D) are 5/16 inch above Tooling Ball Plane  
 Dimensions in Inch

**Barcode # : 2325**

**Mfg. S/N : 002**

## Pole Gap Measurements, Flatness & Parallelism

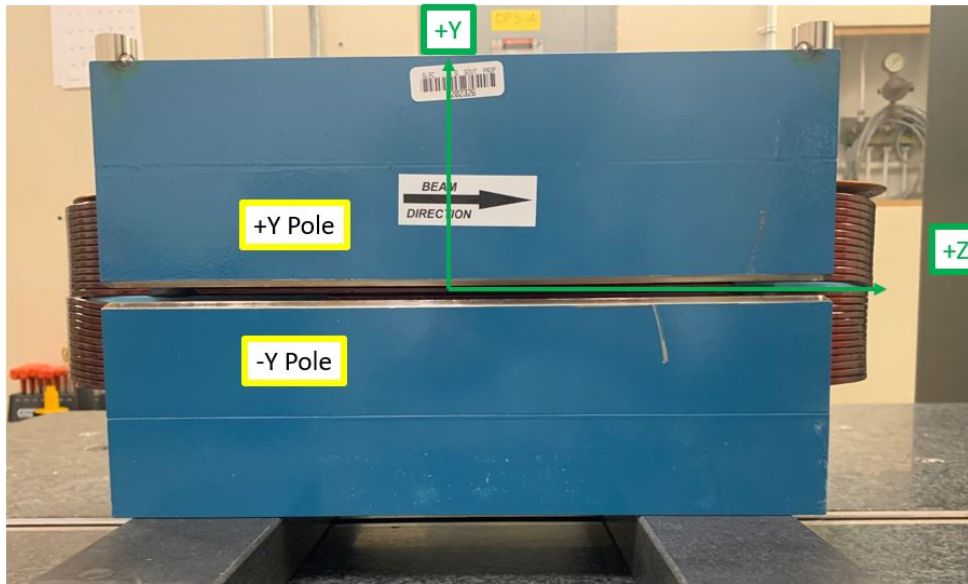

	-Y Pole Fltns	+Y Pole Fltns	Pole Parallel	Avg. Gap	Min. Gap	Max. Gap
POLE DATA	0.0001	0.0001	0.0006	0.2767	0.2763	0.2770

Dimensions in Inch

**Barcode # : 2325**

**MFG S/N: 002**