



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU\_010

This traveler is intended to document the checking of the final magnetic measurements of an Undulator Segment performed on the Kugler bench in the Magnetic Measurement Facility (MMF) at SLAC after the completion of the tuning process. It contains basic performance indicators compared against tolerances as well as documentary information both in graphical and textual representation.

Serial number from magnet label:	29A804-010
Device name from magnet label:	HE_SXU_010

**Measurement Procedure:**

The measurements have been carried out after the undulator segment had been fully tuned according to the “LCLS-II-HE Undulator Test Plan” (LCLS-TN-22-9).

---

**Evaluation of Hall Probe Scans: Data Listings A**

---

MATLAB function "EvaluateUndulatorField" on	10/16/2025 10:28	
A. SCAN PARAMETERS		
z Scanning Date & Time Range	10/13/2025 11:31 - 10/14/2025 09:00	
Undulator Temperature	20.0512±0.0046	°C
x axis position	-0.076103	mm
y axis position	0.000226	mm
Total number of poles per strongback	122	
Number of full field poles	116	
Number of core poles	108	
First core pole #	8	
Last core pole #	115	
Average $\lambda_u$	56.001	mm
Standard deviation from average $\lambda_u$	30.7	$\mu\text{m}$
Average $k_u$	112.198	$\text{m}^{-1}$
Scans averaged	3	
Minimum gap	7.2000	mm
Max. $K_{\text{eff}}$ at minimum gap	9.7124	
Max. core $B_{\text{pk}}$ at minimum gap	1.8522	T
Nominal tuning gap	10.0000	mm
Nominal commissioning gap	12.0770	mm



**Evaluation of Hall Probe Scans at Tuning Gap: Data Listing B**

MATLAB function "EvaluateUndulatorField" on	10/16/2025 10:28	
B. CORE EVALUATIONS FOR TUNING GAP		
Tuning Gap Scanning Date & Time Range	10/13/2025 16:59	
Actual Tuning Gap	10.0006	mm
Tuning Gap Temperature	+20.052±0.037	°C
Planar Hall Effect Correction Range	0.749900 - 4.149900	m
Planar Hall Effect x Corr Function	-0.46 G + (z - 0.749900 m)×-0.05 G/m	
Planar Hall Effect y Corr Function	-0.03 G + (z - 0.749900 m)×0.01 G/m	
Coil Range	0.649979 - 4.249979	m
$\langle \lambda_u \rangle$	+56.001±0.015	mm
$\langle k_u \rangle$	+112.198±0.030	1/m
$\langle K_u \rangle$	+7.3054±0.0060	
$K_{\text{eff}}$ @ Tuning Temperature	+7.30379±0.00011	
$L_{\text{eff}}$	+3.300985±0.000098	m
$L_{2\pi}$	+1.54969±0.00041	m
I1X (Cell Range Total)	+10.18	μTm
I2X (Cell Range Total)	+58.06	μTm <sup>2</sup>
I1Y (Cell Range Total)	-6.78	μTm
I2Y (Cell Range Total)	+67.46	μTm <sup>2</sup>
PI (Cell Range Total)	255,804.5	T <sup>2</sup> mm <sup>3</sup>
Phase Shake	0.97	degXray
Cell Phase Advance ( over 4.400000 m)	21,475.6 (60×360-124.4)	degXray
Undulator Entrance Phase	+1018.8±1.0	degXray
Undulator Exit Phase	+1016.7±1.0	degXray
Undulator Phase Imbalance: Entrance - Exit	+2.1±1.4	degXray



**Evaluation of Hall Probe Scans at Commissioning Gap: Data Listing C**

MATLAB function "EvaluateUndulatorField" on	10/16/2025 10:28	
C. CORE EVALUATIONS FOR COMMISSIONING GAP		
Commissioning Gap Scanning Date & Time Range	10/13/2025 16:59	
Actual Commissioning Gap	12.0772	mm
Commissining Gap Temperature	+20.052±0.037	°C
Planar Hall Effect Correction Range	0.749900 - 4.149900	m
Planar Hall Effect x Corr Function	-0.34 G + (z - 0.749900 m)×-0.05 G/m	
Planar Hall Effect y Corr Function	-0.05 G + (z - 0.749900 m)×0.01 G/m	
Coil Range	0.649971 - 4.249971	m
$\langle\lambda_u\rangle$	+56.001±0.014	mm
$\langle k_u\rangle$	+112.198±0.027	1/m
$\langle K_u\rangle$	+6.0799±0.0049	
$K_{\text{eff}}$ @ Tuning Temperature	+6.079734±0.000090	
$L_{\text{eff}}$	+3.303524±0.000098	m
$L_{2\pi}$	+1.09099±0.00026	m
I1X (Cell Range Total)	+13.26	μTm
I2X (Cell Range Total)	+58.75	μTm <sup>2</sup>
I1Y (Cell Range Total)	-7.08	μTm
I2Y (Cell Range Total)	+56.16	μTm <sup>2</sup>
PI (Cell Range Total)	177,384.3	T <sup>2</sup> mm <sup>3</sup>
Phase Shake	0.85	degXray
Cell Phase Advance (over 4.400000 m)	21,598.4 (6×360-1.6)	degXray
Undulator Entrance Phase	1080.5 (6×180+0.5)±0.8	degXray
Undulator Exit Phase	1077.9 (6×180-2.1)±0.8	degXray
Undulator Phase Imbalance: Entrance - Exit	+2.5±1.2	degXray




---

**Undulator Encoder Settings: Data Listing D**

---

MATLAB function "EvaluateUndulatorField" on 10/16/2025 10:33

D. ENCODER SETTINGS

Upstream Gap Encoder Line Spacing	20,000.0	EncoderCounts/mm
Upstream Scaled Gap Encoder Offset	227.7400	mm
Downstream Gap Encoder Line Spacing	20,000.0	EncoderCounts/mm
Downstream Scaled Gap Encoder Offset	227.2840	mm
Upstream Scaled Top Motor Encoder Offset	-1014.0190	mm
Downstream Scaled Top Motor Encoder Offset	-1014.3505	mm
Upstream Half Gap Encoder Line Spacing	20,000.0	EncoderCounts/mm
Upstream Half Gap Encoder Offset	-30.7340	mm
Downstream Half Gap Encoder Line Spacing	20,000.0	EncoderCounts/mm
Downstream Half Gap Encoder Offset	-30.4930	mm

---

**Undulator Capacitive Sensor Values: Data Listing E**

---


E. CAPACITIVE SENSOR VALUES

Module	Pole	Capacitive Sensor Gap	Upstream Encoder	Downstream Encoder	
Ref	—	46.2243	50.0001	50.0002	mm
Ref	—	46.2243	50.0001	50.0001	mm
1	10	46.5177	46.4999	46.4999	mm
1	10	46.5177	46.4999	46.4999	mm
1	15	46.5135	46.4999	46.4999	mm
1	15	46.5135	46.4999	46.4999	mm
3	25	46.5025	46.4999	46.4999	mm
3	25	46.5025	46.4999	46.4999	mm
3	30	46.5269	46.4999	46.4999	mm
3	30	46.5269	46.4999	46.4999	mm
Ref	—	46.2242	50.0000	50.0001	mm
Ref	—	46.2242	50.0001	50.0001	mm

The following figures show results of the field analysis at the tuning gap.




Evaluation of Hall Probe at Tuning Gap:  $B_x$  &  $B_y$  Plot

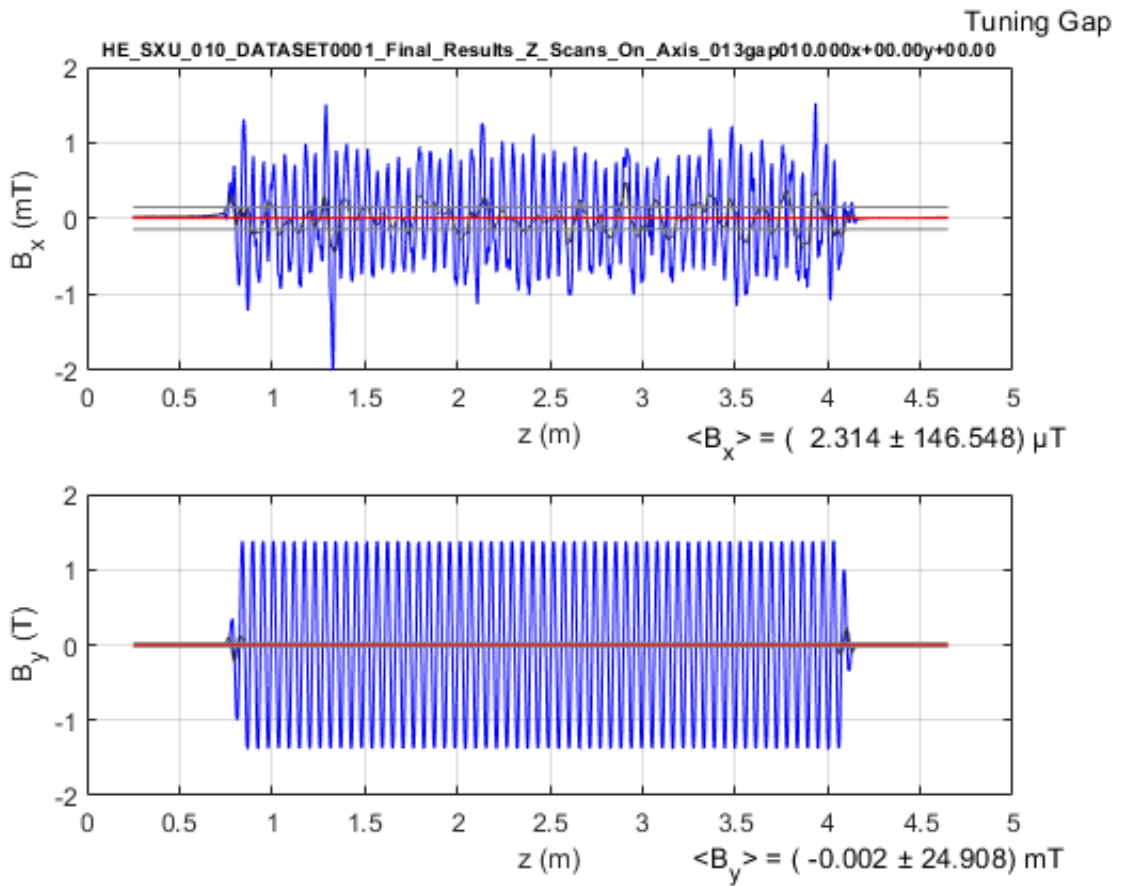

The figures show the x (upper) and y (lower) field components along the undulator tuning axis for the tuning gap. A running undulator-period-average function is plotted in black (not very well visible in the lower figure). The horizontal lines indicate the mean (center red line) and the rms deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard deviations are also printed on the right hand side underneath each figure. [Documentary Information]



Evaluation of Hall Probe at Tuning Gap:  $x$  &  $x'$  Plot

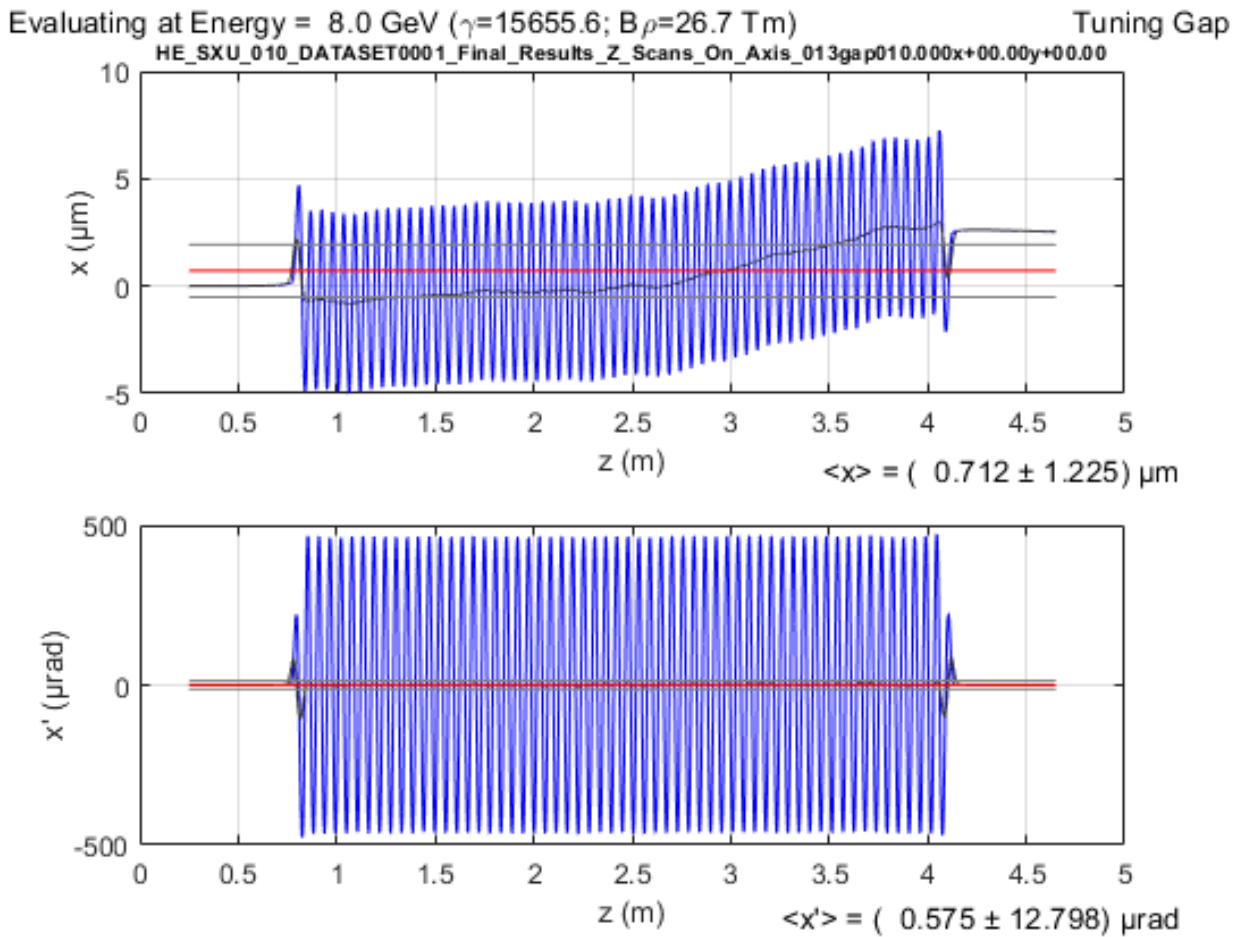



The figures show the  $x$  (upper) and  $x'$  (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (difficult to see in the lower figure). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard deviations are also printed on the right hand side underneath each figure. [Documentary Information]



Evaluation of Hall Probe Scans at Tuning Gap:  $y$  &  $y'$  Plot

Evaluating at Energy = 8.0 GeV ( $\gamma=15655.6$ ;  $B\rho=26.7$  Tm) Tuning Gap

HE\_SXU\_010\_DATASET0001\_Final\_Results\_Z\_Scans\_On\_Axis\_013gap010.000x+00.00y+00.00

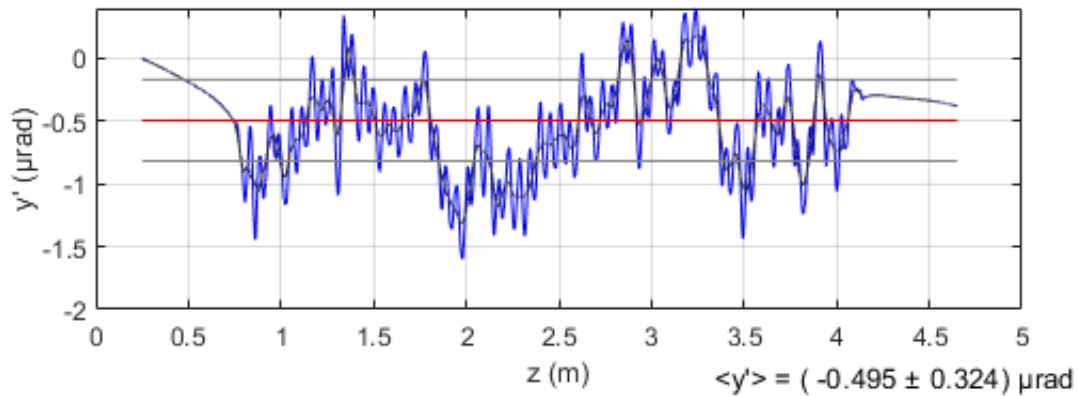
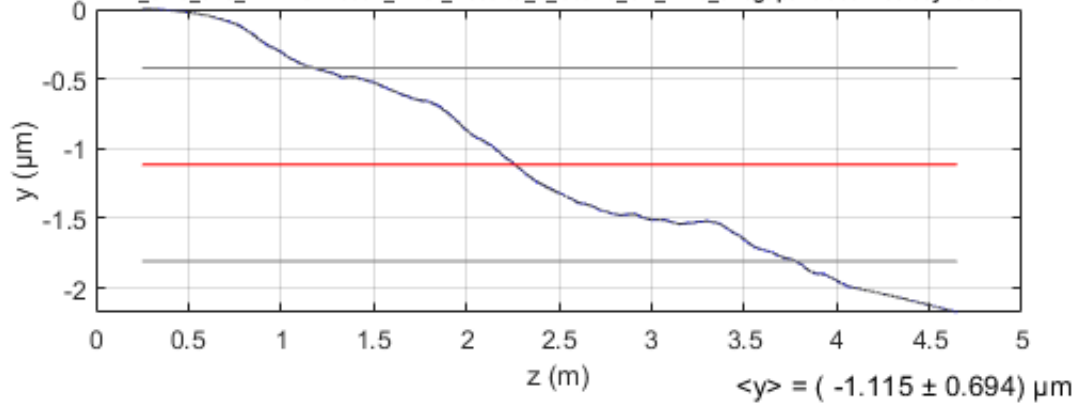


The figures show the  $y$  (upper) and  $y'$  (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (difficult to see). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard deviations are also printed on the right hand side underneath each figure. [Documentary Information]



Evaluation of Hall Probe Scans at Tuning Gap: *x* & *y* Plot

Evaluating at Energy = 8.0 GeV ( $\gamma=15655.6$ ;  $B\rho=26.7$  Tm) Tuning Gap

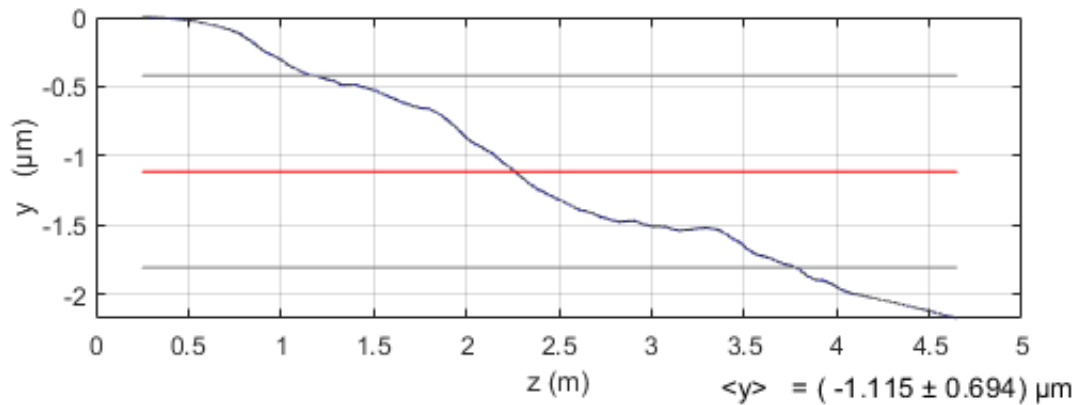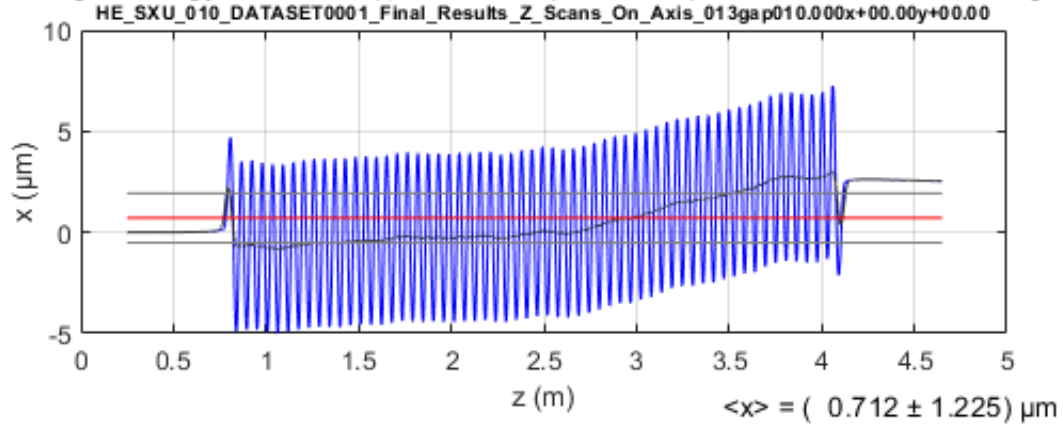


The figures show the *x* (upper) and *y* (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (identical with the trajectory in the lower figure). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard values are also printed on the right hand side underneath each figure. [Documentary Information]



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010


**Evaluation of Hall Probe plus BBA Correction at Tuning Gap:  $x$  &  $x'$  Plot**

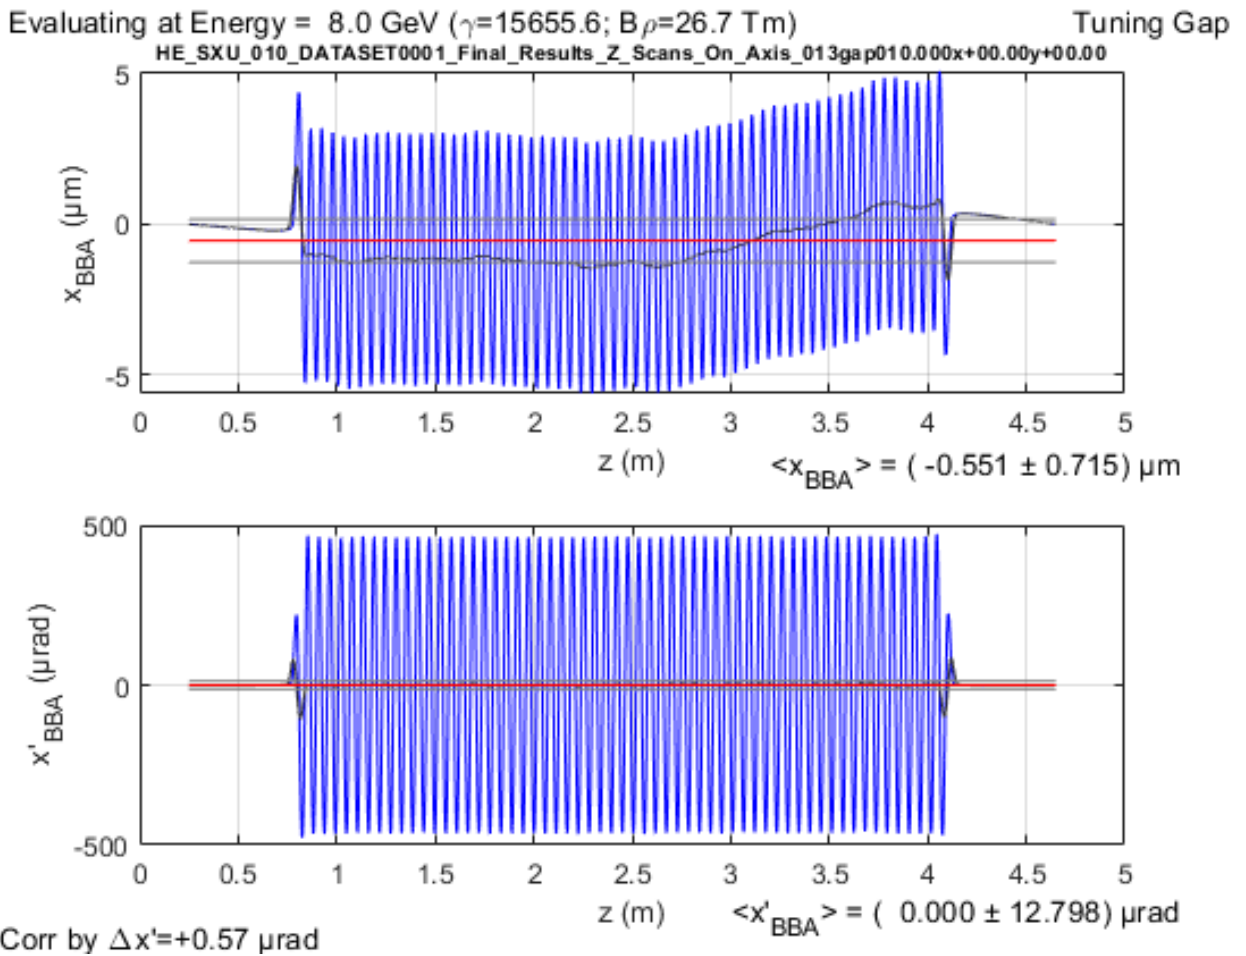

The figures show the  $x$  (upper) and  $x'$  (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components after BBA correction (to zero the amplitudes at the cell boundaries) and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (difficult to see in the lower figure). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard values are also printed on the right hand side underneath each figure. The amount of BBA correction applied is printed underneath the lower left corner of the lower figure. [Documentary Information]




Evaluation of Hall Probe plus BBA Correction at Tuning Gap:  $y$  &  $y'$  Plot

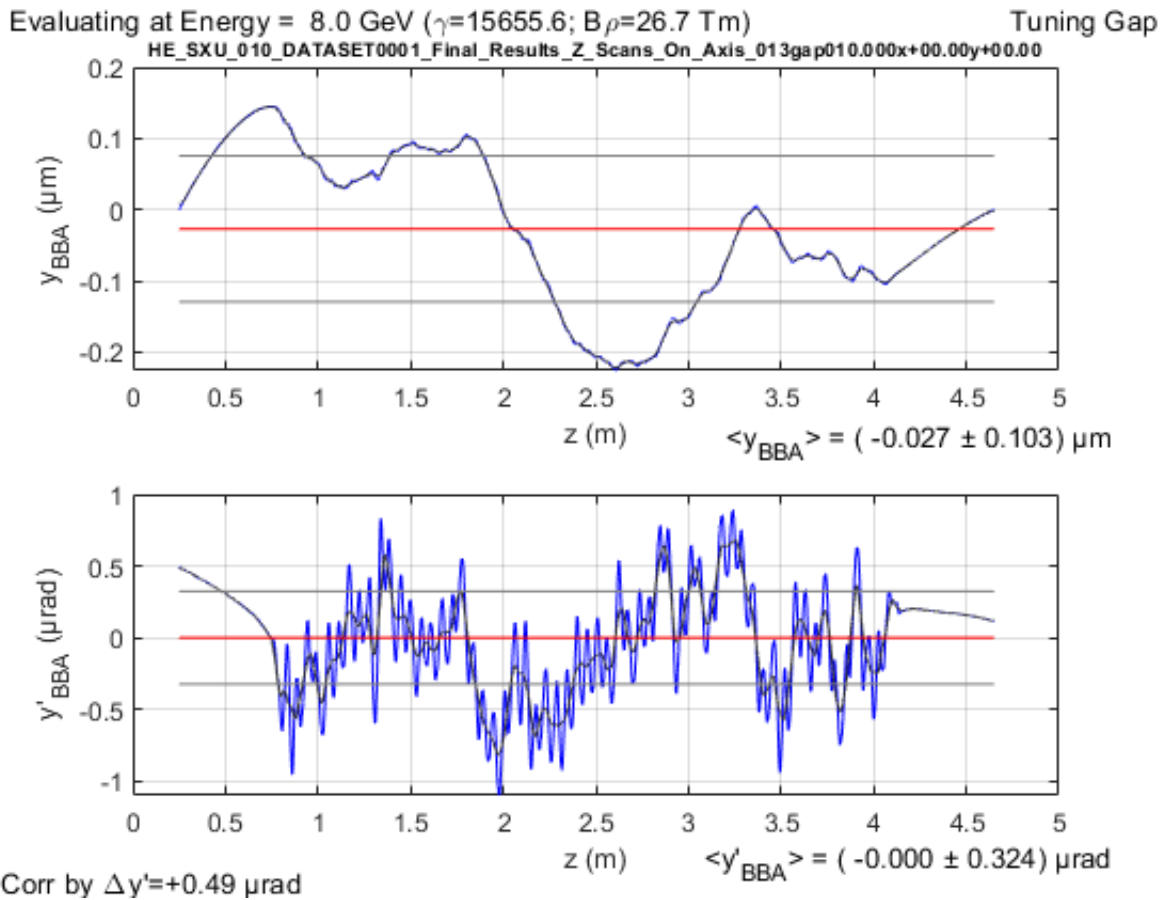

The figures show the  $y$  (upper) and  $y'$  (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components after BBA correction (to zero the amplitudes at the cell boundaries) and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (identical with the trajectories). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard values are also printed on the right hand side underneath each figure. The amount of BBA correction applied is printed underneath the lower left corner of the lower figure. [Documentary Information]




Evaluation of Hall Probe plus BBA Correction at Tuning Gap:  $x$  &  $y$  Plot

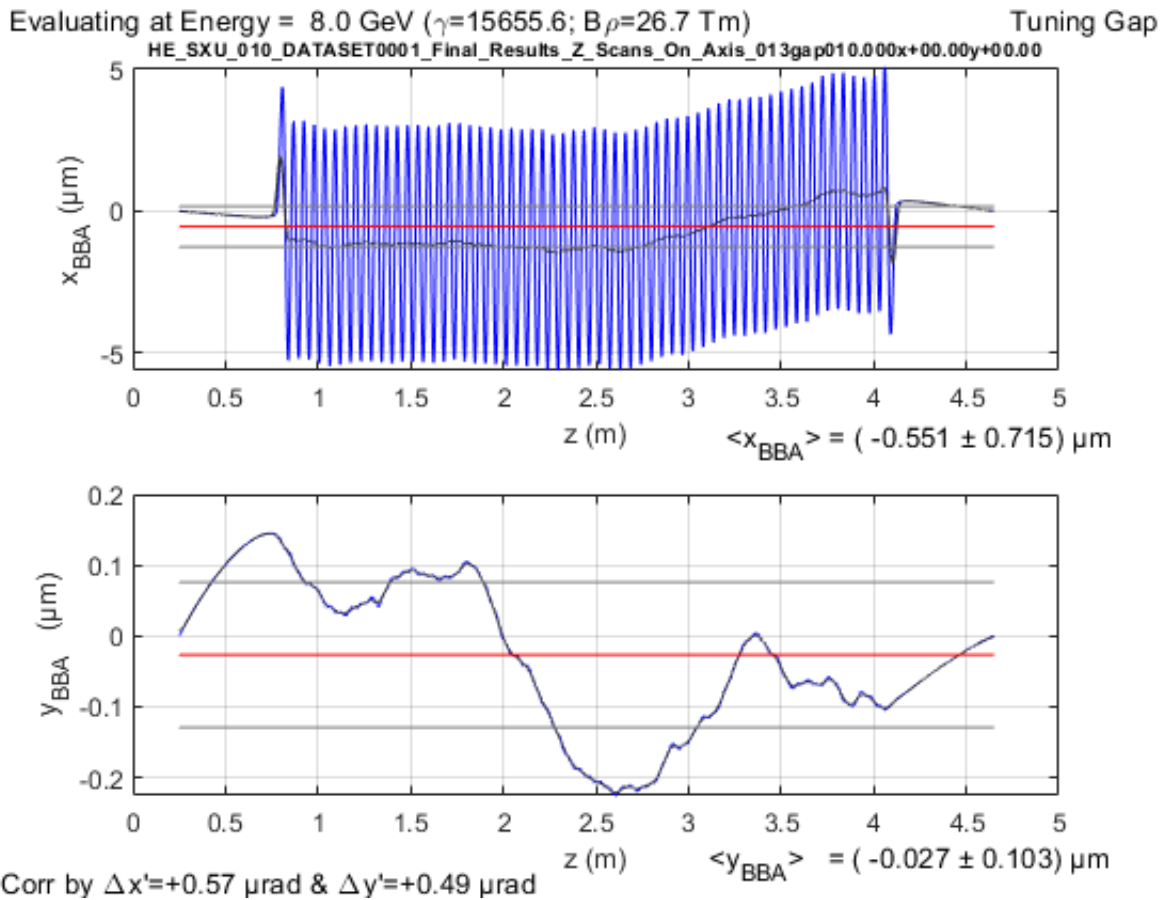

The figures show the  $x$  (upper) and  $y$  (lower) electron beam trajectories along the undulator tuning axis for the tuning gap based on the measured magnetic field components after BBA correction (to zero the amplitudes at the cell boundaries) and estimated for an electron beam energy of 8.0 GeV. A running undulator-period-average function is plotted in black (identical with the trajectory in the lower figure). The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average) of that undulator-period-average function. The corresponding mean values and standard values are also printed on the right hand side underneath each figure. The amount of BBA correction applied is printed underneath the lower left corner of the lower figure. [Documentary Information]



Evaluation of Hall Probe at Tuning Gap:  $K$  and  $\lambda_u$  Plot

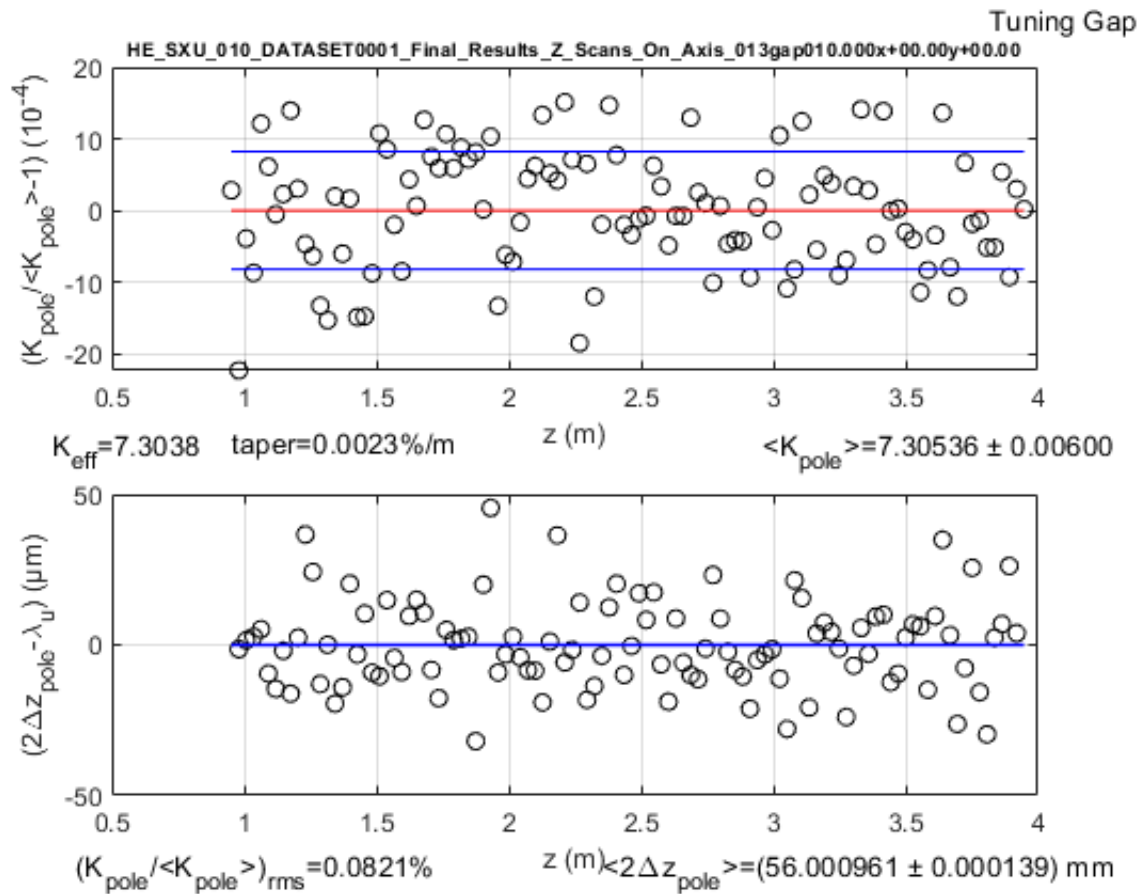

The figures show the per-pole undulator strength  $K_{pole}$  (upper) and the deviation of the pole width from the expected value of  $\lambda_u/2$  (lower) for the 108 core undulator poles for the tuning gap. The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two black lines above and below the average). The corresponding mean values and standard values are also printed on the right hand side underneath each figure. [Documentary Information]

For description of  $K$  calculation see next page.



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

$K$  calculation description for previous page:

The undulator parameter,  $K_{pole}$ , in the upper figure, is calculated for each of the core poles based on the scanned vertical field values  $B_y(z)$  as well as an interpolation of the upstream,  $z_{(0-dn,pole)}$ , and downstream,  $z_{(0-up,pole)}$ , field zero crossing locations using the following formula:


$$K_{pole}(z_{pole}) = \frac{\Delta z_{pole}}{2\pi} \frac{e}{m_e c} \sqrt{\frac{2}{\Delta z_{pole}} \int_{z_{0-up,pole}}^{z_{0-dn,pole}} B_y^2(\hat{z}) d\hat{z}}$$

The term  $\frac{e}{m_e c}$  uses the electron mass,  $m_e$ , the speed of light,  $c$ , and the electron's electric charge,  $e$ . The variable  $\Delta z_{pole}$  stands for


$$\begin{aligned} \Delta z_{pole} &= z_{0-dn,pole} - z_{0-up,pole} \\ z_{pole} &\approx \frac{1}{2} (z_{0-dn,pole} + z_{0-up,pole}) \end{aligned}$$



Evaluation of Hall Probe Scans for Tuning Gap: Phase Integral Plot

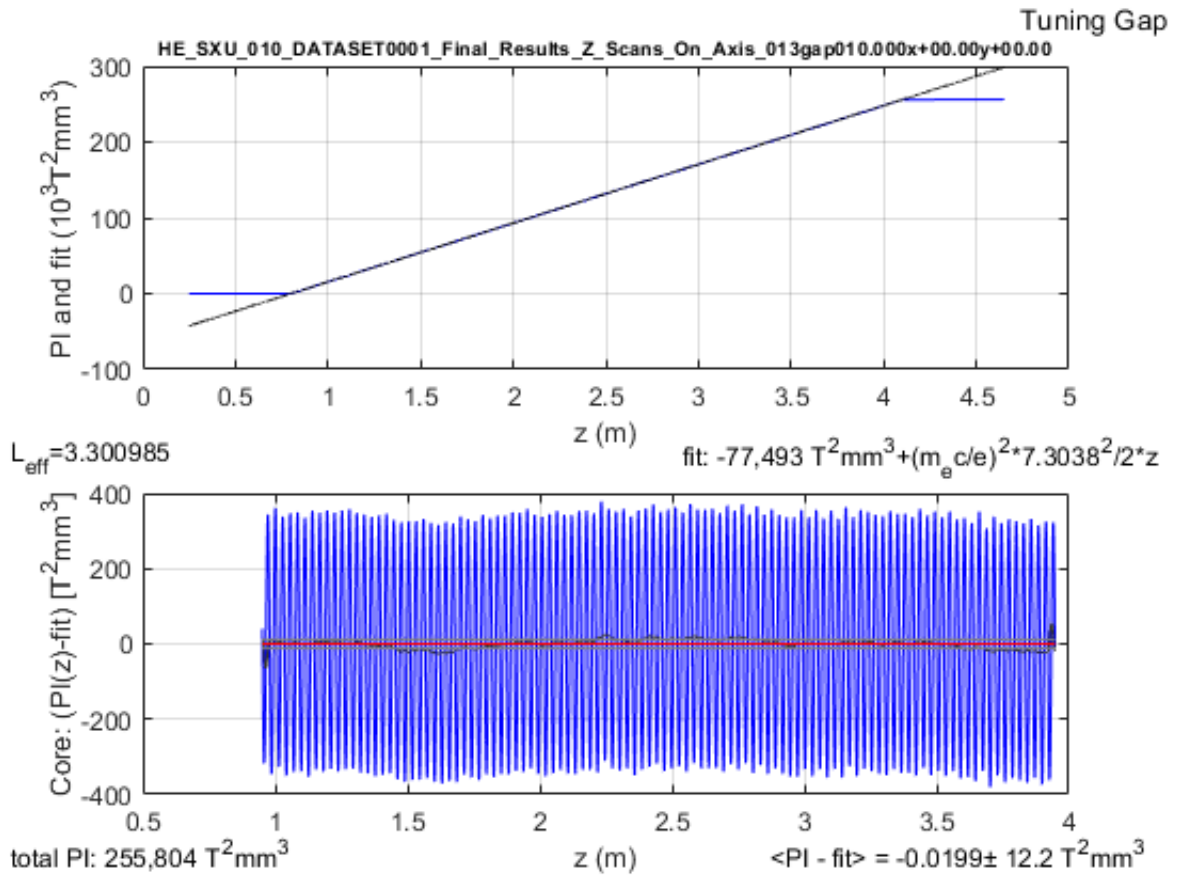

A description of the figure is given on the next page:

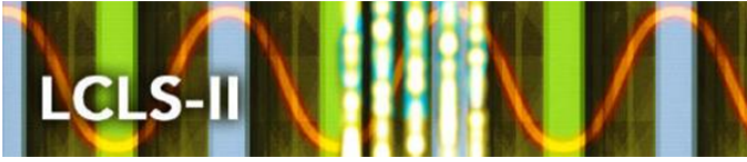

LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

Figure description for previous page:

The upper figure shows the phase integral of an electron calculated from the measured on-axis magnetic field components for the tuning gap:

$$PI(z) = \int_0^z BL_{x1}^2(\hat{z}) d\hat{z} + \int_0^z BL_{y1}^2(\hat{z}) d\hat{z}$$

with

$$BL_{x1,y1}(z) = \int_0^z B_{x,y}(\hat{z}) d\hat{z} - \frac{1}{L} \int_0^L \left\{ \int_0^{\hat{z}} B_{x,y}(\hat{z}) d\hat{z} \right\} d\hat{z}.$$

The function

$$\overline{PI}(z) = \overline{PI}(0) + z \left( \frac{mc}{e} \right)^2 \frac{1}{2} K_{\text{eff}}^2 = p_0 + zp_1$$

fitted to the measured phase integral  $PI(z)$  (along the undulator core) with fit coefficients  $p_0 = \overline{PI}(0)$  and  $p_1 = \left( \frac{mc}{e} \right)^2 \frac{1}{2} K_{\text{eff}}^2$  can be seen as a straight black line in the upper plot. The values of the fit coefficients are printed at the right hand side underneath the upper figure. On the lower left of the upper figure the effective undulator length is printed, which is obtained as the distance over the undulator core, where the blue and black lines in the plot are on top of each other:  $L_{\text{eff}} = PI(z_{\text{max}})/p_1$ , also  $K_{\text{eff}} = \sqrt{2p_1 \left( \frac{e}{mc} \right)}$ .

The lower figure shows the residuals between the phase integral and the fit function over the core part of the undulator magnet. A running undulator-period-averaged function is plotted in black. The horizontal lines indicate the mean values (center red line) and the standard deviations from the mean (two blue lines above and below the mean) of that undulator-period-averaged function. The corresponding mean values and standard values are also printed on the right hand side underneath the figure. On the lower left of the plot, the total phase integral accumulated along the undulator magnet, is shown, i.e.,  $PI(z_{\text{max}})$ , the right-hand side value of the blue line in the upper plot.

The undulator-period averaged phase,  $\langle \Phi \rangle_{\lambda_u}(z)$  can be calculated from  $PI(z)$  via

$$\langle \Phi \rangle_{\lambda_u}(z) = \frac{2\pi}{L_{2\pi}} \left( \frac{e}{mc} \right)^2 \frac{1}{\lambda_u} \int_{z - \frac{\lambda_u}{2}}^{z + \frac{\lambda_u}{2}} (PI(\hat{z}) - \overline{PI}(\hat{z})) d\hat{z}, \quad (1)$$

integrated over the undulator core.

Here  $L_{2\pi} = \lambda_u \left( 1 + \frac{1}{2} K_{\text{eff}}^2 \right)$  (see next figure) is the free space distance over which a phase slippage of  $2\pi$  occurs. The phase shake,  $\langle \Delta \phi \rangle_{\text{rms}}$ , which will be discussed later in this document, is calculated as

$$\langle \Delta \phi \rangle_{\text{rms}} = (\Delta \langle \Phi \rangle_{\lambda_u})_{\text{rms}} = (\langle \Phi \rangle_{\lambda_u}(z) - \langle \langle \Phi \rangle_{\lambda_u}(z) \rangle)_{\text{rms}}$$


The cell phase  $\phi(z)$  is calculated over the entire cell length (not just the undulator core)

$$\phi(z) = \frac{360 \text{ degXray}}{L_{2\pi}} \left( z - z_{\text{center}} + \left( \frac{e}{mc} \right)^2 PI(z) \right).$$

The following figures show the results of the gap dependent analysis.




Evaluation of Hall Scans:  $L_{2\pi}$  vs gap

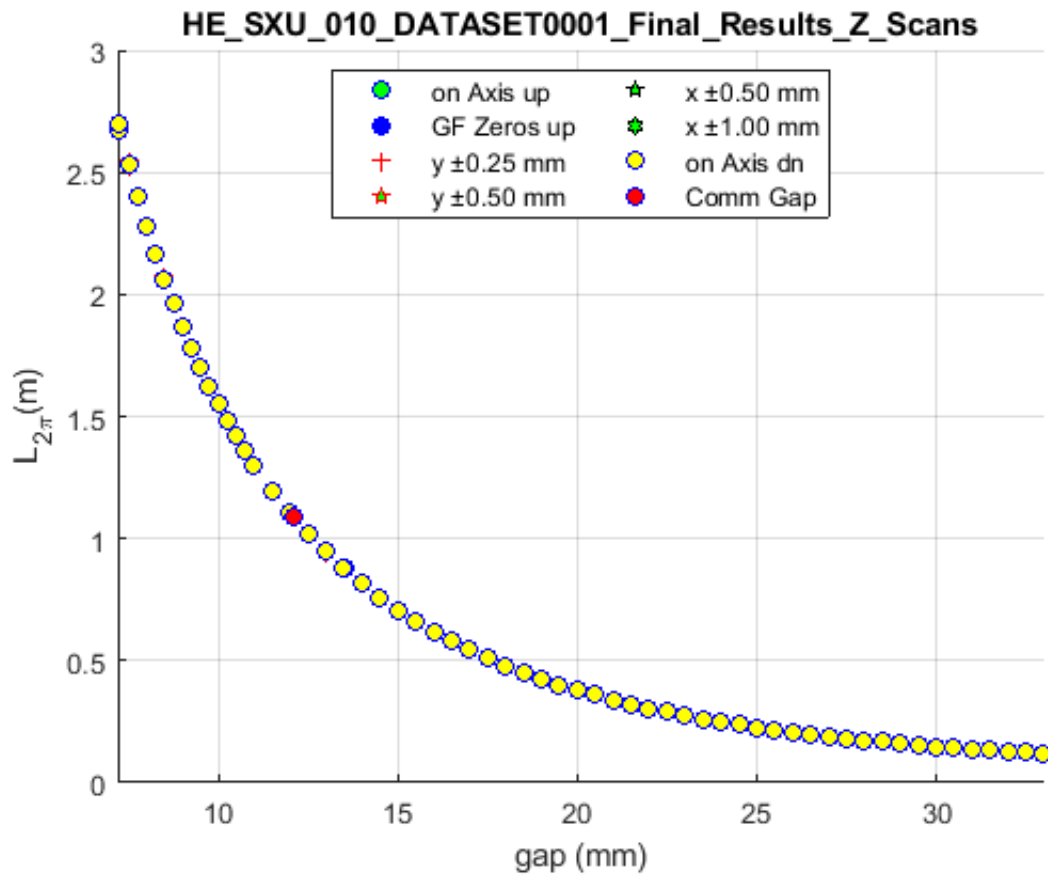

The figure shows the free space distance over which a  $2\pi$  slippage occurs between the radiation field and the electron bunch (see explanation above) as a function of undulator gap over the operational gap range. Note: the free space travel distance required to accumulate  $2\pi$  slippage gets shorter towards larger gap values, which correspond to shorter undulator wavelengths. [Documentary Information]



Evaluation of Hall Scans:  $K_{\text{eff}}$  vs gap

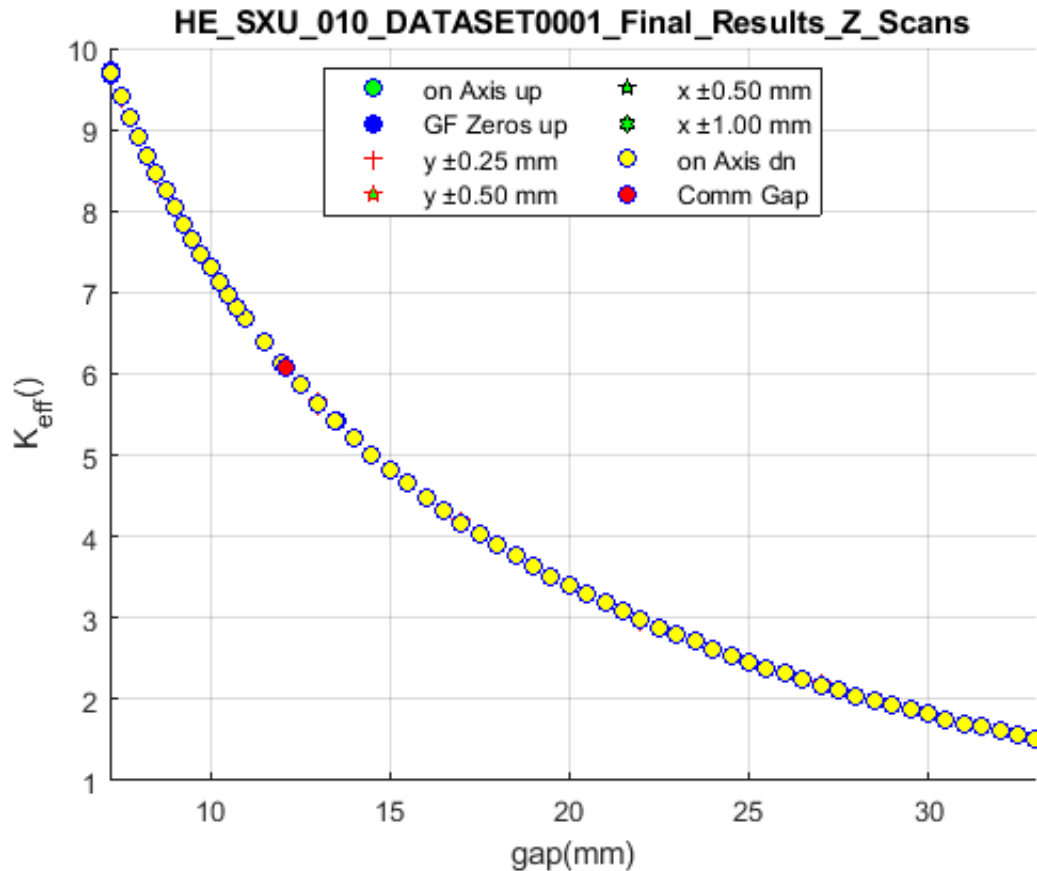


The figure shows undulator strength  $K_{\text{eff}}$  (see formula on page 15) as a function of gap over the 7.2 mm - 33 mm operational range. The maximum value is  $K_{\text{eff,max}} = 9.7124$ . The legend shows a number of different cases that will be explained later in this document, because their effect cannot be observed in this full scale plot. Note: The gap values are derived from the readings of the two gap encoders installed on the SXU. In that sense these are nominal gap numbers that will be close but not identical to each of the individual pole separations measured across the undulator gap.

The continuous conversion between the two axes (i.e.  $K_{\text{eff}}(\text{gap})$  and  $\text{gap}(K_{\text{eff}})$ ) will be done during operations based on the list of reference data points stored in file `sxu_010_k_vs_gap_spline.dat` in the Controls Data folder on the V: drive (see final section of this document for file information). From that list  $K_{\text{eff}}(\text{gap})$  and  $\text{gap}(K_{\text{eff}})$  can be calculated via cubic spline fits or equivalent. [Documentary Information]



Evaluation of Hall Scans:  $K_{\text{eff}} - K_{\text{control}}$  vs gap

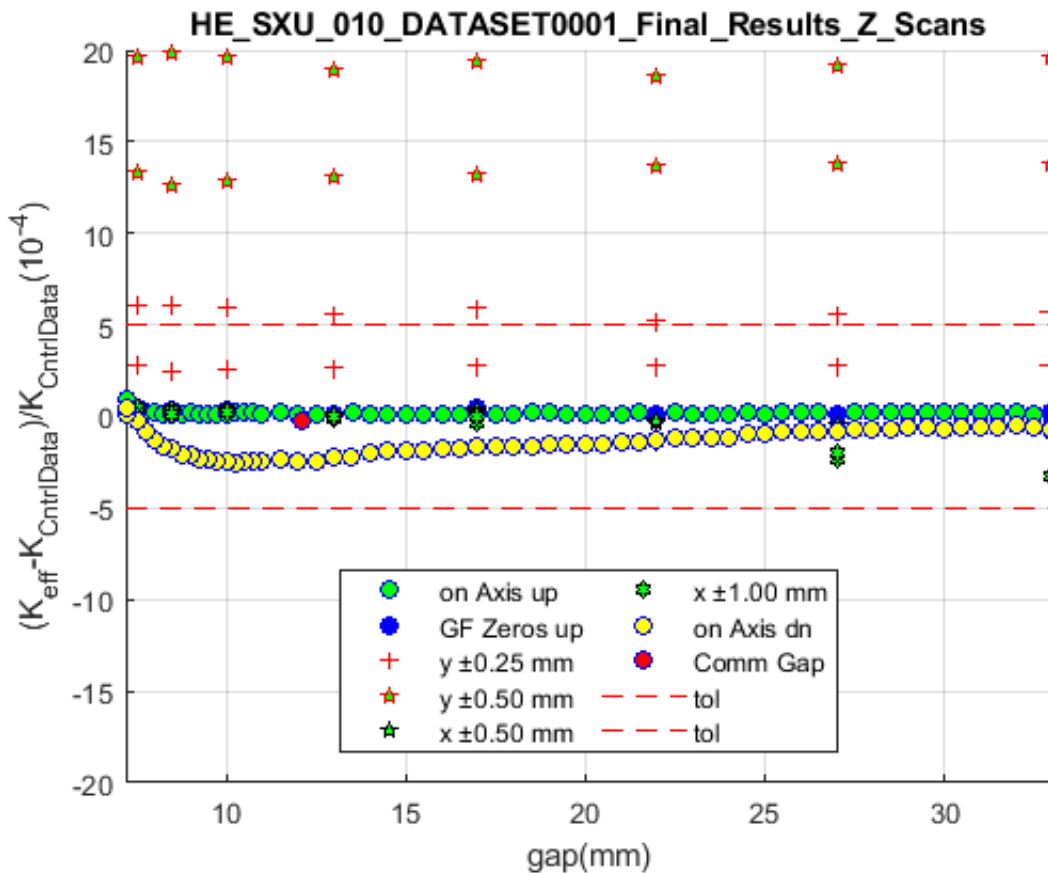


The figure shows the relative difference between the measured undulator strength  $K_{\text{eff}}$  and a cubic spline fit to the list of reference data points stored in file `sxu_010_k-vs-gap_spline.dat` in the Controls Data folder on the V: drive as a function of gap over the 7.2 mm—33 mm operational range.

The legend explains the different cases that are shown in the plot: The green filled circles are data acquired on axis as the gap was changed from close to open. The yellow filled circles are data acquired on axis as the gap was changed from open to close. The horizontal red dashed lines show the tolerance limits. Note: The undulator  $K_{\text{eff}}$  value shows a hysteresis, i.e., for a given gap, the value depends on the direction of gap motion to reach that gap. While this is not a desirable feature, its effect stays within the given tolerance and will be acceptable. The other symbols shown indicate off-axis measurements that are added for interest only. The tolerance limits apply for on-axis readings, only.




Evaluation of Hall Scans:  $(K_{\text{eff}} - K_{\text{CntrlData}}) / K_{\text{CntrlData}}$  vs gap

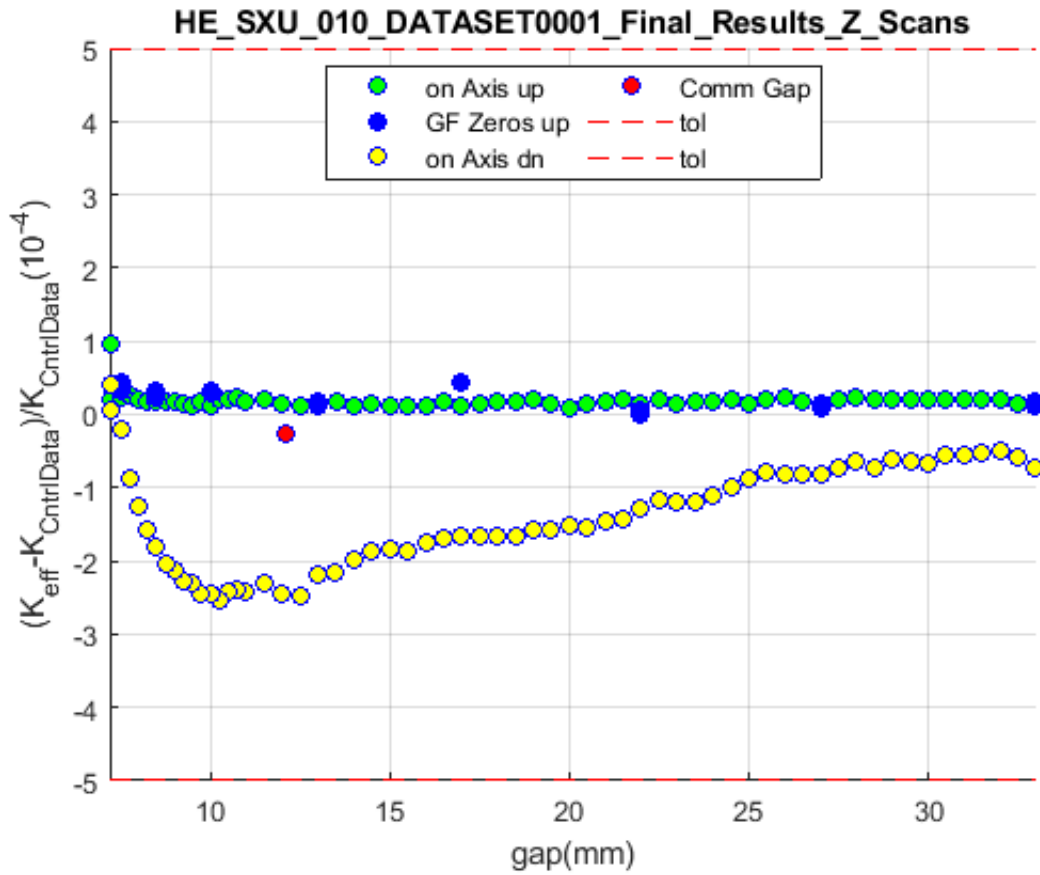

The figure shows some of the data shown in the previous figure but with a larger vertical scale that just captures the tolerance range. The off-axis measurements are not shown.




Evaluation of Hall Scans: Phase Shake vs gap

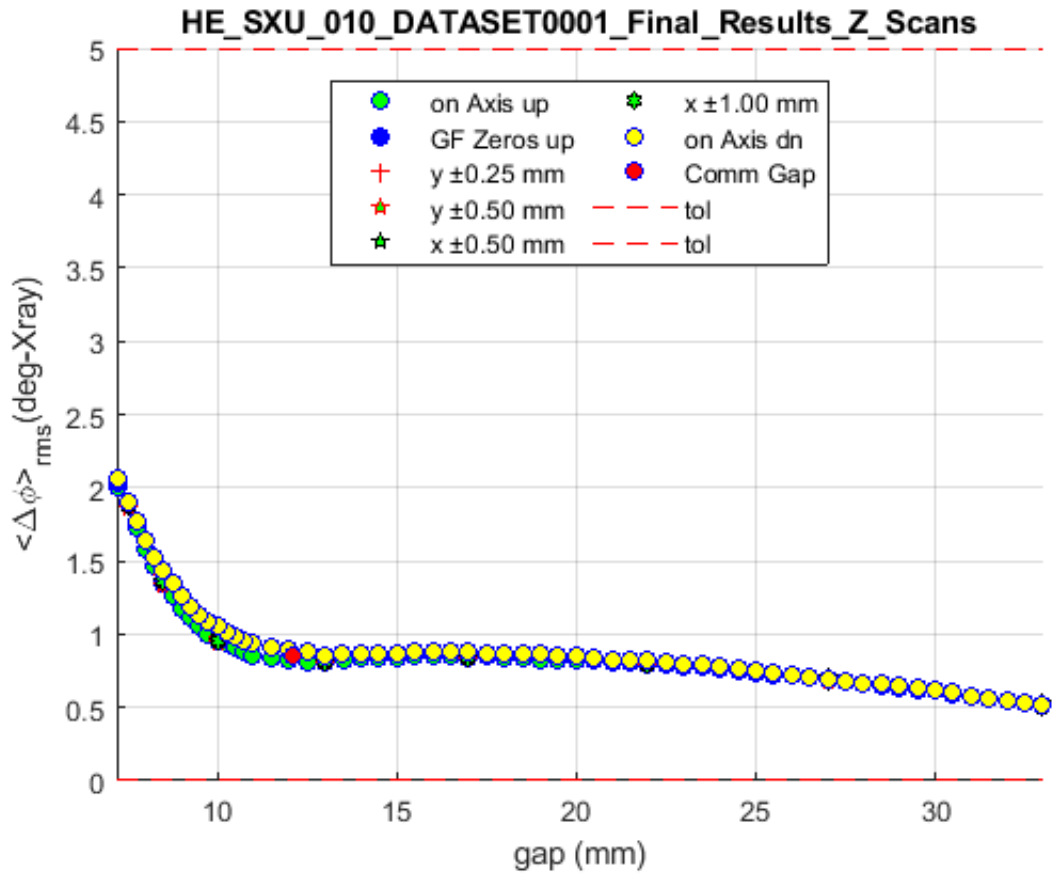

The figure shows the phase shake,  $\langle \Delta\phi \rangle_{rms}$ , (see Eq. 1 above on page 15) as a function of operational gap. The vertical axis extends over the entire tolerance range. The values show a slight hysteresis (see explanation above) but are well within tolerance.



Evaluation of Hall Probe: Entrance to Exit Phase Error Balance vs. gap

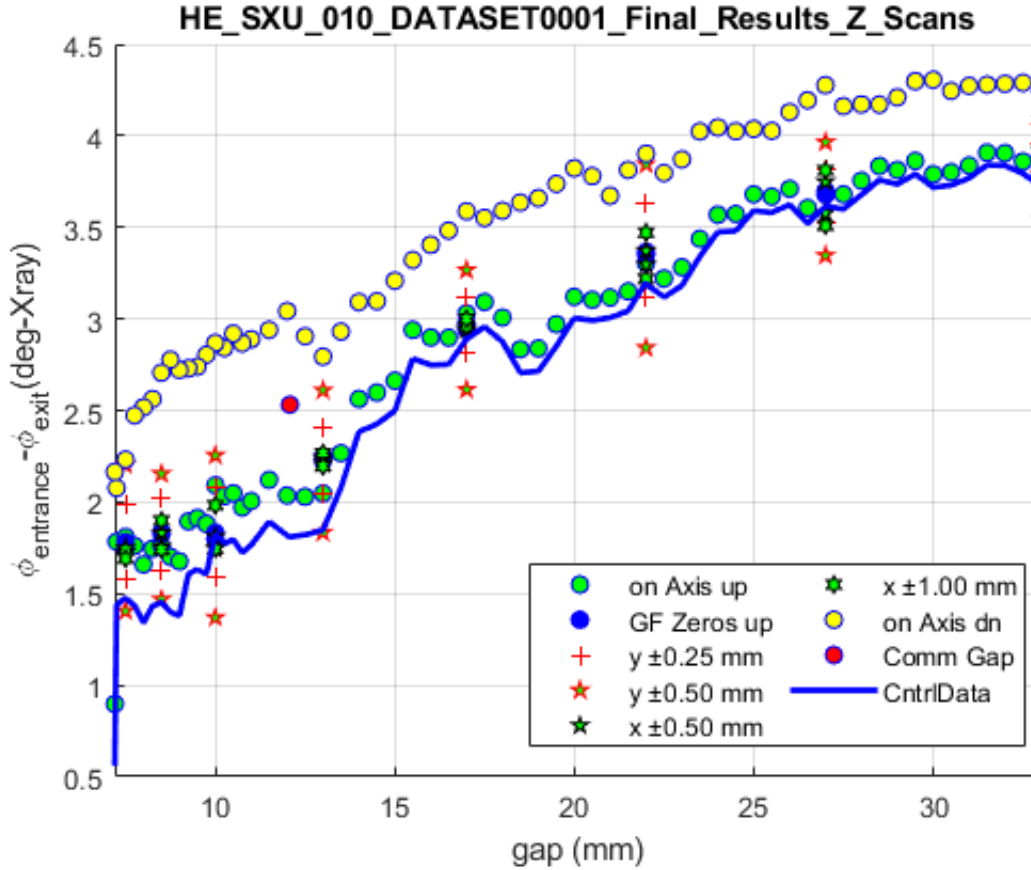

The figure shows a (negligible) imbalance of the entrance (cell boundary start to undulator core) to the exit (undulator core to cell boundary end) phase slippage for the undulator. In addition to the signals described above, the blue curve is a spline fit to the difference of the data in files

“...\_phase\_match\_enter\_vs\_gap\_spline.dat”  
 “...\_phase\_match\_exit\_vs\_gap\_spline.dat”.

The small change in phase difference between opening and closing measurements shows the effect of gap hysteresis. The explanation for the legend items can be found on previous pages above. The entrance and exit phase slippage is calculated as





$$\phi_{\text{entrance}} = -\phi(z_{\text{Cell-Start}}) + \frac{1}{n+1} \sum_{j=1}^{n+1} (\phi(z_{(B0,j)}) - \pi(j-1)). \quad (2)$$

$$\phi_{\text{exit}} = -\phi(z_{\text{Cell-End}}) - \frac{1}{n+1} \sum_{j=1}^{n+1} (\phi(z_{(B0,j)}) + \pi(n+1-j)). \quad (3)$$

Here,  $z_{(B0,j)}$  is the  $z$  location of the zero crossing of  $B_y(z)$  in front of the  $j^{\text{th}}$  core  $B_y$  peak.  $z_{(B0,(n+1))}$  is the  $z$  location of the field zero of  $B_y(z)$  after the last core  $B_y$  peak.



Evaluation of Hall Probe: Field Integrals vs. gap

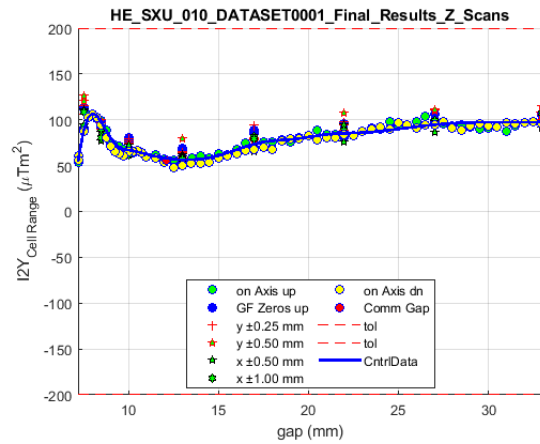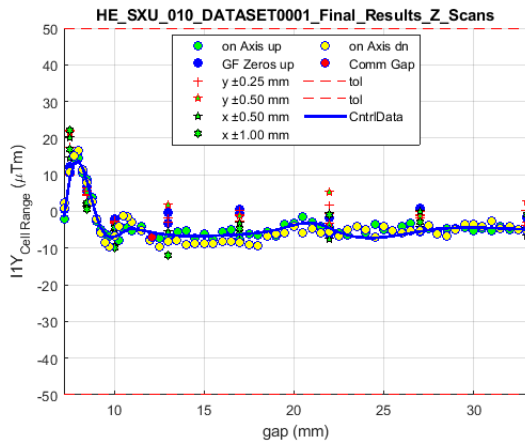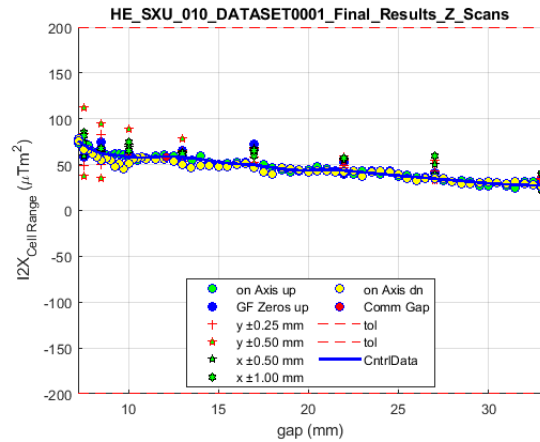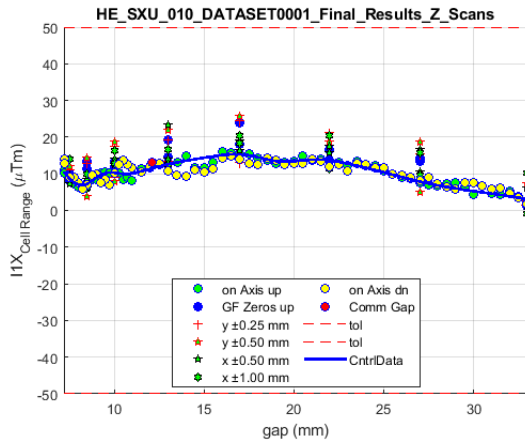

The figures show the field integrals (I1X, I2X, I1Y, I2Y) as functions of the operational gap. The proximity of the green and yellow circles shows that the field integrals are not sensitive to the hysteresis in  $K$  as seen on a previous page. The blue curves are spline fits to the data in files

```



"...i1xvsgap_spline.dat",
"...i2xvsgap_spline.dat",
"...i1yvsgap_spline.dat",
"...i2yvsgap_spline.dat",

```

and demonstrate how the controls representations of the field integrals relates to the actual measurements (see final section of this document for file information).




### Evaluation of Hall Probe: BBA Field Integrals

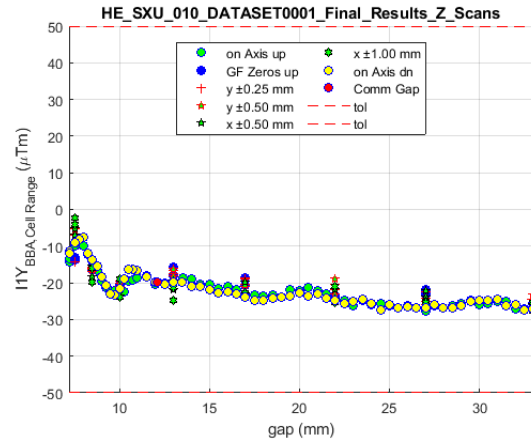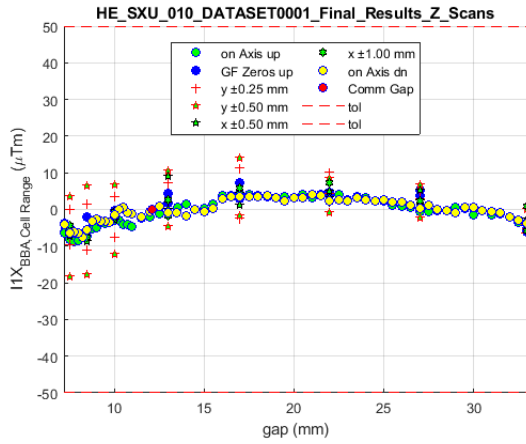

The figure shows the first integrals after a BBA equivalent correction was applied. The values stay within tolerance over the operational range.



Evaluation of Hall Scans:  $K$  vs.  $x$  dependence

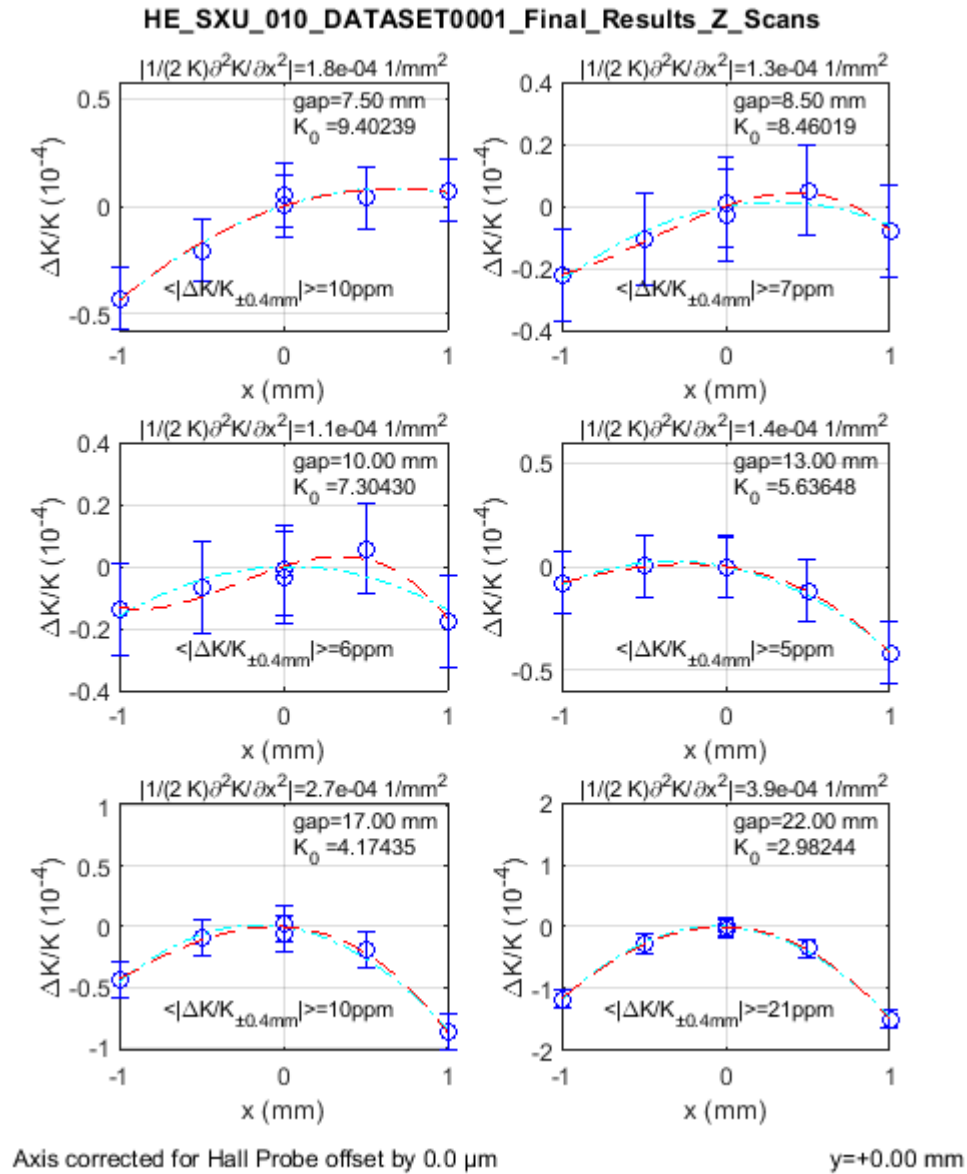


The figure shows the deviation of the relative undulator strength,  $K$ , from the on-axis value,  $K_0$ , as function of  $x$  at a number of operational gaps. The dash-dot lines are polynomial fits to the data (cyan:  $2^{nd}$  order, red:  $3^{rd}$  order). The average deviation at  $z = 0.4 \text{ mm}$  is well below the tolerance of 160 ppm in all cases.



Evaluation of Hall Scans:  $K$  vs.  $y$  dependence





HE\_SXU\_010\_DATASET0001\_Final\_Results\_Z\_Scans

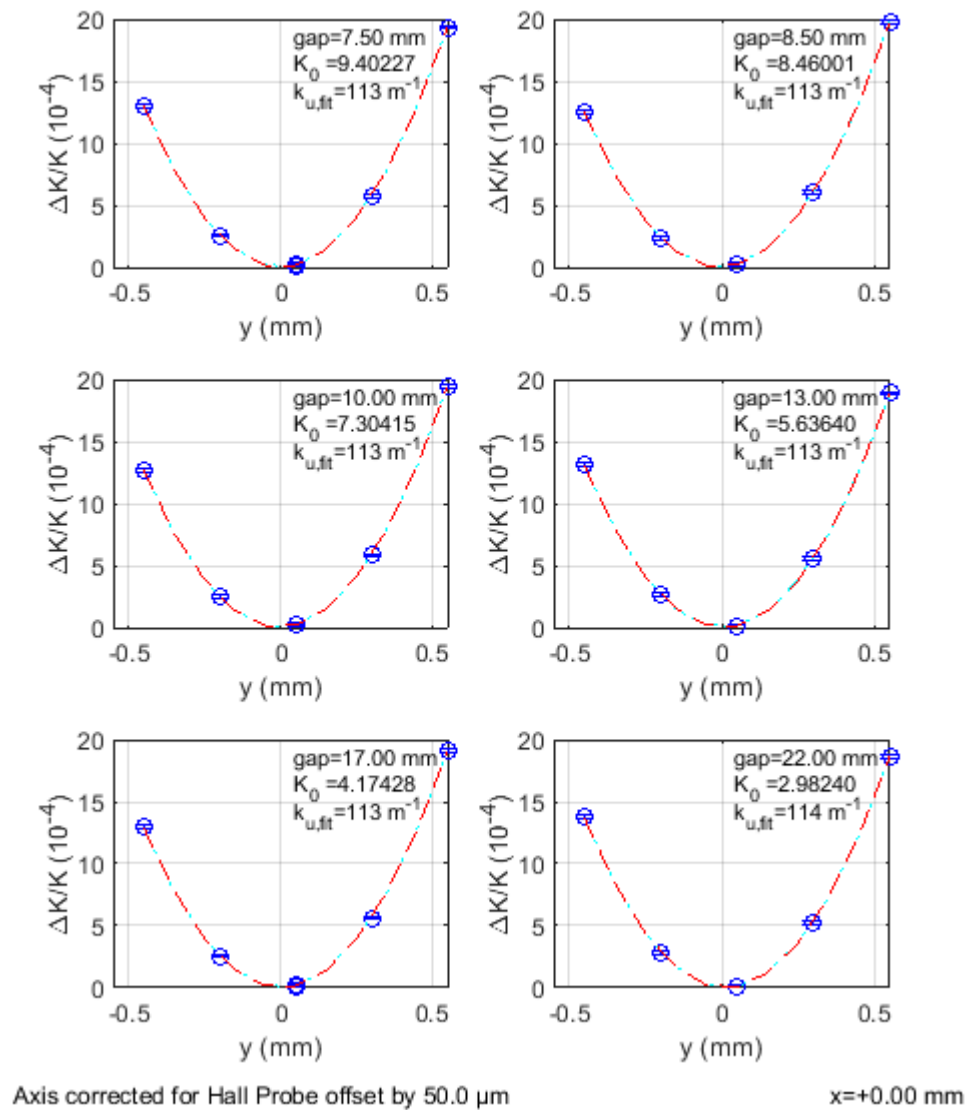

The figure shows the deviation of the relative undulator strength,  $K$ , from the on-axis value,  $K_0$ , as function of  $y$  at a number of operational gaps. The dash-dot lines are polynomial fits to the data (cyan:  $2^{nd}$  order, red:  $3^{rd}$  order). The deviations follow closely the expected functional form  $(\cosh(k_u y) - 1)$ . The value of  $k_{u,fit}$ , calculated from the fit parameters, is recorded in the upper right hand corner of each figure. These values are quite close to the expected value of  $112.198 m^{-1}$ .







### Long Coil Measurement of the On-Axis Field Integrals

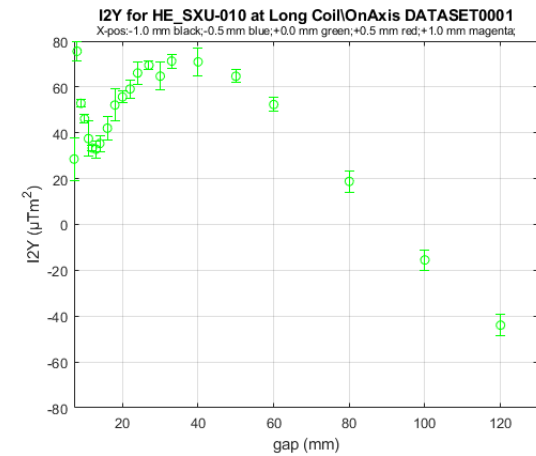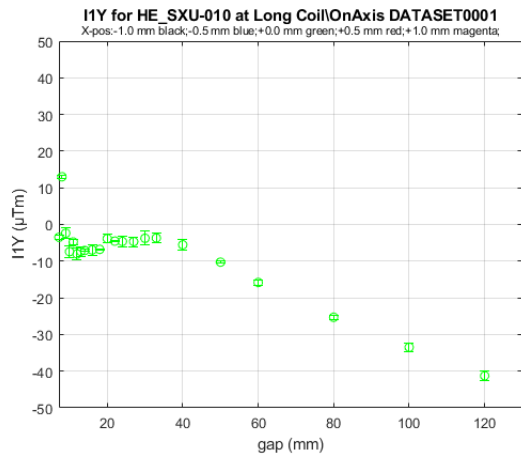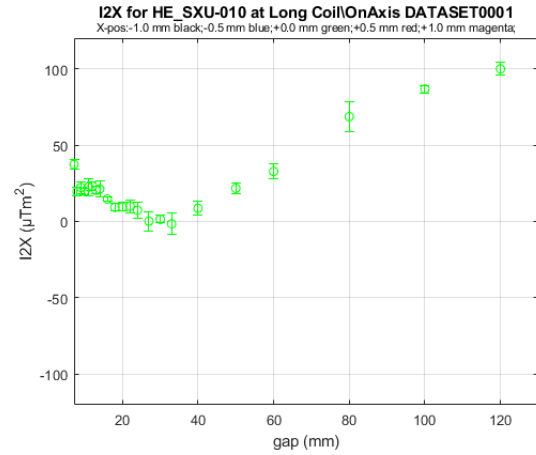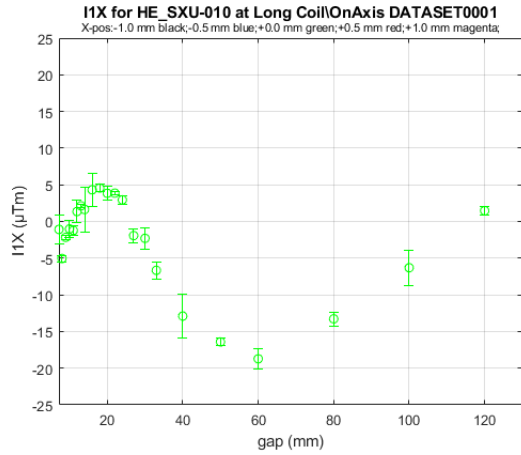

The figure shows the field integrals obtained from long coil measurements on-axis. The vertical axes extend over the tolerance range. All integrals are in tolerance.







Long Coil Measurement of the Horizontally Off-Axis Field Integrals

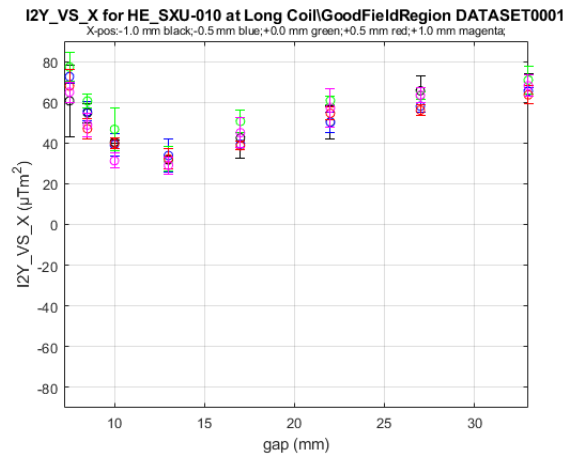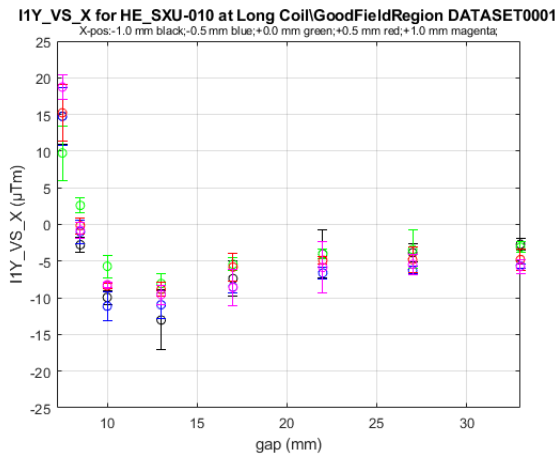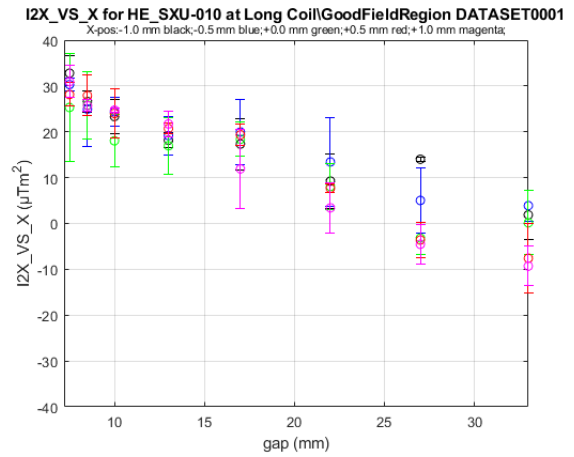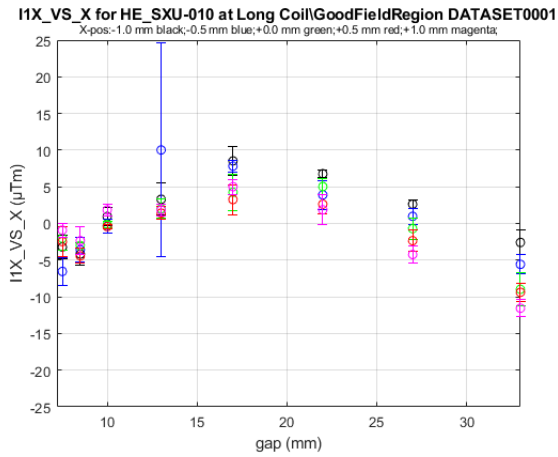

The figure shows the integrals obtained from long coil measurements off axis in the vertical plane using colors to indicate offset distance (black: -1.0 mm, blue: -0.5 mm, green: on-axis; red: +0.5 mm, magenta: +1.0 mm). The vertical axes extend of the tolerance range. All integrals are in tolerance.




## Long Coil Measurement of the Vertically Off-Axis Field Integrals

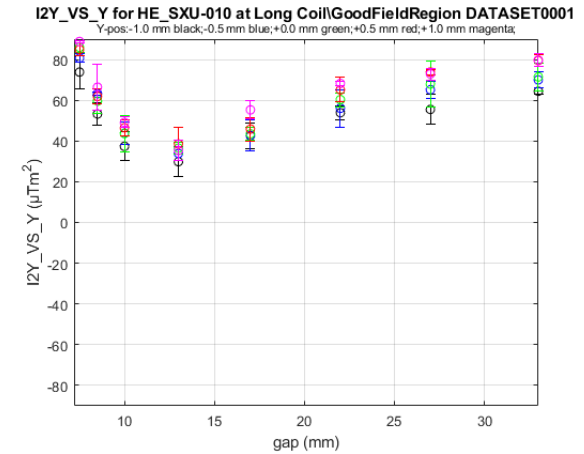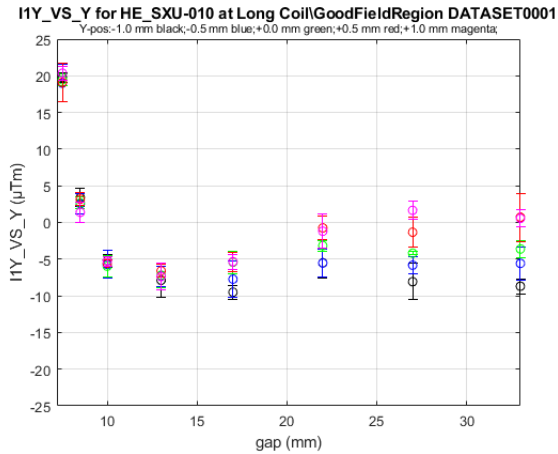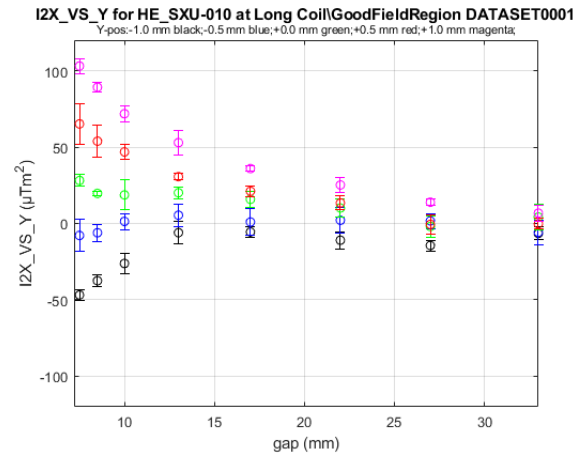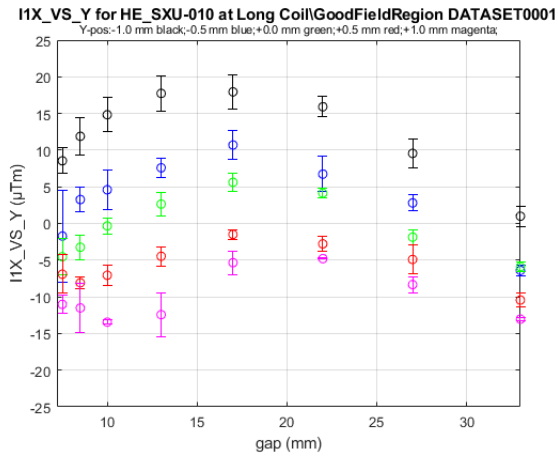

The figure shows the field integrals obtained from long coil measurements off axis in the horizontal plane using colors to indicate offset distance (black: -1.0 mm, blue: -0.5 mm, green: on-axis; red: +0.5 mm, magenta: +1.0 mm). The vertical axes extend over the tolerance range. All integrals are in tolerance.




**Estimated Upstream Horizontal Corrector Strength Requirement vs.  $x$**

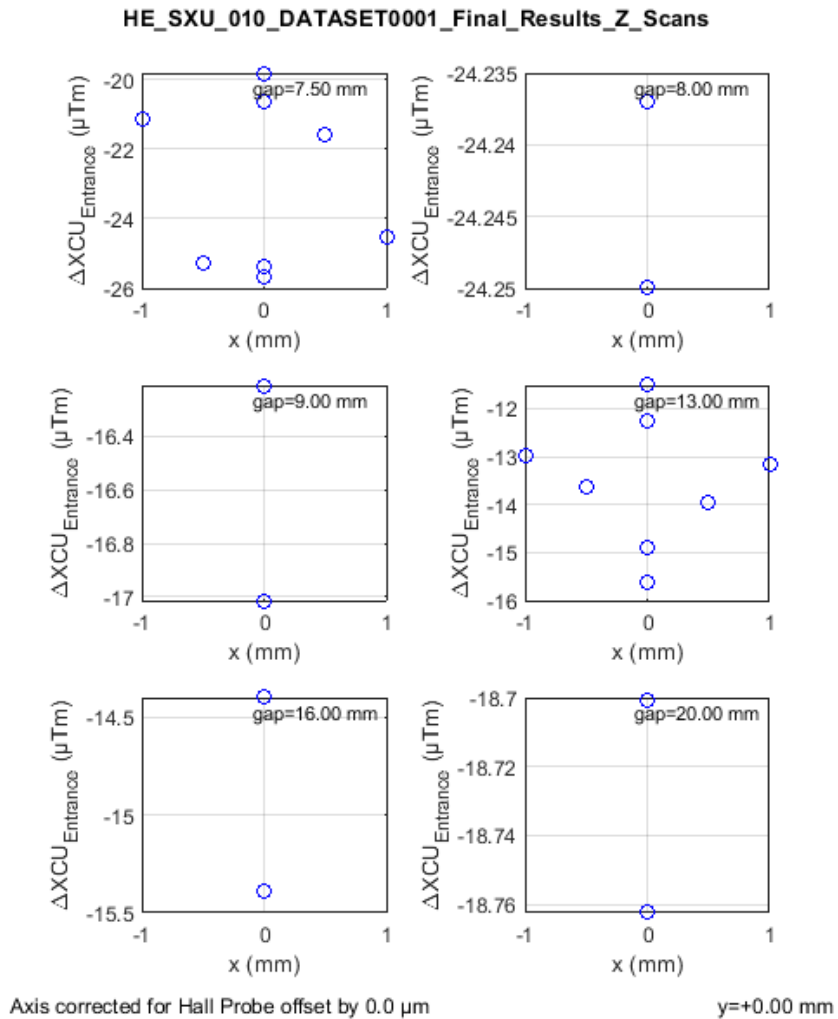

The figure shows the required strength of the upstream horizontal corrector to remove the second vertical undulator field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the x-z plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




**Estimated Downstream Horizontal Corrector Strength Requirement vs.  $x$**

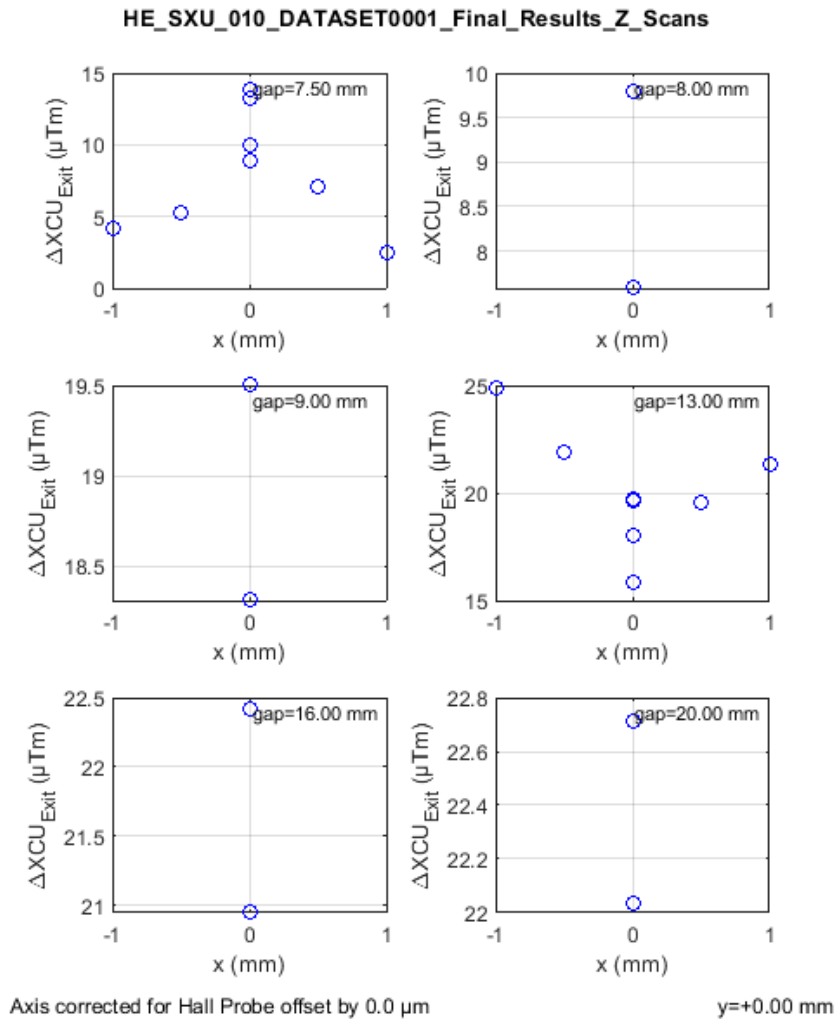

The figure shows the required strength of the downstream horizontal corrector to remove the first vertical undulator field integral and upstream corrector field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the x-z plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




**Estimated Upstream Horizontal Corrector Strength Requirement vs.  $y$**

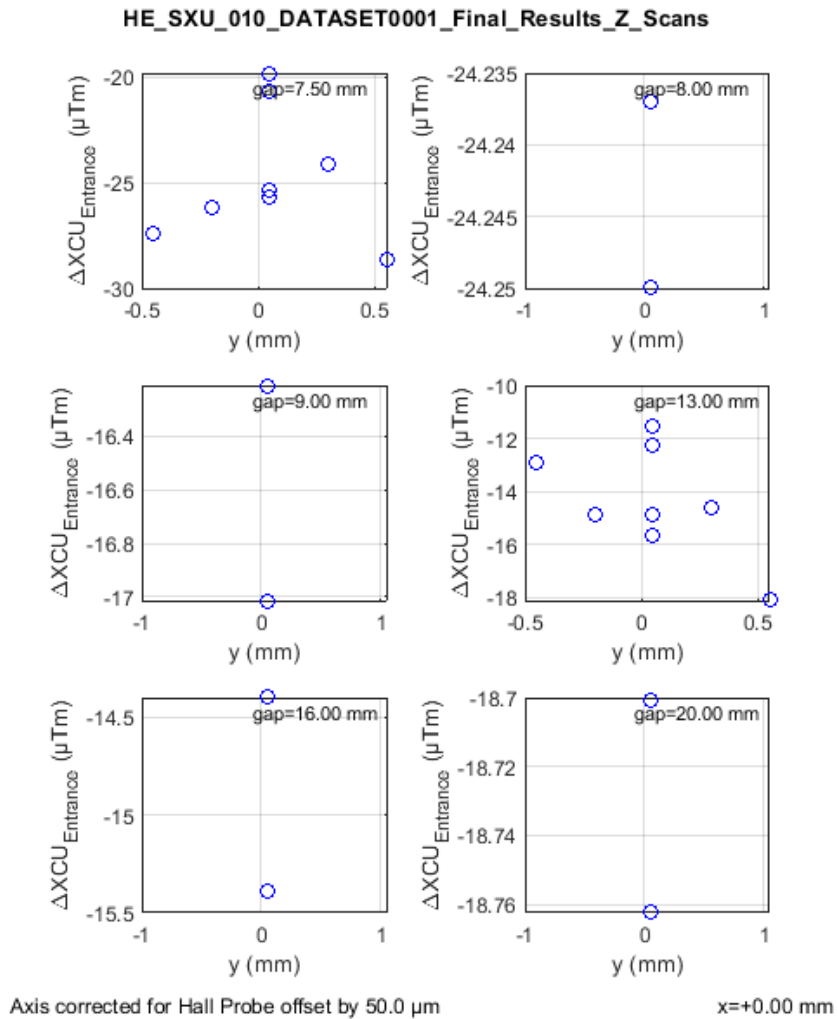

The figure shows the required strength of the upstream horizontal corrector to remove the second vertical undulator field integrals at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the  $y$ - $z$  plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




Estimated Downstream Horizontal Corrector Strength Requirement vs.  $y$

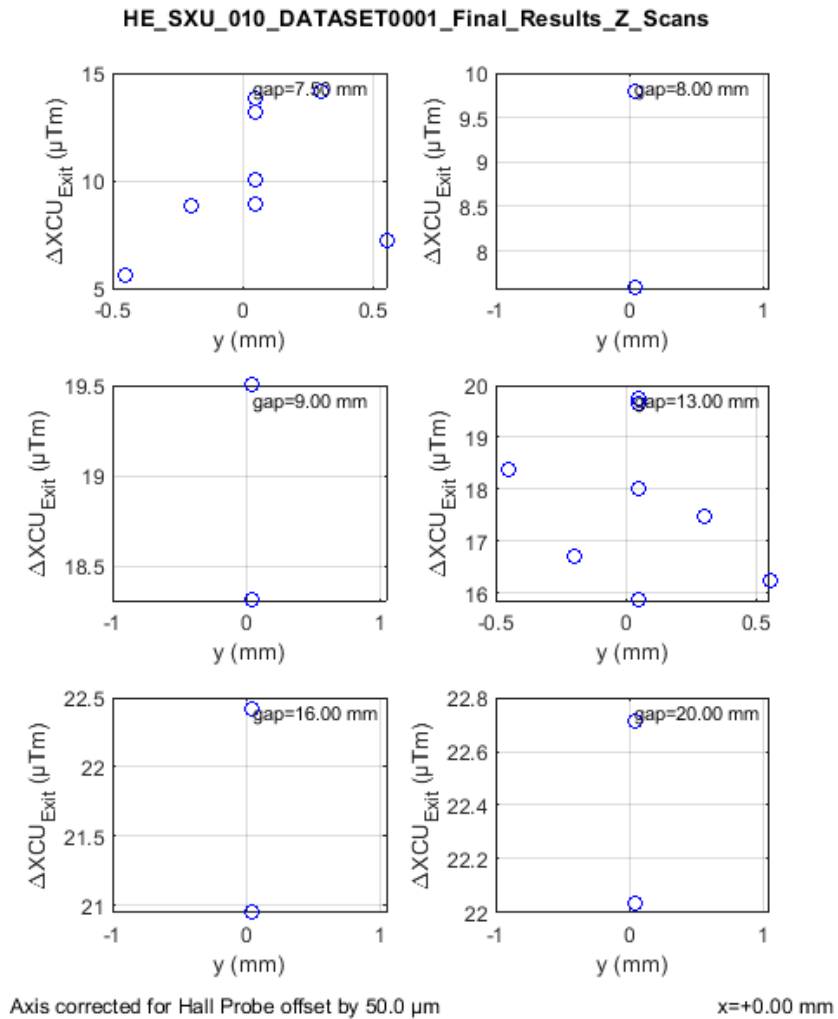

The figure shows the required strength of the upstream horizontal corrector to remove the first vertical undulator and upstream corrector field integrals at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the y-z plane. All values are small and well below the maximum correction amplitude of greater than 550  $\mu Tm$  capabilities of the actual correctors.




Estimated Upstream Vertical Corrector Strength Requirement vs.  $x$

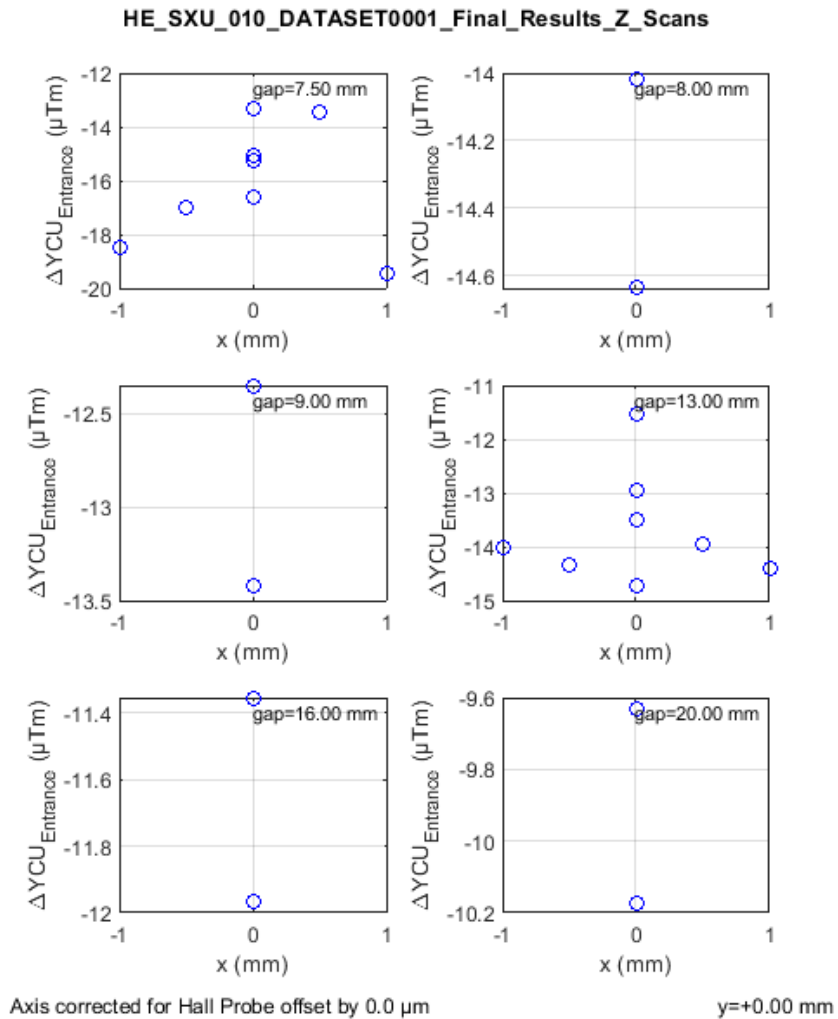

The figure shows the required strength of the upstream horizontal corrector to remove the second horizontal undulator field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the x-z plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




Estimated Downstream Vertical Corrector Strength Requirement vs.  $x$

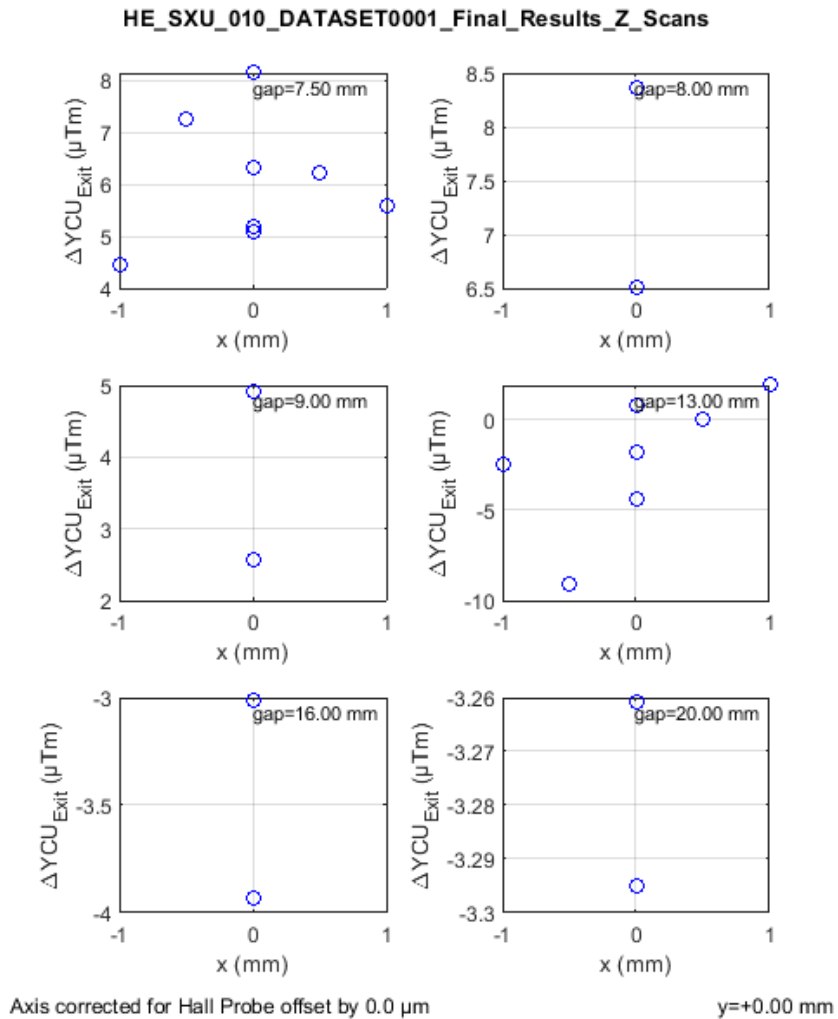

The figure shows the required strength of the downstream vertical corrector to remove the first horizontal undulator field integral and upstream corrector field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the x-z plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




Estimated Upstream Vertical Corrector Strength Requirement vs.  $y$

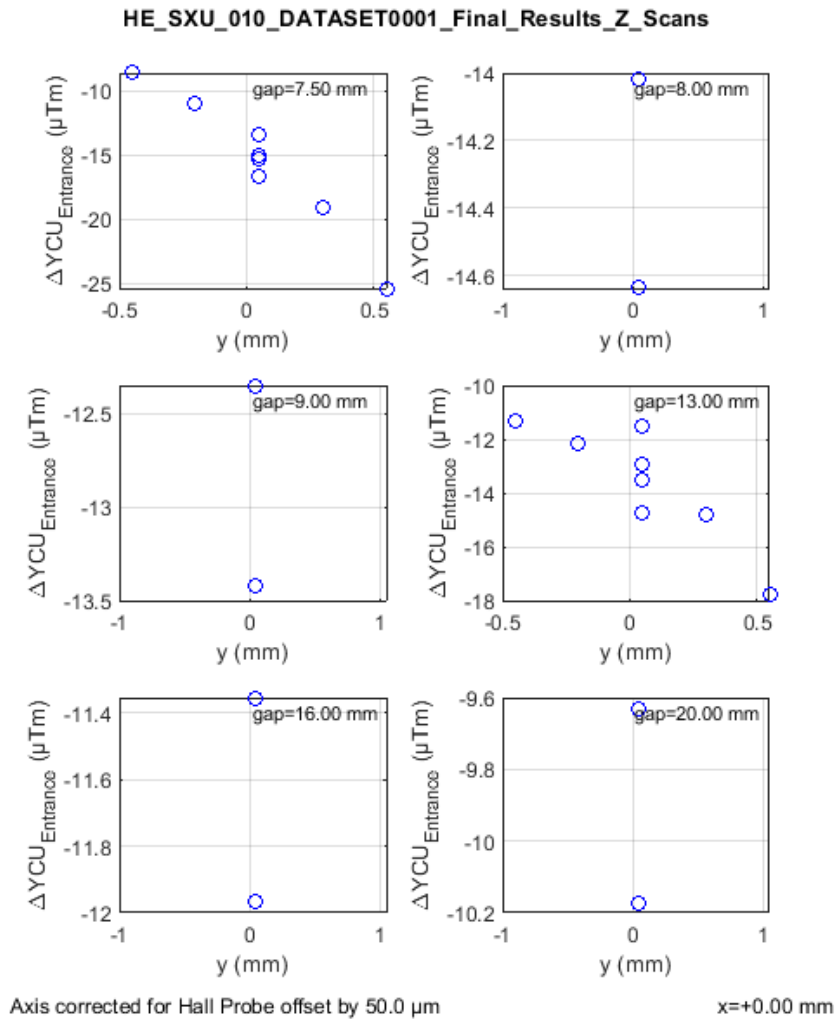

The figure shows the required strength of the upstream vertical corrector to remove the second horizontal undulator field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the  $y$ - $z$  plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




Estimated Downstream Vertical Corrector Strength Requirement vs.  $y$

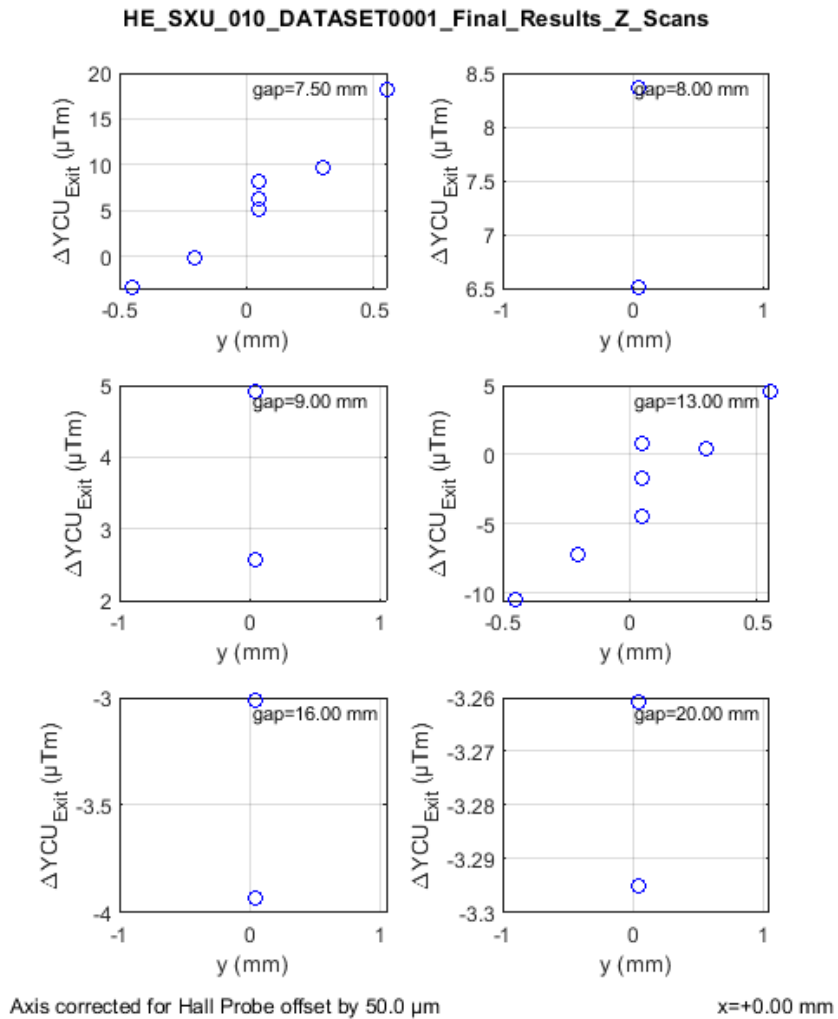

The figure shows the required strength of the downstream vertical corrector to remove the first horizontal undulator field integral and the upstream corrector field integral at the downstream BPM for a number of operational undulator gaps. The analysis was done at a number of off-axis locations in the y-z plane. All values are small and well below the maximum correction capabilities of greater than 550  $\mu Tm$  of the actual correctors.




Estimated Corrector Strengths Requirement vs. gap

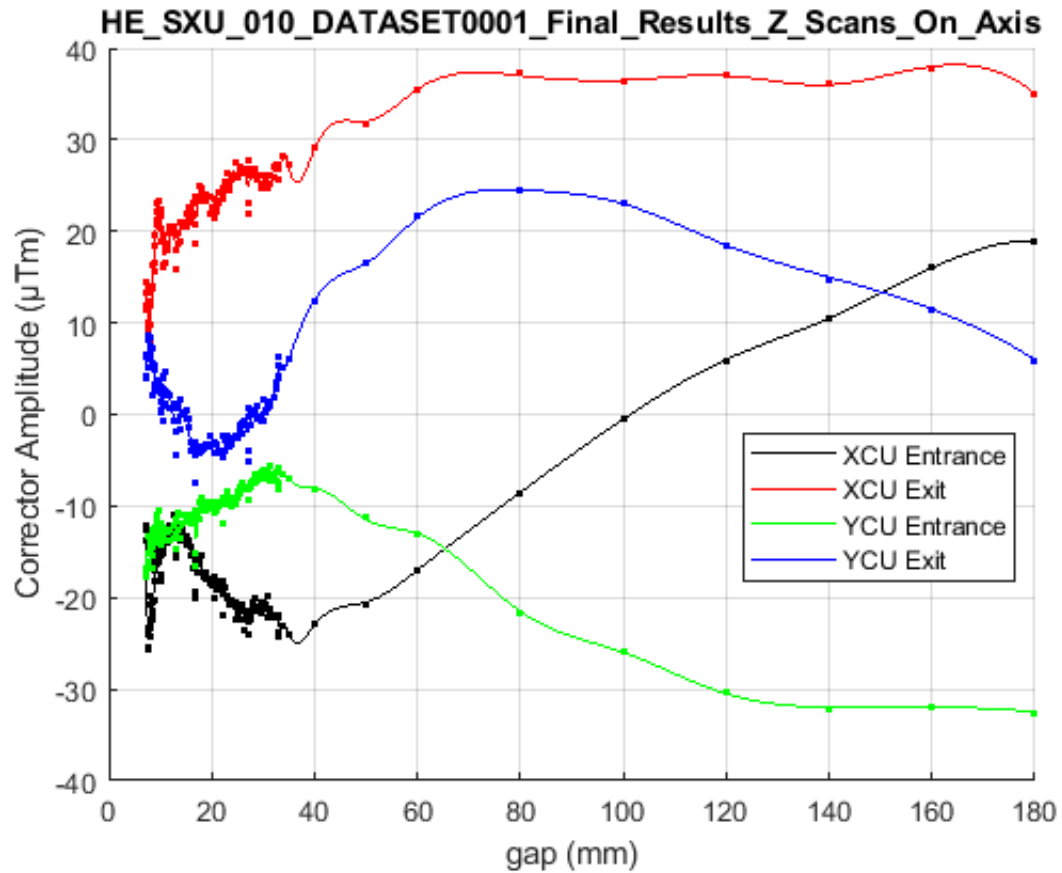

The figure shows as a function of undulator gap the required strengths of the upstream and downstream horizontal and vertical correctors to remove the effect of undulator field integrals at the downstream BPM over the entire available gap range. All values are small and well below the maximum correction capabilities of greater than 550  $\mu\text{Tm}$  of the actual correctors.



### Measured Undulator Entrance and Exit Phase Delays vs. gap

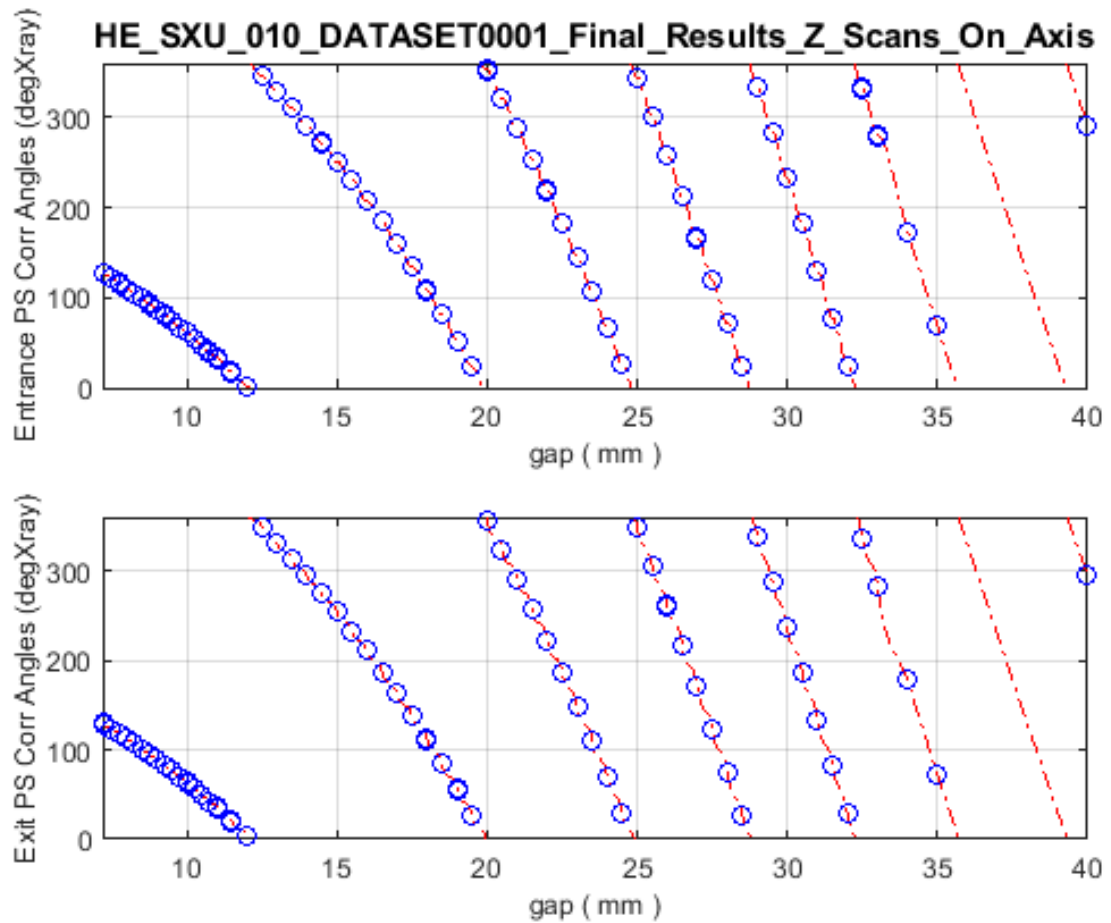


The two figures show, as a function of undulator gap, the phase delays generated by the undulator entrance and exit sections (as calculated by Eqs. 2 and 3 show on page 21), respectively, as red dash-dotted lines. The blue circles indicate MMF measurements.

Note: The break-ups of the function are just for fitting it into the 0 - 360 degXray range, they are not related to the phaseshifter resets needed during operations.



Measured Undulator Entrance and Exit Phase Delays vs.  $K_{\text{eff}}$

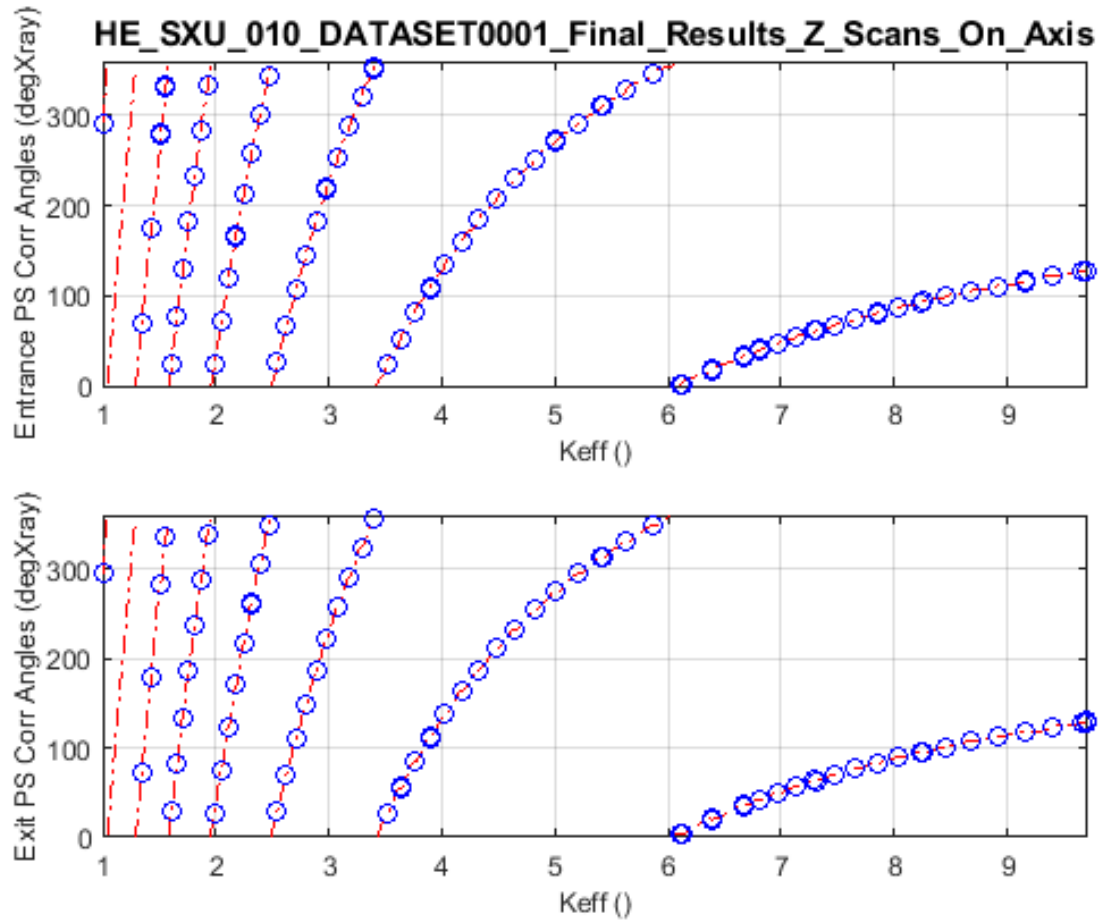


The two figures show, as a function of undulator parameter,  $K_{\text{eff}}$ , the phase delays generated by the undulator entrance and exit sections (as calculated by Eqs. 2 and 3 shown on page 21), respectively, as red dash-dotted lines. The blue circles indicate MMF measurements.

Note: The break-ups of the function are just for fitting it into the 0 - 360 degXray range, they are not related to the phaseshifter resets needed during operations.




Phase Integrals from Undulator Entrance and Exit Phase Delays vs. gap

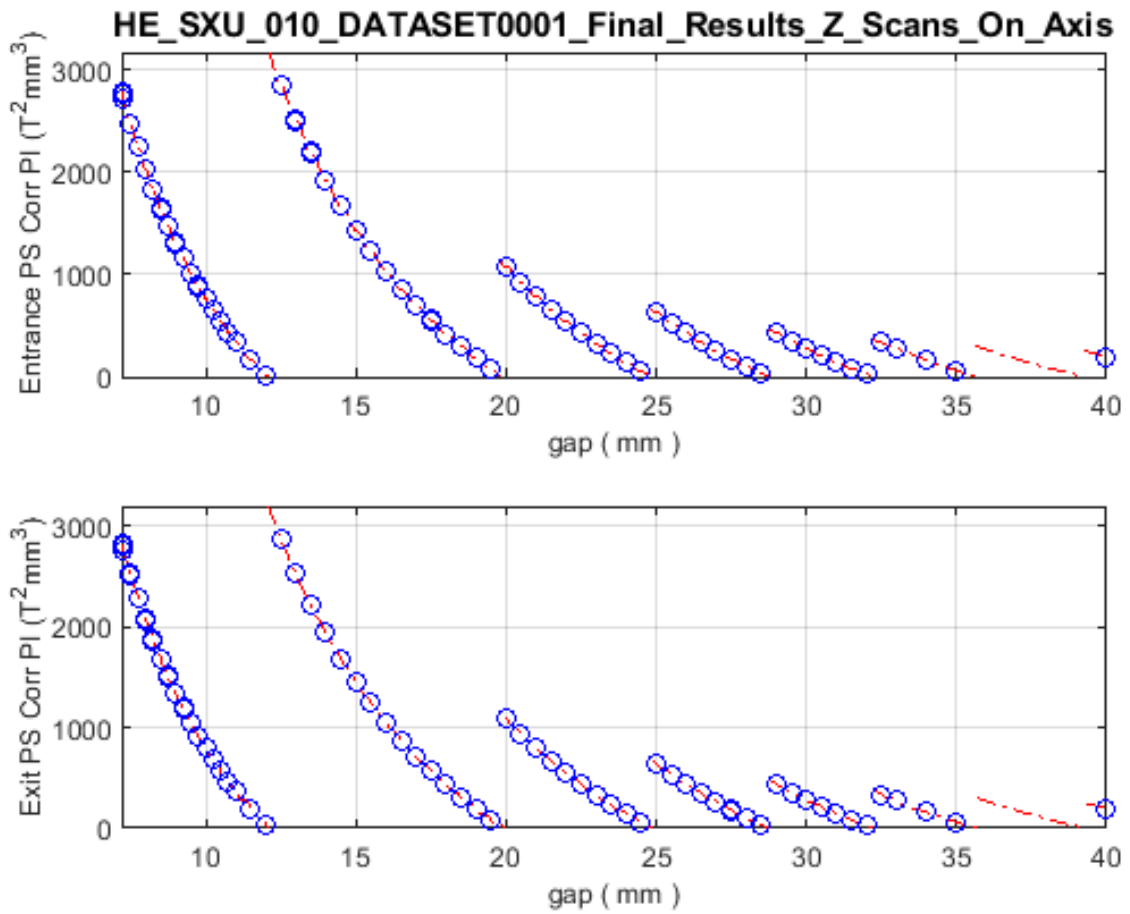

The two figures show, as a function of undulator gap, the phase integral ( $PI$ ) values corresponding to the phase delay angles shown in the figures on page 38. The red dash-dotted lines and the blue circles indicate MMF measurements corresponds to the same symbols in the figures on page 38.



Phase Integrals from Undulator Entrance and Exit Phase Delays vs.  $K_{eff}$

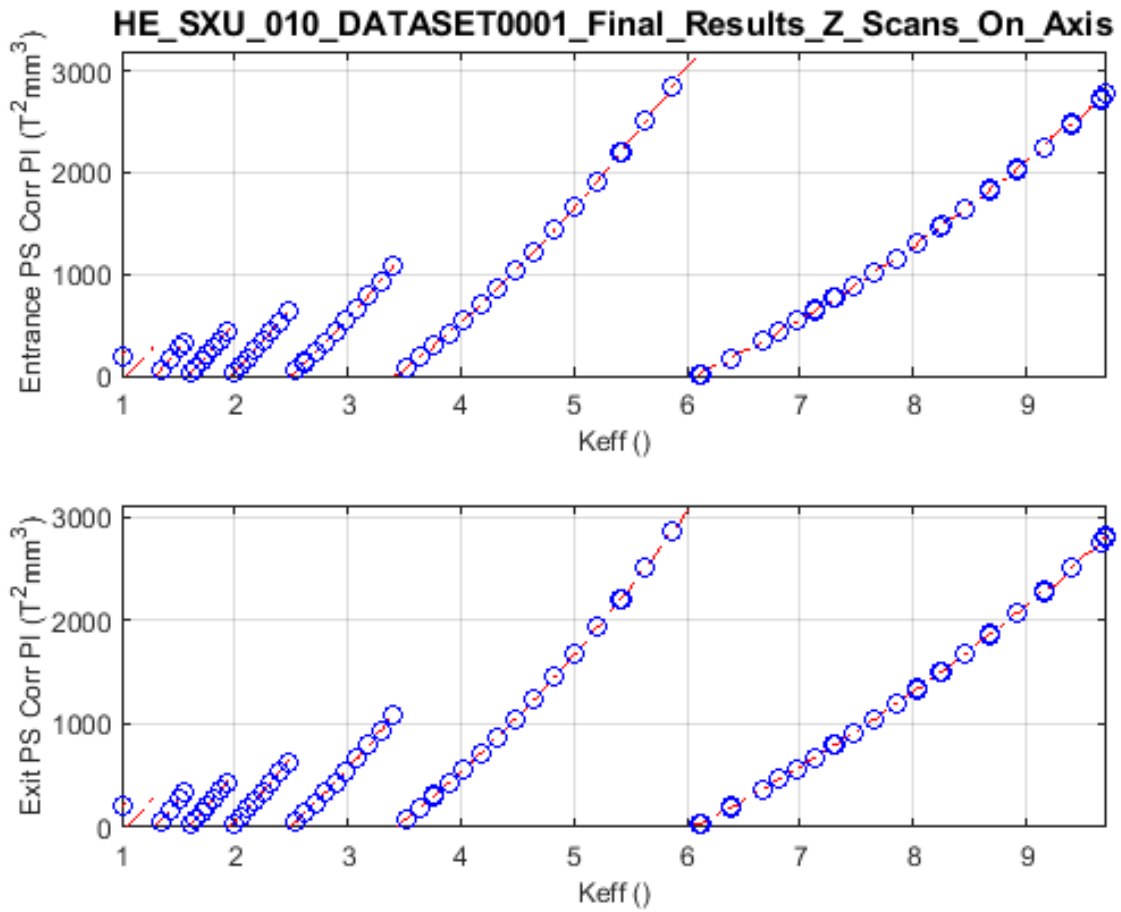


The two figures show, as a function of undulator  $K_{eff}$ , the phase integral ( $PI$ ) values corresponding to the phase delay angles shown in the figures on page 39. The red dash-dotted lines and the blue circles indicate MMF measurements corresponds to the same symbols in the figures on page 39.



Zero Taper Fit vs. gap

HE\_SXU.010\_DATASET0001\_Final\_Results\_Z\_Scans\_ZeroTaper  
Fitted Undulator Field Peaks for Various Undulator Gaps

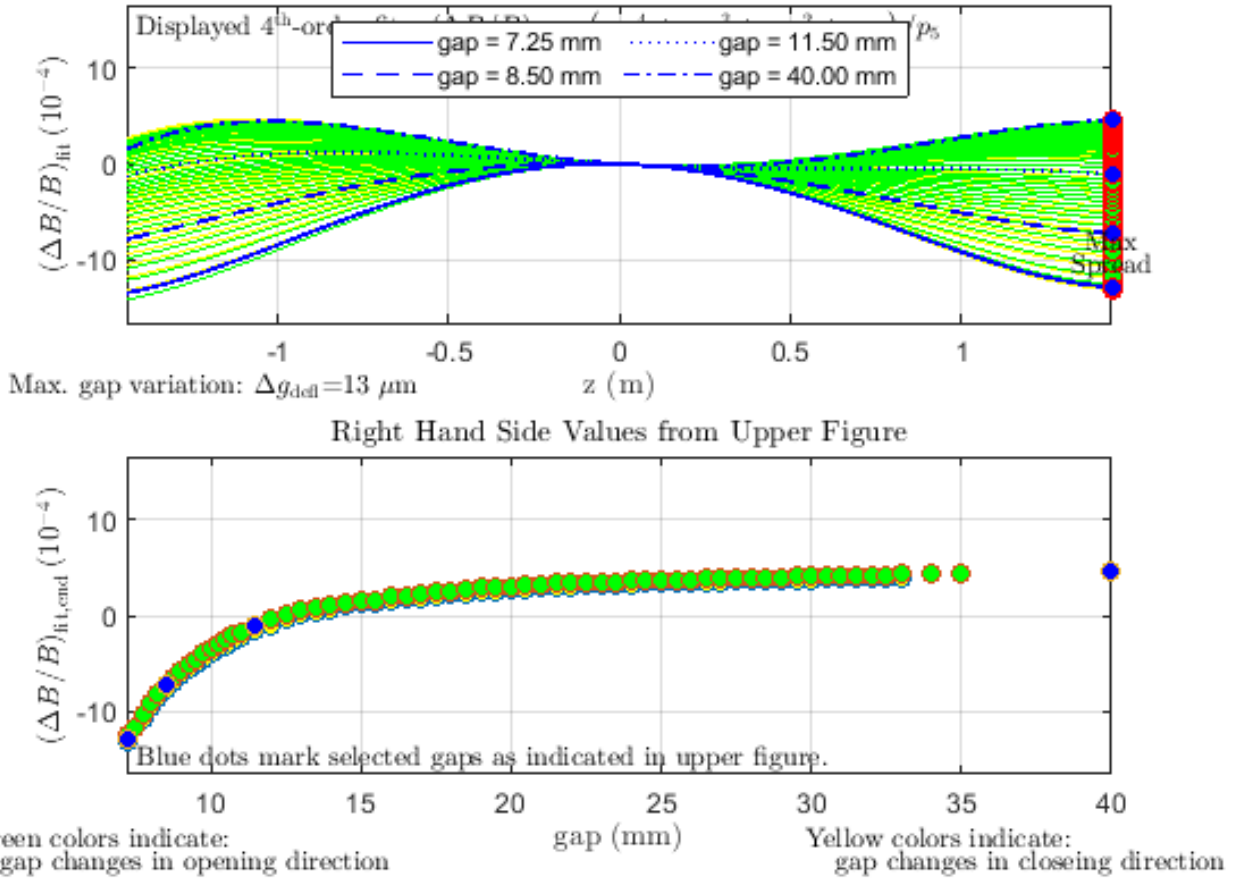


The top figure shows 4<sup>th</sup> order fits ( $B_{\text{fit}}(z) = p_1 \times z^4 + p_2 \times z^3 + p_3 \times z^2 + p_4 \times z + p_5$ ) to the absolute peak values,  $\hat{B}_u$ , for each core pole for different gaps when the device is set to zero taper. Plotted are  $B_{\text{fit}}(z)/p_5 - 1$ . Green curves indicate that the gap was approached from smaller gaps, while yellow curves indicate approach from larger gaps. The  $B_{\text{fit}}(z)/p_5 - 1$  value at the  $z$ -position, where the spread is largest is marked with a solid circle with the same color coding. The bottom figure shows the same solid circles as in the upper plot but this time plotted against the corresponding undulator gap values. As expected, the figures show that the undulator has a small 4<sup>th</sup> order taper that varies with gap. This could explain the phase shake dependence on gap as shown in an earlier figure (see page 20).




## Gap Tapering—Tapered $K_u$ Values

The SXU devices support a gap taper, which is controlled by the taper PV, which holds the difference between the upstream and downstream gap encoder readings measured in micro-meter. The taper can be varied over the  $\pm 300 \mu\text{m}$ -range.


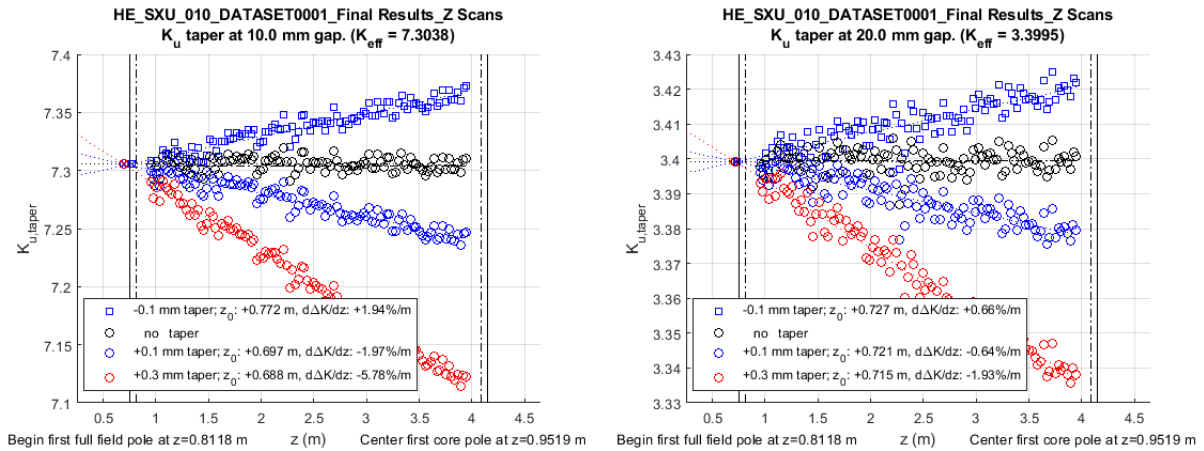


The figure shows  $K_u$ , taper for the 108 core poles based on Hall probe measurements versus  $z$  location for 4 different taper amplitudes ( $-100 \mu\text{m}$ ,  $0 \mu\text{m}$ ,  $+100 \mu\text{m}$ ,  $+300 \mu\text{m}$ ) and 2 different gaps (8 mm, 22 mm). The vertical dashed lines indicate the beginning of the first and the end of the last full field pole. The solid vertical lines indicate the longitudinal limits of the strongbacks. The crosses on the left hand side of the undulator segment border surrounded by the taper symbol for the representative taper amplitude indicate the intersections between linear fits to each of the tapered cases (indicated by dotted lines in the representative color) and the untapered case. The horizontal dash-dotted line next to the figure center (hard to see) indicated the level of  $K_{\text{eff}}$  of the untapered undulator. The taper operation for this segment is functional.

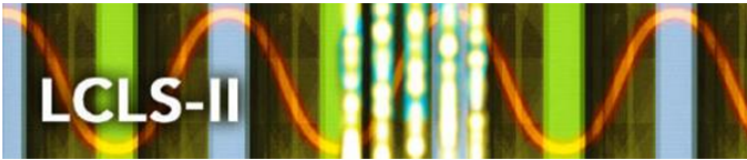

### Gap Tapering—Tapered $K_u$ Values


Generally, gap tapering will cause significant increases in the phase shake within the undulator segment. If however during high gain FEL operation the electrons loose significant amounts of energy, a matching gap taper can reduce the total phase shake to stay within the original parallel gap phase shake tolerance for constant energy.

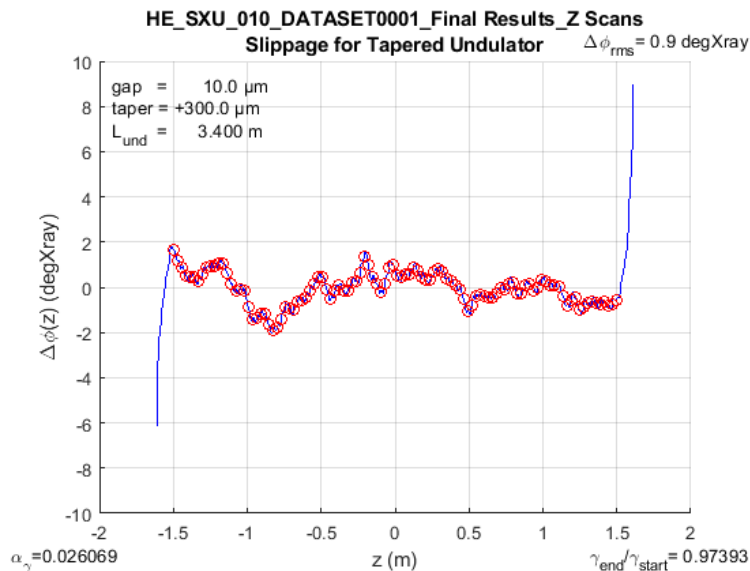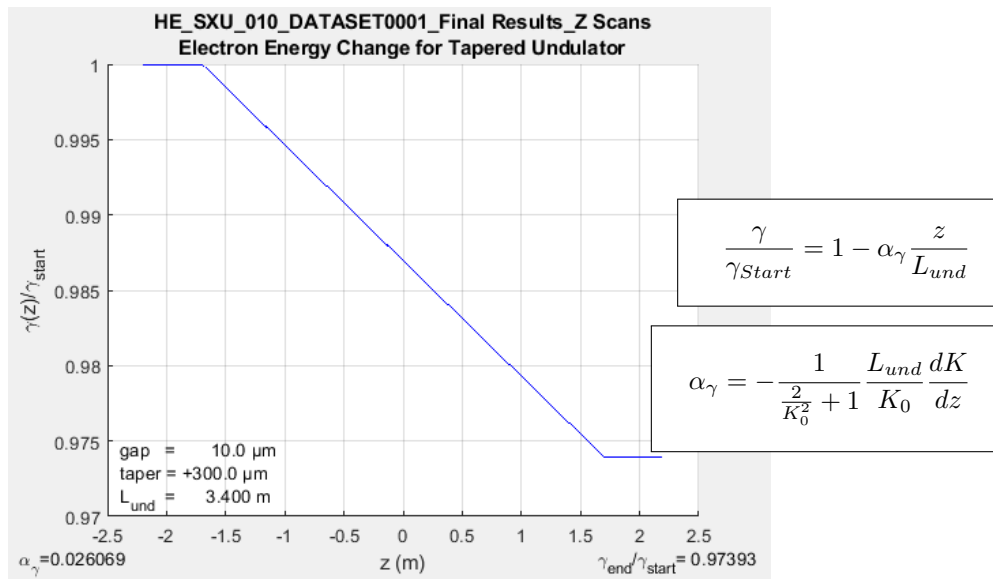

The upper figure shows a simplified linear energy loss function (Lorentz factor  $\gamma/\gamma_{Start}$ ) optimized for the 0.3 mm gap taper at a 10 mm nominal gap. The lower figure shows the phase error along the undulator segment for the same parameters.




Touch Probe (TP) Analysis — Per pole gap vs. per pole  $K$  (untapered)

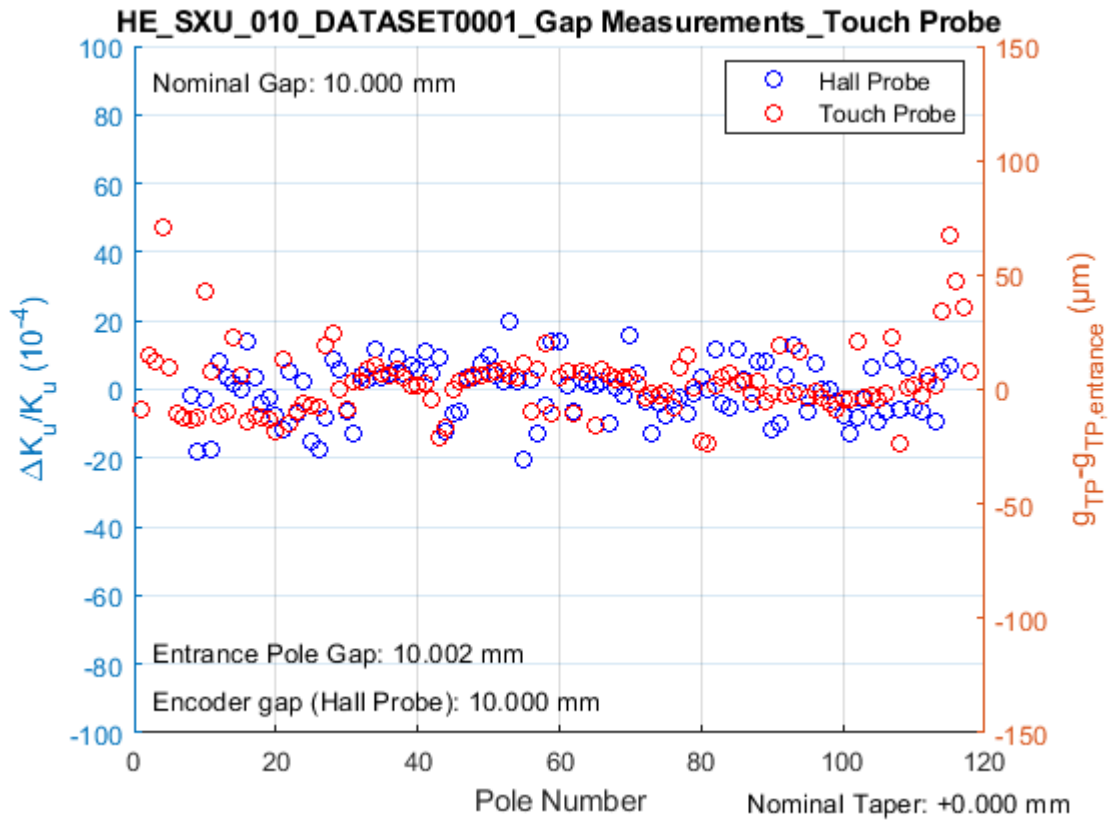


The figure shows  $\Delta K/K$  (blue, left axis) (for the 108 core poles) as well as mechanical gap heights ( $\langle g_{TP} \rangle - g_{TP}$ ) (red, right axis) (for all 122 poles) based on touch probe measurements versus pole number. The large amplitude outliers are the result of tuning.




Touch Probe (TP) Analysis —  $K$  vs. per pole gap (untapered)

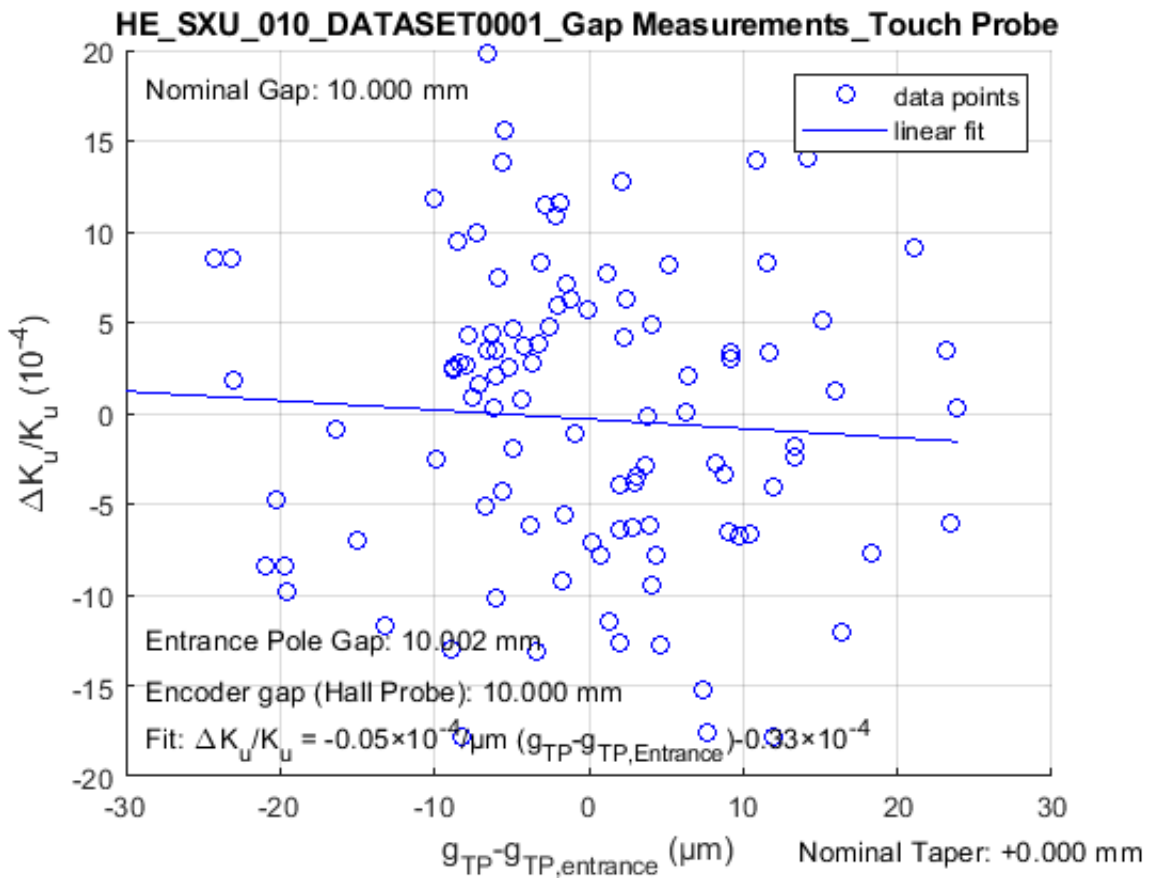


The figure shows the correlation between the  $\Delta K_u/K_u$  for each pole from Hall probe measurements for the tuning gap and the deviation of the pole gap measured by the touch probe relative to its average (for the 108 core poles). The average gap measured with the touch probe and the one measured with the gap encoder are shown in the lower left corner of the figure. Also shown is the fit function.

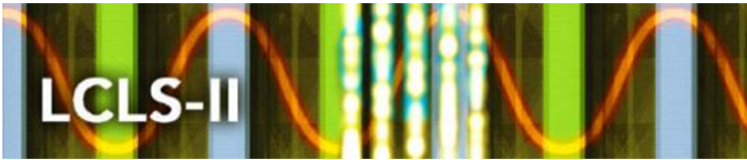


Touch Probe (TP) Analysis — Pole Cant Angles (untapered)

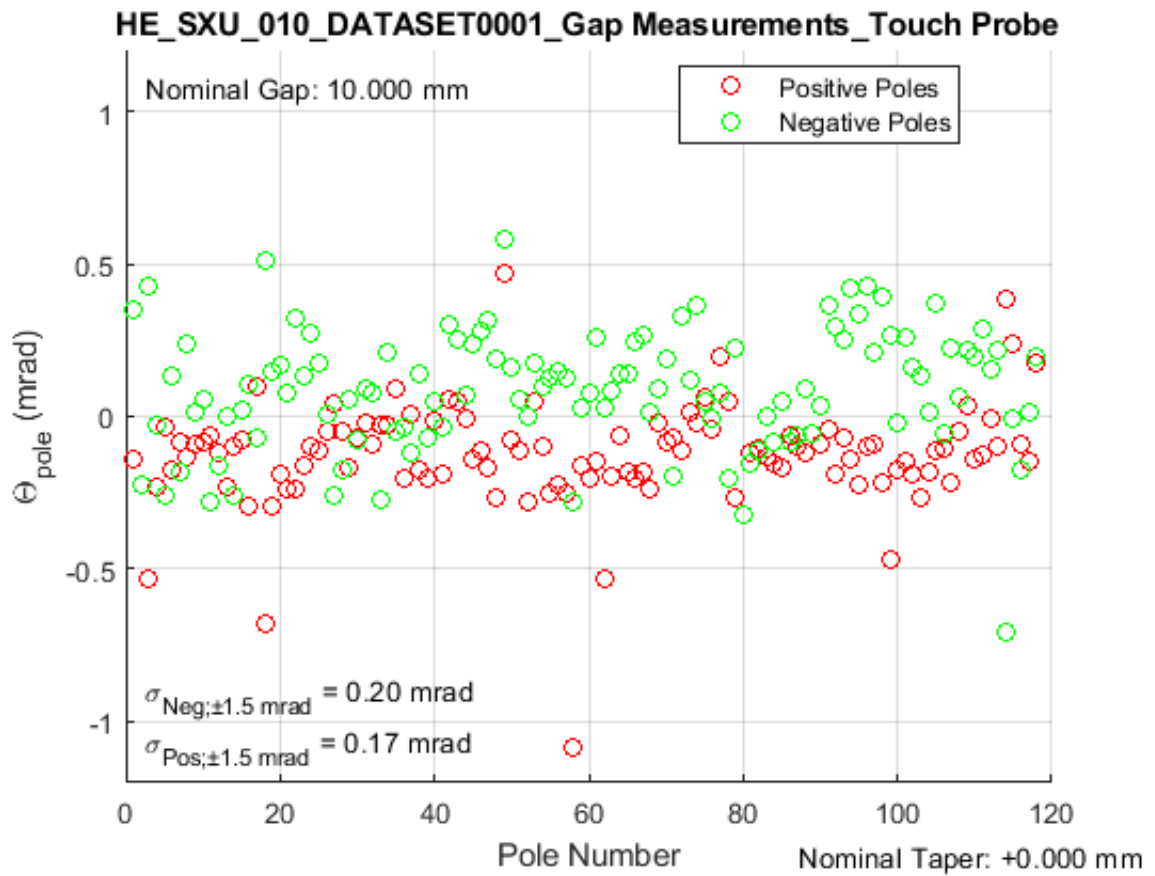

The figure shows the cant angles of each pole (top red, bottom green) relative to the horizontal plane defined by the Kugler bench at the Tuning Gap for all 122 poles, measured by the touch probe. The rms width of each distribution within a  $\pm 1.5$  mrad band is shown in the lower left corner of the figure.

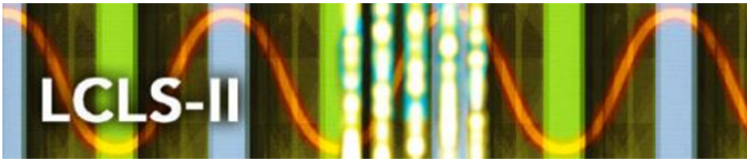


Touch Probe (TP) Analysis — Gap Cant Angles (untapered)

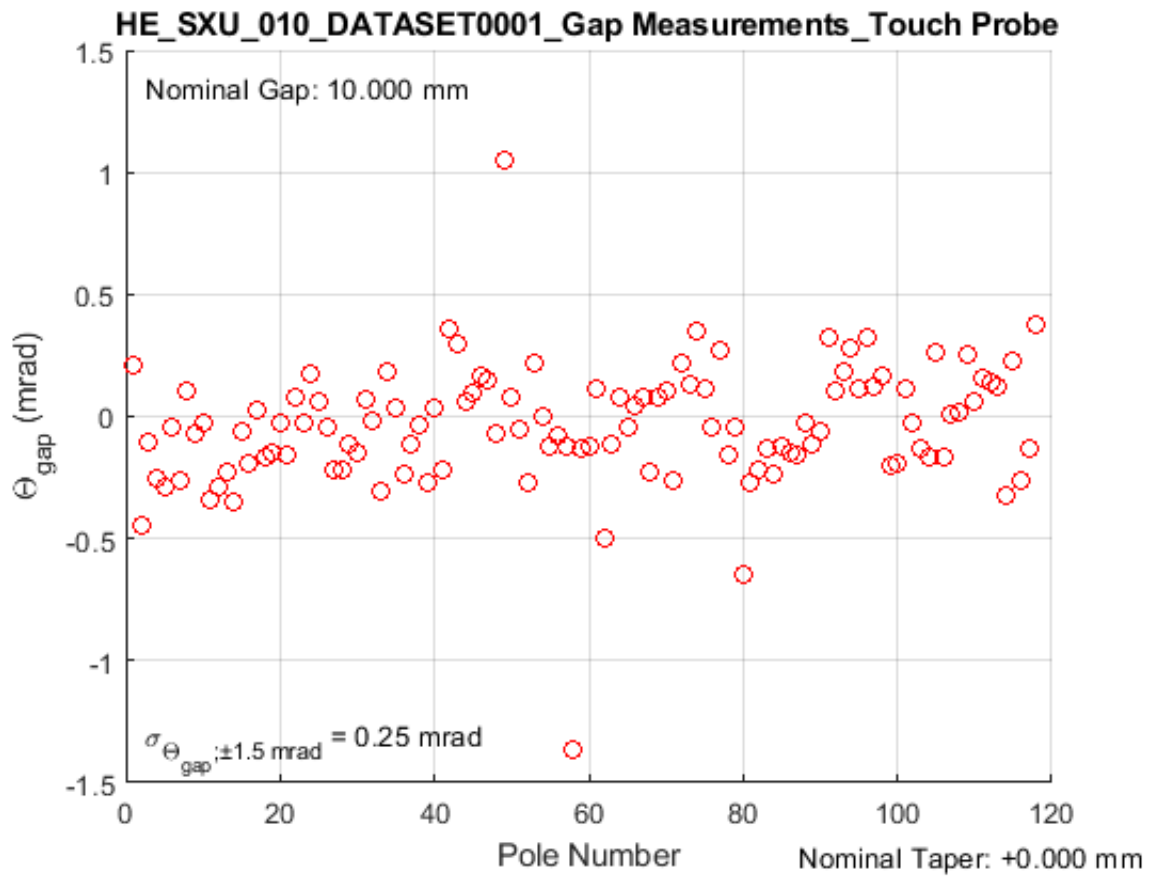

The figure shows the cant angles between the top and bottom part of each pole at the Tuning Gap for all 122 poles, measured by the touch probe. The rms width of each distribution within a  $\pm 1.5$  mrad band is shown in the lower left corner of the figure.



Touch Probe (TP) Analysis — Pole Heights (untapered)

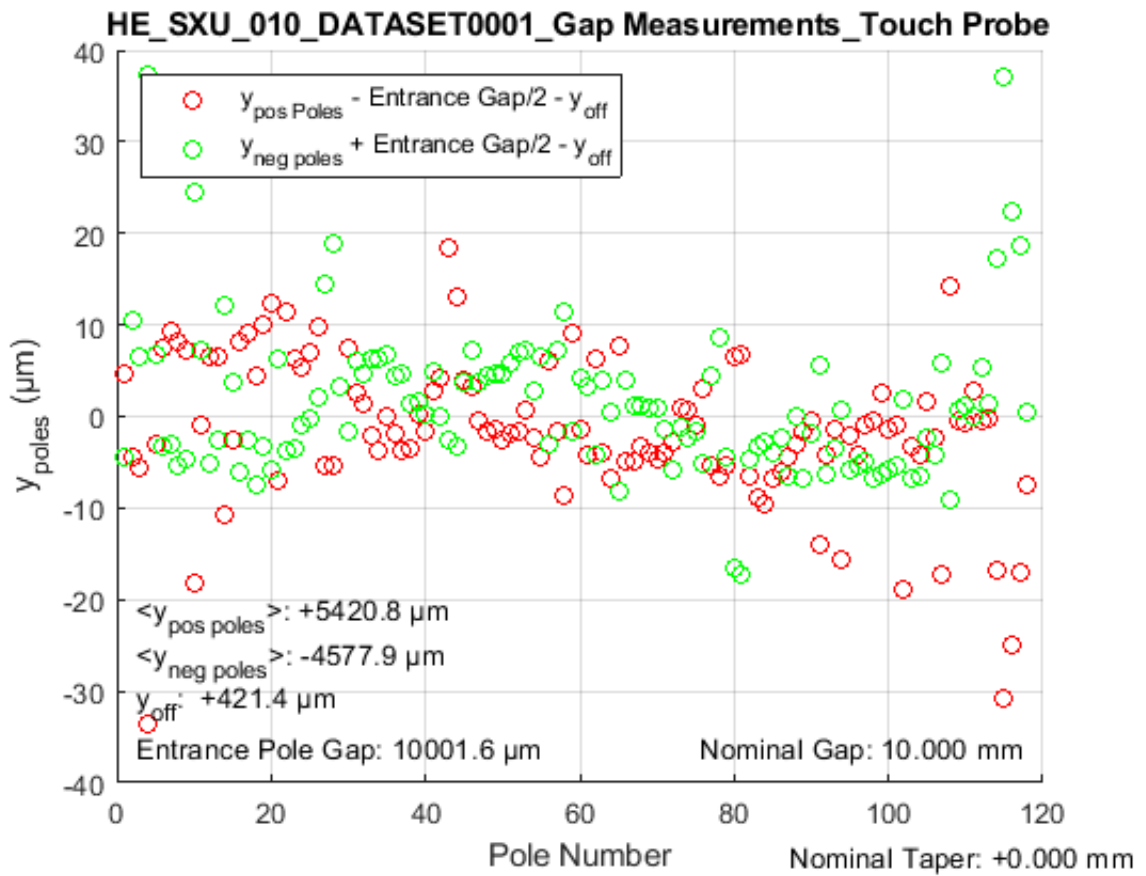

The figure shows the relative vertical positions of the center of each pole (top red, bottom green) relative to the horizontal plane defined by the Kugler bench at the Tuning Gap for all 122 poles, measured by the touch probe.



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU\_010

## Measurement Results are stored:

### At V-Drive:

V:\MET\MagServe\MagData\LCLS-II-HE\Undulator\  
 \_\_\_\_\_

### In Folder

HE\_SXU\_010\DATASET0001\Final Results\  
 \_\_\_\_\_

## Confirmation of File Locations:

The following tables list all required data files documenting the calibration results. An existence check was done and the result is indicated next to each filename as “exists” or “missing”.

Sub folder: **Z Scans\Good Field Region**      **exists**

005gap007.500x-01.00y+00.00\zscan.dat	exists
004gap007.500x-00.50y+00.00\zscan.dat	exists
003gap007.500x+00.00y+00.00\zscan.dat	exists
002gap007.500x+00.50y+00.00\zscan.dat	exists
001gap007.500x+01.00y+00.00\zscan.dat	exists
006gap007.500x+00.00y-00.50\zscan.dat	exists
007gap007.500x+00.00y-00.25\zscan.dat	exists
009gap007.500x+00.00y+00.25\zscan.dat	exists
010gap007.500x+00.00y+00.50\zscan.dat	exists
015gap008.500x-01.00y+00.00\zscan.dat	exists
014gap008.500x-00.50y+00.00\zscan.dat	exists
013gap008.500x+00.00y+00.00\zscan.dat	exists
012gap008.500x+00.50y+00.00\zscan.dat	exists
011gap008.500x+01.00y+00.00\zscan.dat	exists
016gap008.500x+00.00y-00.50\zscan.dat	exists
017gap008.500x+00.00y-00.25\zscan.dat	exists
019gap008.500x+00.00y+00.25\zscan.dat	exists
020gap008.500x+00.00y+00.50\zscan.dat	exists
025gap010.000x-01.00y+00.00\zscan.dat	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

024gap010.000x-00.50y+00.00\zscan.dat	exists
023gap010.000x+00.00y+00.00\zscan.dat	exists
022gap010.000x+00.50y+00.00\zscan.dat	exists
021gap010.000x+01.00y+00.00\zscan.dat	exists
026gap010.000x+00.00y-00.50\zscan.dat	exists
027gap010.000x+00.00y-00.25\zscan.dat	exists
029gap010.000x+00.00y+00.25\zscan.dat	exists
030gap010.000x+00.00y+00.50\zscan.dat	exists
035gap013.000x-01.00y+00.00\zscan.dat	exists
034gap013.000x-00.50y+00.00\zscan.dat	exists
033gap013.000x+00.00y+00.00\zscan.dat	exists
032gap013.000x+00.50y+00.00\zscan.dat	exists
031gap013.000x+01.00y+00.00\zscan.dat	exists
036gap013.000x+00.00y-00.50\zscan.dat	exists
037gap013.000x+00.00y-00.25\zscan.dat	exists
039gap013.000x+00.00y+00.25\zscan.dat	exists
040gap013.000x+00.00y+00.50\zscan.dat	exists
045gap017.000x-01.00y+00.00\zscan.dat	exists
044gap017.000x-00.50y+00.00\zscan.dat	exists
043gap017.000x+00.00y+00.00\zscan.dat	exists
042gap017.000x+00.50y+00.00\zscan.dat	exists
041gap017.000x+01.00y+00.00\zscan.dat	exists
046gap017.000x+00.00y-00.50\zscan.dat	exists
047gap017.000x+00.00y-00.25\zscan.dat	exists
049gap017.000x+00.00y+00.25\zscan.dat	exists
050gap017.000x+00.00y+00.50\zscan.dat	exists
055gap022.000x-01.00y+00.00\zscan.dat	exists
054gap022.000x-00.50y+00.00\zscan.dat	exists
053gap022.000x+00.00y+00.00\zscan.dat	exists
052gap022.000x+00.50y+00.00\zscan.dat	exists
051gap022.000x+01.00y+00.00\zscan.dat	exists
056gap022.000x+00.00y-00.50\zscan.dat	exists
057gap022.000x+00.00y-00.25\zscan.dat	exists
059gap022.000x+00.00y+00.25\zscan.dat	exists
060gap022.000x+00.00y+00.50\zscan.dat	exists
065gap027.000x-01.00y+00.00\zscan.dat	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

064gap027.000x-00.50y+00.00\zscan.dat	exists
063gap027.000x+00.00y+00.00\zscan.dat	exists
062gap027.000x+00.50y+00.00\zscan.dat	exists
061gap027.000x+01.00y+00.00\zscan.dat	exists
066gap027.000x+00.00y-00.50\zscan.dat	exists
067gap027.000x+00.00y-00.25\zscan.dat	exists
069gap027.000x+00.00y+00.25\zscan.dat	exists
070gap027.000x+00.00y+00.50\zscan.dat	exists
075gap033.000x-01.00y+00.00\zscan.dat	exists
074gap033.000x-00.50y+00.00\zscan.dat	exists
073gap033.000x+00.00y+00.00\zscan.dat	exists
072gap033.000x+00.50y+00.00\zscan.dat	exists
071gap033.000x+01.00y+00.00\zscan.dat	exists
076gap033.000x+00.00y-00.50\zscan.dat	exists
077gap033.000x+00.00y-00.25\zscan.dat	exists
079gap033.000x+00.00y+00.25\zscan.dat	exists
080gap033.000x+00.00y+00.50\zscan.dat	exists

Sub folder: Z Scans\On Axis exists

001gap007.200x+00.00y+00.00\zscan.dat	exists
002gap007.250x+00.00y+00.00\zscan.dat	exists
003gap007.500x+00.00y+00.00\zscan.dat	exists
004gap007.750x+00.00y+00.00\zscan.dat	exists
005gap008.000x+00.00y+00.00\zscan.dat	exists
006gap008.250x+00.00y+00.00\zscan.dat	exists
007gap008.500x+00.00y+00.00\zscan.dat	exists
008gap008.750x+00.00y+00.00\zscan.dat	exists
009gap009.000x+00.00y+00.00\zscan.dat	exists
010gap009.250x+00.00y+00.00\zscan.dat	exists
011gap009.500x+00.00y+00.00\zscan.dat	exists
012gap009.750x+00.00y+00.00\zscan.dat	exists
013gap010.000x+00.00y+00.00\zscan.dat	exists
014gap010.250x+00.00y+00.00\zscan.dat	exists
015gap010.500x+00.00y+00.00\zscan.dat	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

016gap010.750x+00.00y+00.00\zscan.dat	exists
017gap011.000x+00.00y+00.00\zscan.dat	exists
018gap011.500x+00.00y+00.00\zscan.dat	exists
019gap012.000x+00.00y+00.00\zscan.dat	exists
020gap012.500x+00.00y+00.00\zscan.dat	exists
021gap013.000x+00.00y+00.00\zscan.dat	exists
022gap013.500x+00.00y+00.00\zscan.dat	exists
023gap014.000x+00.00y+00.00\zscan.dat	exists
024gap014.500x+00.00y+00.00\zscan.dat	exists
025gap015.000x+00.00y+00.00\zscan.dat	exists
026gap015.500x+00.00y+00.00\zscan.dat	exists
027gap016.000x+00.00y+00.00\zscan.dat	exists
028gap016.500x+00.00y+00.00\zscan.dat	exists
029gap017.000x+00.00y+00.00\zscan.dat	exists
030gap017.500x+00.00y+00.00\zscan.dat	exists
031gap018.000x+00.00y+00.00\zscan.dat	exists
032gap018.500x+00.00y+00.00\zscan.dat	exists
033gap019.000x+00.00y+00.00\zscan.dat	exists
034gap019.500x+00.00y+00.00\zscan.dat	exists
035gap020.000x+00.00y+00.00\zscan.dat	exists
036gap020.500x+00.00y+00.00\zscan.dat	exists
037gap021.000x+00.00y+00.00\zscan.dat	exists
038gap021.500x+00.00y+00.00\zscan.dat	exists
039gap022.000x+00.00y+00.00\zscan.dat	exists
040gap022.500x+00.00y+00.00\zscan.dat	exists
041gap023.000x+00.00y+00.00\zscan.dat	exists
042gap023.500x+00.00y+00.00\zscan.dat	exists
043gap024.000x+00.00y+00.00\zscan.dat	exists
044gap024.500x+00.00y+00.00\zscan.dat	exists
045gap025.000x+00.00y+00.00\zscan.dat	exists
046gap025.500x+00.00y+00.00\zscan.dat	exists
047gap026.000x+00.00y+00.00\zscan.dat	exists
048gap026.500x+00.00y+00.00\zscan.dat	exists
049gap027.000x+00.00y+00.00\zscan.dat	exists
050gap027.500x+00.00y+00.00\zscan.dat	exists
051gap028.000x+00.00y+00.00\zscan.dat	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

052gap028.500x+00.00y+00.00\zscan.dat	exists
053gap029.000x+00.00y+00.00\zscan.dat	exists
054gap029.500x+00.00y+00.00\zscan.dat	exists
055gap030.000x+00.00y+00.00\zscan.dat	exists
056gap030.500x+00.00y+00.00\zscan.dat	exists
057gap031.000x+00.00y+00.00\zscan.dat	exists
058gap031.500x+00.00y+00.00\zscan.dat	exists
059gap032.000x+00.00y+00.00\zscan.dat	exists
061gap033.000x+00.00y+00.00\zscan.dat	exists
063gap035.000x+00.00y+00.00\zscan.dat	exists
055gap030.000x+00.00y+00.00\zscan.dat	exists
064gap040.000x+00.00y+00.00\zscan.dat	exists
065gap050.000x+00.00y+00.00\zscan.dat	exists
066gap060.000x+00.00y+00.00\zscan.dat	exists
067gap080.000x+00.00y+00.00\zscan.dat	exists
068gap100.000x+00.00y+00.00\zscan.dat	exists
069gap120.000x+00.00y+00.00\zscan.dat	exists
070gap140.000x+00.00y+00.00\zscan.dat	exists
071gap160.000x+00.00y+00.00\zscan.dat	exists
072gap180.000x+00.00y+00.00\zscan.dat	exists

Sub folder: Z Scans\Commissioning Gap exists

001gap012.077x+00.00y+00.00\zscan.dat	exists
---------------------------------------	--------

Sub folder: Z Scans\Gap with taper exists

005gap010.000taper-0.100x+00.00y+00.00\zscan.dat	exists
007gap010.000taper+0.000x+00.00y+00.00\zscan.dat	exists
001gap010.000taper+0.100x+00.00y+00.00\zscan.dat	exists
003gap010.000taper+0.300x+00.00y+00.00\zscan.dat	exists
006gap020.000taper-0.100x+00.00y+00.00\zscan.dat	exists
008gap020.000taper+0.000x+00.00y+00.00\zscan.dat	exists
002gap020.000taper+0.100x+00.00y+00.00\zscan.dat	exists
004gap020.000taper+0.300x+00.00y+00.00\zscan.dat	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

Sub folder: Long Coil exists

Sub folder: Long Coil\Good Field Region exists

integrals_summary.txt	exists
015gap007.500x-01.00y+00.00.i1X.integrals.txt	exists
014gap007.500x-00.50y+00.00.i1X.integrals.txt	exists
013gap007.500x+00.00y+00.00.i1X.integrals.txt	exists
012gap007.500x+00.50y+00.00.i1X.integrals.txt	exists
011gap007.500x+01.00y+00.00.i1X.integrals.txt	exists
031gap007.500x+00.00y-01.00.i1X.integrals.txt	exists
035gap007.500x+00.00y+01.00.i1X.integrals.txt	exists
055gap008.500x-01.00y+00.00.i1X.integrals.txt	exists
054gap008.500x-00.50y+00.00.i1X.integrals.txt	exists
053gap008.500x+00.00y+00.00.i1X.integrals.txt	exists
052gap008.500x+00.50y+00.00.i1X.integrals.txt	exists
051gap008.500x+01.00y+00.00.i1X.integrals.txt	exists
071gap008.500x+00.00y-01.00.i1X.integrals.txt	exists
075gap008.500x+00.00y+01.00.i1X.integrals.txt	exists
095gap010.000x-01.00y+00.00.i1X.integrals.txt	exists
094gap010.000x-00.50y+00.00.i1X.integrals.txt	exists
093gap010.000x+00.00y+00.00.i1X.integrals.txt	exists
092gap010.000x+00.50y+00.00.i1X.integrals.txt	exists
091gap010.000x+01.00y+00.00.i1X.integrals.txt	exists
111gap010.000x+00.00y-01.00.i1X.integrals.txt	exists
115gap010.000x+00.00y+01.00.i1X.integrals.txt	exists
135gap013.000x-01.00y+00.00.i1X.integrals.txt	exists
134gap013.000x-00.50y+00.00.i1X.integrals.txt	exists
133gap013.000x+00.00y+00.00.i1X.integrals.txt	exists
132gap013.000x+00.50y+00.00.i1X.integrals.txt	exists
131gap013.000x+01.00y+00.00.i1X.integrals.txt	exists
151gap013.000x+00.00y-01.00.i1X.integrals.txt	exists
155gap013.000x+00.00y+01.00.i1X.integrals.txt	exists
175gap017.000x-01.00y+00.00.i1X.integrals.txt	exists
174gap017.000x-00.50y+00.00.i1X.integrals.txt	exists
173gap017.000x+00.00y+00.00.i1X.integrals.txt	exists
172gap017.000x+00.50y+00.00.i1X.integrals.txt	exists




LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

171gap017.000x+01.00y+00.00.i1X.integrals.txt	exists
191gap017.000x+00.00y-01.00.i1X.integrals.txt	exists
195gap017.000x+00.00y+01.00.i1X.integrals.txt	exists
215gap022.000x-01.00y+00.00.i1X.integrals.txt	exists
214gap022.000x-00.50y+00.00.i1X.integrals.txt	exists
213gap022.000x+00.00y+00.00.i1X.integrals.txt	exists
212gap022.000x+00.50y+00.00.i1X.integrals.txt	exists
211gap022.000x+01.00y+00.00.i1X.integrals.txt	exists
231gap022.000x+00.00y-01.00.i1X.integrals.txt	exists
235gap022.000x+00.00y+01.00.i1X.integrals.txt	exists
255gap027.000x-01.00y+00.00.i1X.integrals.txt	exists
254gap027.000x-00.50y+00.00.i1X.integrals.txt	exists
253gap027.000x+00.00y+00.00.i1X.integrals.txt	exists
252gap027.000x+00.50y+00.00.i1X.integrals.txt	exists
251gap027.000x+01.00y+00.00.i1X.integrals.txt	exists
271gap027.000x+00.00y-01.00.i1X.integrals.txt	exists
275gap027.000x+00.00y+01.00.i1X.integrals.txt	exists
295gap033.000x-01.00y+00.00.i1X.integrals.txt	exists
294gap033.000x-00.50y+00.00.i1X.integrals.txt	exists
293gap033.000x+00.00y+00.00.i1X.integrals.txt	exists
292gap033.000x+00.50y+00.00.i1X.integrals.txt	exists
291gap033.000x+01.00y+00.00.i1X.integrals.txt	exists
311gap033.000x+00.00y-01.00.i1X.integrals.txt	exists
315gap033.000x+00.00y+01.00.i1X.integrals.txt	exists
335gap100.000x-01.00y+00.00.i1X.integrals.txt	exists
334gap100.000x-00.50y+00.00.i1X.integrals.txt	exists
333gap100.000x+00.00y+00.00.i1X.integrals.txt	exists
332gap100.000x+00.50y+00.00.i1X.integrals.txt	exists
331gap100.000x+01.00y+00.00.i1X.integrals.txt	exists
351gap100.000x+00.00y-01.00.i1X.integrals.txt	exists
355gap100.000x+00.00y+01.00.i1X.integrals.txt	exists
020gap007.500x-01.00y+00.00.i2X.integrals.txt	exists
019gap007.500x-00.50y+00.00.i2X.integrals.txt	exists
018gap007.500x+00.00y+00.00.i2X.integrals.txt	exists
017gap007.500x+00.50y+00.00.i2X.integrals.txt	exists
016gap007.500x+01.00y+00.00.i2X.integrals.txt	exists



036gap007.500x+00.00y-01.00.i2X_integrals.txt	exists
040gap007.500x+00.00y+01.00.i2X_integrals.txt	exists
060gap008.500x-01.00y+00.00.i2X_integrals.txt	exists
059gap008.500x-00.50y+00.00.i2X_integrals.txt	exists
058gap008.500x+00.00y+00.00.i2X_integrals.txt	exists
057gap008.500x+00.50y+00.00.i2X_integrals.txt	exists
056gap008.500x+01.00y+00.00.i2X_integrals.txt	exists
076gap008.500x+00.00y-01.00.i2X_integrals.txt	exists
080gap008.500x+00.00y+01.00.i2X_integrals.txt	exists
100gap010.000x-01.00y+00.00.i2X_integrals.txt	exists
099gap010.000x-00.50y+00.00.i2X_integrals.txt	exists
098gap010.000x+00.00y+00.00.i2X_integrals.txt	exists
097gap010.000x+00.50y+00.00.i2X_integrals.txt	exists
096gap010.000x+01.00y+00.00.i2X_integrals.txt	exists
116gap010.000x+00.00y-01.00.i2X_integrals.txt	exists
120gap010.000x+00.00y+01.00.i2X_integrals.txt	exists
140gap013.000x-01.00y+00.00.i2X_integrals.txt	exists
139gap013.000x-00.50y+00.00.i2X_integrals.txt	exists
138gap013.000x+00.00y+00.00.i2X_integrals.txt	exists
137gap013.000x+00.50y+00.00.i2X_integrals.txt	exists
136gap013.000x+01.00y+00.00.i2X_integrals.txt	exists
156gap013.000x+00.00y-01.00.i2X_integrals.txt	exists
160gap013.000x+00.00y+01.00.i2X_integrals.txt	exists
180gap017.000x-01.00y+00.00.i2X_integrals.txt	exists
179gap017.000x-00.50y+00.00.i2X_integrals.txt	exists
178gap017.000x+00.00y+00.00.i2X_integrals.txt	exists
177gap017.000x+00.50y+00.00.i2X_integrals.txt	exists
176gap017.000x+01.00y+00.00.i2X_integrals.txt	exists
196gap017.000x+00.00y-01.00.i2X_integrals.txt	exists
200gap017.000x+00.00y+01.00.i2X_integrals.txt	exists
220gap022.000x-01.00y+00.00.i2X_integrals.txt	exists
219gap022.000x-00.50y+00.00.i2X_integrals.txt	exists
218gap022.000x+00.00y+00.00.i2X_integrals.txt	exists
217gap022.000x+00.50y+00.00.i2X_integrals.txt	exists
216gap022.000x+01.00y+00.00.i2X_integrals.txt	exists
236gap022.000x+00.00y-01.00.i2X_integrals.txt	exists

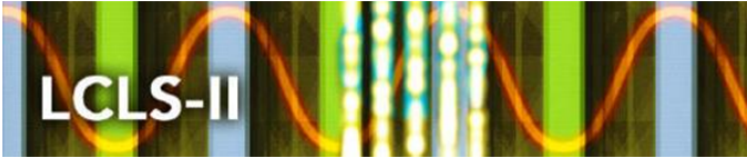

240gap022.000x+00.00y+01.00.i2X.integrals.txt	exists
260gap027.000x-01.00y+00.00.i2X.integrals.txt	exists
259gap027.000x-00.50y+00.00.i2X.integrals.txt	exists
258gap027.000x+00.00y+00.00.i2X.integrals.txt	exists
257gap027.000x+00.50y+00.00.i2X.integrals.txt	exists
256gap027.000x+01.00y+00.00.i2X.integrals.txt	exists
276gap027.000x+00.00y-01.00.i2X.integrals.txt	exists
280gap027.000x+00.00y+01.00.i2X.integrals.txt	exists
300gap033.000x-01.00y+00.00.i2X.integrals.txt	exists
299gap033.000x-00.50y+00.00.i2X.integrals.txt	exists
298gap033.000x+00.00y+00.00.i2X.integrals.txt	exists
297gap033.000x+00.50y+00.00.i2X.integrals.txt	exists
296gap033.000x+01.00y+00.00.i2X.integrals.txt	exists
316gap033.000x+00.00y-01.00.i2X.integrals.txt	exists
320gap033.000x+00.00y+01.00.i2X.integrals.txt	exists
340gap100.000x-01.00y+00.00.i2X.integrals.txt	exists
339gap100.000x-00.50y+00.00.i2X.integrals.txt	exists
338gap100.000x+00.00y+00.00.i2X.integrals.txt	exists
337gap100.000x+00.50y+00.00.i2X.integrals.txt	exists
336gap100.000x+01.00y+00.00.i2X.integrals.txt	exists
356gap100.000x+00.00y-01.00.i2X.integrals.txt	exists
360gap100.000x+00.00y+01.00.i2X.integrals.txt	exists
005gap007.500x-01.00y+00.00.i1Y.integrals.txt	exists
004gap007.500x-00.50y+00.00.i1Y.integrals.txt	exists
003gap007.500x+00.00y+00.00.i1Y.integrals.txt	exists
002gap007.500x+00.50y+00.00.i1Y.integrals.txt	exists
001gap007.500x+01.00y+00.00.i1Y.integrals.txt	exists
021gap007.500x+00.00y-01.00.i1Y.integrals.txt	exists
025gap007.500x+00.00y+01.00.i1Y.integrals.txt	exists
045gap008.500x-01.00y+00.00.i1Y.integrals.txt	exists
044gap008.500x-00.50y+00.00.i1Y.integrals.txt	exists
043gap008.500x+00.00y+00.00.i1Y.integrals.txt	exists
042gap008.500x+00.50y+00.00.i1Y.integrals.txt	exists
041gap008.500x+01.00y+00.00.i1Y.integrals.txt	exists
061gap008.500x+00.00y-01.00.i1Y.integrals.txt	exists
065gap008.500x+00.00y+01.00.i1Y.integrals.txt	exists



085gap010.000x-01.00y+00.00.i1Y.integrals.txt	exists
084gap010.000x-00.50y+00.00.i1Y.integrals.txt	exists
083gap010.000x+00.00y+00.00.i1Y.integrals.txt	exists
082gap010.000x+00.50y+00.00.i1Y.integrals.txt	exists
081gap010.000x+01.00y+00.00.i1Y.integrals.txt	exists
101gap010.000x+00.00y-01.00.i1Y.integrals.txt	exists
105gap010.000x+00.00y+01.00.i1Y.integrals.txt	exists
125gap013.000x-01.00y+00.00.i1Y.integrals.txt	exists
124gap013.000x-00.50y+00.00.i1Y.integrals.txt	exists
123gap013.000x+00.00y+00.00.i1Y.integrals.txt	exists
122gap013.000x+00.50y+00.00.i1Y.integrals.txt	exists
121gap013.000x+01.00y+00.00.i1Y.integrals.txt	exists
141gap013.000x+00.00y-01.00.i1Y.integrals.txt	exists
145gap013.000x+00.00y+01.00.i1Y.integrals.txt	exists
165gap017.000x-01.00y+00.00.i1Y.integrals.txt	exists
164gap017.000x-00.50y+00.00.i1Y.integrals.txt	exists
163gap017.000x+00.00y+00.00.i1Y.integrals.txt	exists
162gap017.000x+00.50y+00.00.i1Y.integrals.txt	exists
161gap017.000x+01.00y+00.00.i1Y.integrals.txt	exists
181gap017.000x+00.00y-01.00.i1Y.integrals.txt	exists
185gap017.000x+00.00y+01.00.i1Y.integrals.txt	exists
205gap022.000x-01.00y+00.00.i1Y.integrals.txt	exists
204gap022.000x-00.50y+00.00.i1Y.integrals.txt	exists
203gap022.000x+00.00y+00.00.i1Y.integrals.txt	exists
202gap022.000x+00.50y+00.00.i1Y.integrals.txt	exists
201gap022.000x+01.00y+00.00.i1Y.integrals.txt	exists
221gap022.000x+00.00y-01.00.i1Y.integrals.txt	exists
225gap022.000x+00.00y+01.00.i1Y.integrals.txt	exists
245gap027.000x-01.00y+00.00.i1Y.integrals.txt	exists
244gap027.000x-00.50y+00.00.i1Y.integrals.txt	exists
243gap027.000x+00.00y+00.00.i1Y.integrals.txt	exists
242gap027.000x+00.50y+00.00.i1Y.integrals.txt	exists
241gap027.000x+01.00y+00.00.i1Y.integrals.txt	exists
261gap027.000x+00.00y-01.00.i1Y.integrals.txt	exists
265gap027.000x+00.00y+01.00.i1Y.integrals.txt	exists
285gap033.000x-01.00y+00.00.i1Y.integrals.txt	exists



284gap033.000x-00.50y+00.00.i1Y_integrals.txt	exists
283gap033.000x+00.00y+00.00.i1Y_integrals.txt	exists
282gap033.000x+00.50y+00.00.i1Y_integrals.txt	exists
281gap033.000x+01.00y+00.00.i1Y_integrals.txt	exists
301gap033.000x+00.00y-01.00.i1Y_integrals.txt	exists
305gap033.000x+00.00y+01.00.i1Y_integrals.txt	exists
325gap100.000x-01.00y+00.00.i1Y_integrals.txt	exists
324gap100.000x-00.50y+00.00.i1Y_integrals.txt	exists
323gap100.000x+00.00y+00.00.i1Y_integrals.txt	exists
322gap100.000x+00.50y+00.00.i1Y_integrals.txt	exists
321gap100.000x+01.00y+00.00.i1Y_integrals.txt	exists
341gap100.000x+00.00y-01.00.i1Y_integrals.txt	exists
345gap100.000x+00.00y+01.00.i1Y_integrals.txt	exists
010gap007.500x-01.00y+00.00.i2Y_integrals.txt	exists
009gap007.500x-00.50y+00.00.i2Y_integrals.txt	exists
008gap007.500x+00.00y+00.00.i2Y_integrals.txt	exists
007gap007.500x+00.50y+00.00.i2Y_integrals.txt	exists
006gap007.500x+01.00y+00.00.i2Y_integrals.txt	exists
026gap007.500x+00.00y-01.00.i2Y_integrals.txt	exists
030gap007.500x+00.00y+01.00.i2Y_integrals.txt	exists
050gap008.500x-01.00y+00.00.i2Y_integrals.txt	exists
049gap008.500x-00.50y+00.00.i2Y_integrals.txt	exists
048gap008.500x+00.00y+00.00.i2Y_integrals.txt	exists
047gap008.500x+00.50y+00.00.i2Y_integrals.txt	exists
046gap008.500x+01.00y+00.00.i2Y_integrals.txt	exists
066gap008.500x+00.00y-01.00.i2Y_integrals.txt	exists
070gap008.500x+00.00y+01.00.i2Y_integrals.txt	exists
090gap010.000x-01.00y+00.00.i2Y_integrals.txt	exists
089gap010.000x-00.50y+00.00.i2Y_integrals.txt	exists
088gap010.000x+00.00y+00.00.i2Y_integrals.txt	exists
087gap010.000x+00.50y+00.00.i2Y_integrals.txt	exists
086gap010.000x+01.00y+00.00.i2Y_integrals.txt	exists
106gap010.000x+00.00y-01.00.i2Y_integrals.txt	exists
110gap010.000x+00.00y+01.00.i2Y_integrals.txt	exists
130gap013.000x-01.00y+00.00.i2Y_integrals.txt	exists
129gap013.000x-00.50y+00.00.i2Y_integrals.txt	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

128gap013.000x+00.00y+00.00.i2Y_integrals.txt	exists
127gap013.000x+00.50y+00.00.i2Y_integrals.txt	exists
126gap013.000x+01.00y+00.00.i2Y_integrals.txt	exists
146gap013.000x+00.00y-01.00.i2Y_integrals.txt	exists
150gap013.000x+00.00y+01.00.i2Y_integrals.txt	exists
170gap017.000x-01.00y+00.00.i2Y_integrals.txt	exists
169gap017.000x-00.50y+00.00.i2Y_integrals.txt	exists
168gap017.000x+00.00y+00.00.i2Y_integrals.txt	exists
167gap017.000x+00.50y+00.00.i2Y_integrals.txt	exists
166gap017.000x+01.00y+00.00.i2Y_integrals.txt	exists
186gap017.000x+00.00y-01.00.i2Y_integrals.txt	exists
190gap017.000x+00.00y+01.00.i2Y_integrals.txt	exists
210gap022.000x-01.00y+00.00.i2Y_integrals.txt	exists
209gap022.000x-00.50y+00.00.i2Y_integrals.txt	exists
208gap022.000x+00.00y+00.00.i2Y_integrals.txt	exists
207gap022.000x+00.50y+00.00.i2Y_integrals.txt	exists
206gap022.000x+01.00y+00.00.i2Y_integrals.txt	exists
226gap022.000x+00.00y-01.00.i2Y_integrals.txt	exists
230gap022.000x+00.00y+01.00.i2Y_integrals.txt	exists
250gap027.000x-01.00y+00.00.i2Y_integrals.txt	exists
249gap027.000x-00.50y+00.00.i2Y_integrals.txt	exists
248gap027.000x+00.00y+00.00.i2Y_integrals.txt	exists
247gap027.000x+00.50y+00.00.i2Y_integrals.txt	exists
246gap027.000x+01.00y+00.00.i2Y_integrals.txt	exists
266gap027.000x+00.00y-01.00.i2Y_integrals.txt	exists
270gap027.000x+00.00y+01.00.i2Y_integrals.txt	exists
290gap033.000x-01.00y+00.00.i2Y_integrals.txt	exists
289gap033.000x-00.50y+00.00.i2Y_integrals.txt	exists
288gap033.000x+00.00y+00.00.i2Y_integrals.txt	exists
287gap033.000x+00.50y+00.00.i2Y_integrals.txt	exists
286gap033.000x+01.00y+00.00.i2Y_integrals.txt	exists
306gap033.000x+00.00y-01.00.i2Y_integrals.txt	exists
310gap033.000x+00.00y+01.00.i2Y_integrals.txt	exists
330gap100.000x-01.00y+00.00.i2Y_integrals.txt	exists
329gap100.000x-00.50y+00.00.i2Y_integrals.txt	exists
328gap100.000x+00.00y+00.00.i2Y_integrals.txt	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

327gap100.000x+00.50y+00.00.i2Y_integrals.txt	exists
326gap100.000x+01.00y+00.00.i2Y_integrals.txt	exists
346gap100.000x+00.00y-01.00.i2Y_integrals.txt	exists
350gap100.000x+00.00y+01.00.i2Y_integrals.txt	exists

Sub folder: Long Coil\On Axis exists

integrals_summary.txt	exists
003gap007.200x+00.00y+00.00.i1X_integrals.txt	exists
004gap007.200x+00.00y+00.00.i2X_integrals.txt	exists
001gap007.200x+00.00y+00.00.i1Y_integrals.txt	exists
002gap007.200x+00.00y+00.00.i2Y_integrals.txt	exists
007gap008.000x+00.00y+00.00.i1X_integrals.txt	exists
008gap008.000x+00.00y+00.00.i2X_integrals.txt	exists
005gap008.000x+00.00y+00.00.i1Y_integrals.txt	exists
006gap008.000x+00.00y+00.00.i2Y_integrals.txt	exists
011gap009.000x+00.00y+00.00.i1X_integrals.txt	exists
012gap009.000x+00.00y+00.00.i2X_integrals.txt	exists
009gap009.000x+00.00y+00.00.i1Y_integrals.txt	exists
010gap009.000x+00.00y+00.00.i2Y_integrals.txt	exists
015gap010.000x+00.00y+00.00.i1X_integrals.txt	exists
016gap010.000x+00.00y+00.00.i2X_integrals.txt	exists
013gap010.000x+00.00y+00.00.i1Y_integrals.txt	exists
014gap010.000x+00.00y+00.00.i2Y_integrals.txt	exists
019gap011.000x+00.00y+00.00.i1X_integrals.txt	exists
020gap011.000x+00.00y+00.00.i2X_integrals.txt	exists
017gap011.000x+00.00y+00.00.i1Y_integrals.txt	exists
018gap011.000x+00.00y+00.00.i2Y_integrals.txt	exists
023gap012.000x+00.00y+00.00.i1X_integrals.txt	exists
024gap012.000x+00.00y+00.00.i2X_integrals.txt	exists
021gap012.000x+00.00y+00.00.i1Y_integrals.txt	exists
022gap012.000x+00.00y+00.00.i2Y_integrals.txt	exists
027gap013.000x+00.00y+00.00.i1X_integrals.txt	exists
028gap013.000x+00.00y+00.00.i2X_integrals.txt	exists
025gap013.000x+00.00y+00.00.i1Y_integrals.txt	exists



026gap013.000x+00.00y+00.00.i2Y_integrals.txt	exists
031gap014.000x+00.00y+00.00.i1X_integrals.txt	exists
032gap014.000x+00.00y+00.00.i2X_integrals.txt	exists
029gap014.000x+00.00y+00.00.i1Y_integrals.txt	exists
030gap014.000x+00.00y+00.00.i2Y_integrals.txt	exists
035gap016.000x+00.00y+00.00.i1X_integrals.txt	exists
036gap016.000x+00.00y+00.00.i2X_integrals.txt	exists
033gap016.000x+00.00y+00.00.i1Y_integrals.txt	exists
034gap016.000x+00.00y+00.00.i2Y_integrals.txt	exists
039gap018.000x+00.00y+00.00.i1X_integrals.txt	exists
040gap018.000x+00.00y+00.00.i2X_integrals.txt	exists
037gap018.000x+00.00y+00.00.i1Y_integrals.txt	exists
038gap018.000x+00.00y+00.00.i2Y_integrals.txt	exists
043gap020.000x+00.00y+00.00.i1X_integrals.txt	exists
044gap020.000x+00.00y+00.00.i2X_integrals.txt	exists
041gap020.000x+00.00y+00.00.i1Y_integrals.txt	exists
042gap020.000x+00.00y+00.00.i2Y_integrals.txt	exists
047gap022.000x+00.00y+00.00.i1X_integrals.txt	exists
048gap022.000x+00.00y+00.00.i2X_integrals.txt	exists
045gap022.000x+00.00y+00.00.i1Y_integrals.txt	exists
046gap022.000x+00.00y+00.00.i2Y_integrals.txt	exists
051gap024.000x+00.00y+00.00.i1X_integrals.txt	exists
052gap024.000x+00.00y+00.00.i2X_integrals.txt	exists
049gap024.000x+00.00y+00.00.i1Y_integrals.txt	exists
050gap024.000x+00.00y+00.00.i2Y_integrals.txt	exists
055gap027.000x+00.00y+00.00.i1X_integrals.txt	exists
056gap027.000x+00.00y+00.00.i2X_integrals.txt	exists
053gap027.000x+00.00y+00.00.i1Y_integrals.txt	exists
054gap027.000x+00.00y+00.00.i2Y_integrals.txt	exists
059gap030.000x+00.00y+00.00.i1X_integrals.txt	exists
060gap030.000x+00.00y+00.00.i2X_integrals.txt	exists
057gap030.000x+00.00y+00.00.i1Y_integrals.txt	exists
058gap030.000x+00.00y+00.00.i2Y_integrals.txt	exists
063gap033.000x+00.00y+00.00.i1X_integrals.txt	exists
064gap033.000x+00.00y+00.00.i2X_integrals.txt	exists
061gap033.000x+00.00y+00.00.i1Y_integrals.txt	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU.010

062gap033.000x+00.00y+00.00.i2Y_integrals.txt	exists
067gap040.000x+00.00y+00.00.i1X_integrals.txt	exists
068gap040.000x+00.00y+00.00.i2X_integrals.txt	exists
065gap040.000x+00.00y+00.00.i1Y_integrals.txt	exists
066gap040.000x+00.00y+00.00.i2Y_integrals.txt	exists
071gap050.000x+00.00y+00.00.i1X_integrals.txt	exists
072gap050.000x+00.00y+00.00.i2X_integrals.txt	exists
069gap050.000x+00.00y+00.00.i1Y_integrals.txt	exists
070gap050.000x+00.00y+00.00.i2Y_integrals.txt	exists
075gap060.000x+00.00y+00.00.i1X_integrals.txt	exists
076gap060.000x+00.00y+00.00.i2X_integrals.txt	exists
073gap060.000x+00.00y+00.00.i1Y_integrals.txt	exists
074gap060.000x+00.00y+00.00.i2Y_integrals.txt	exists
079gap080.000x+00.00y+00.00.i1X_integrals.txt	exists
080gap080.000x+00.00y+00.00.i2X_integrals.txt	exists
077gap080.000x+00.00y+00.00.i1Y_integrals.txt	exists
078gap080.000x+00.00y+00.00.i2Y_integrals.txt	exists
083gap100.000x+00.00y+00.00.i1X_integrals.txt	exists
084gap100.000x+00.00y+00.00.i2X_integrals.txt	exists
081gap100.000x+00.00y+00.00.i1Y_integrals.txt	exists
082gap100.000x+00.00y+00.00.i2Y_integrals.txt	exists
087gap120.000x+00.00y+00.00.i1X_integrals.txt	exists
088gap120.000x+00.00y+00.00.i2X_integrals.txt	exists
085gap120.000x+00.00y+00.00.i1Y_integrals.txt	exists
086gap120.000x+00.00y+00.00.i2Y_integrals.txt	exists
091gap140.000x+00.00y+00.00.i1X_integrals.txt	exists
092gap140.000x+00.00y+00.00.i2X_integrals.txt	exists
089gap140.000x+00.00y+00.00.i1Y_integrals.txt	exists
090gap140.000x+00.00y+00.00.i2Y_integrals.txt	exists
095gap160.000x+00.00y+00.00.i1X_integrals.txt	exists
096gap160.000x+00.00y+00.00.i2X_integrals.txt	exists
093gap160.000x+00.00y+00.00.i1Y_integrals.txt	exists
094gap160.000x+00.00y+00.00.i2Y_integrals.txt	exists
099gap180.000x+00.00y+00.00.i1X_integrals.txt	exists
100gap180.000x+00.00y+00.00.i2X_integrals.txt	exists
097gap180.000x+00.00y+00.00.i1Y_integrals.txt	exists



LCLS-II-HE Undulator Segment Measurement Results

HE\_SXU\_010

098gap180.000x+00.00y+00.00.i2Y.integrals.txt	exists
---	--------

Sub folder: Fiducialization exists

LCLS2HE SXU 010 Fiducial Report.docx	exists
--------------------------------------	--------

Sub folder: Gap Measurements exists

Sub folder: Gap Measurements\Touch Probe exists


003gap010.000taper-0.100.pdf	exists
003gap010.000taper-0.100.txt	exists
004gap010.000taper+0.000.pdf	exists
004gap010.000taper+0.000.txt	exists
001gap010.000taper+0.100.pdf	exists
001gap010.000taper+0.100.txt	exists
002gap010.000taper+0.300.pdf	exists
002gap010.000taper+0.300.txt	exists

Sub folder: Capacitive Sensors exists

gap_dat_ru1.dat	exists
-----------------	--------

Sub folder: Controls Data exists

he_sxu_010_parameters.txt	exists
he_sxu_010_k_vs_gap_spline.dat	exists
he_sxu_010_phase_match_enter_vs_gap_spline.dat	exists
he_sxu_010_phase_match_exit_vs_gap_spline.dat	exists
he_sxu_010_i1xvsgap_spline.dat	exists
he_sxu_010_i1yvsgap_spline.dat	exists
he_sxu_010_i2xvsgap_spline.dat	exists
he_sxu_010_i2yvsgap_spline.dat	exists

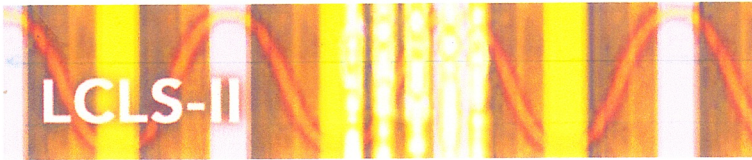

LCLS-II-HE Undulator Segment Measurement Results


HE\_SXU\_010

Summary of findings

Finding	Solution

Approval and Assignment by Heinz-Dieter Nuhn

Data Storage Checked:	Y	
Magnet Accepted:	Y	
Assigned Location:	HE_SXU_010	

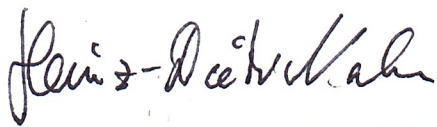	Heinz-Dieter Nuhn	October 16, 2025
(Signature)	(Name)	(Date)