


Minimum Effective Gap = 9.980

Y Value Scales Centered on Mean Values  
 Step Between Measured Pole Tips = 10

Regression Line Through Points = -----  
 Dimensions in mm

	<h2 style="margin: 0;">LCLS II - SXR Undulator</h2> <p style="margin: 0;">Nominal Gap = 10</p> <p style="margin: 0;">Gap Reading = 10.0000    US Encoder = 10.0000    DS Encoder = 10.0000</p>	<p style="margin: 0;">11-DEC-2017</p> <p style="margin: 0;">S/N = 006</p> <p style="margin: 0;">D/S= 0001</p> <p style="margin: 0;">Run= 02</p>
---	--	---

# Gap Between Opposing Pole Tips

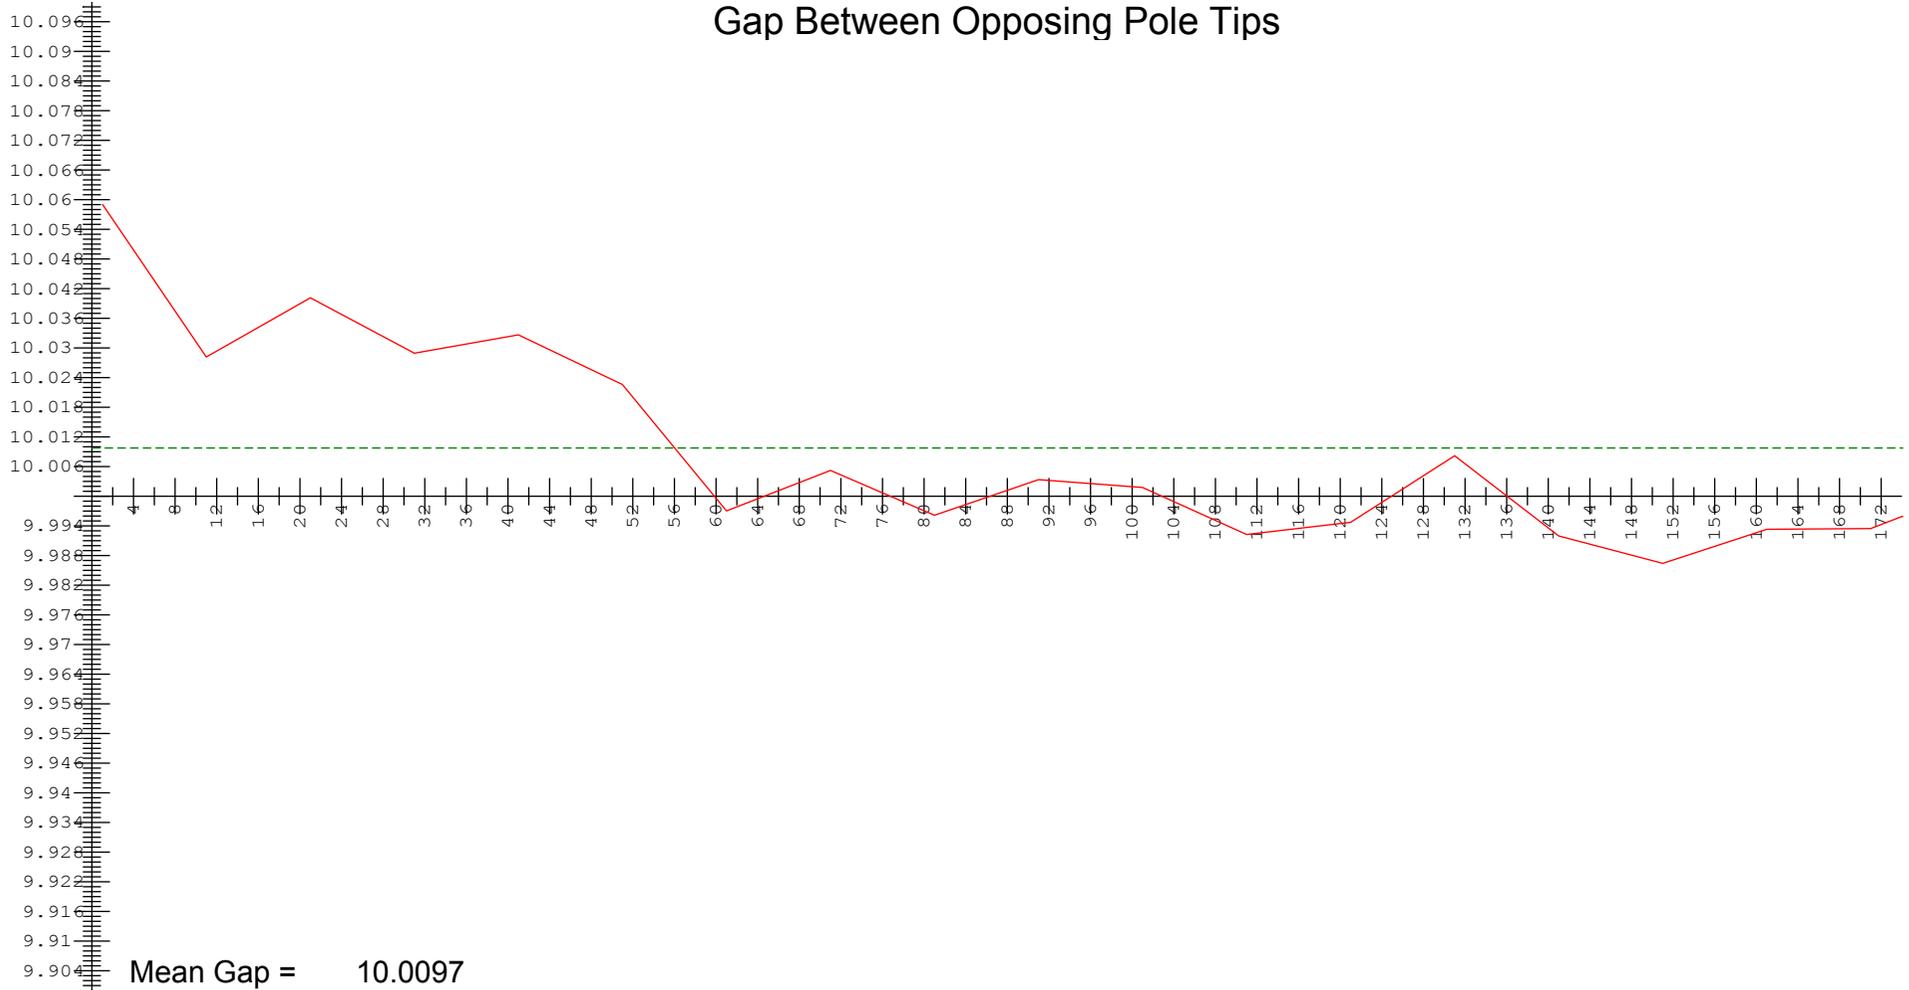

Step Between Measured Pole Tips = 10

Dimensions in mm



## LCLS II - SXR Undulator

Nominal Gap = 10

Gap Reading = 10.0000    US Encoder = 10.0000    DS Encoder = 10.0000


11-DEC-2017

S/N = 006

D/S = 0001

Run = 02

### Symmetry Point Between Pole Tips

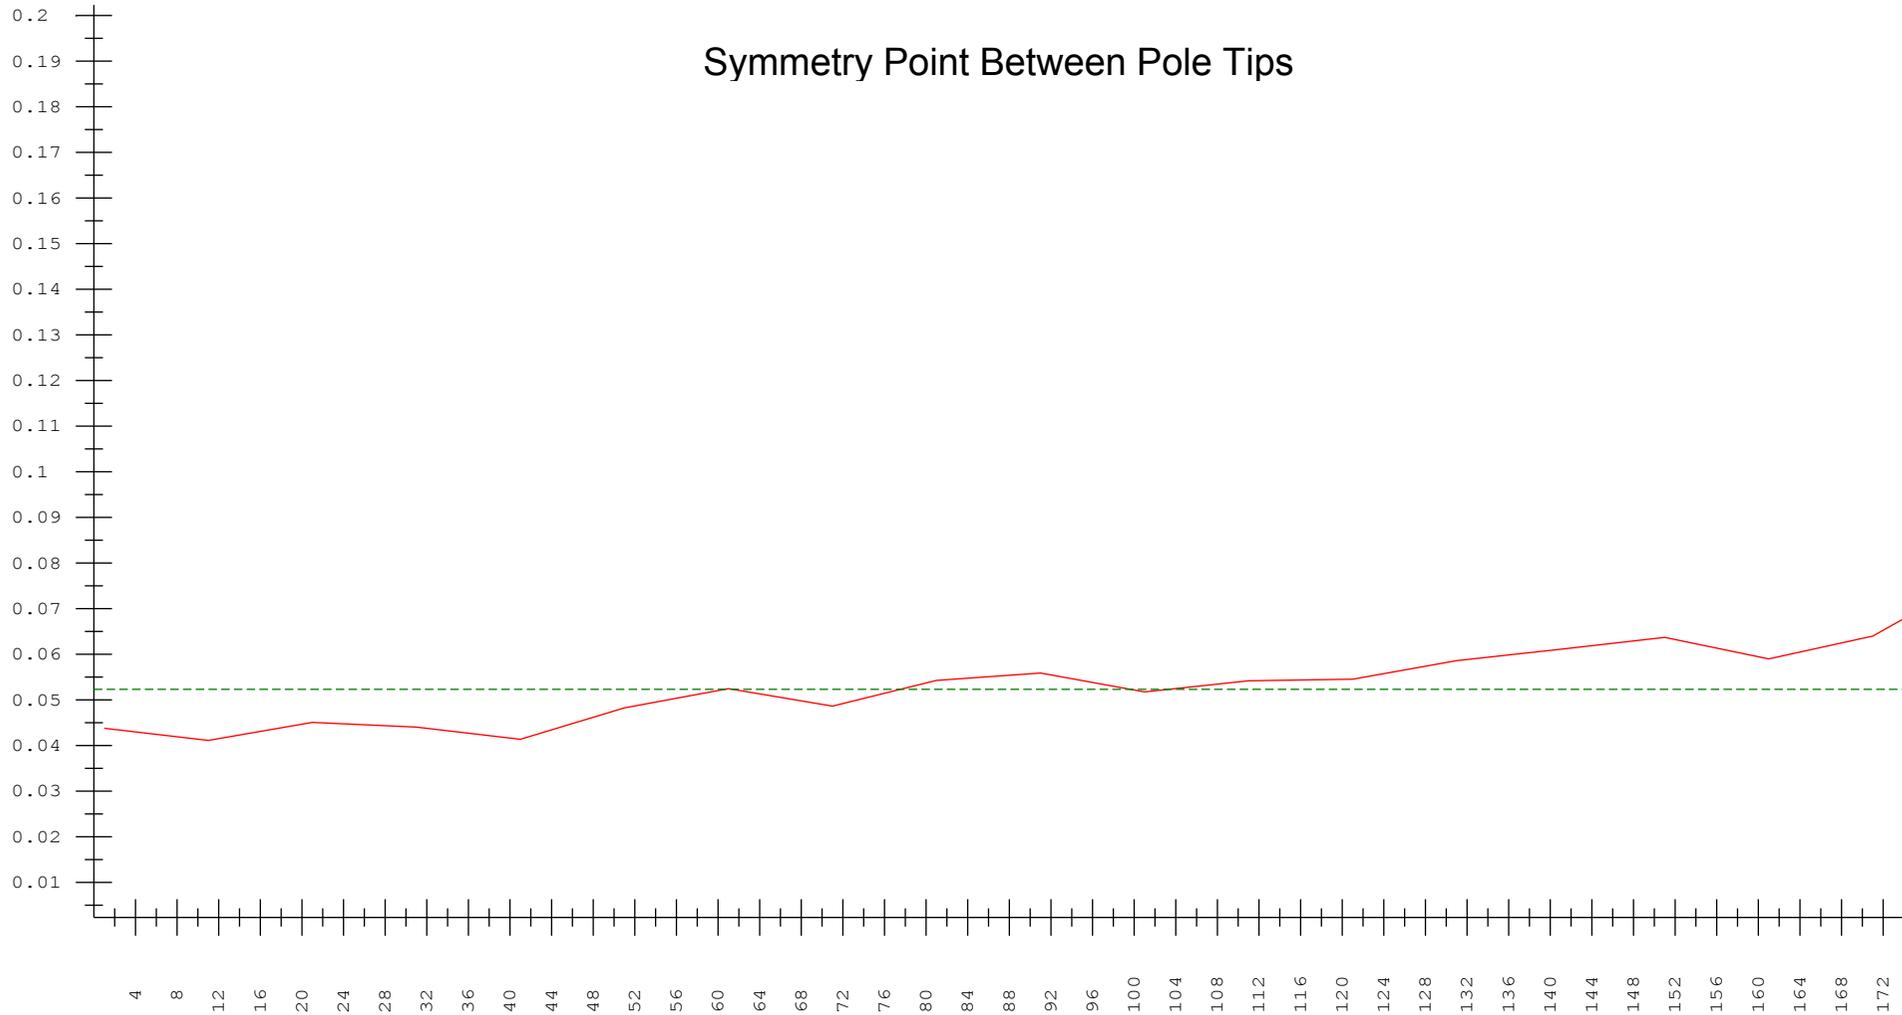

Mean Symmetry Value = 0.0523

Step Between Measured Pole Tips = 10

Dimensions in mm



## LCLS II - SXR Undulator

Nominal Gap = 10

Gap Reading = 10.0000    US Encoder = 10.0000    DS Encoder = 10.0000

11-DEC-2017

S/N = 006

D/S = 0001

Run = 02

## Top and Bottom Jaw Regression Line Intersect Points

Jaw	First Pole (Pole 1)	US Actuator (Pole 39)	DS Actuator (Pole 135)	Last Pole (Pole 174)
Top	5.0592	5.0585	5.0569	5.0562
Bottom	-4.9773	-4.9663	-4.9385	-4.9273

## Summary of Mean Values

Top Jaw Poles	Btm. Jaw Poles	Gap Values	Sym. Pt. Values
5.0572	-4.9525	10.0097	0.0523

## Additional Calculated Values

Bottom Pole #1 Z Value	979.309
Top Jaw Pitch (mrad)	0.001
Bottom Jaw Pitch(mrad)	0.015
Minimum Effective Gap	9.980
Reference Block Gap	6.808

Dimensions in mm



### LCLS II - SXR Undulator

Nominal Gap = 10

Gap Reading = 10.0000    US Encoder = 10.0000    DS Encoder = 10.0000

11-DEC-2017  
S/N = 006  
D/S= 0001  
Run= 02