SLAC Magnetic Measurements

Hall Probe Array Analysis
****

Parameters:
INPUT−FILE−DIR =s:\MagData\LCLS\Undulator\DELTA\Data\Run 428\
INPUT−FILE−NAME =DUTestStep+0.010
INPUT−FILE−TYPE =ZVXYZVXYZH
UND−POL−MODE =LIN−POL−HORIZ−FIELD
PROBE1−BX−CALIB−FILE =v:\MET\MagServe\MagData\LCLS\Hall probe\SENIS−119−12\SENIS−119−12−X.ini
PROBE1−BY−CALIB−FILE =v:\MET\MagServe\MagData\LCLS\Hall probe\SENIS−119−12\SENIS−119−12−Y.ini
PROBE2−BX−CALIB−FILE =v:\MET\MagServe\MagData\LCLS\Hall probe\SENIS−120−12\SENIS−120−12−X.ini
PROBE2−BY−CALIB−FILE =v:\MET\MagServe\MagData\LCLS\Hall probe\SENIS−120−12\SENIS−120−12−Y.ini
NUM−ZERO−GAUSS−MEAS =200
PROBE2−OFFSET−DIR =Y

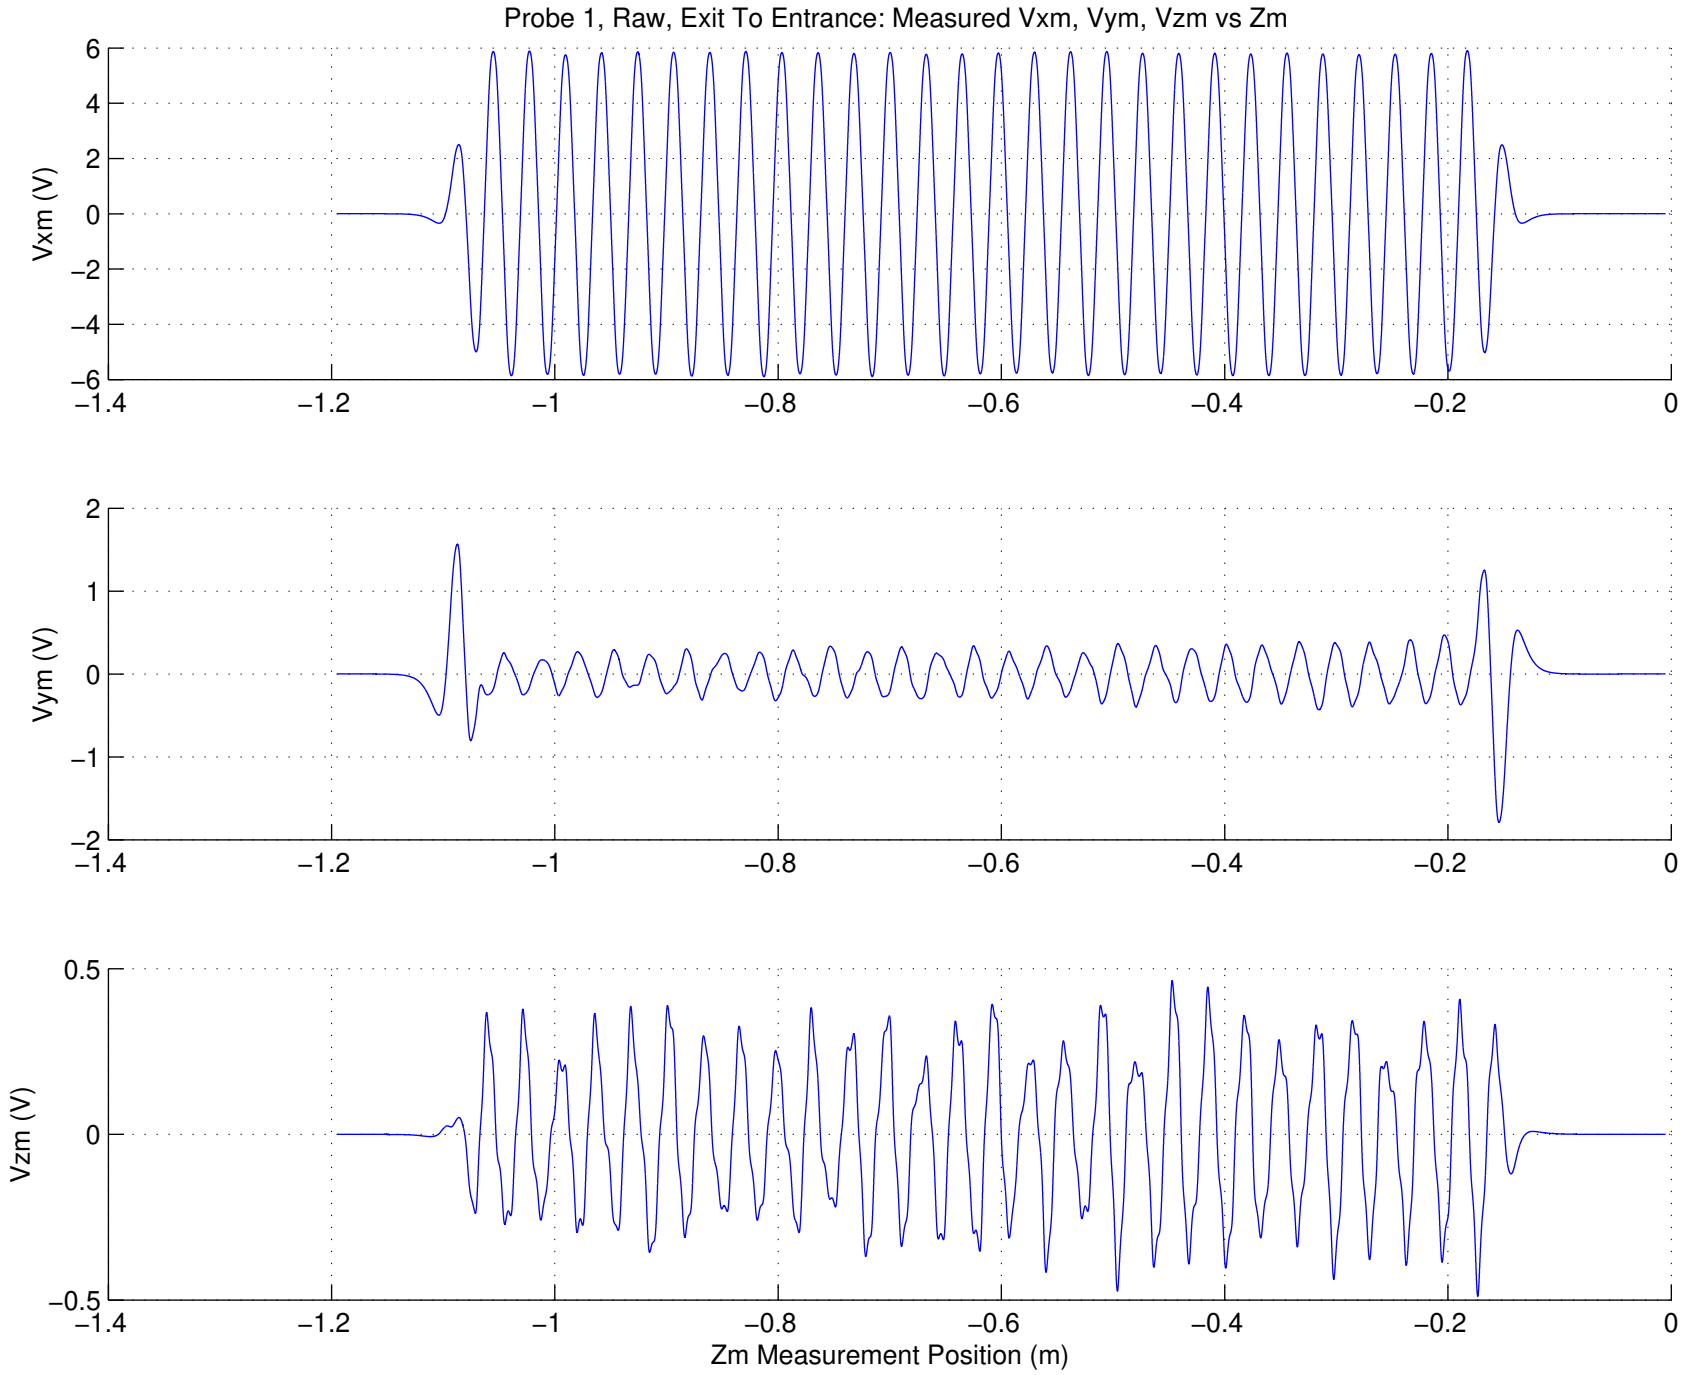
Probe 1, Raw, Exit To Entrance: Measured Vxm, Vym, Vzm vs Zm
Vxm (V)
Vym (V)
Vzm (V)
Zm Measurement Position (m)
6
4
2
0
−2
−4
−6
1
0.5
−0.5
−1.4
−1.2
−1
−0.8
−0.6
−0.4
−0.2

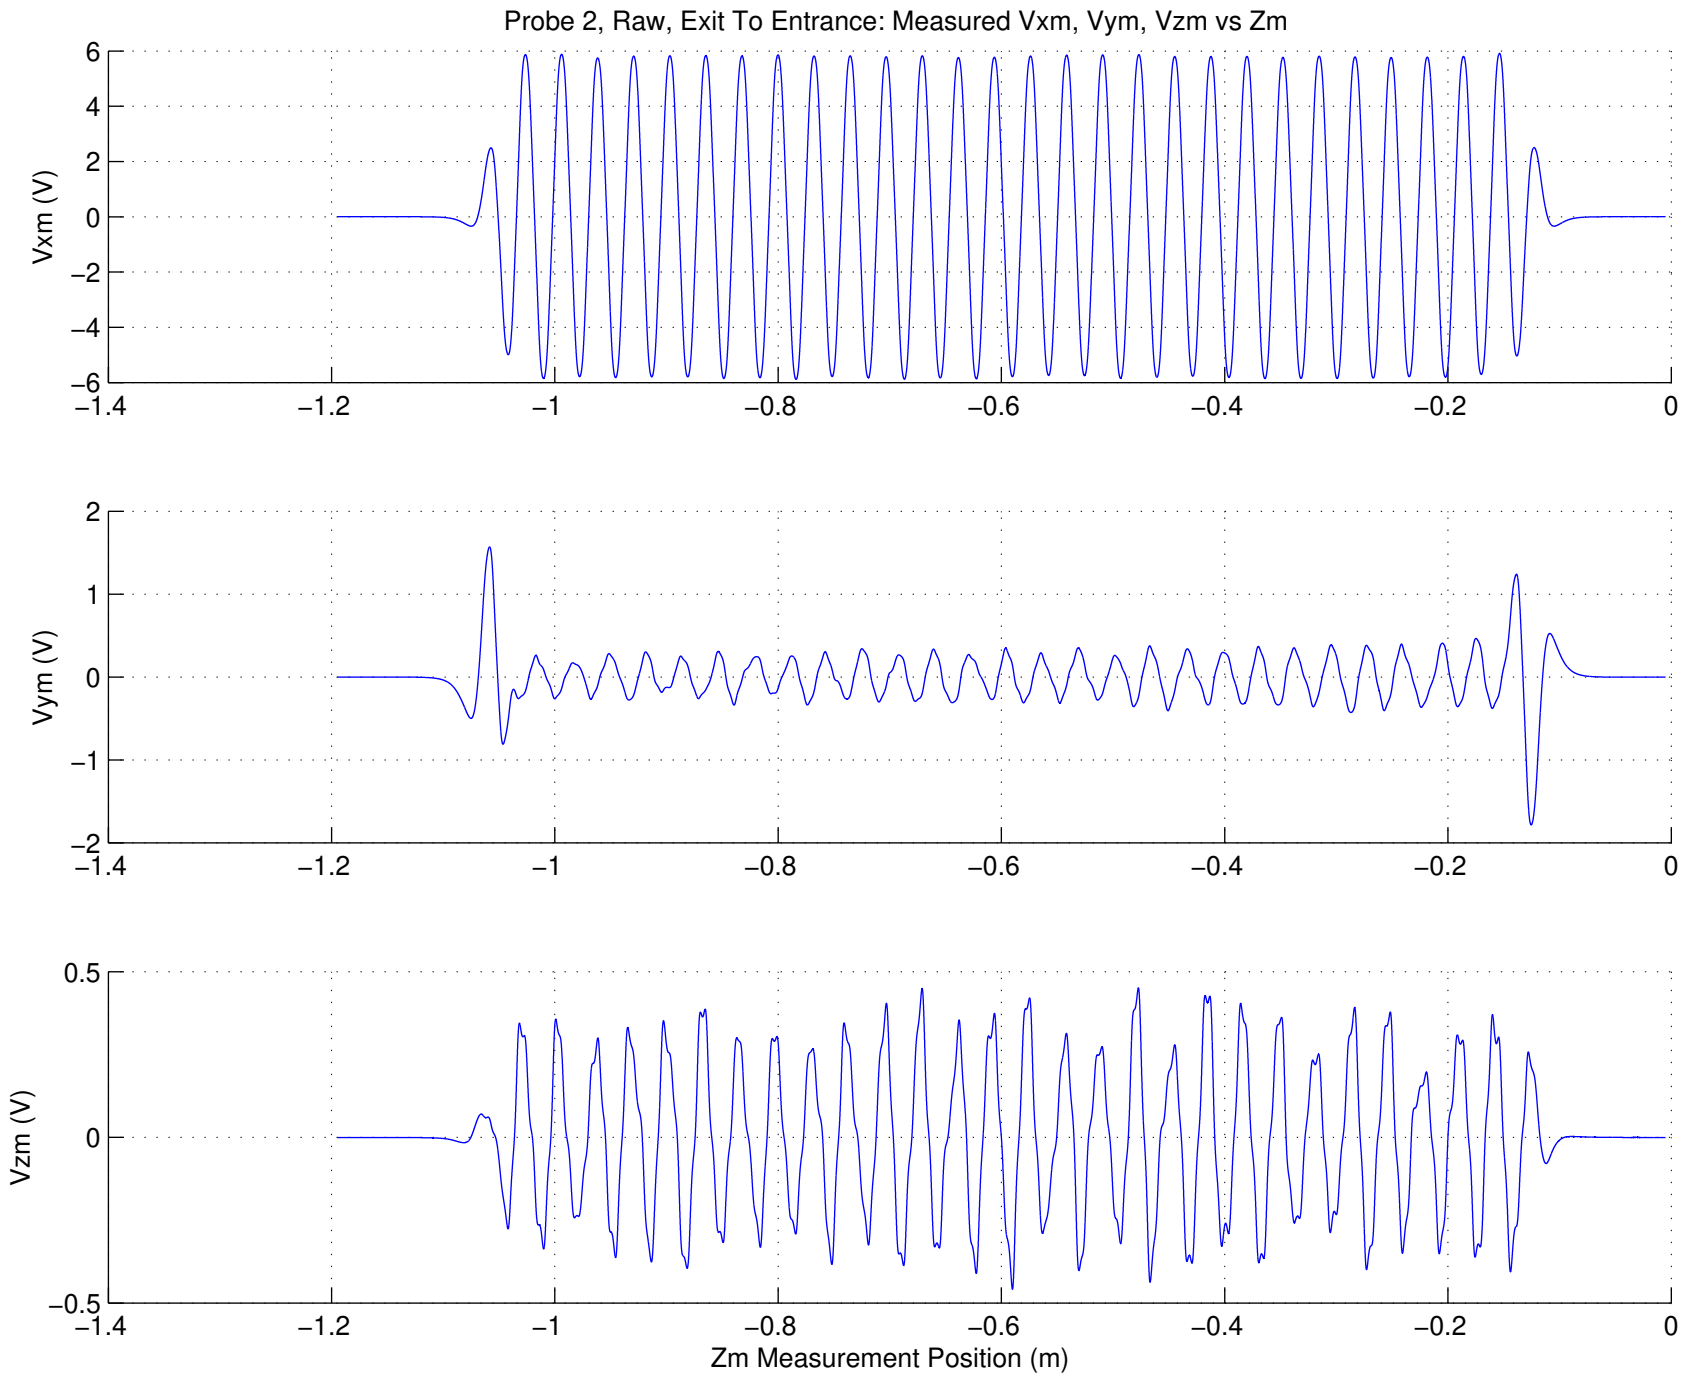
Probe 2, Raw, Exit To Entrance: Measured Vxm, Vym, Vzm vs Zm
Vxm (V)
Vym (V)
Vzm (V)
Zm Measurement Position (m)
6
4
2
0
−2
−4
−6
1
0.5
−0.5
−1.4
−1.2
−1
−0.8
−0.6
−0.4
−0.2
0

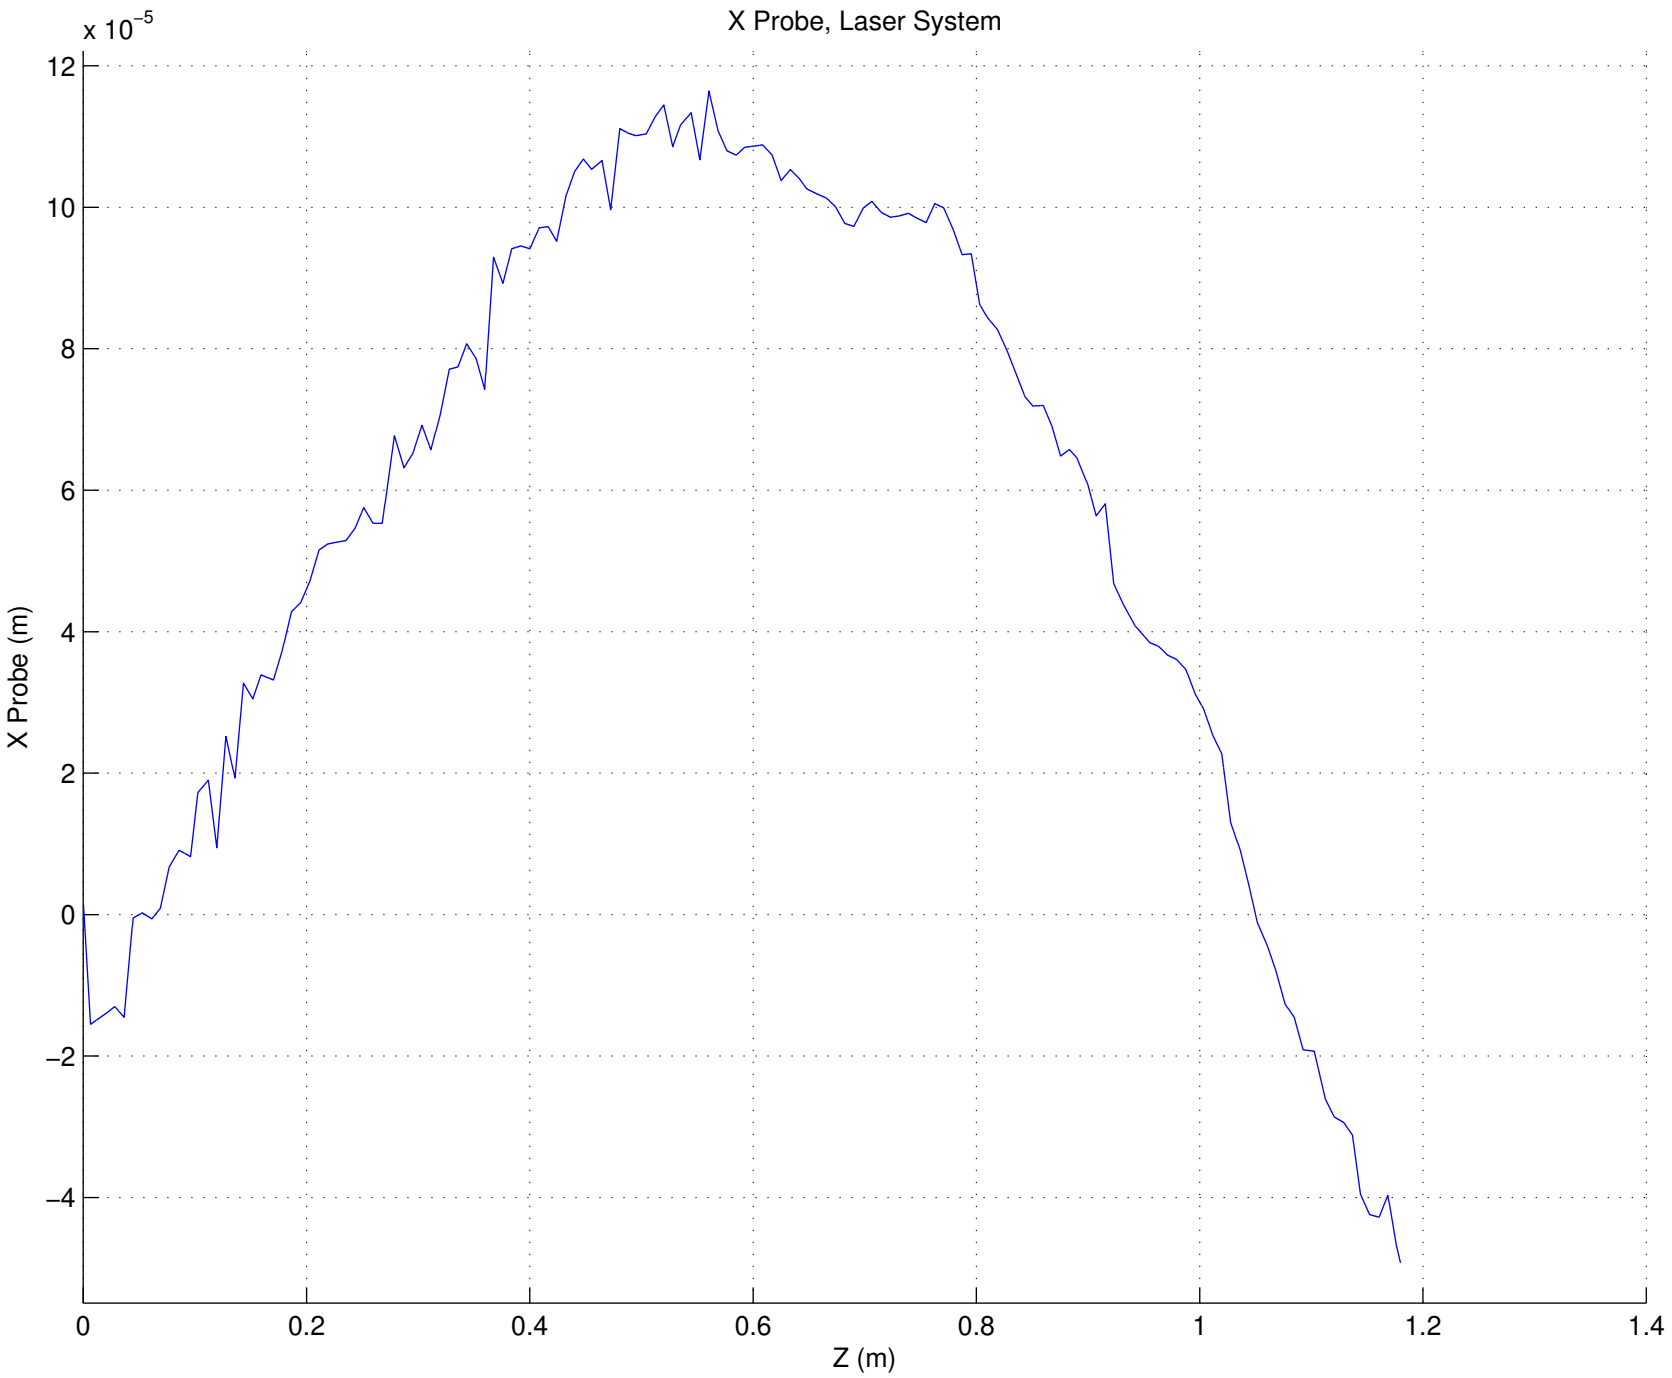
X Probe, Laser System
x 10^-5
12
10
8
6
4
2
0
−2
−4
X Probe (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

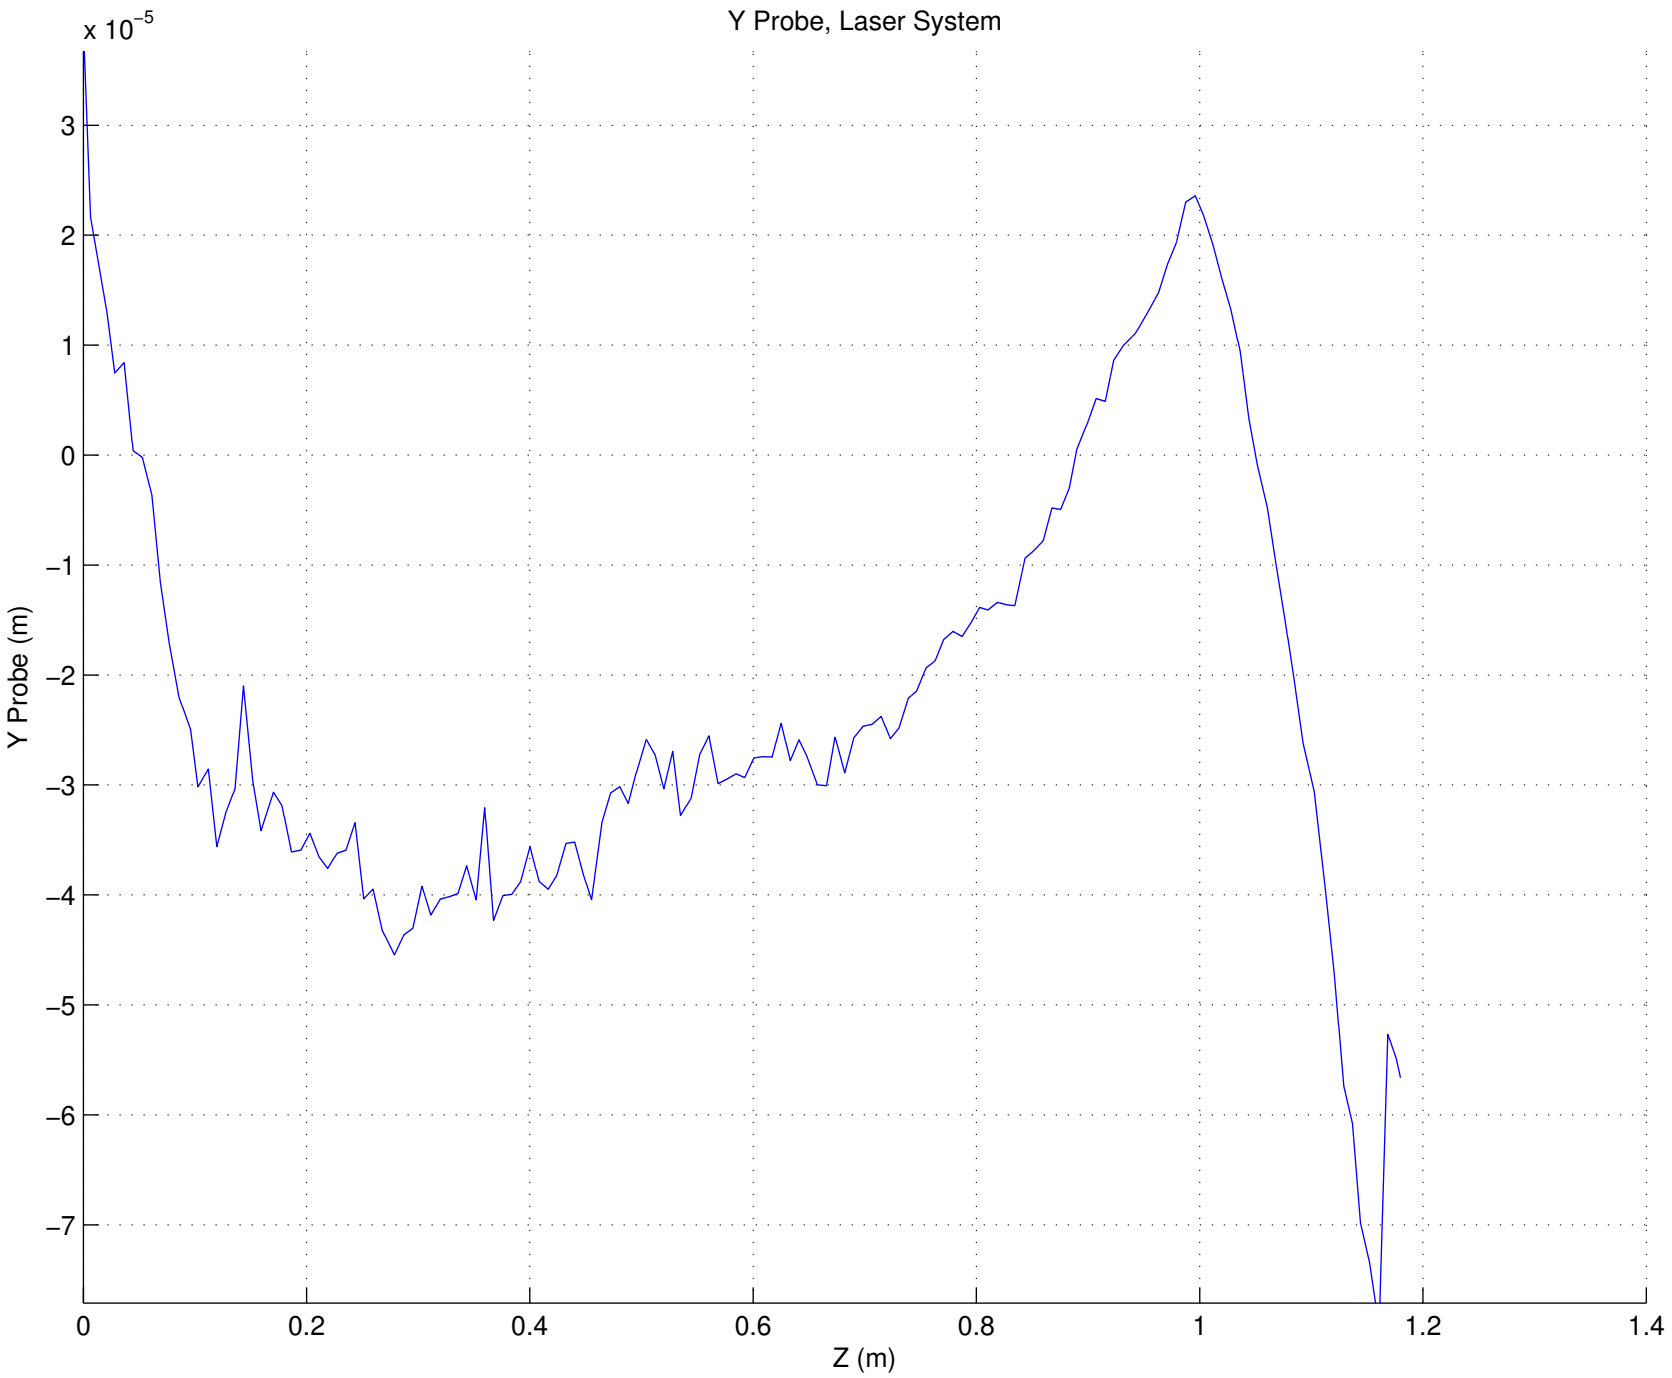
Y Probe, Laser System
x 10^-5
3
2
1
0
−1
−2
−3
−4
−5
−6
−7
Y Probe (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

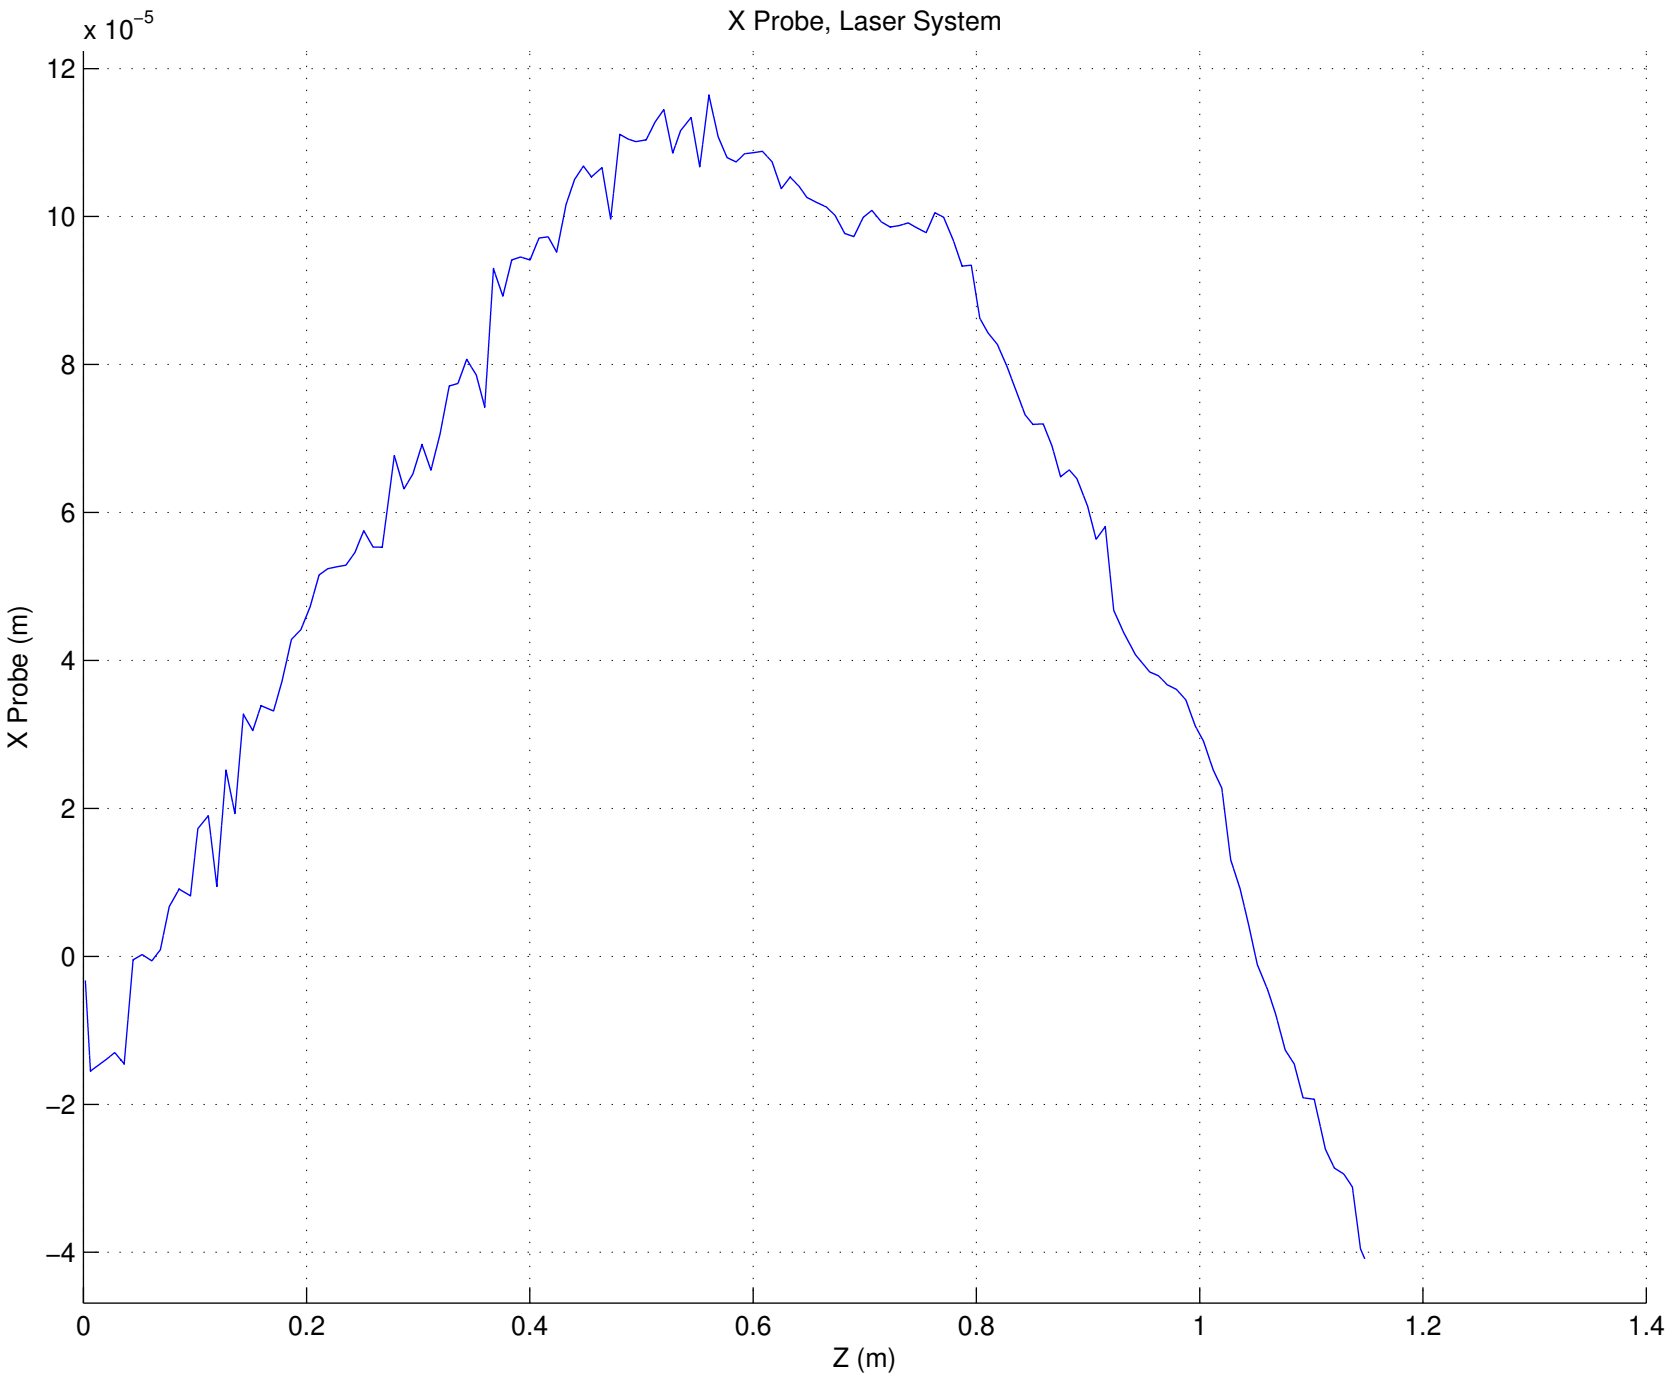
X Probe, Laser System
x 10^-5
12
10
8
6
4
2
0
−2
−4
X Probe (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

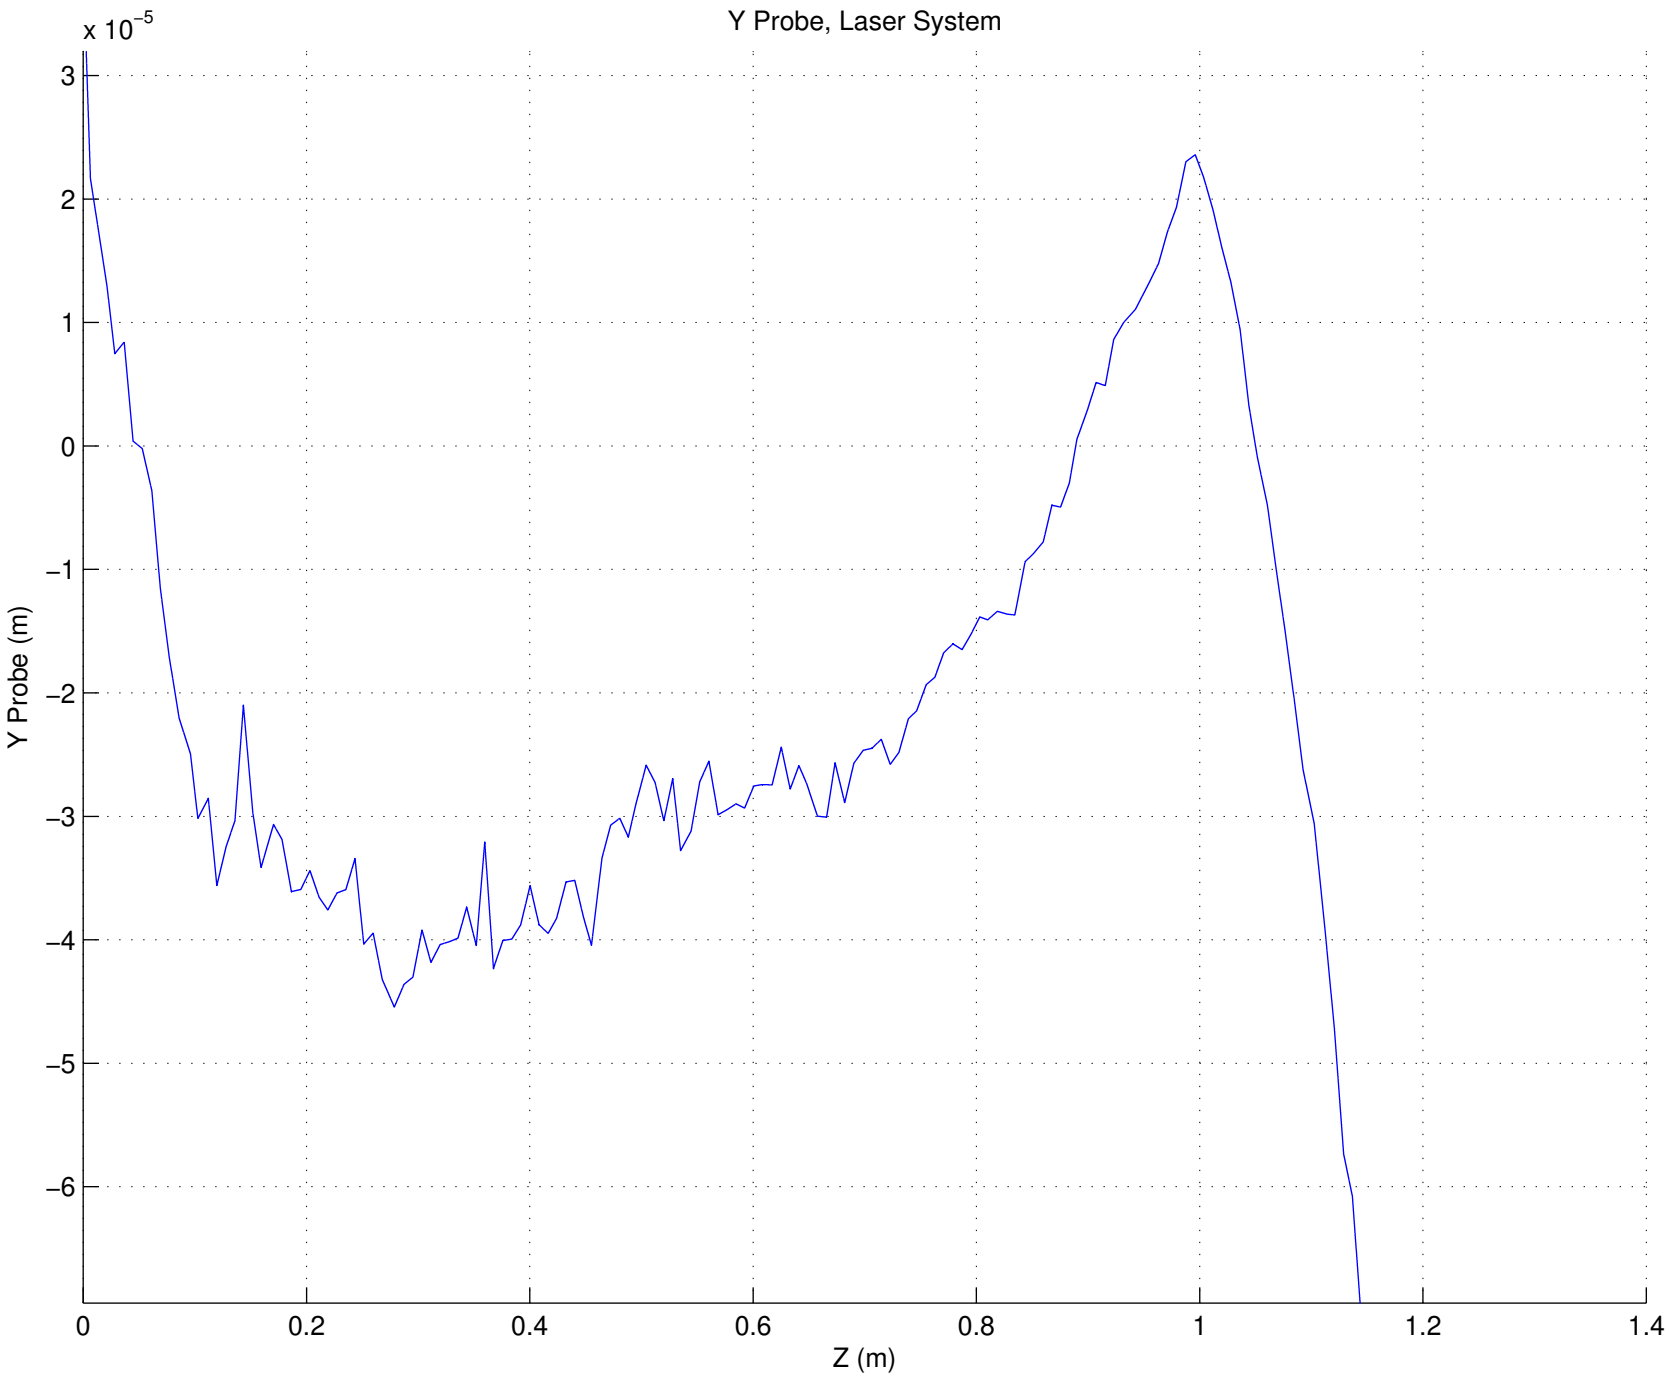
Y Probe, Laser System
x 10^-5
3
2
1
0
−1
−2
−3
−4
−5
−6
Y Probe (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

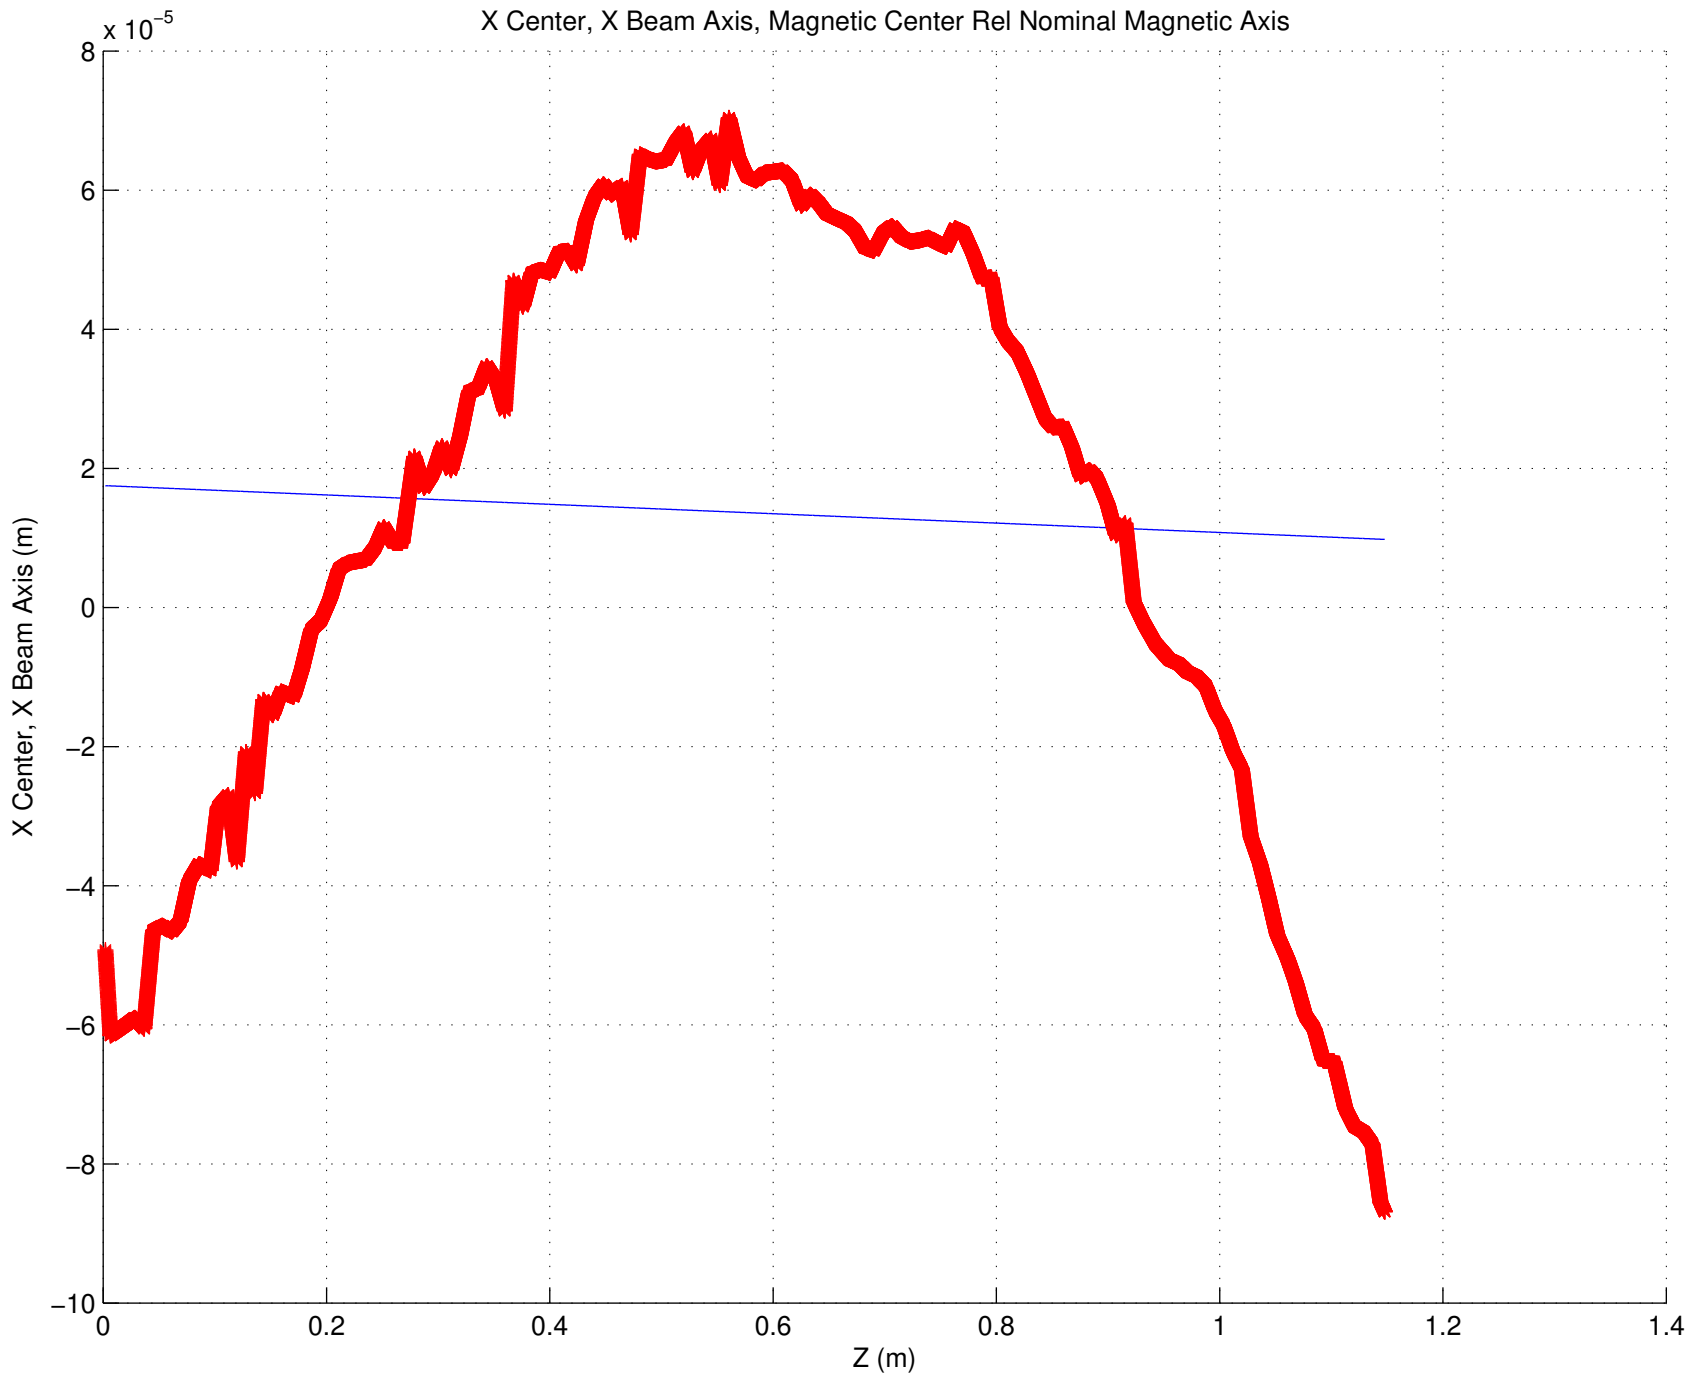
X Center, X Beam Axis, Magnetic Center Rel Nominal Magnetic Axis
x 10^-5
8
6
4
2
0
−2
−4
−6
−8
−10
X Center, X Beam Axis (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

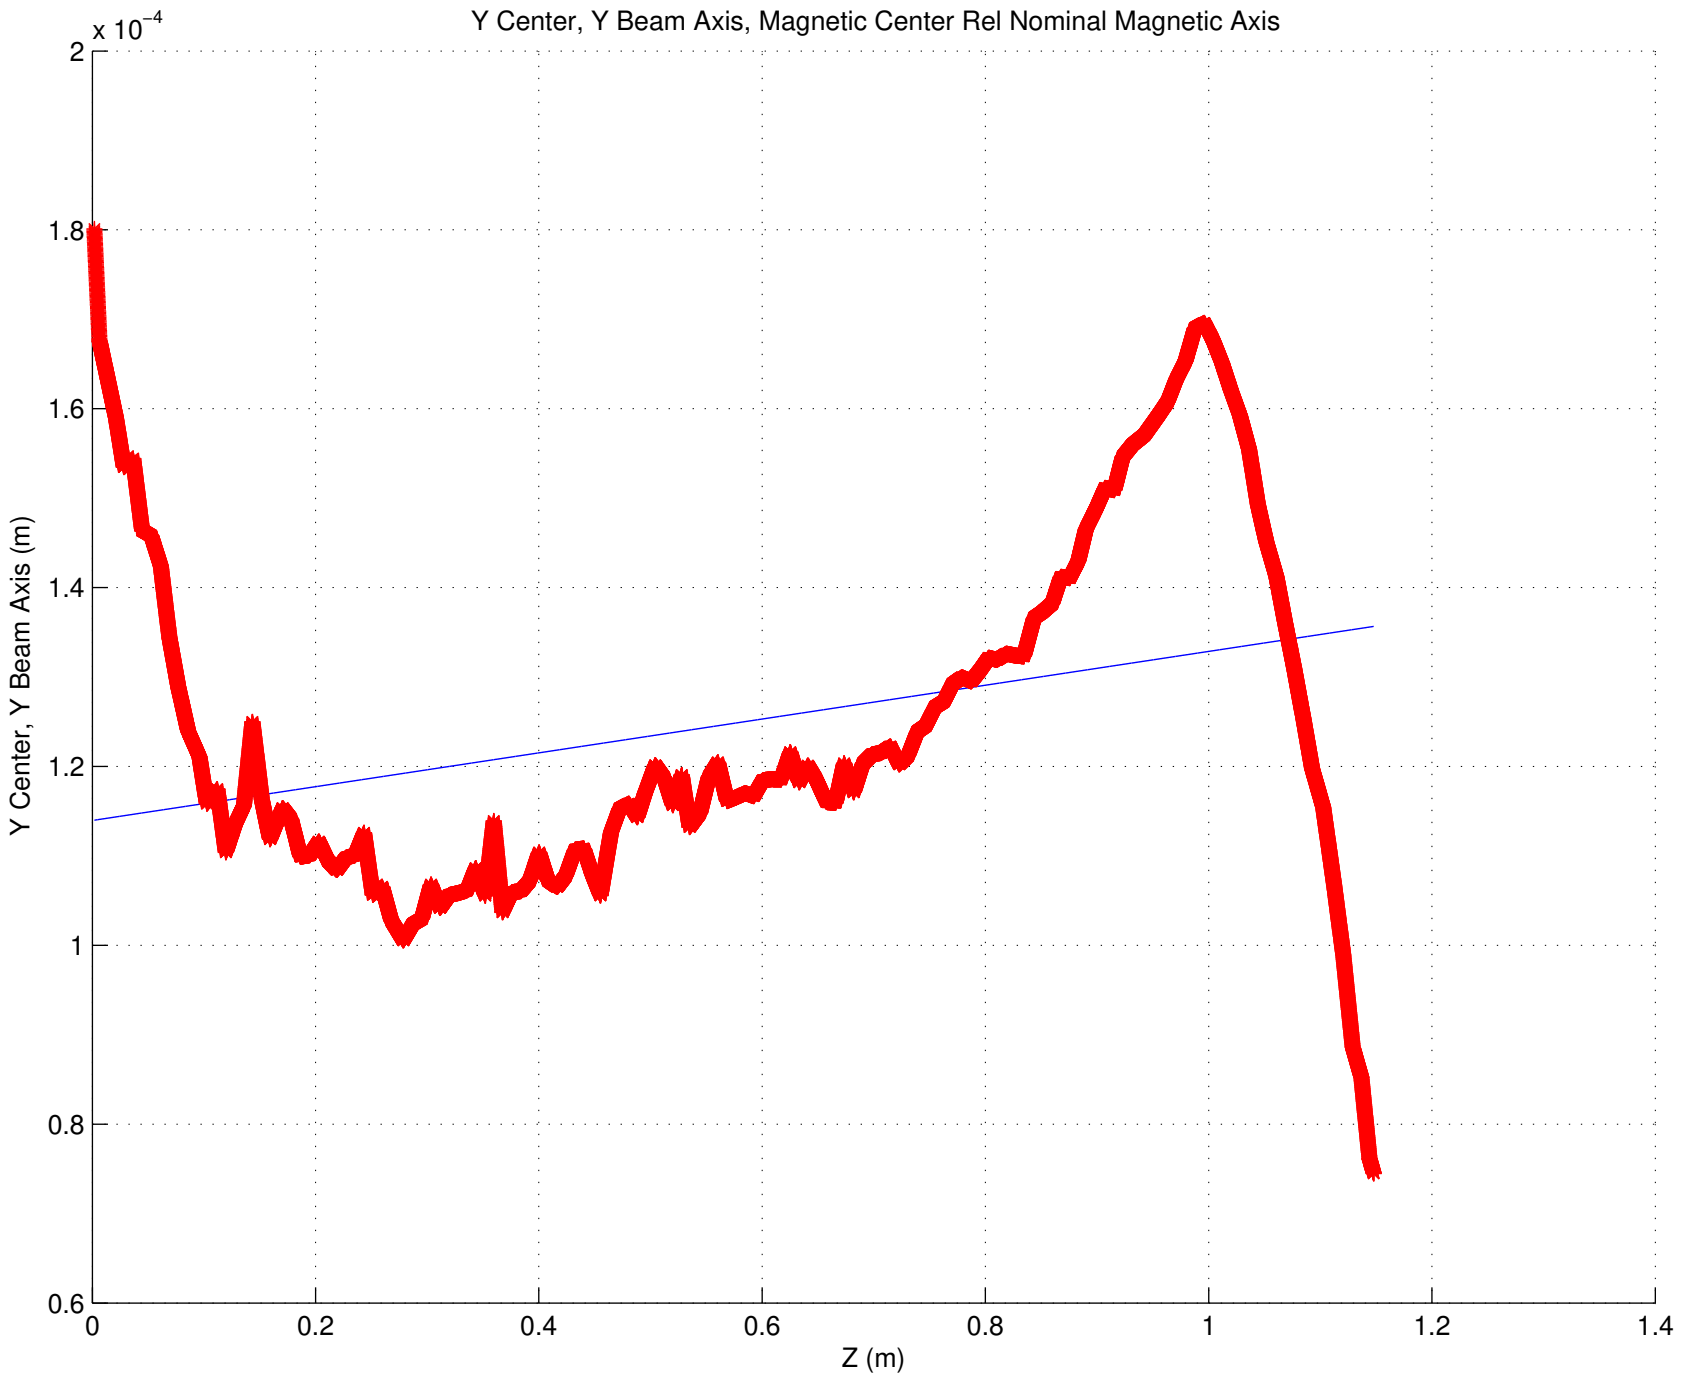
Y Center, Y Beam Axis, Magnetic Center Rel Nominal Magnetic Axis
x 10^-4
2
1.8
1.6
1.4
1.2
1
0.8
0.6
Y Center, Y Beam Axis (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

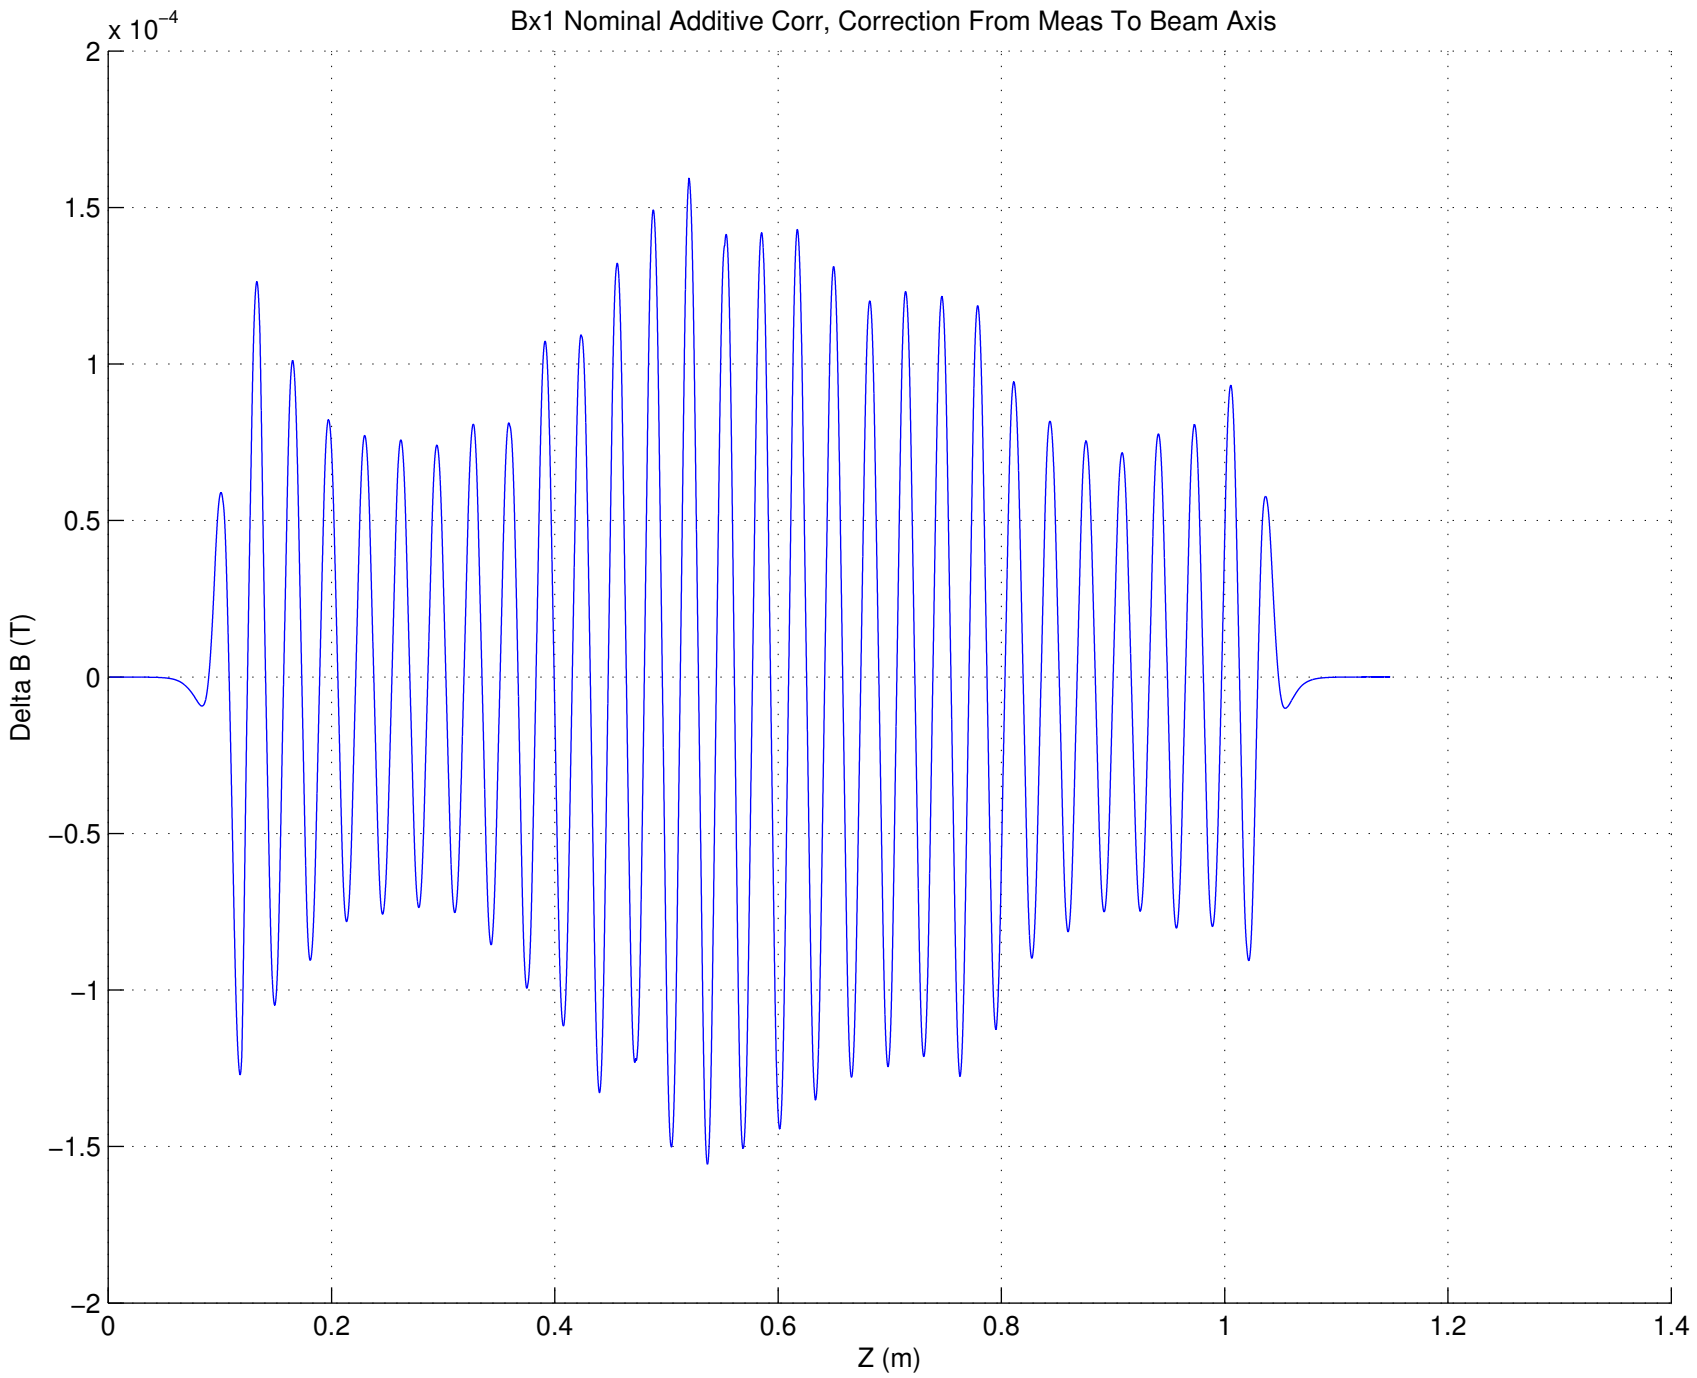
Bx1 Nominal Additive Corr, Correction From Meas To Beam Axis
x 10^-4
2
1.5
1
0.5
0
−0.5
−1
−1.5
−2
Delta B (T)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

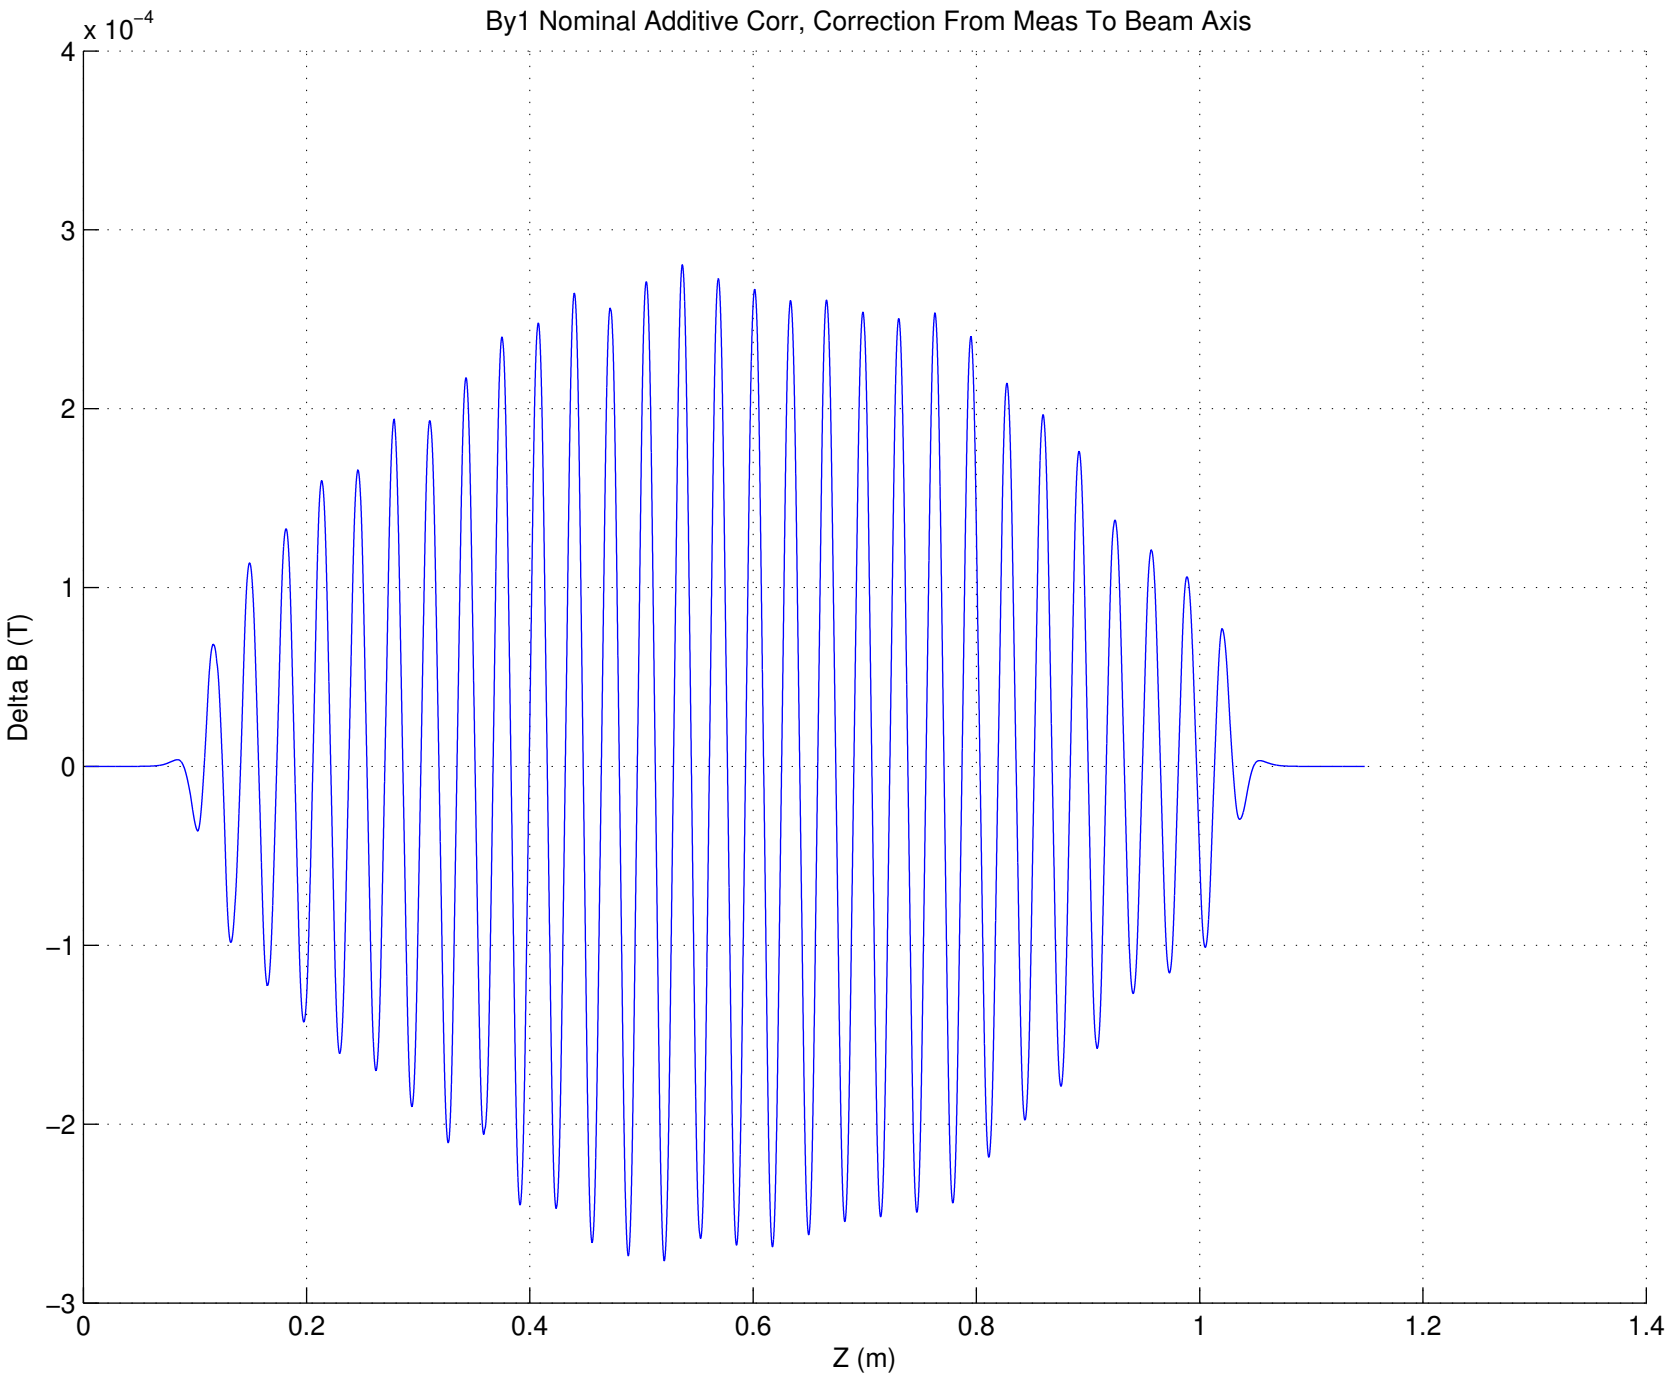
By1 Nominal Additive Corr, Correction From Meas To Beam Axis
x 10^-4
4
3
2
1
0
−1
−2
−3
Delta B (T)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

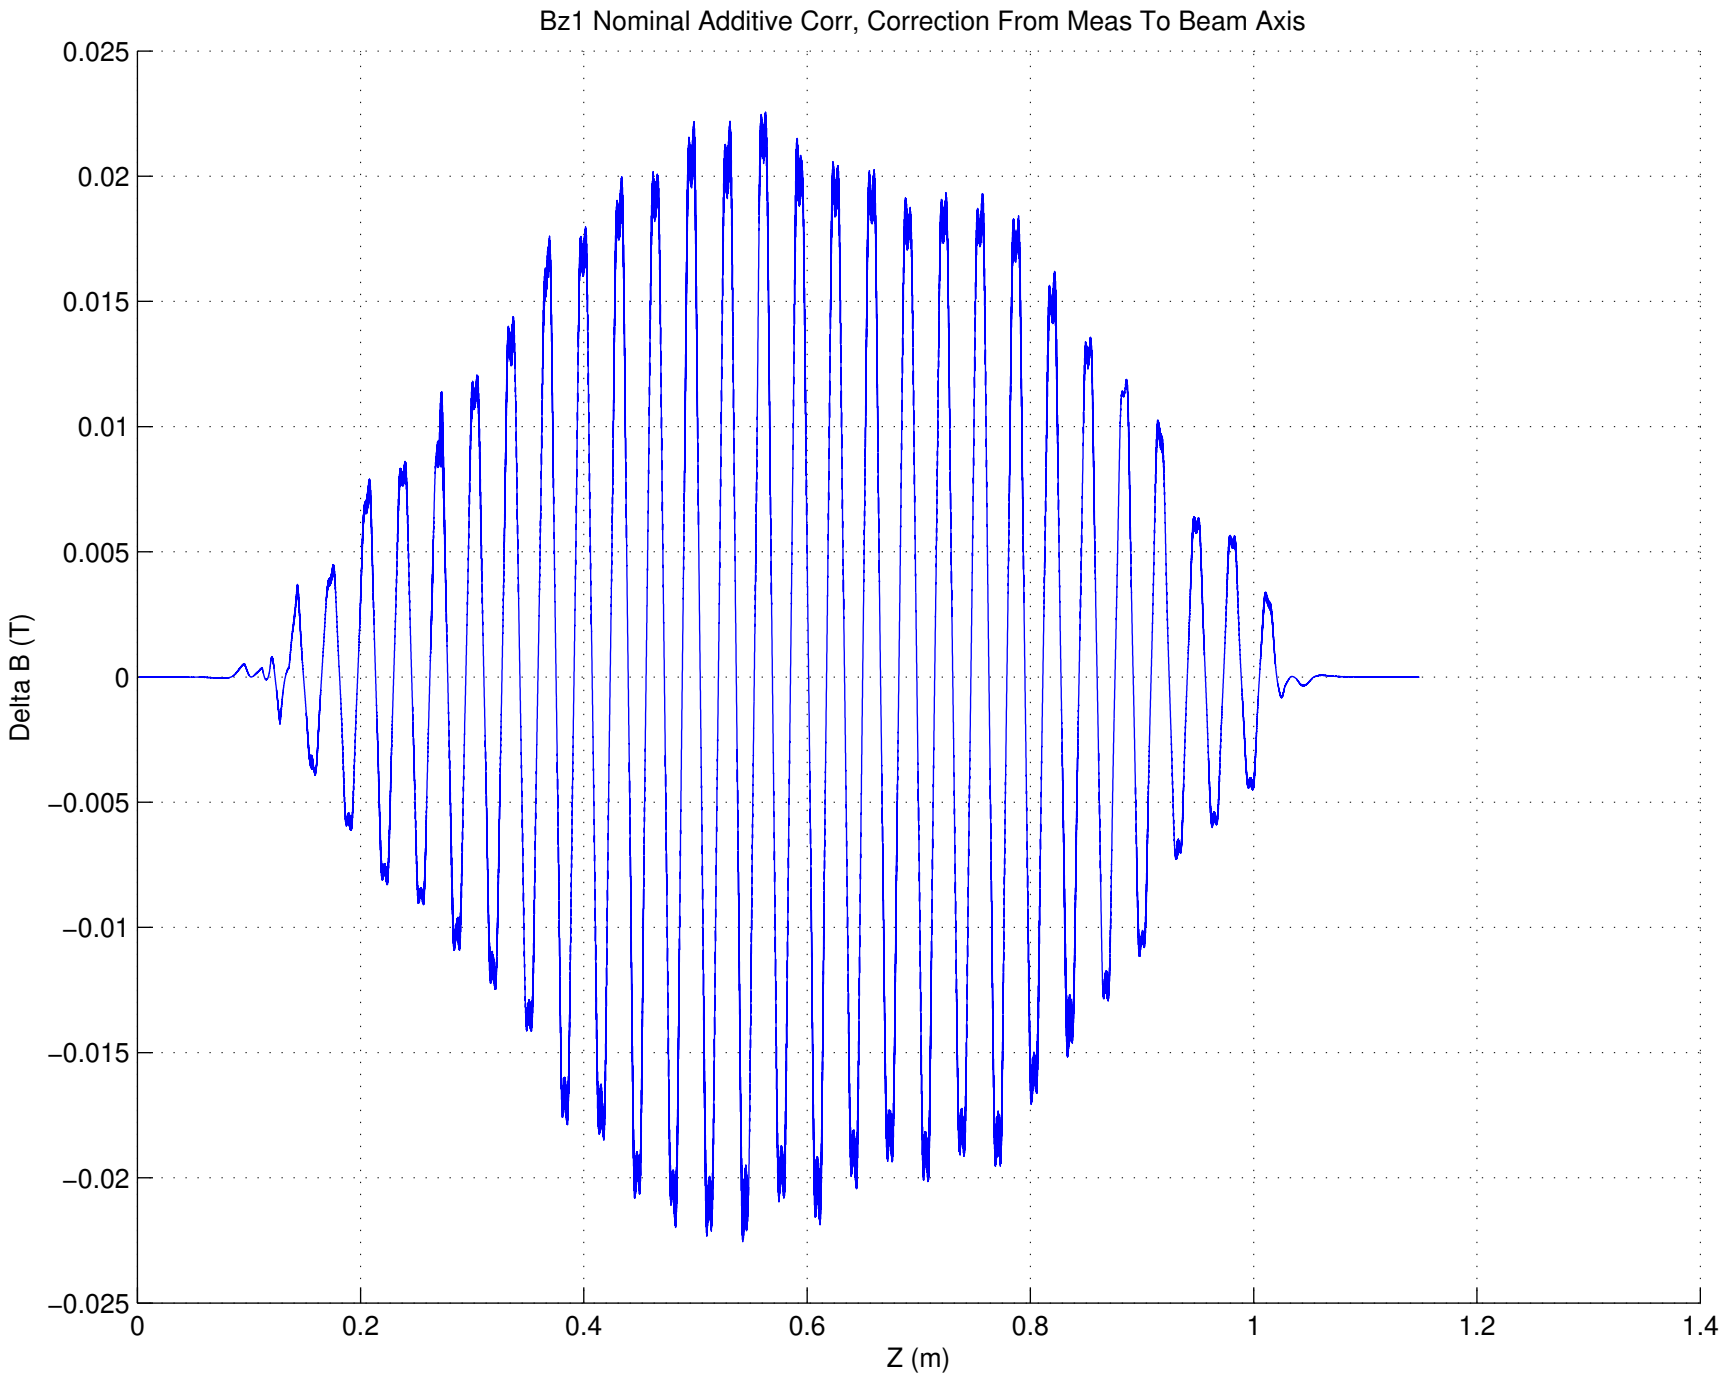
Bz1 Nominal Additive Corr, Correction From Meas To Beam Axis
Delta B (T)
Z (m)
0.025
0.02
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
−0.02
−0.025
0
0.2
0.4
0.6
0.8
1
1.2
1.4

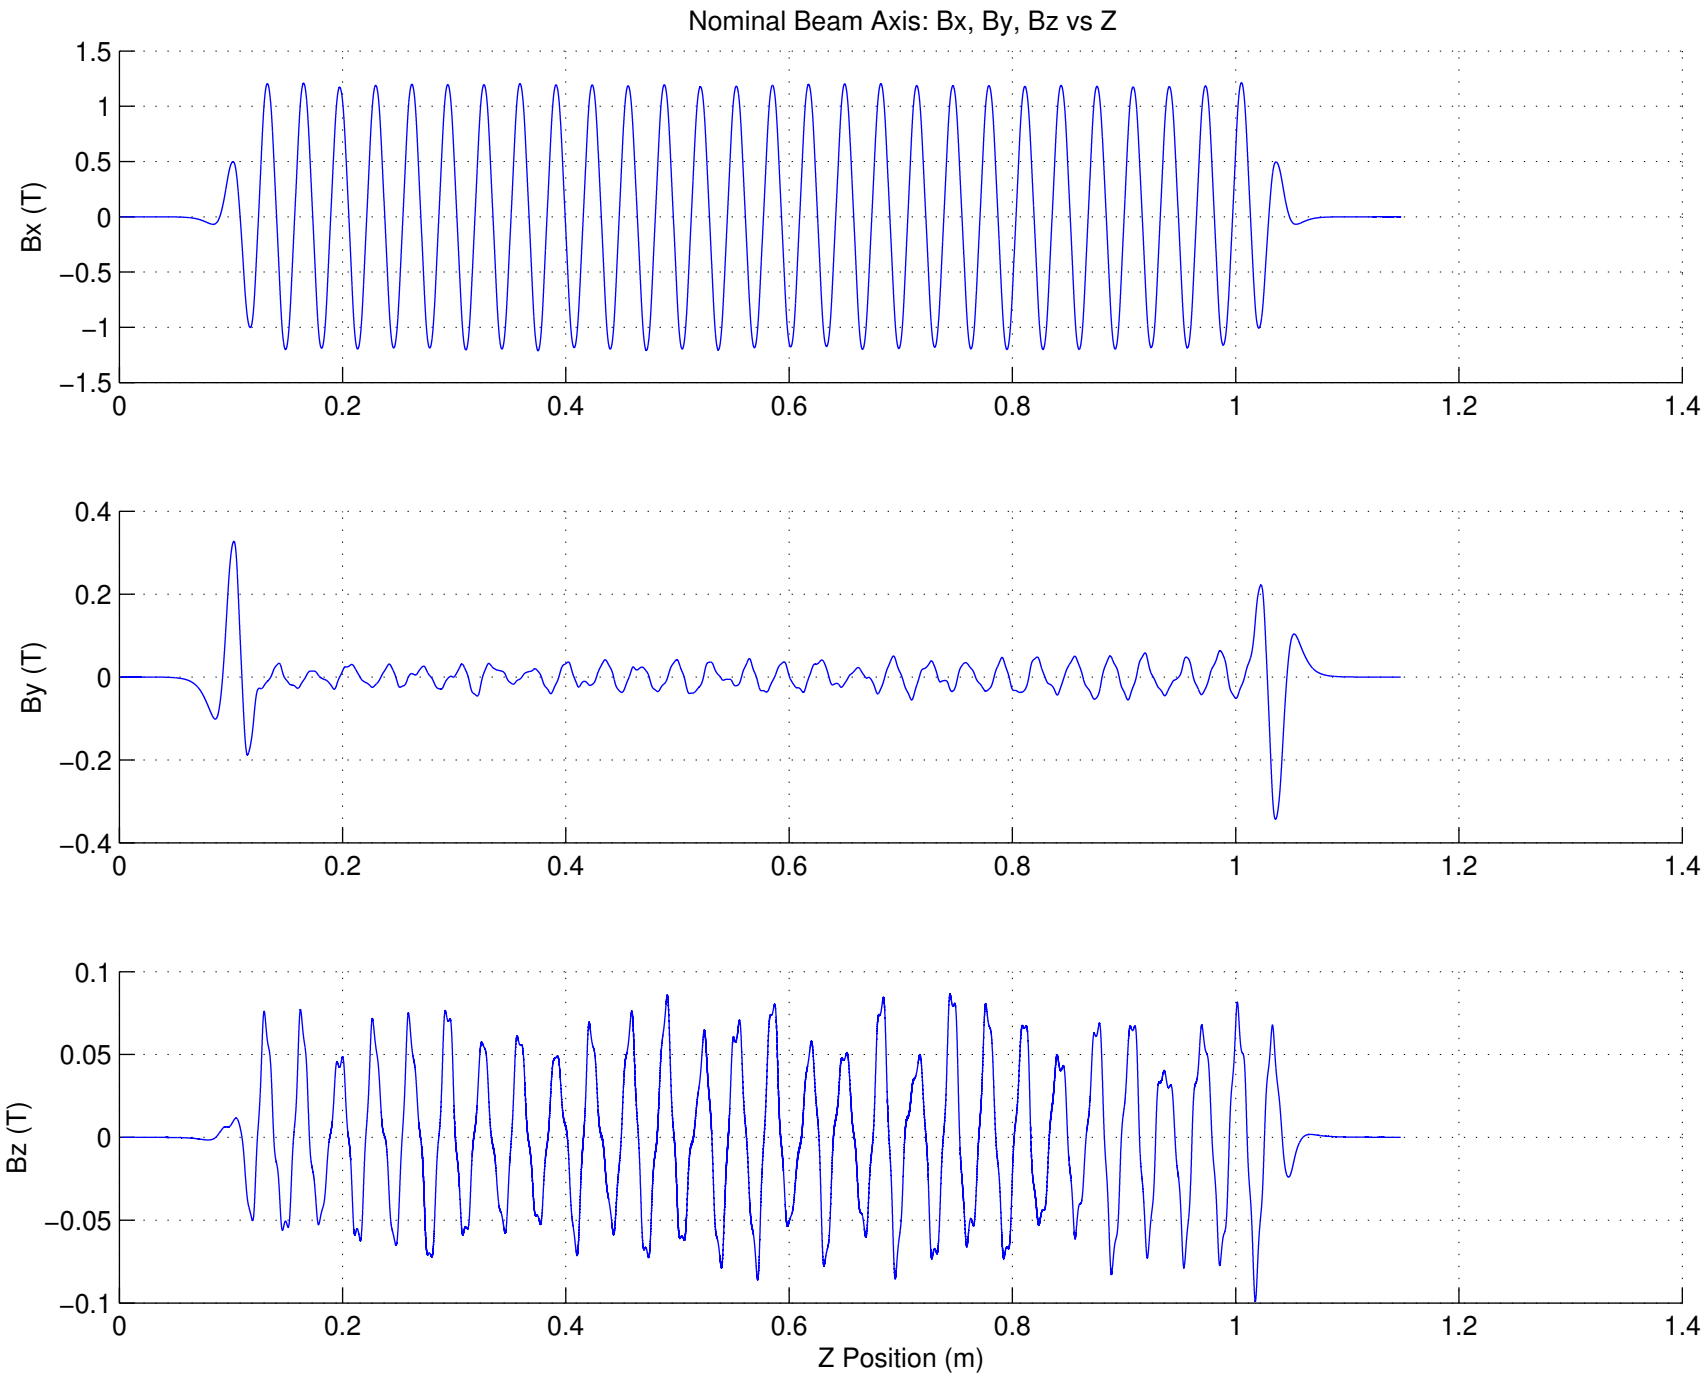
Nominal Beam Axis: Bx, By, Bz vs Z
Bx (T)
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
0.4
0.2
0
−0.2
−0.4
Bz (T)
0.1
0.05
0
−0.05
−0.1
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z Position (m)

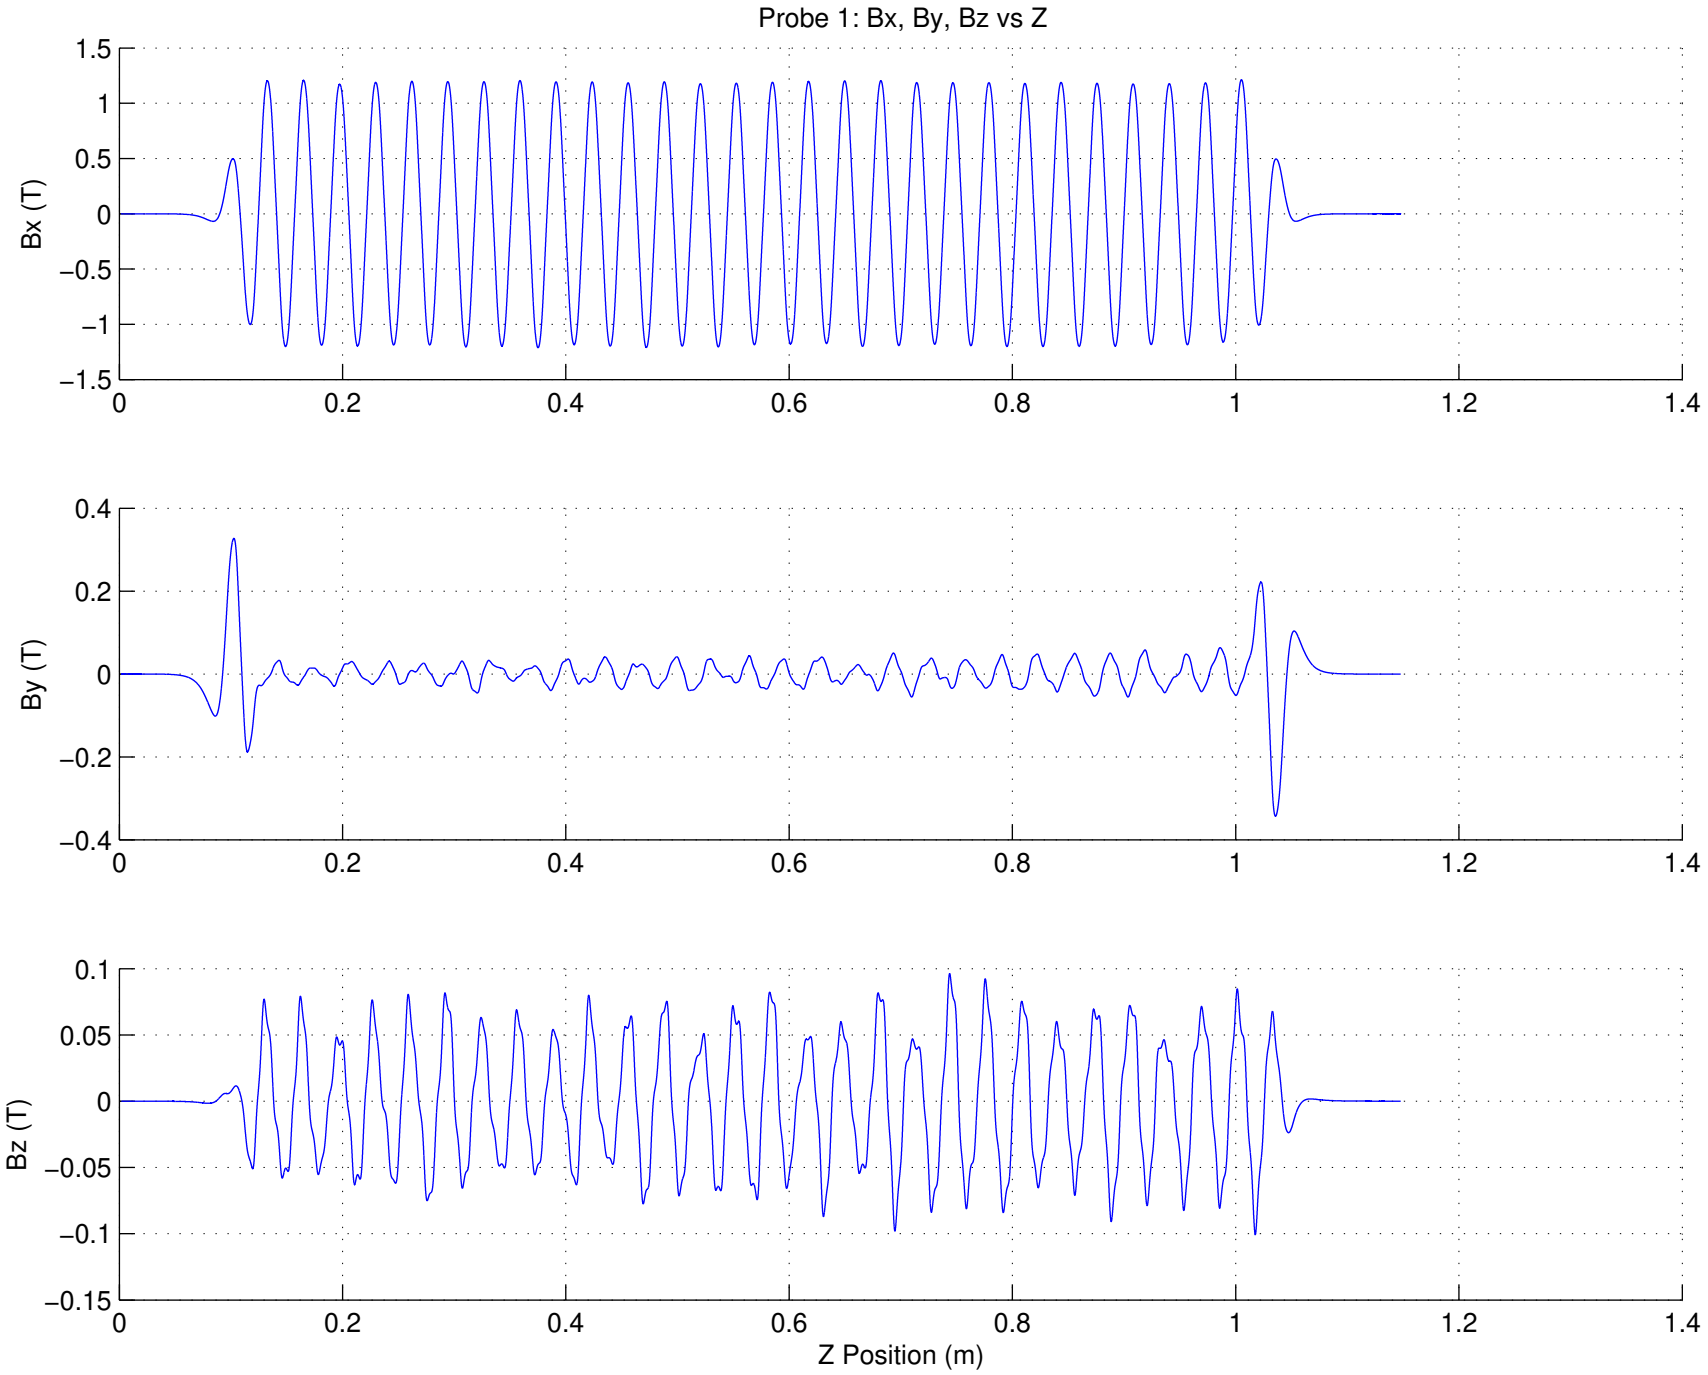
Probe 1: Bx, By, Bz vs Z
Bx (T)
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
0.4
0.2
0
−0.2
−0.4
Bz (T)
0.1
0.05
0
−0.05
−0.1
−0.15
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z Position (m)

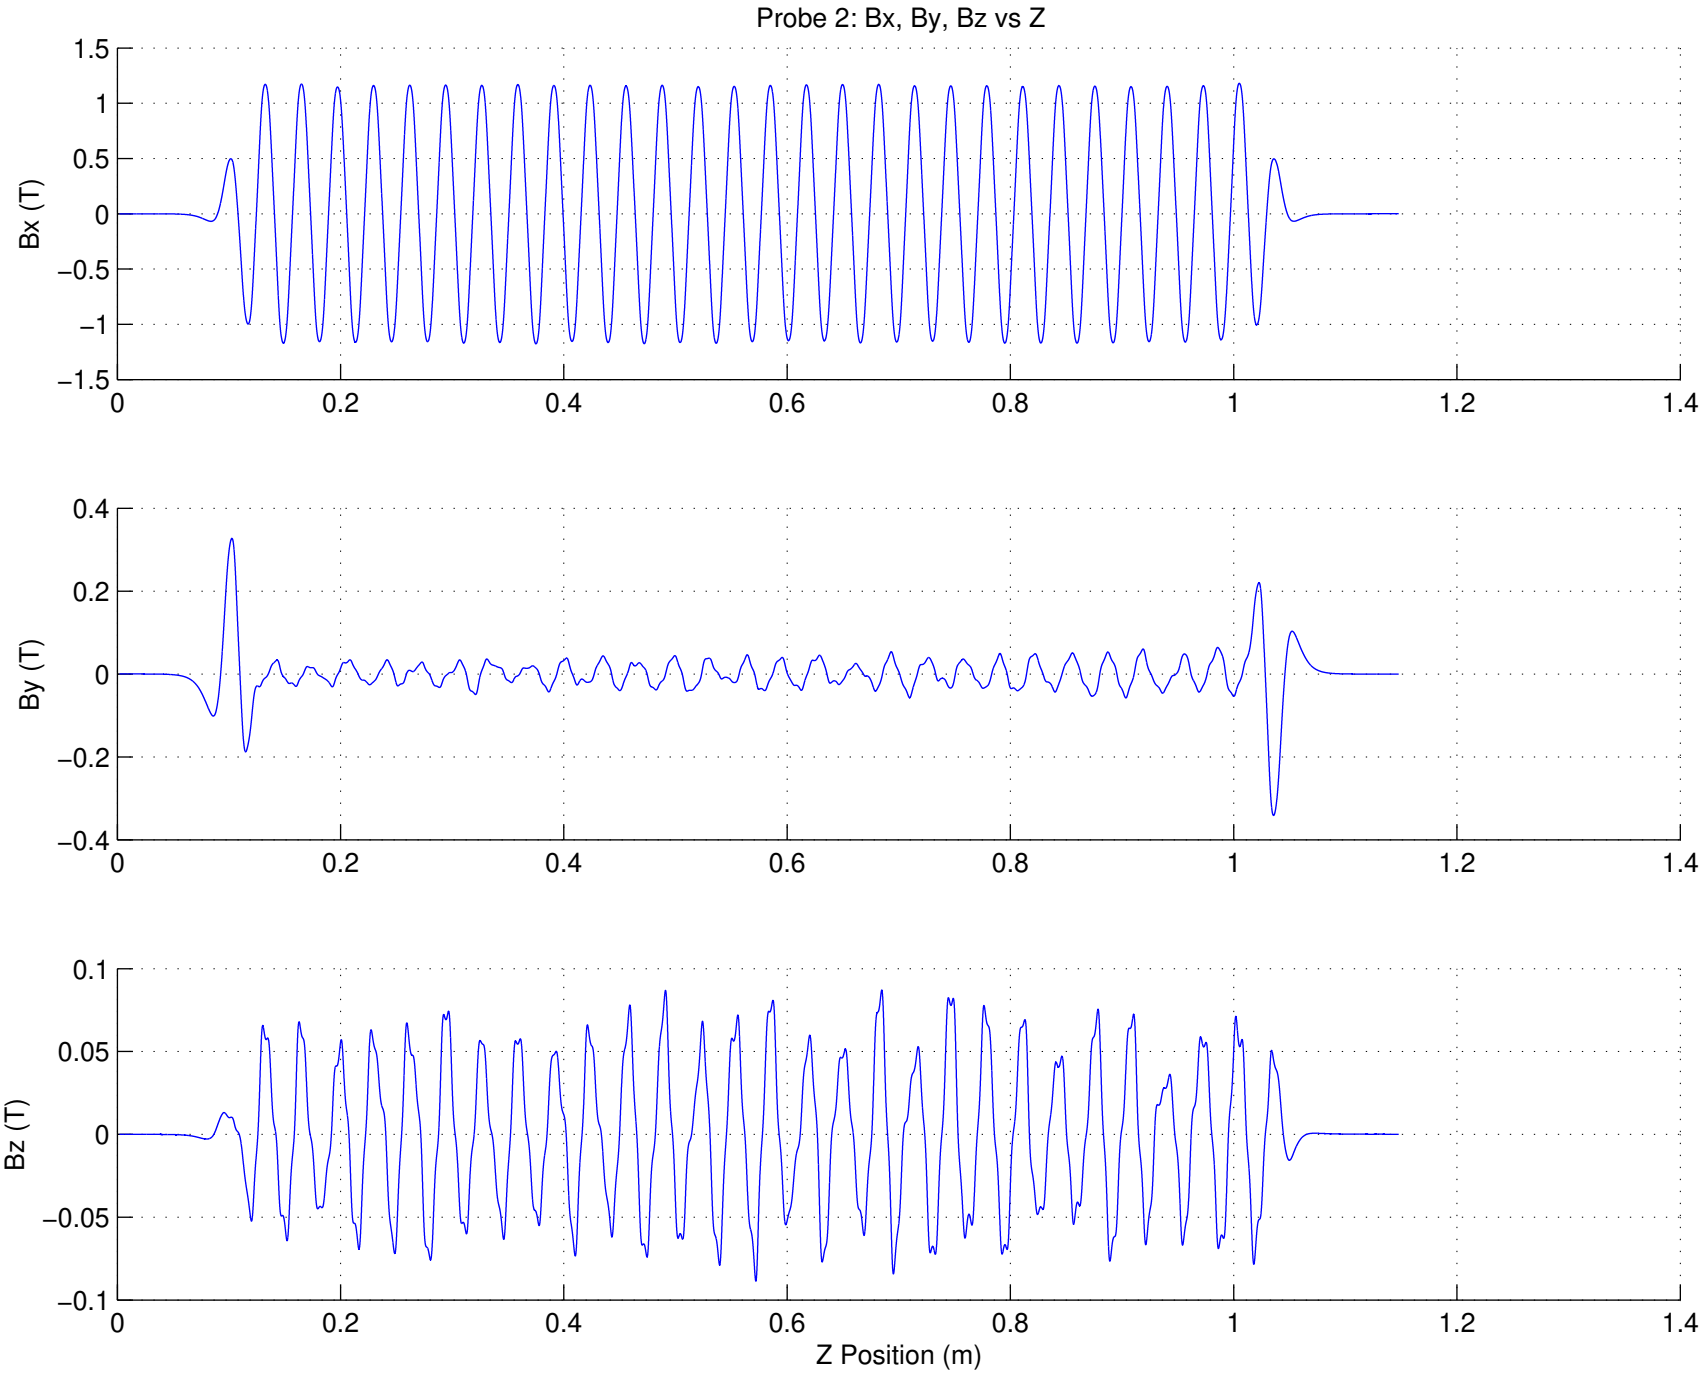
Probe 2: Bx, By, Bz vs Z
Bx (T)
1.5
1
0.5
0
−0.5
−1
−1.5
By (T)
0.4
0.2
0
−0.2
−0.4
Bz (T)
0.1
0.05
0
−0.05
−0.1
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z Position (m)

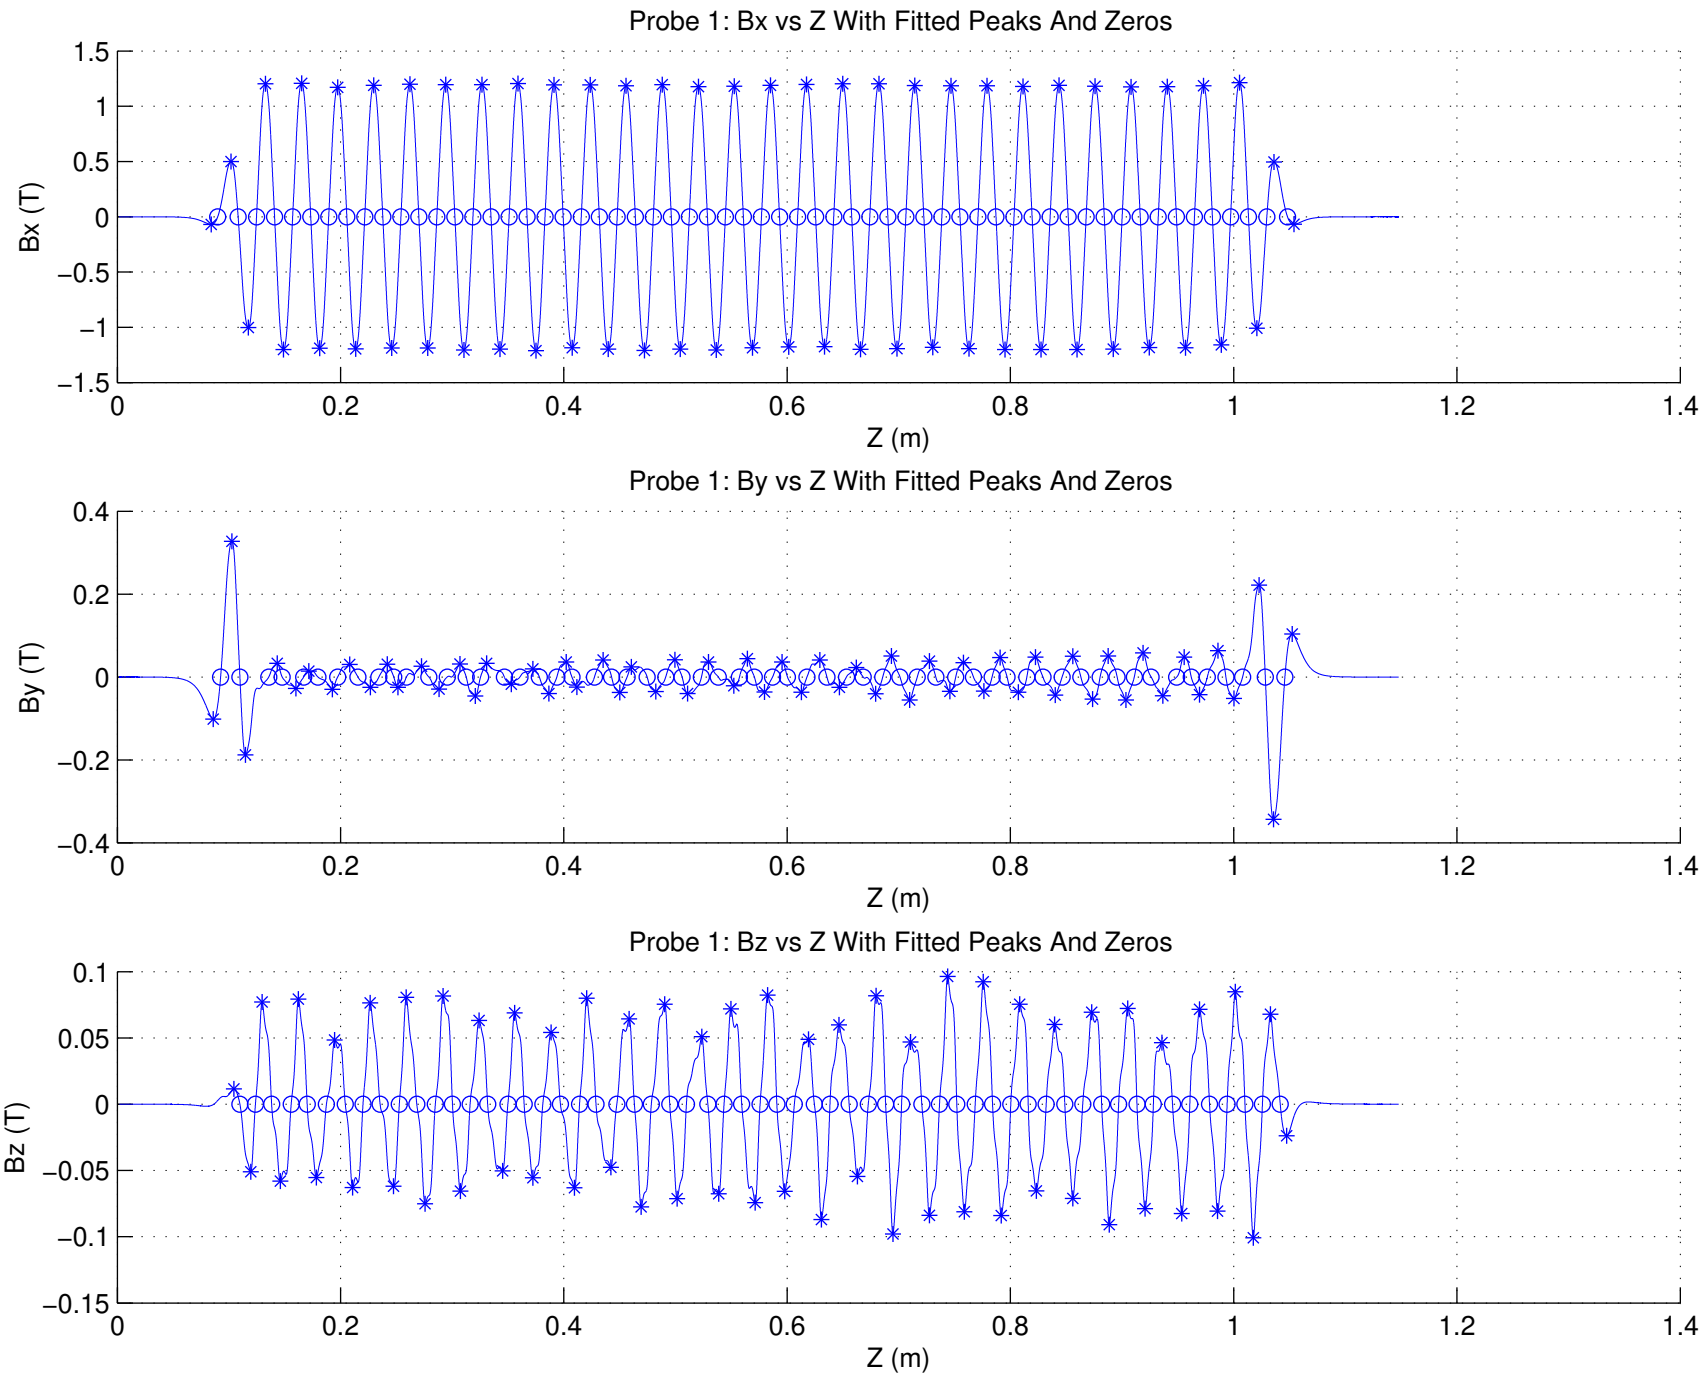
Probe 1: Bx vs Z With Fitted Peaks And Zeros
Bx (T)
Z (m)
Probe 1: By vs Z With Fitted Peaks And Zeros
By (T)
Z (m)
Probe 1: Bz vs Z With Fitted Peaks And Zeros
Bz (T)
Z (m)

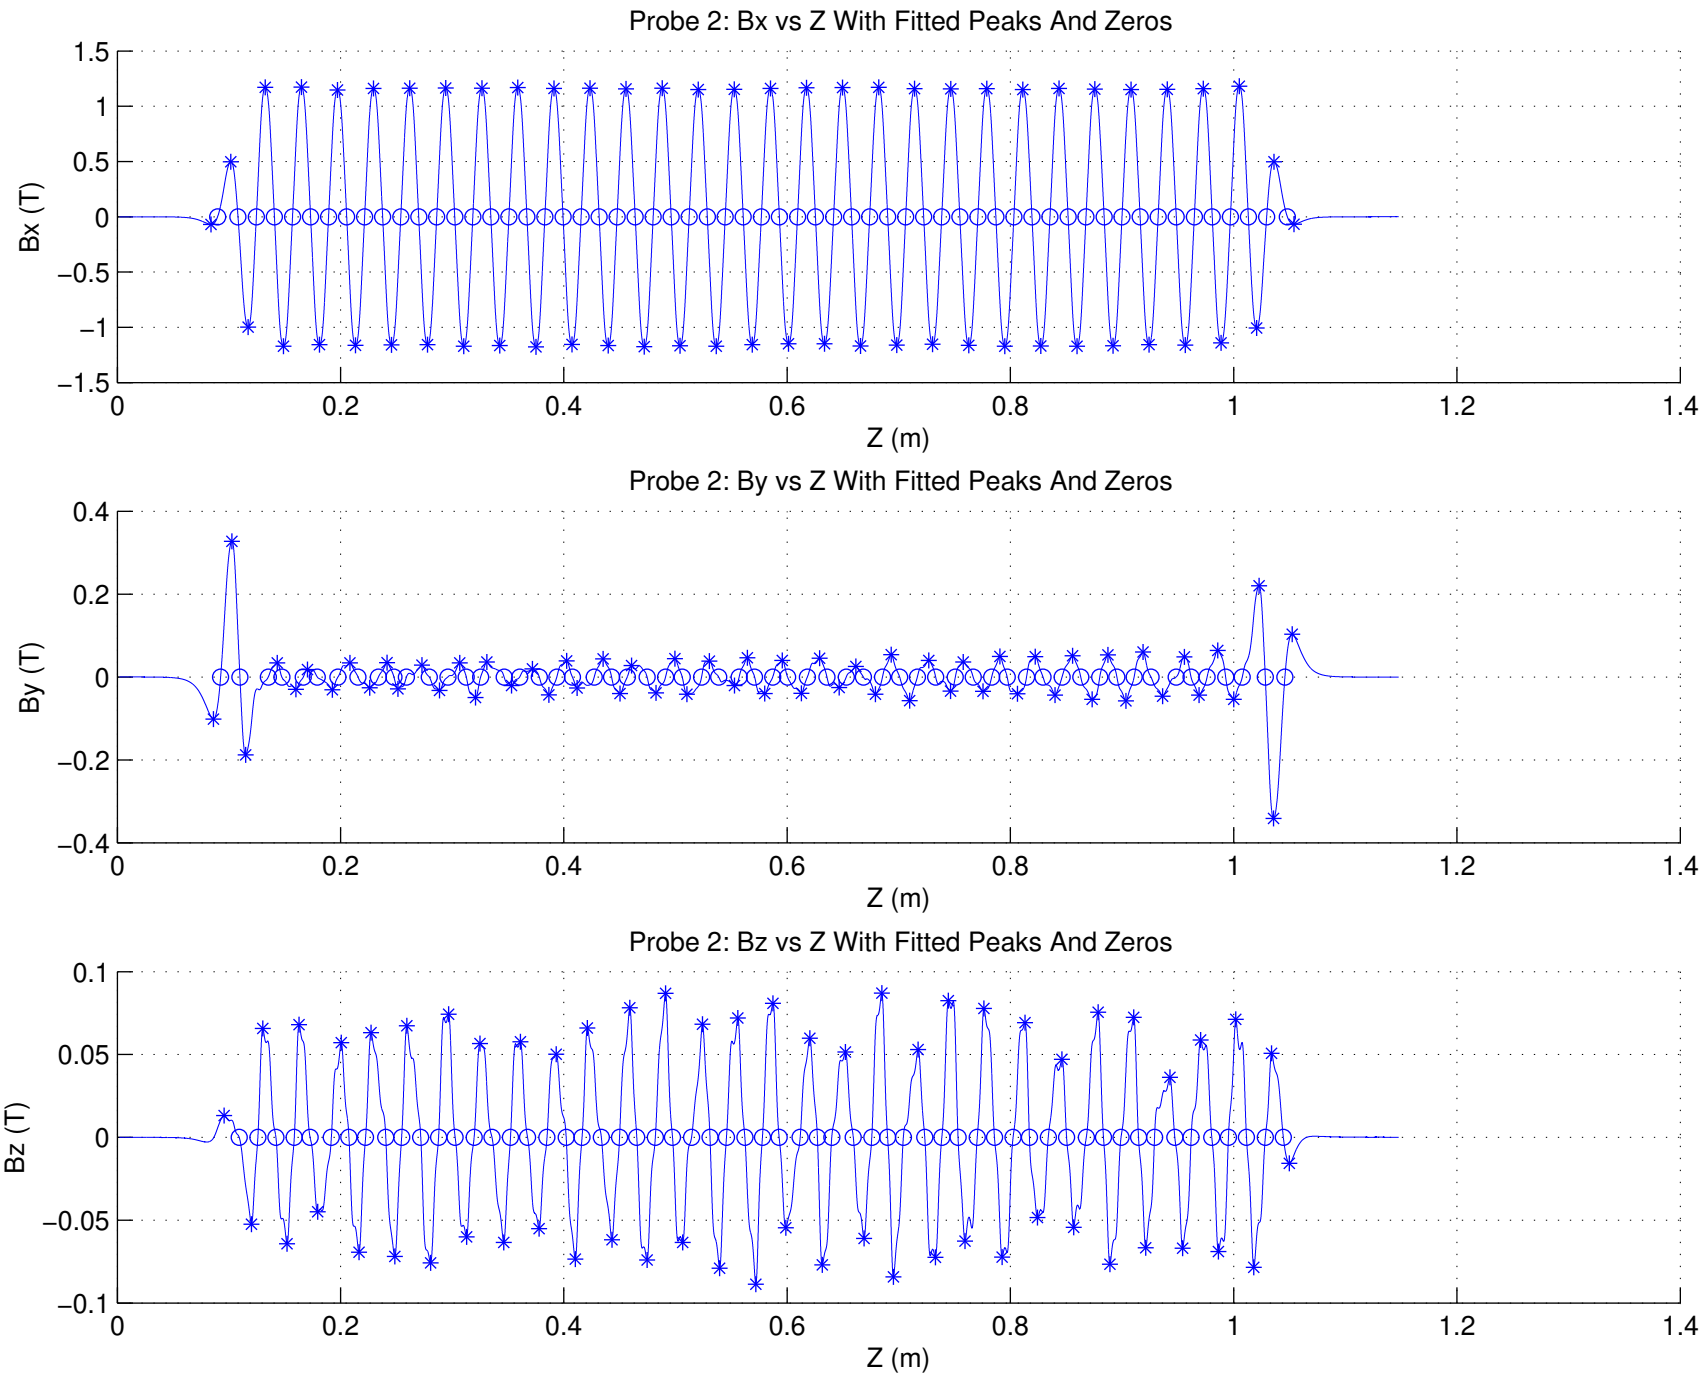
Probe 2: Bx vs Z With Fitted Peaks And Zeros
Bx (T)
Z (m)
Probe 2: By vs Z With Fitted Peaks And Zeros
By (T)
Z (m)
Probe 2: Bz vs Z With Fitted Peaks And Zeros
Bz (T)
Z (m)

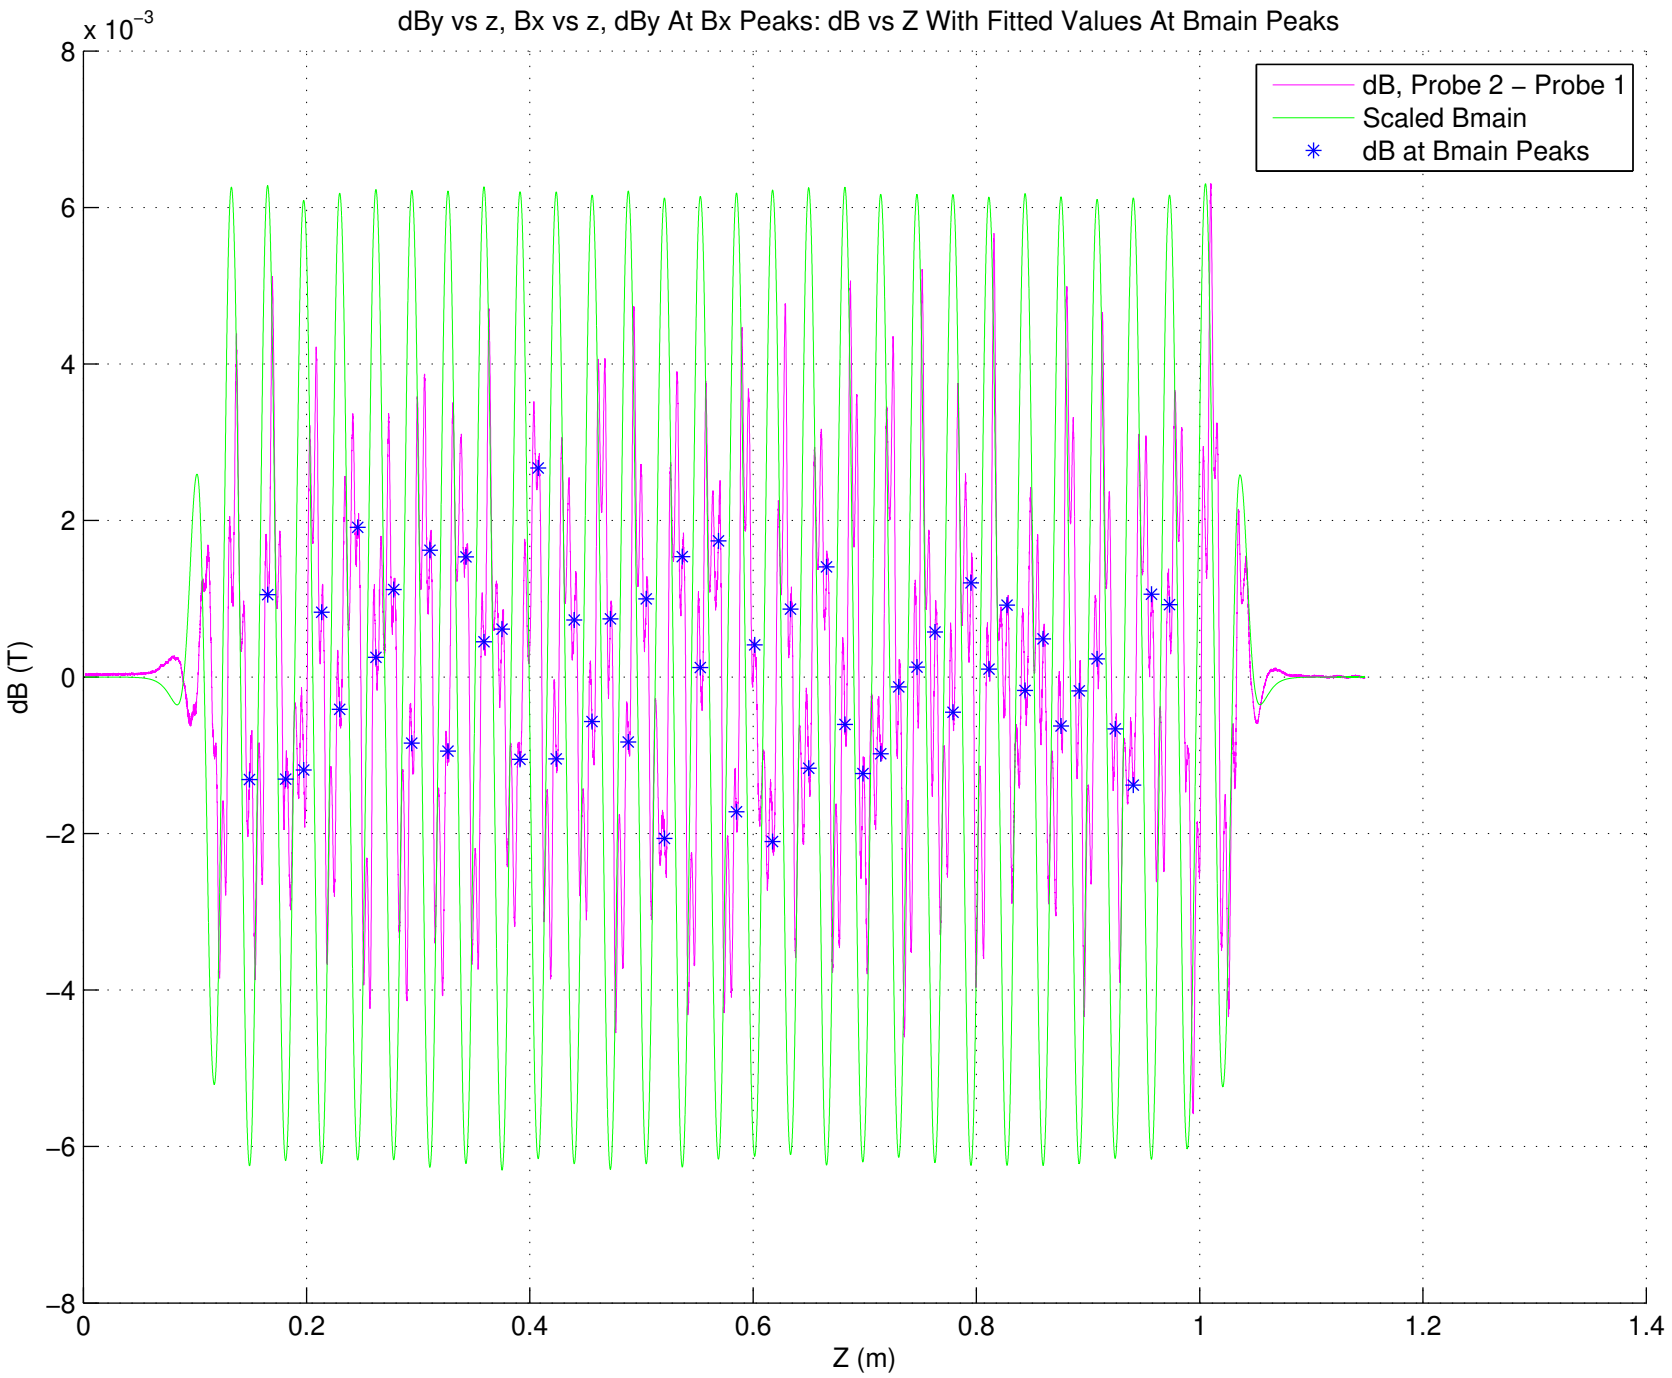
dBy vs z, Bx vs z, dBy At Bx Peaks: dB vs Z With Fitted Values At Bmain Peaks
x 10^-3
dB, Probe 2 – Probe 1
Scaled Bmain
dB at Bmain Peaks
dB (T)
Z (m)
8
6
4
2
0
−2
−4
−6
−8
0
0.2
0.4
0.6
0.8
1
1.2
1.4

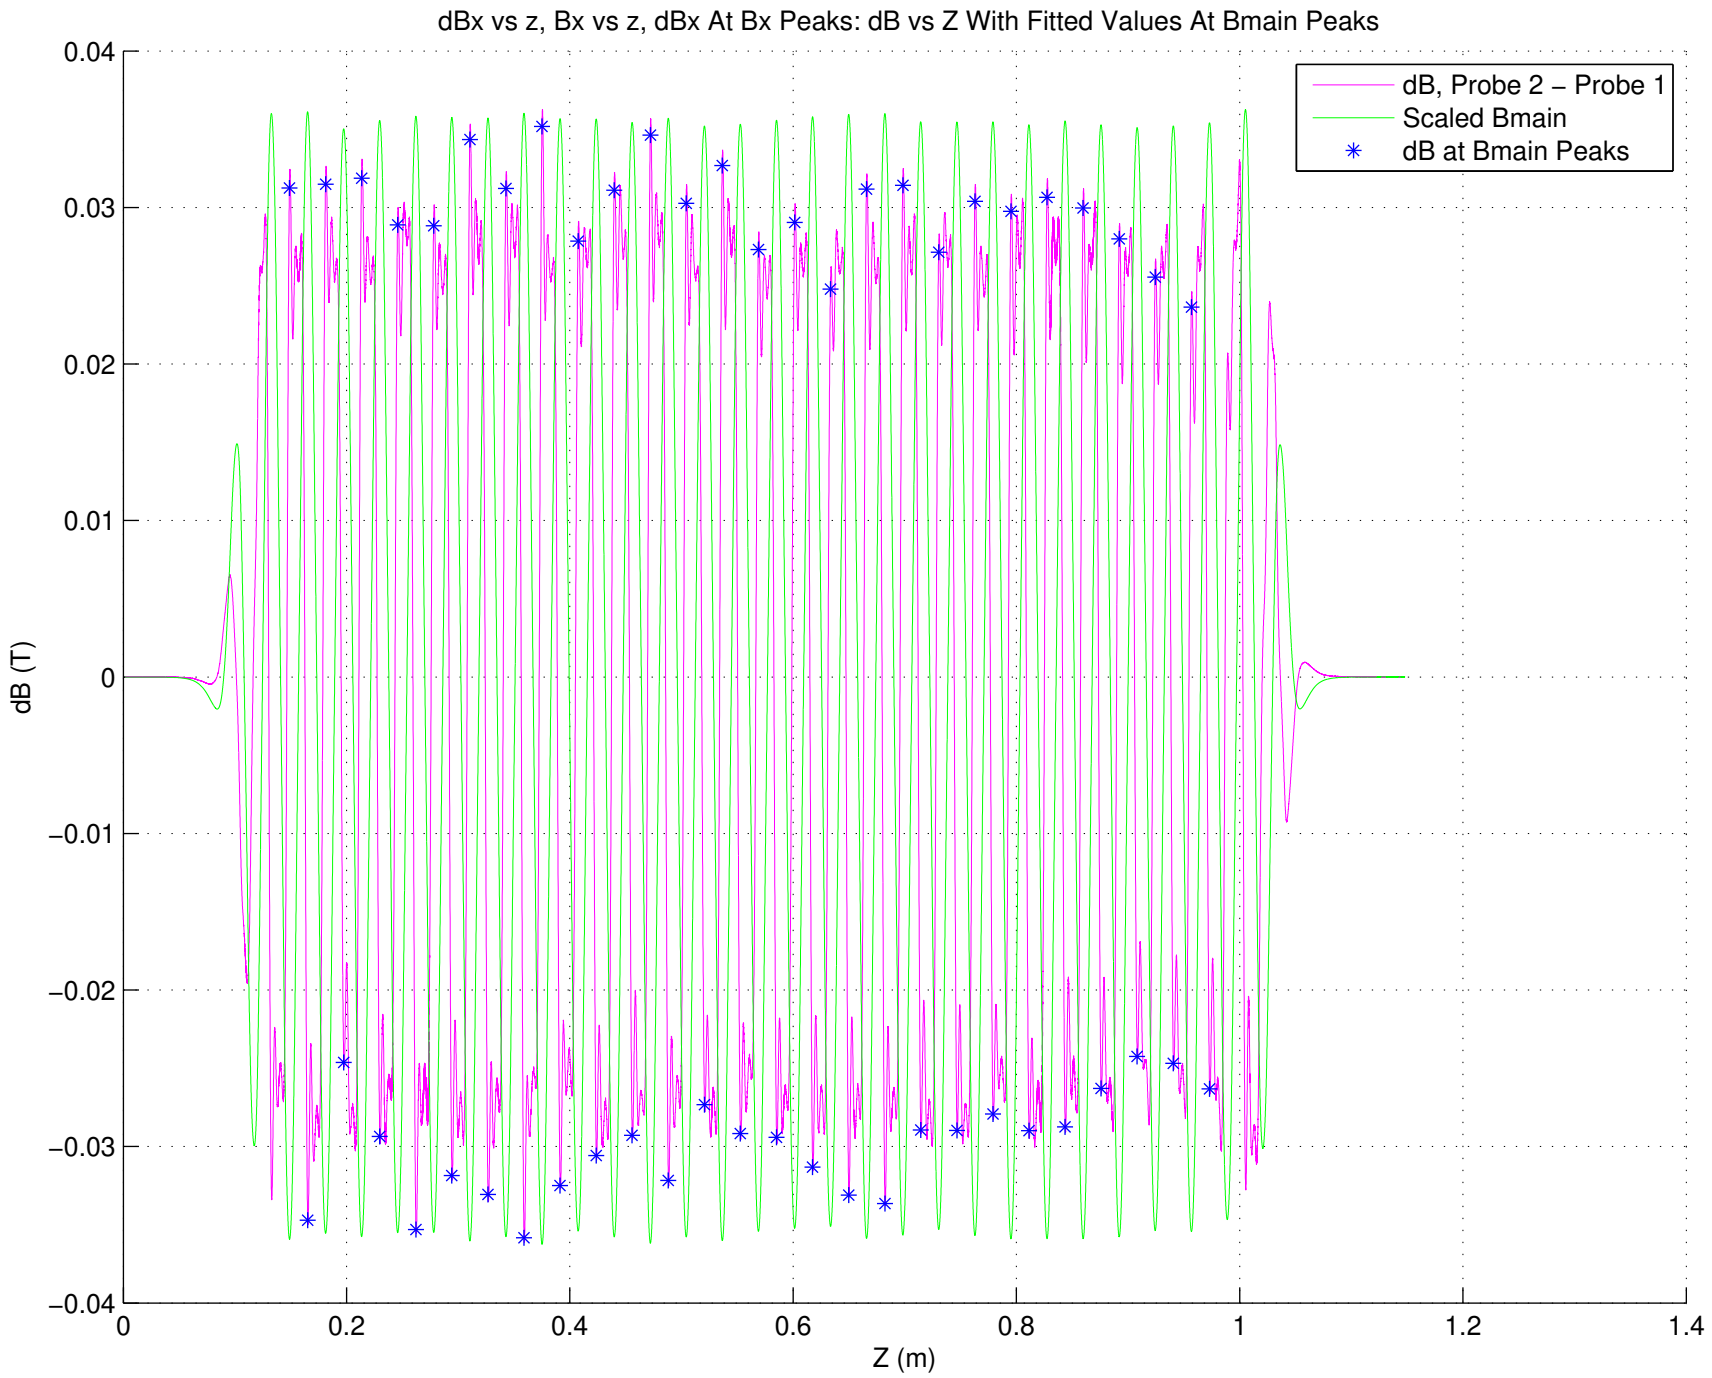
dBx vs z, Bx vs z, dBx At Bx Peaks: dB vs Z With Fitted Values At Bmain Peaks
dB, Probe 2 – Probe 1
Scaled Bmain
dB at Bmain Peaks
dB (T)
Z (m)
0.04
0.03
0.02
0.01
0
−0.01
−0.02
−0.03
−0.04
0
0.2
0.4
0.6
0.8
1
1.2
1.4

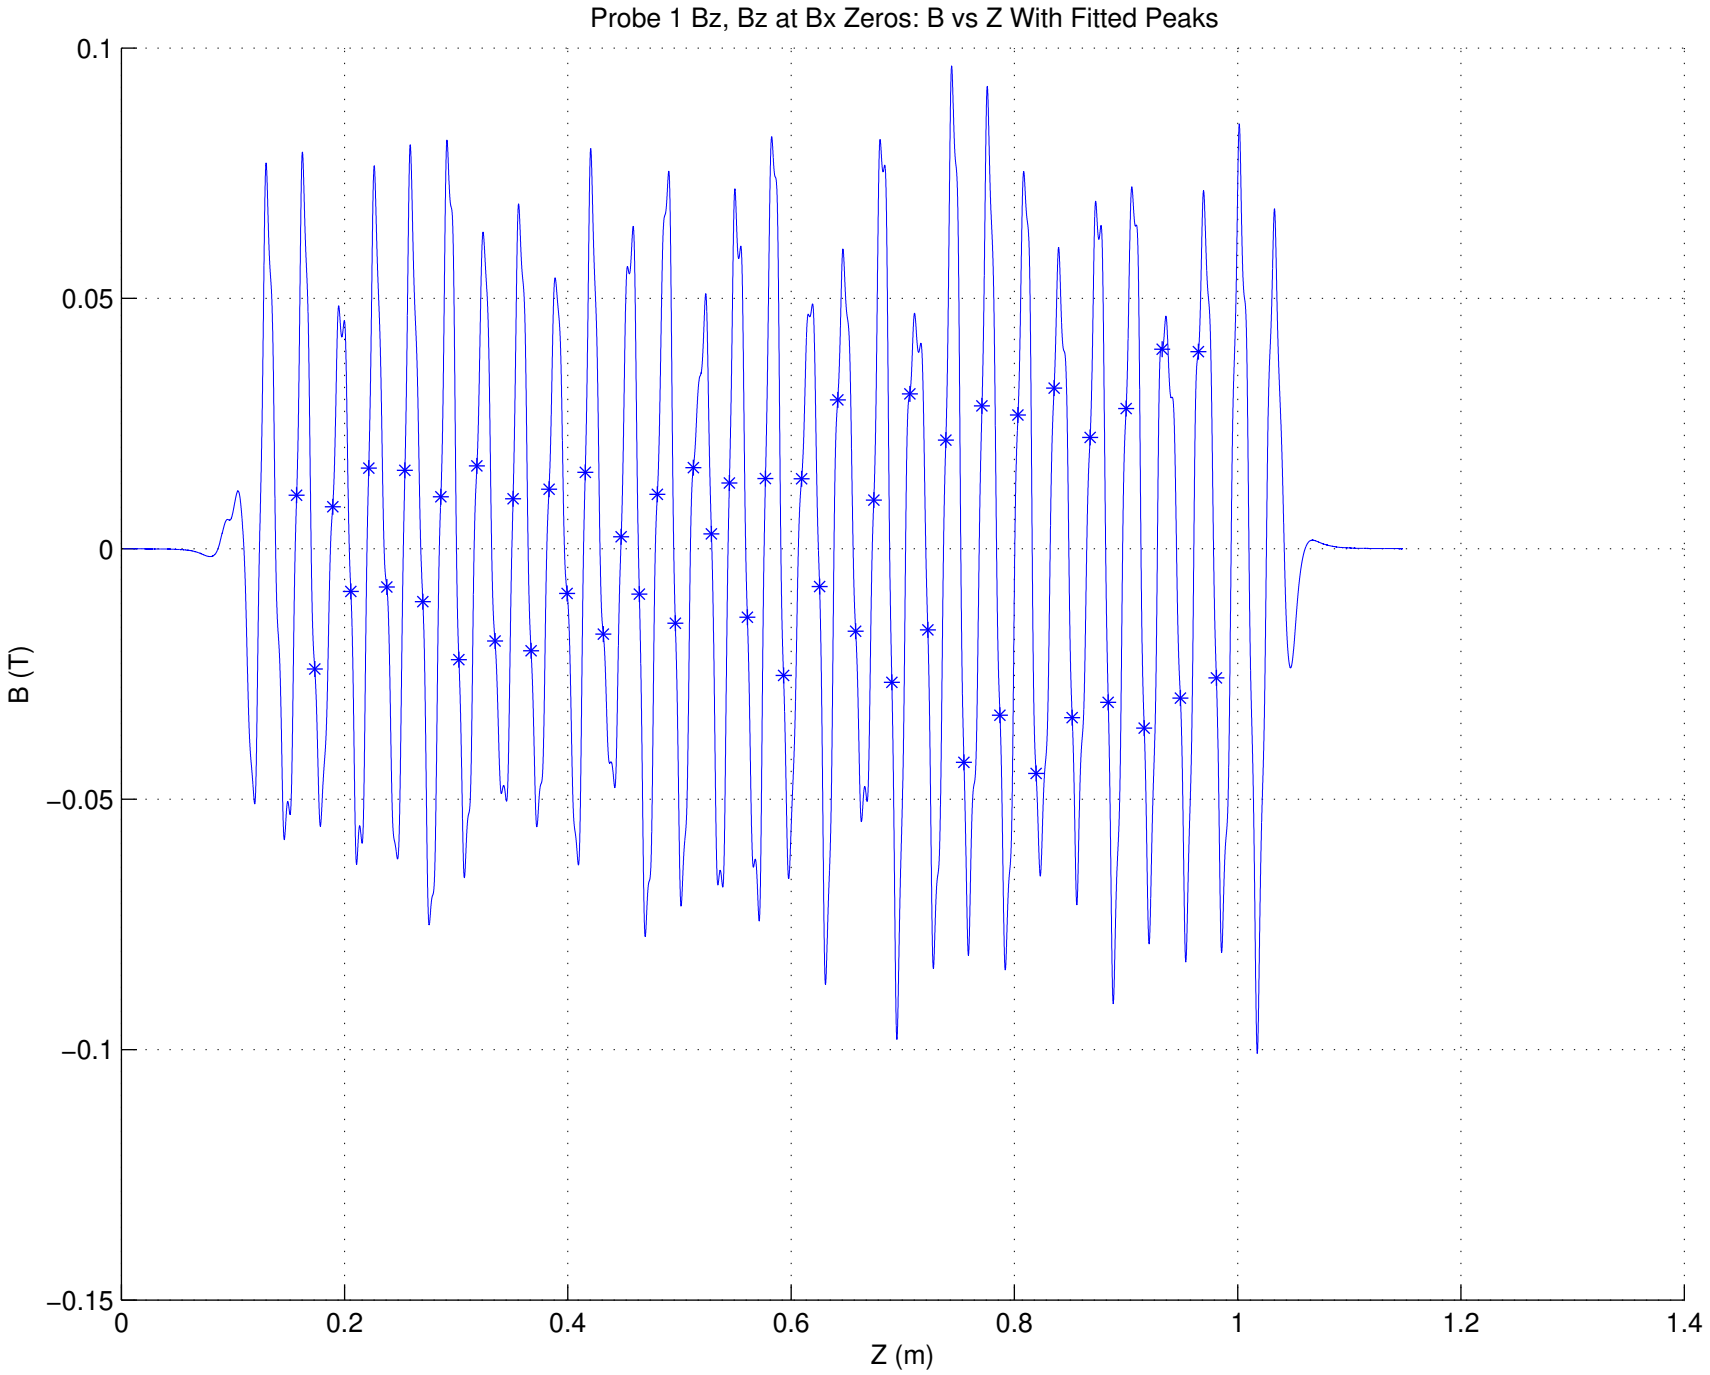
Probe 1 Bz, Bz at Bx Zeros: B vs Z With Fitted Peaks
B (T)
Z (m)
0.1
0.05
0
−0.05
−0.1
−0.15
0
0.2
0.4
0.6
0.8
1
1.2
1.4

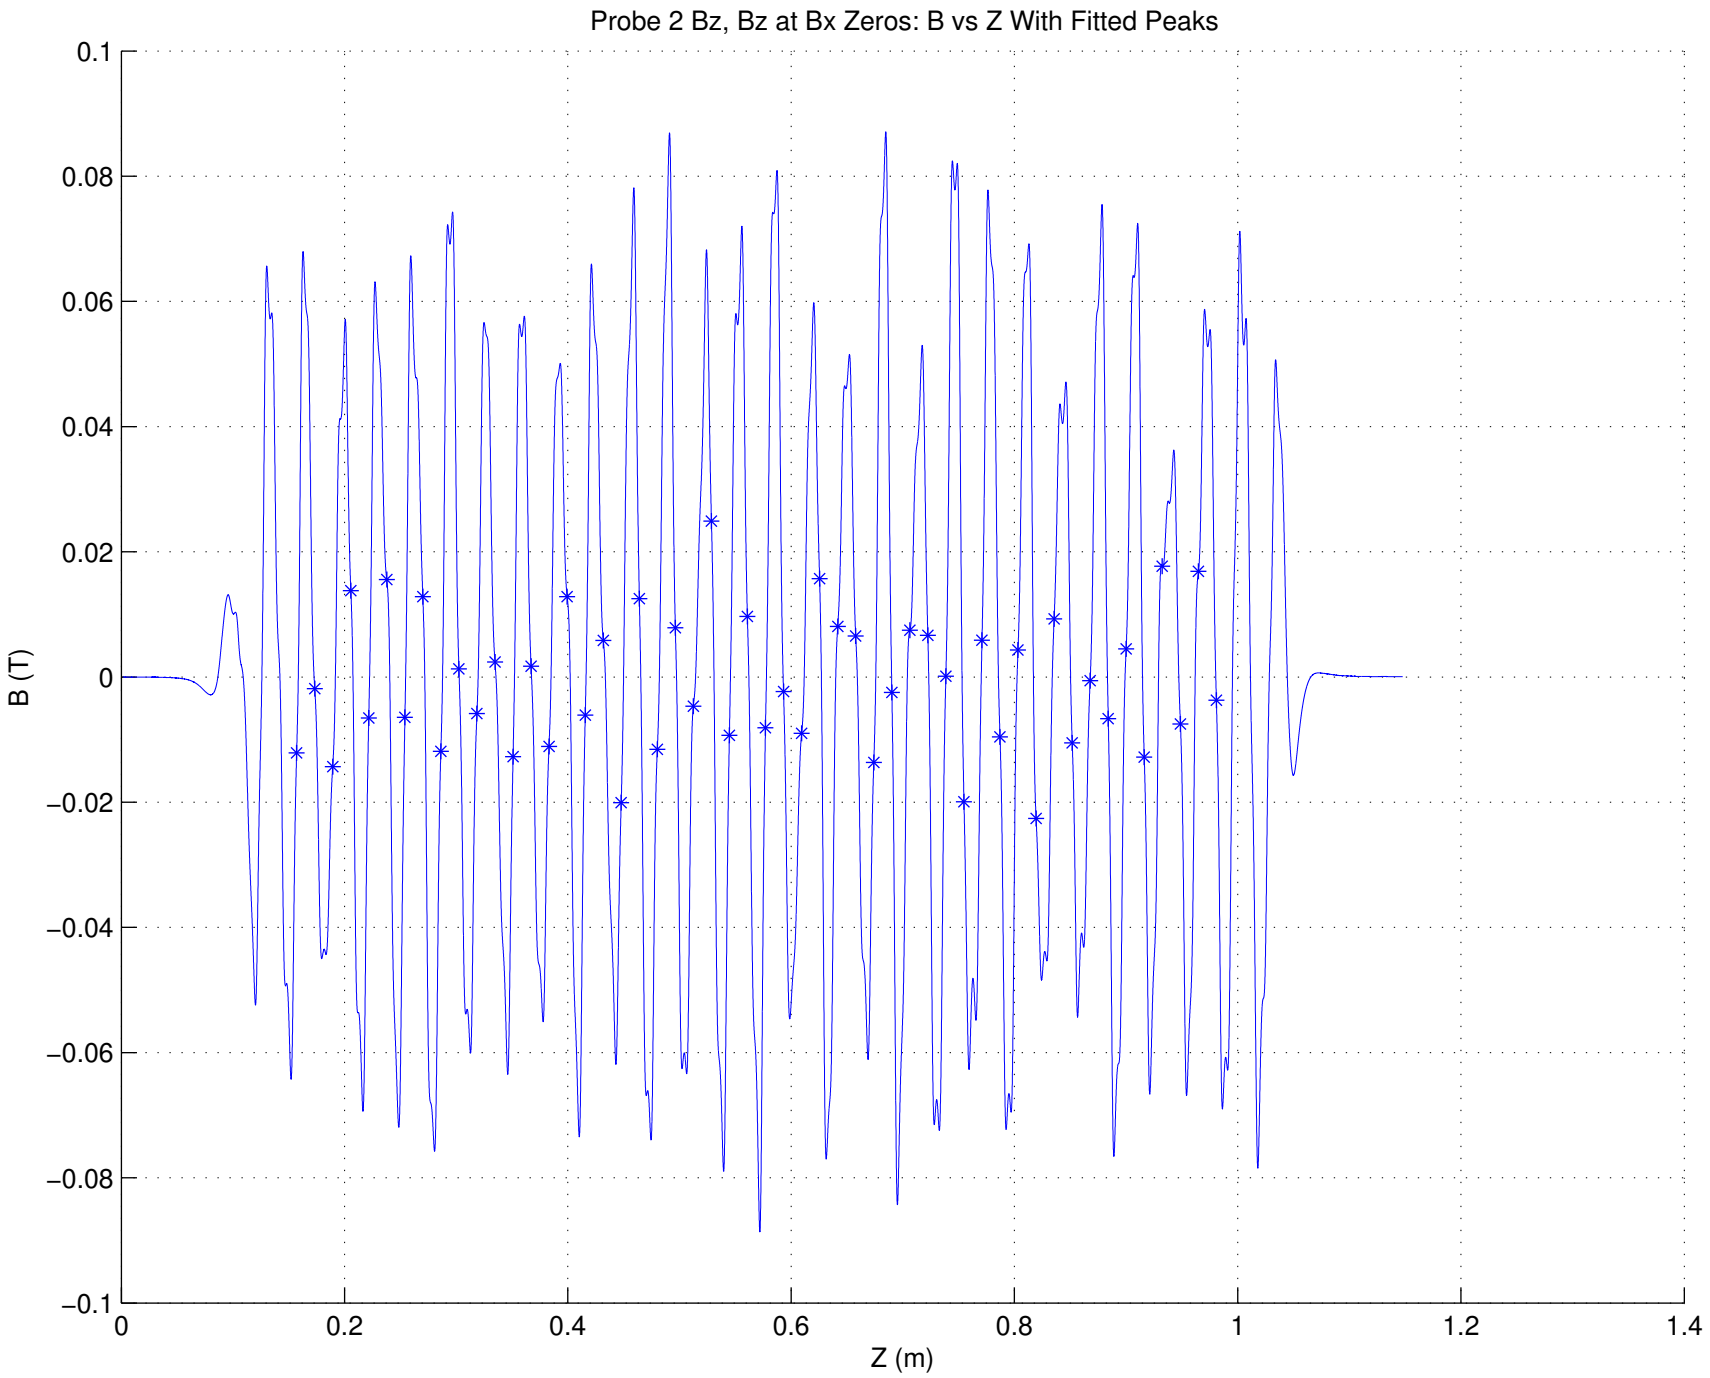
Probe 2 Bz, Bz at Bx Zeros: B vs Z With Fitted Peaks
B (T)
Z (m)
0.1
0.08
0.06
0.04
0.02
0
−0.02
−0.04
−0.06
−0.08
−0.1
0
0.2
0.4
0.6
0.8
1
1.2
1.4

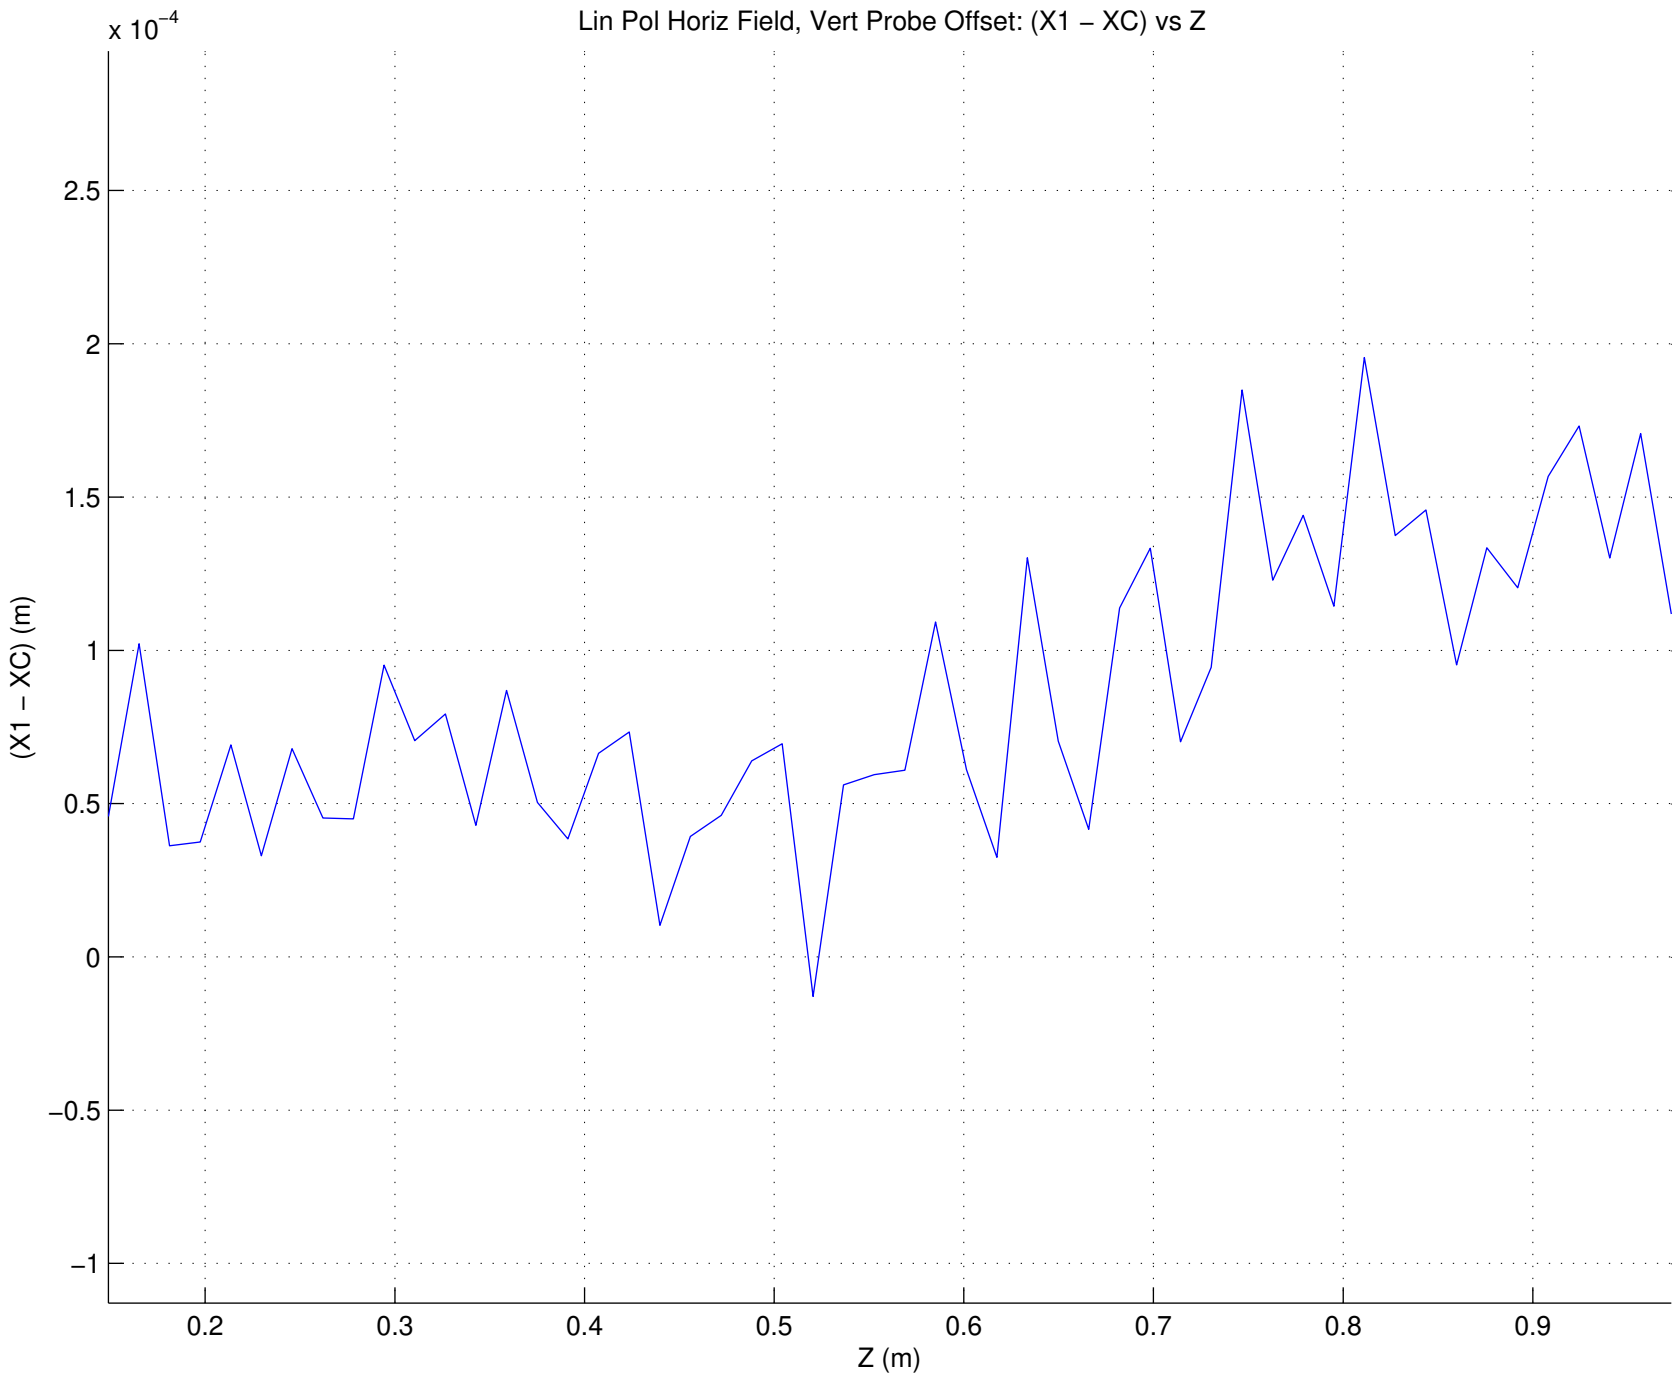
Lin Pol Horiz Field, Vert Probe Offset: (X1 – XC) vs Z
x 10^-4
2.5
2
1.5
1
0.5
0
−0.5
−1
(X1 – XC) (m)
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
Z (m)

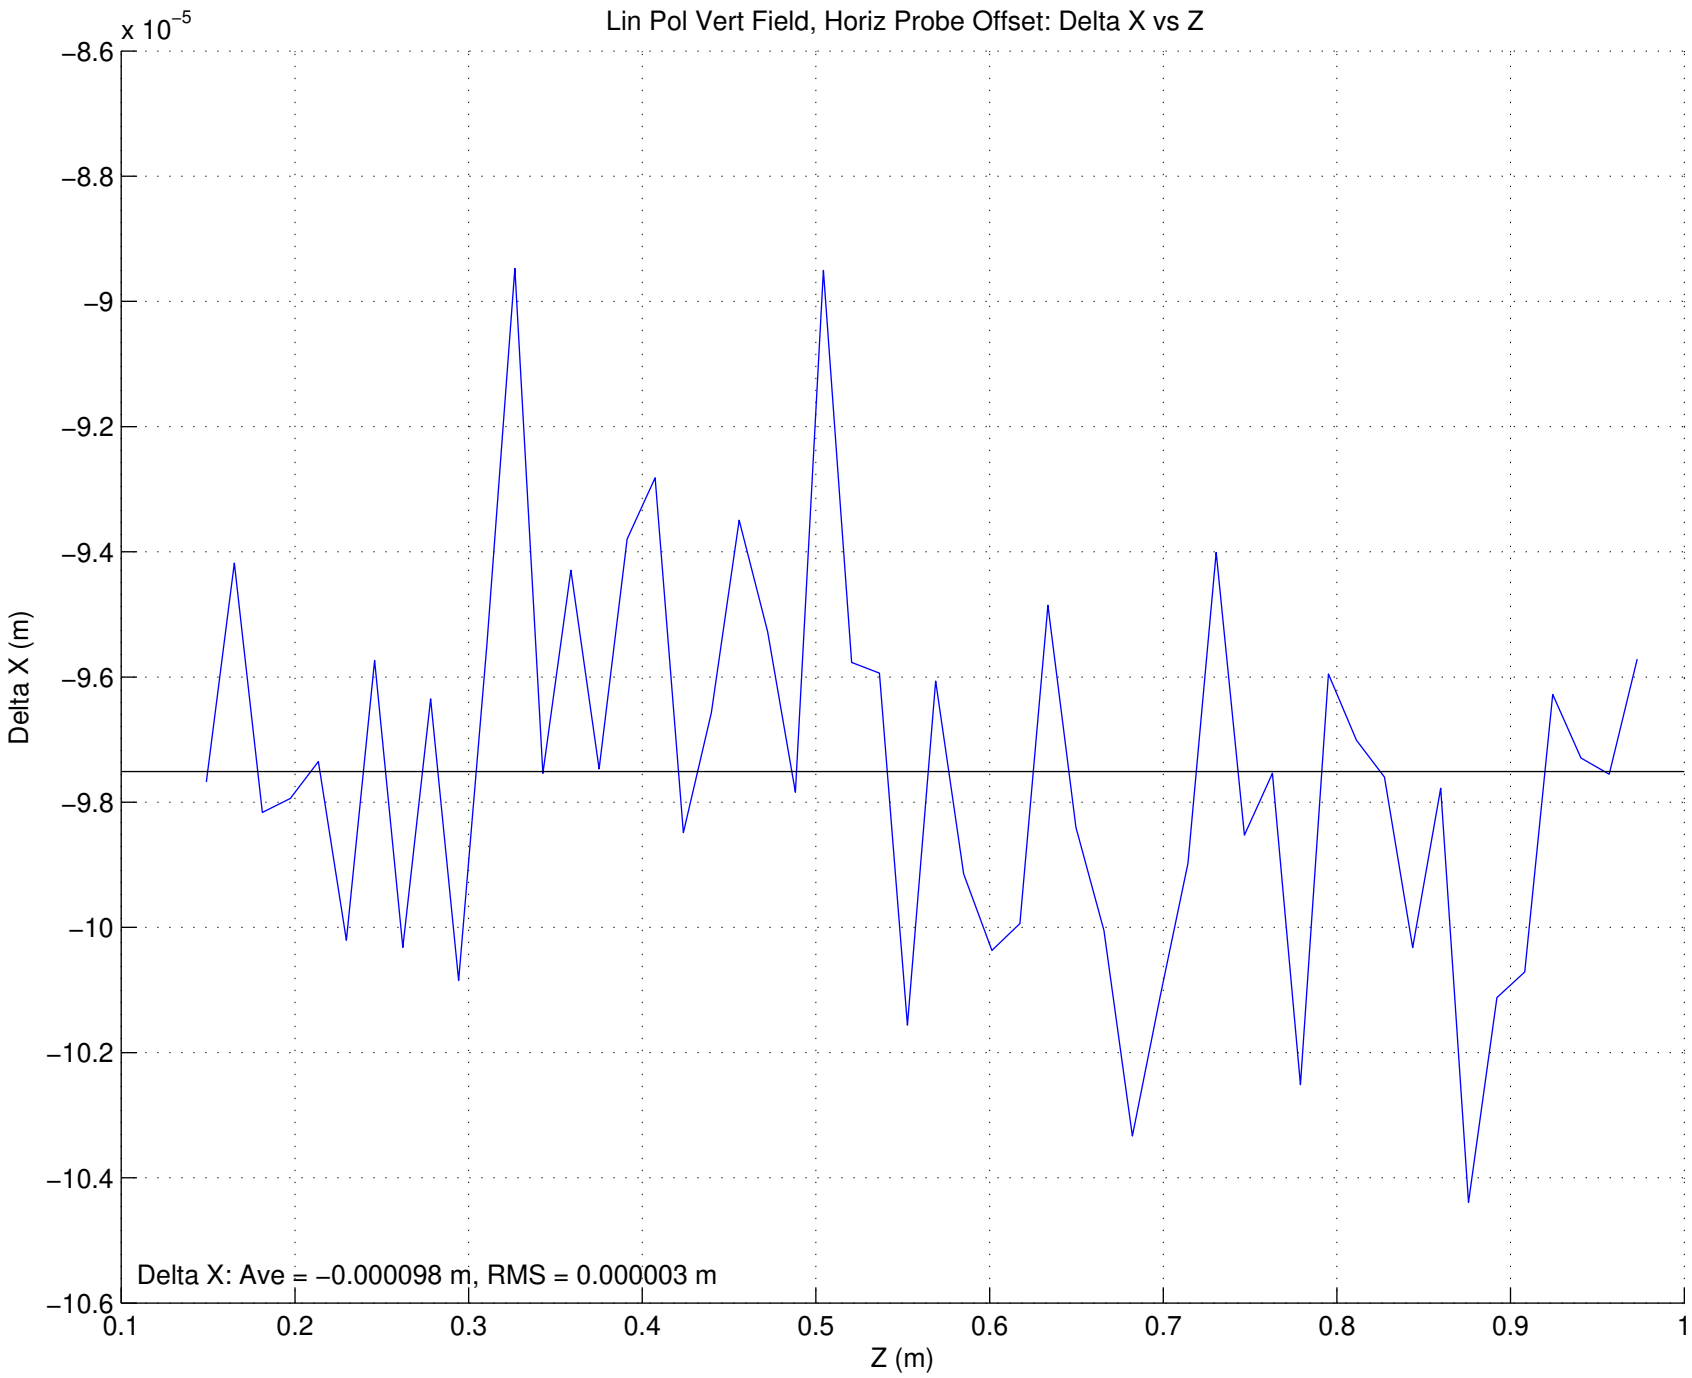
Lin Pol Vert Field, Horiz Probe Offset: Delta X vs Z
x 10^-5
−8.6
−8.8
−9
−9.2
−9.4
−9.6
−9.8
−10
−10.2
−10.4
−10.6
Delta X (m)
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
Z (m)
Delta X: Ave = −0.000098 m, RMS = 0.000003 m

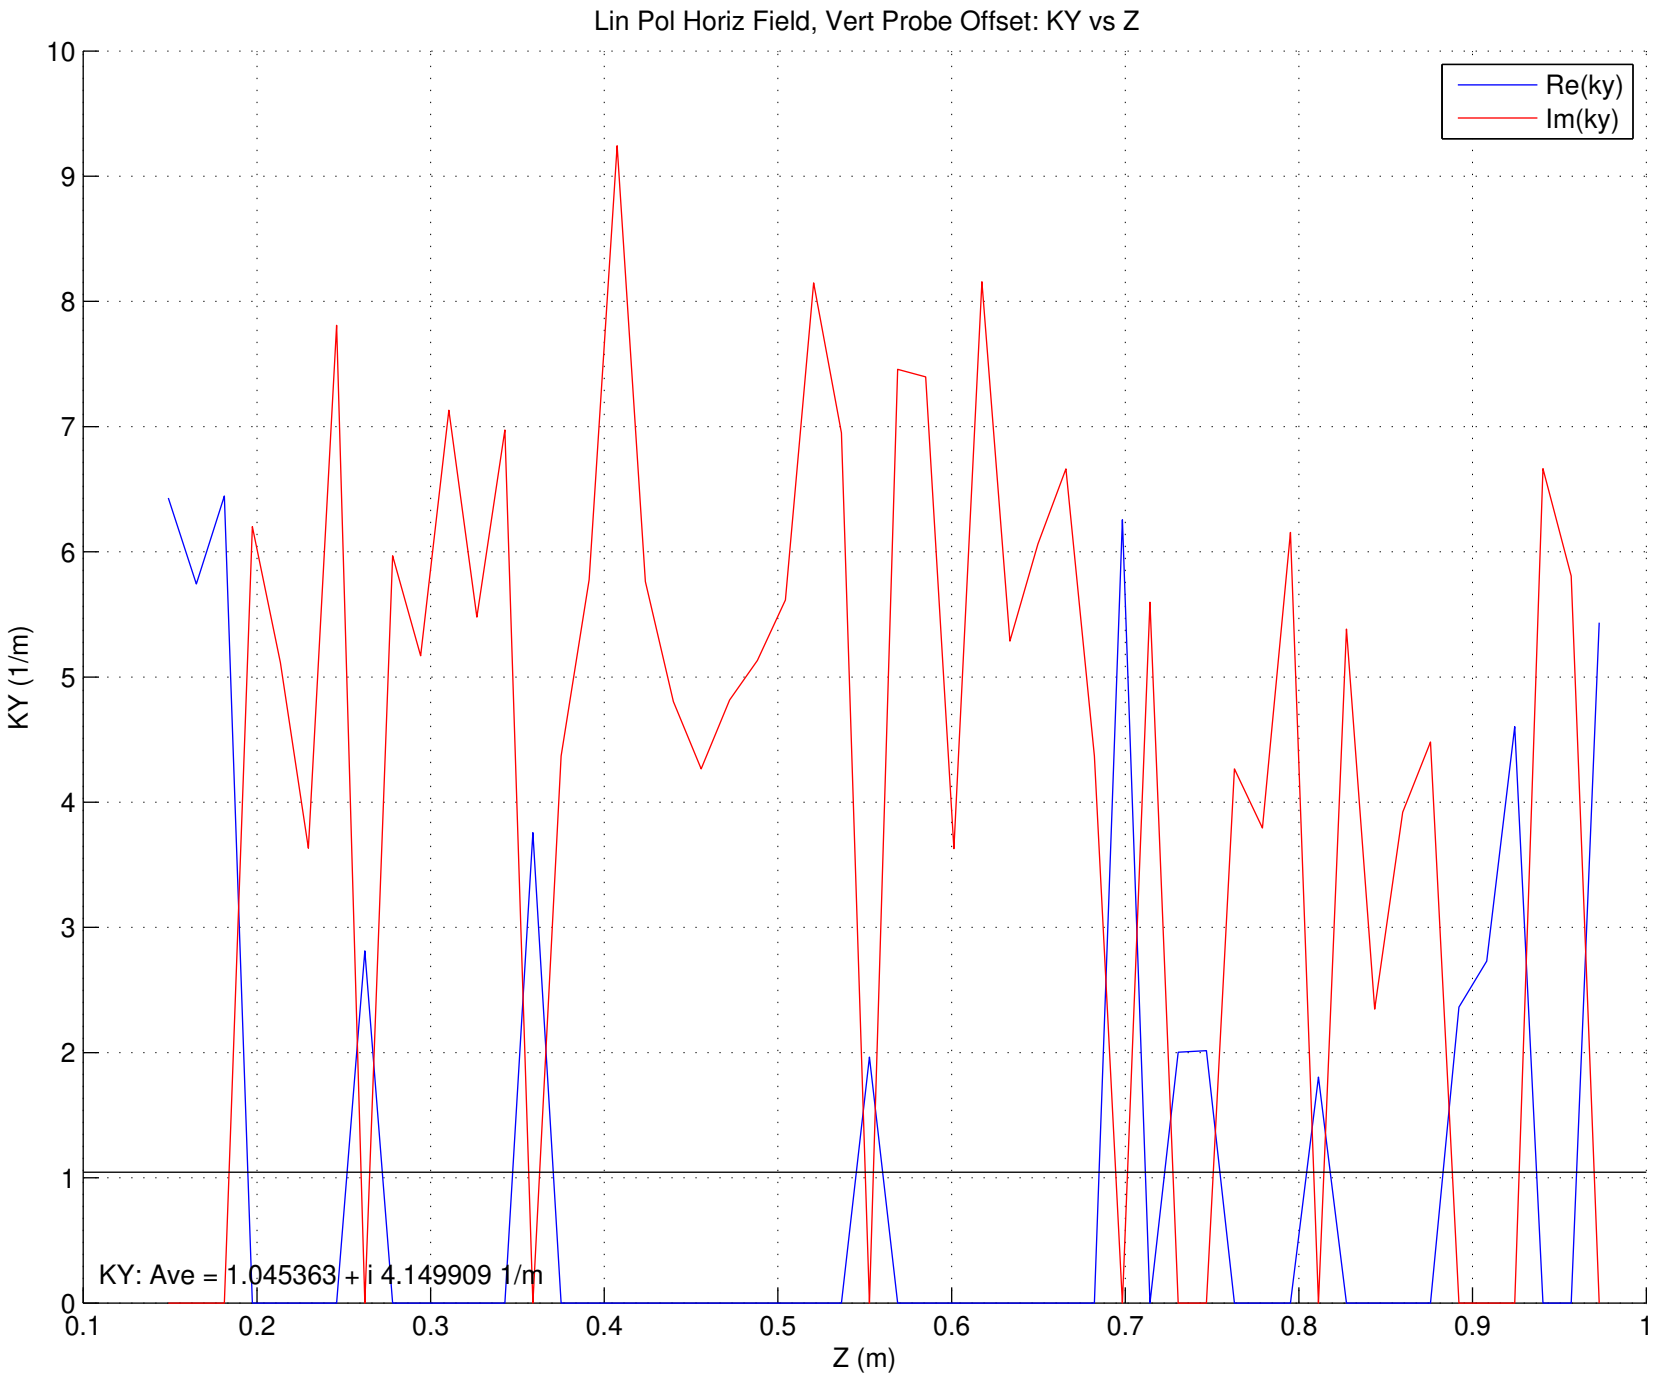
Lin Pol Horiz Field, Vert Probe Offset: KY vs Z
Re(ky)
Im(ky)
KY (1/m)
Z (m)
KY: Ave = 1.045363 + i 4.149909 1/m
0
1
2
3
4
5
6
7
8
9
10
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1

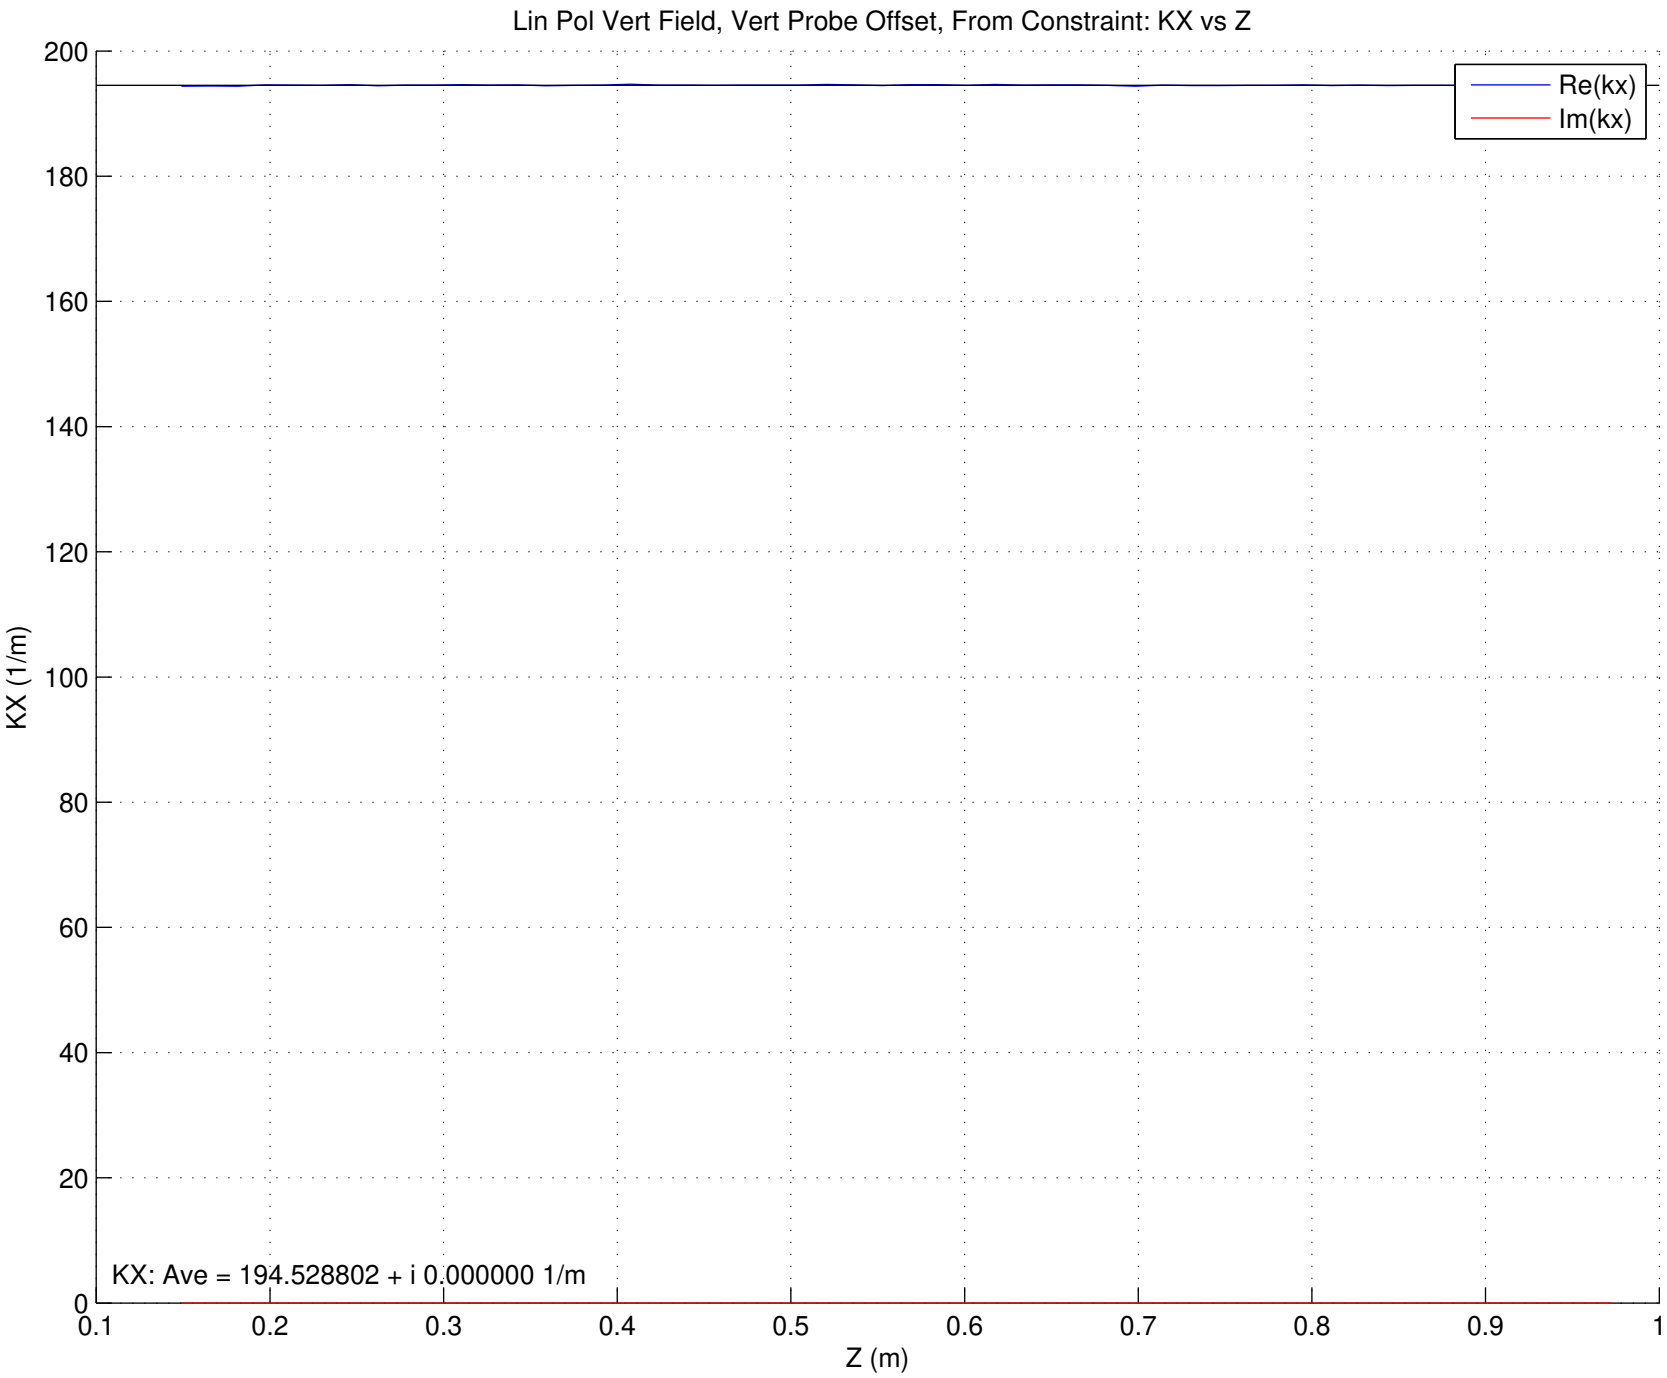
Lin Pol Vert Field, Vert Probe Offset, From Constraint: KX vs Z
Re(kx)
Im(kx)
KX (1/m)
Z (m)
KX: Ave = 194.528802 + i 0.000000 1/m
200
180
160
140
120
100
80
60
40
20
0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1

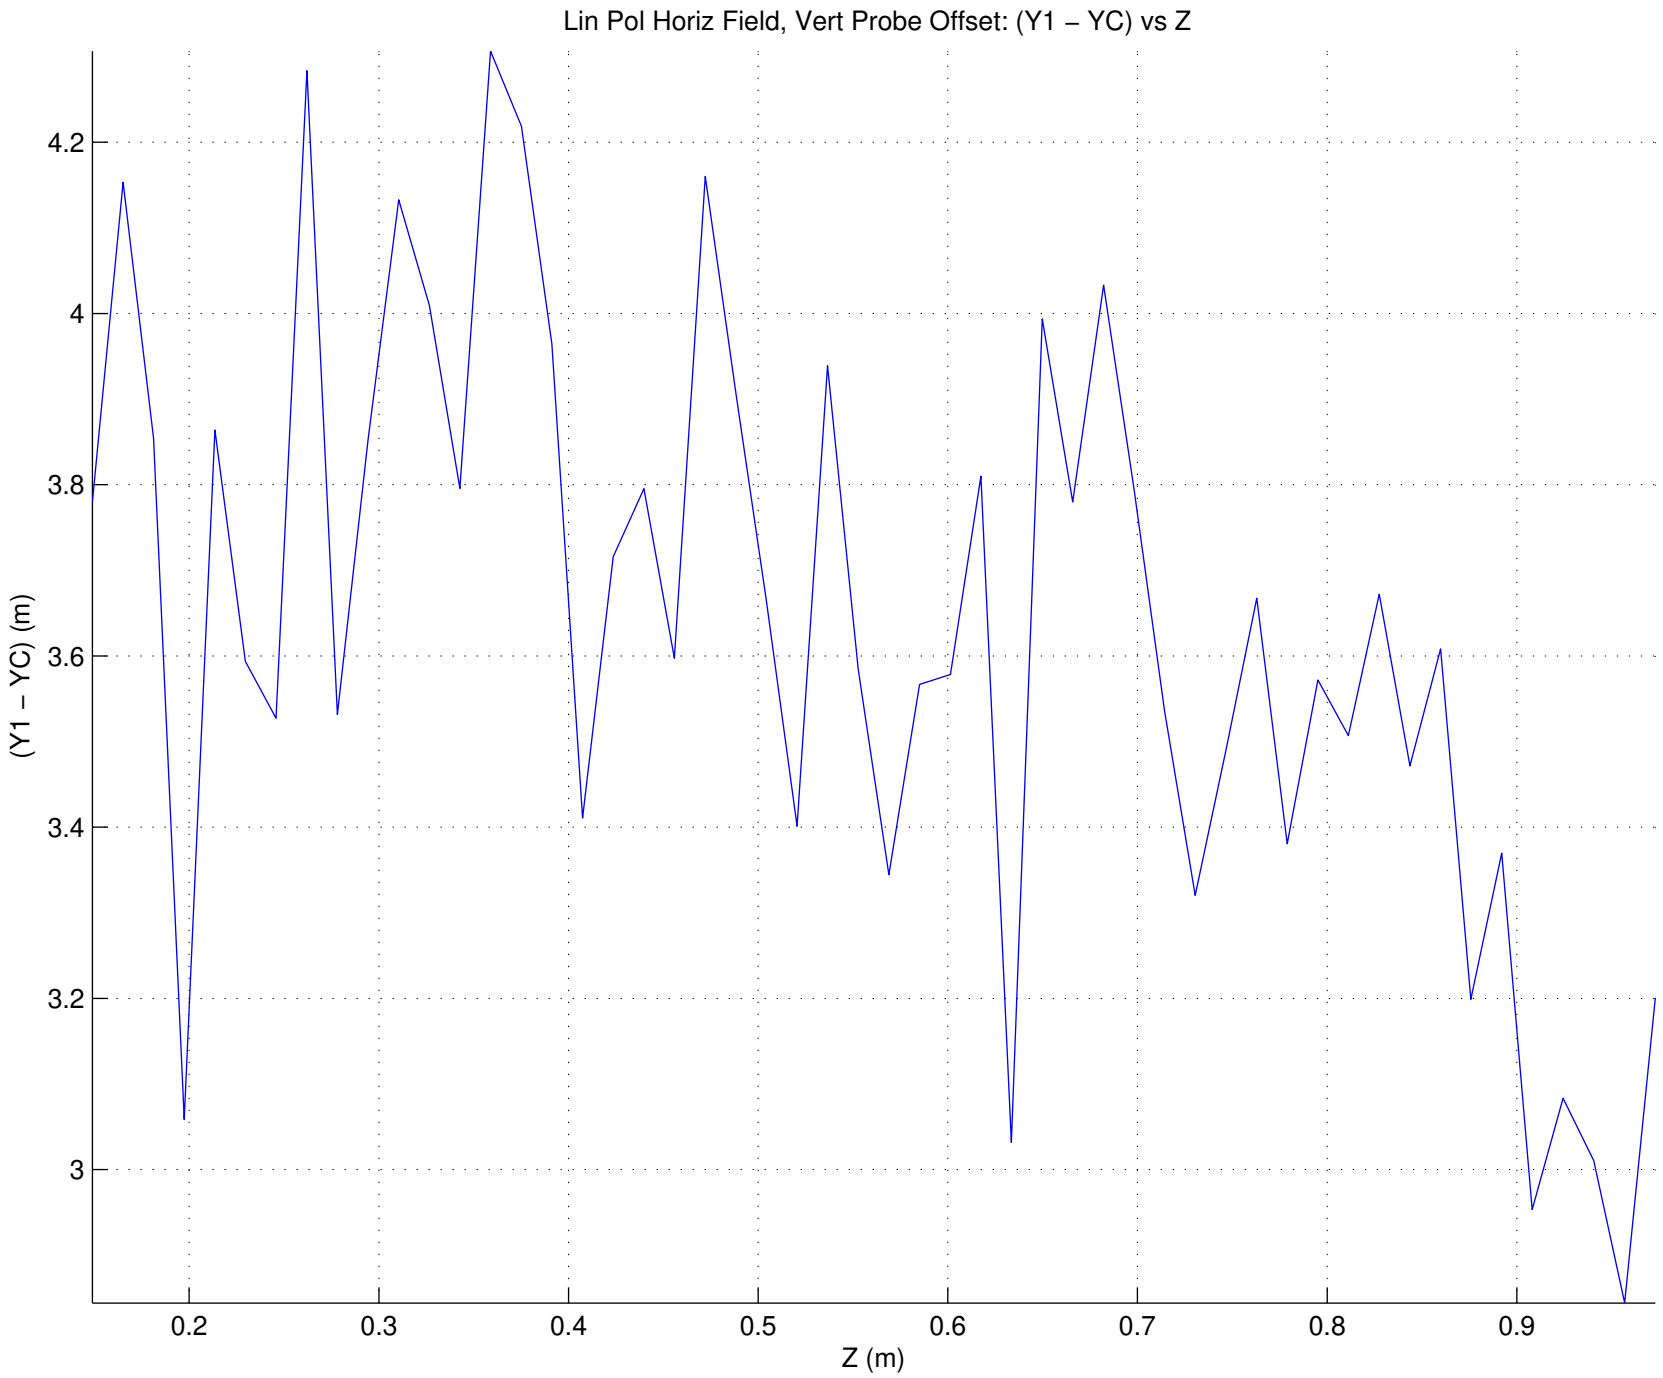
Lin Pol Horiz Field, Vert Probe Offset: (Y1 – YC) vs Z
(Y1 – YC) (m)
4.2
4
3.8
3.6
3.4
3.2
3
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
Z (m)

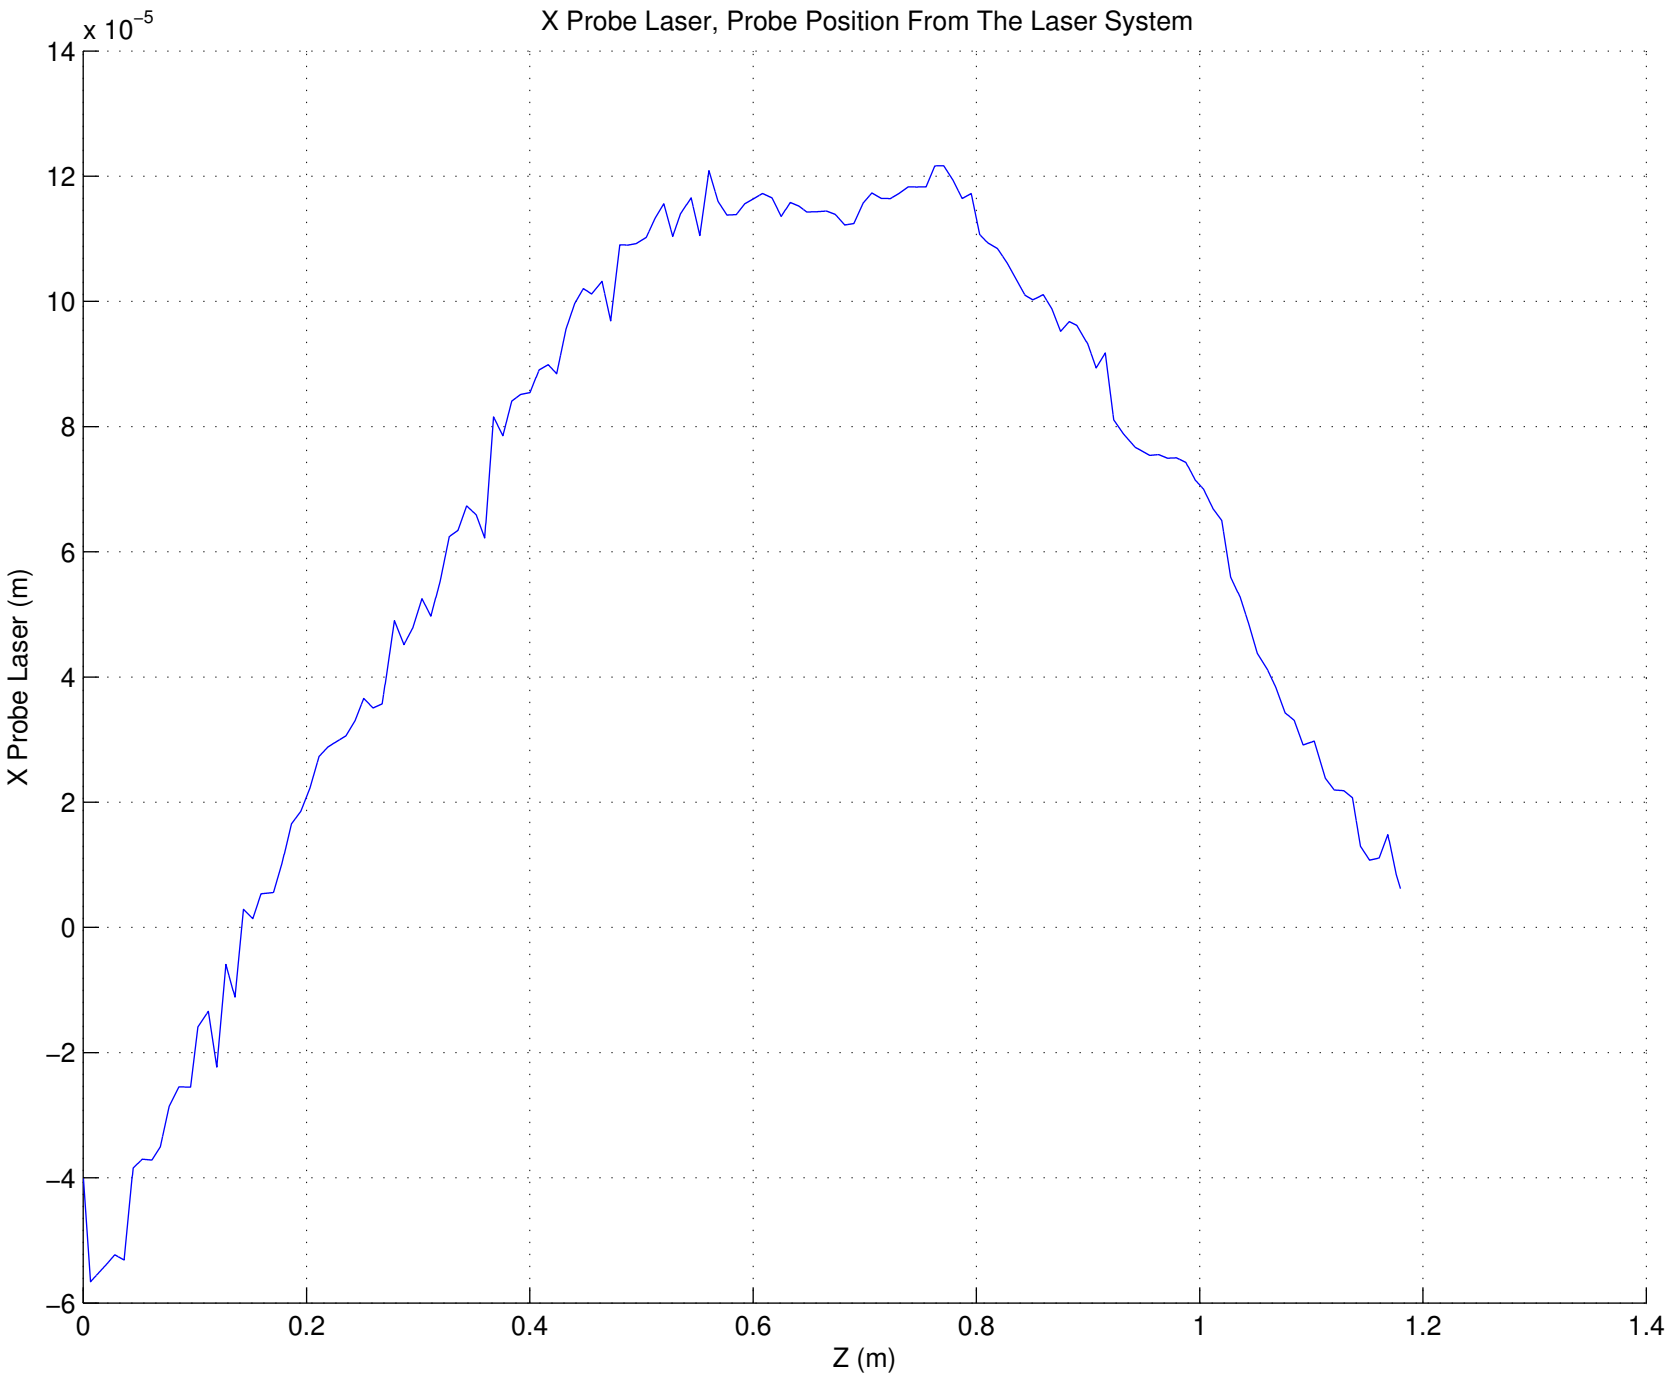
X Probe Laser, Probe Position From The Laser System
x 10^-5
14
12
10
8
6
4
2
0
−2
−4
−6
X Probe Laser (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

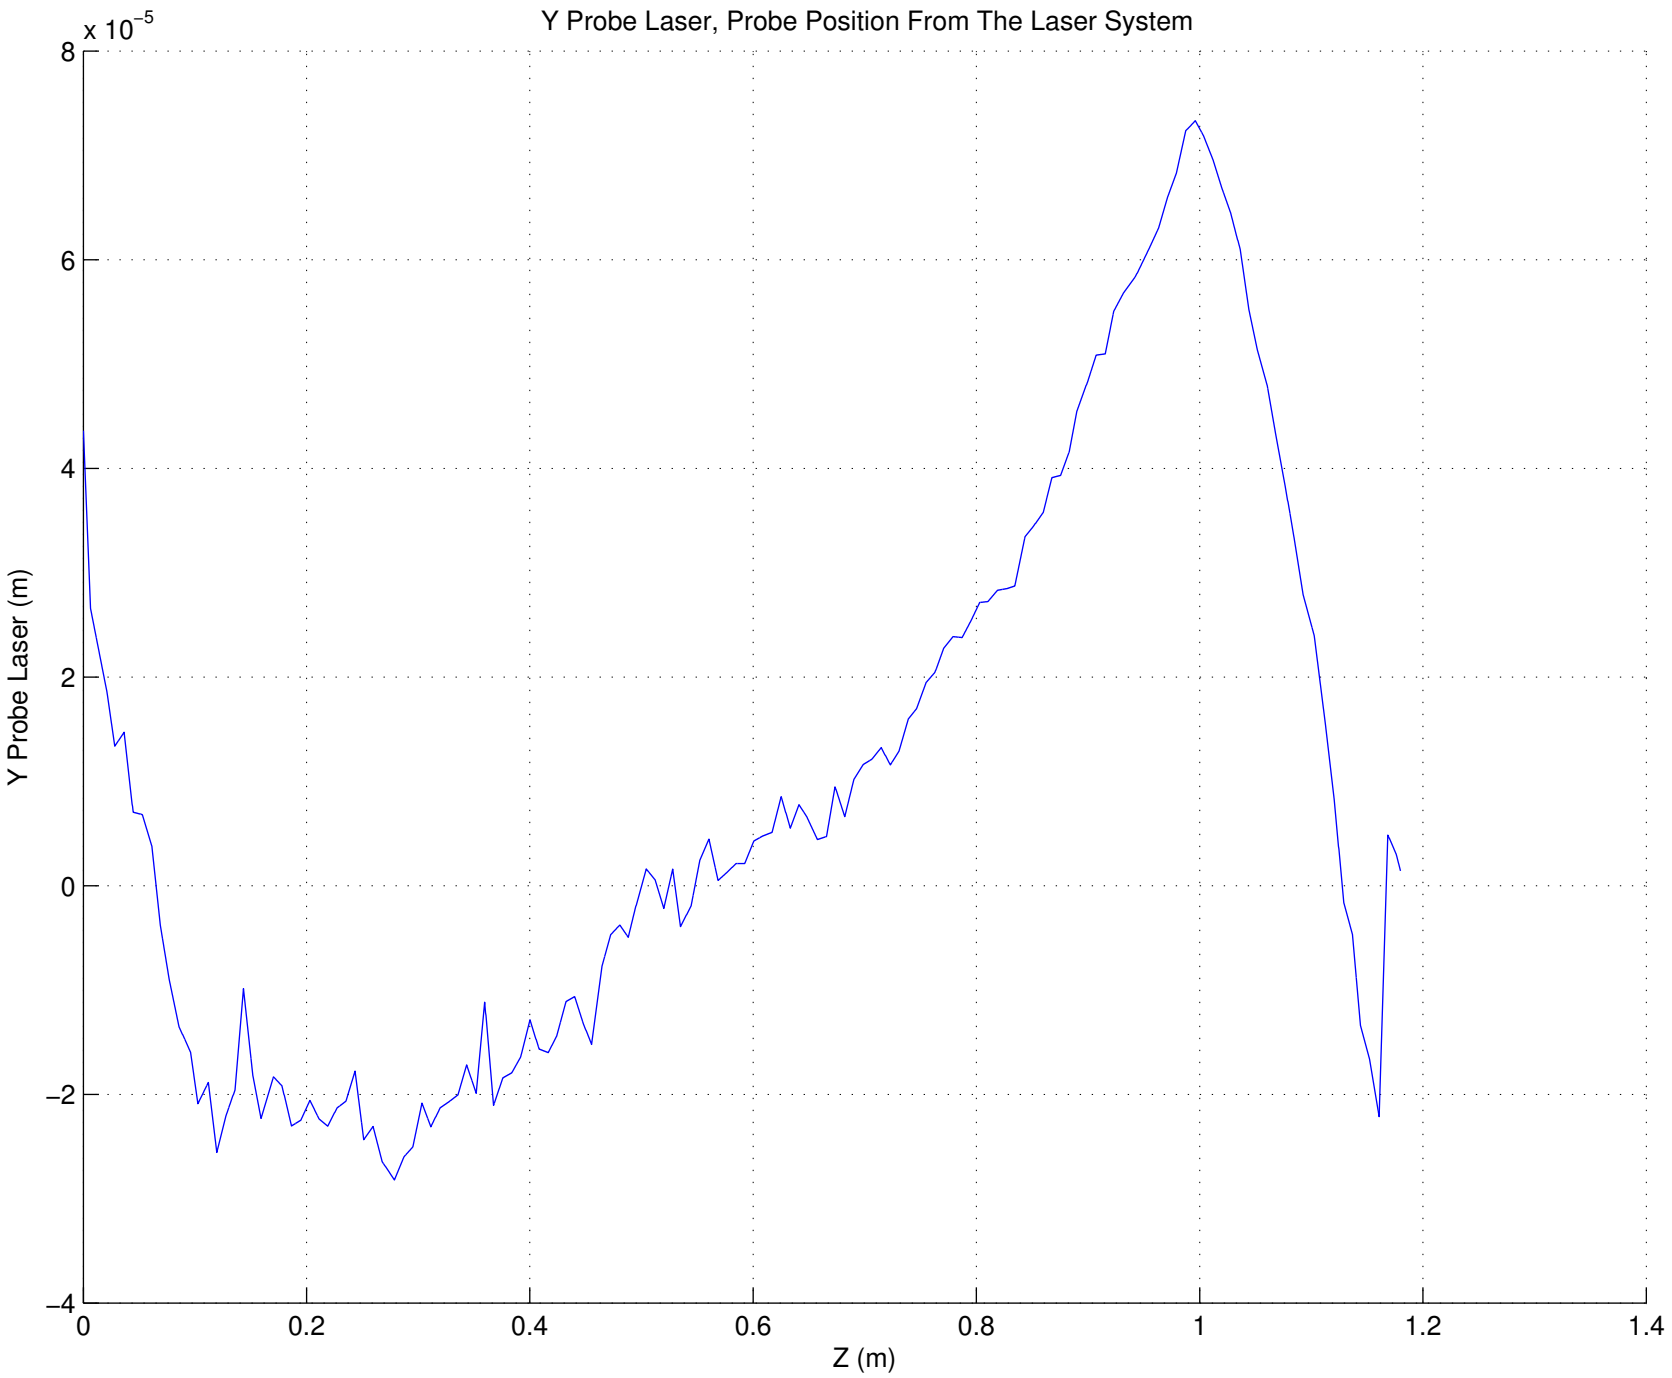
Y Probe Laser, Probe Position From The Laser System
x 10^-5
8
6
4
2
0
−2
−4
Y Probe Laser (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

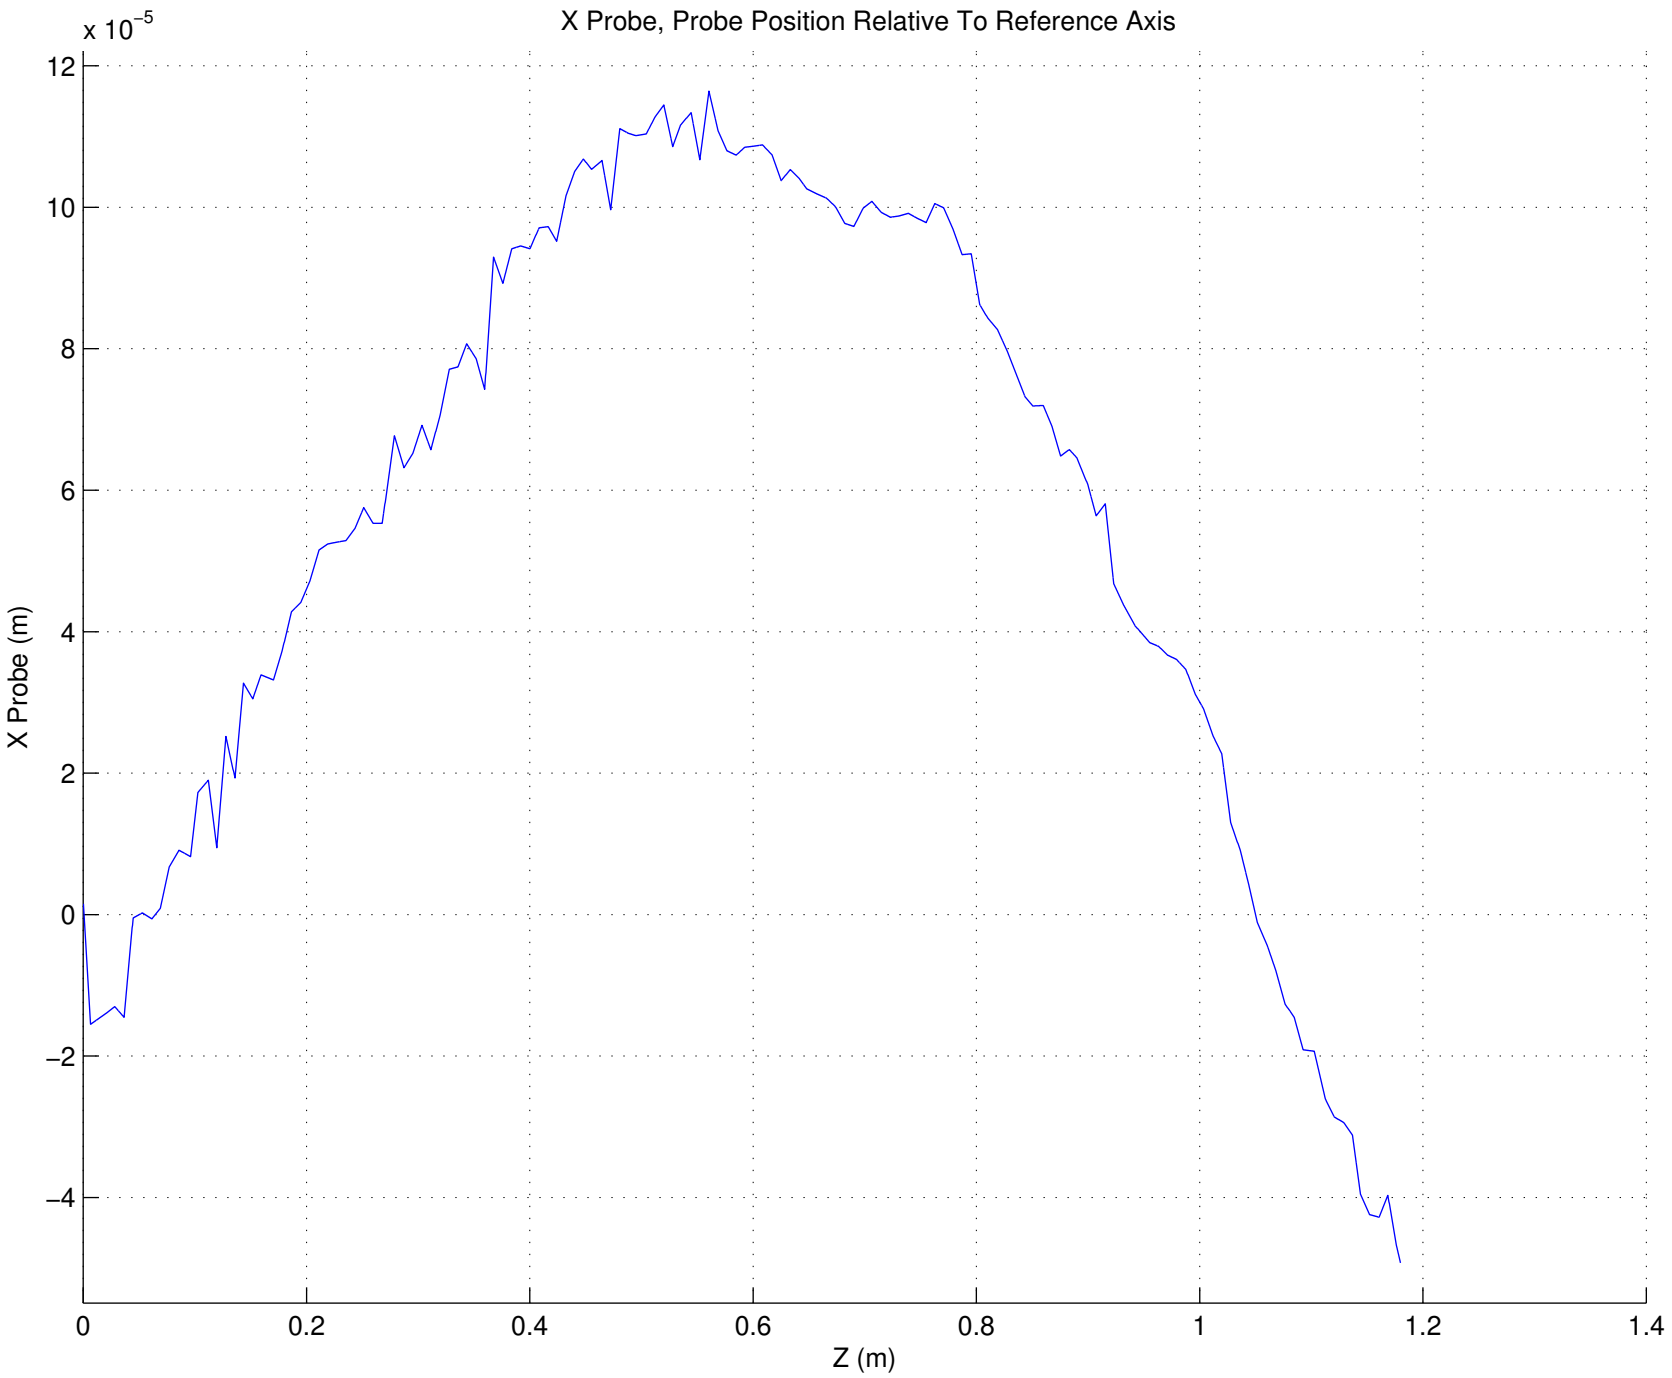
X Probe, Probe Position Relative To Reference Axis
x 10^-5
12
10
8
6
4
2
0
−2
−4
X Probe (m)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

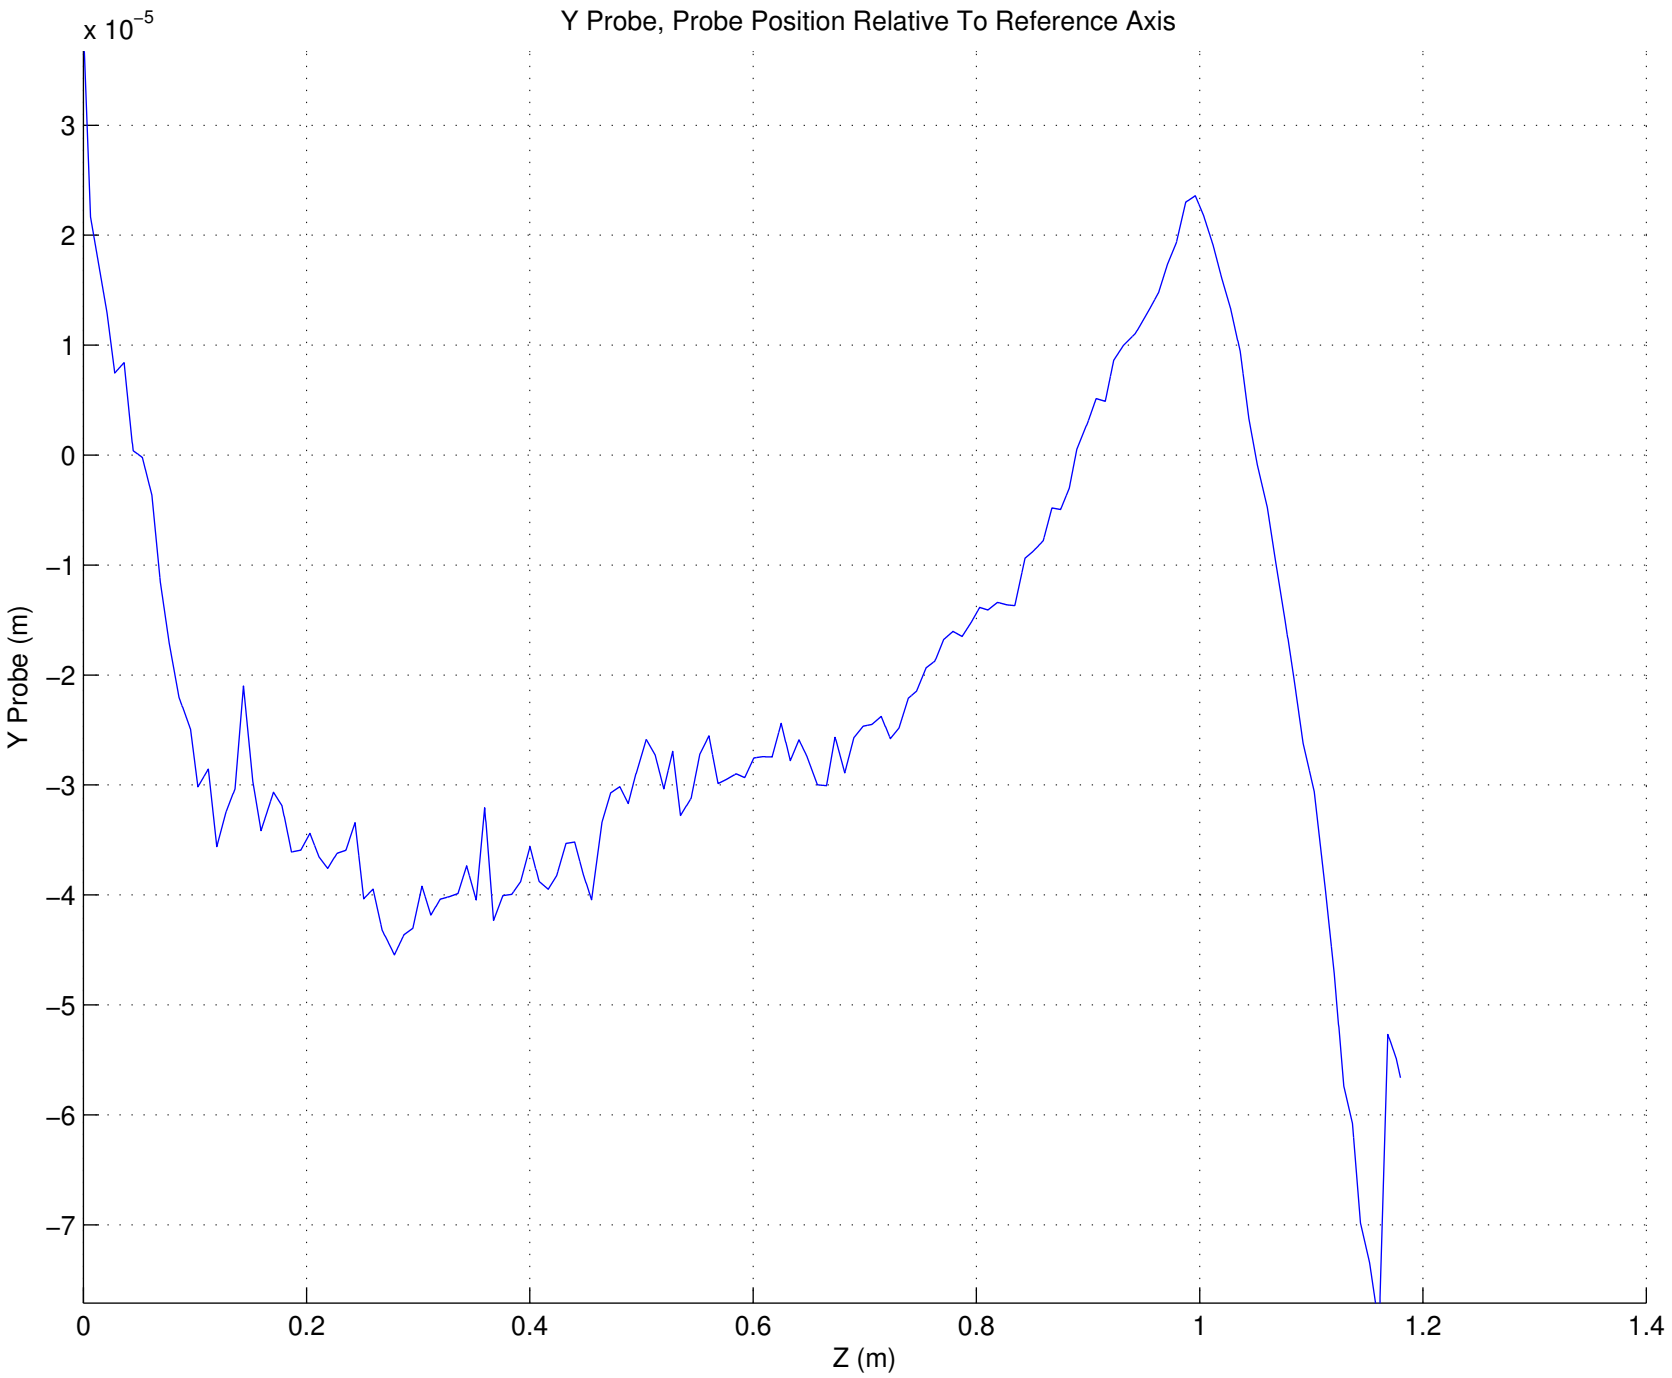
Y Probe, Probe Position Relative To Reference Axis
x 10^-5
Y Probe (m)
Z (m)
3
2
1
0
−1
−2
−3
−4
−5
−6
−7
0
0.2
0.4
0.6
0.8
1
1.2
1.4

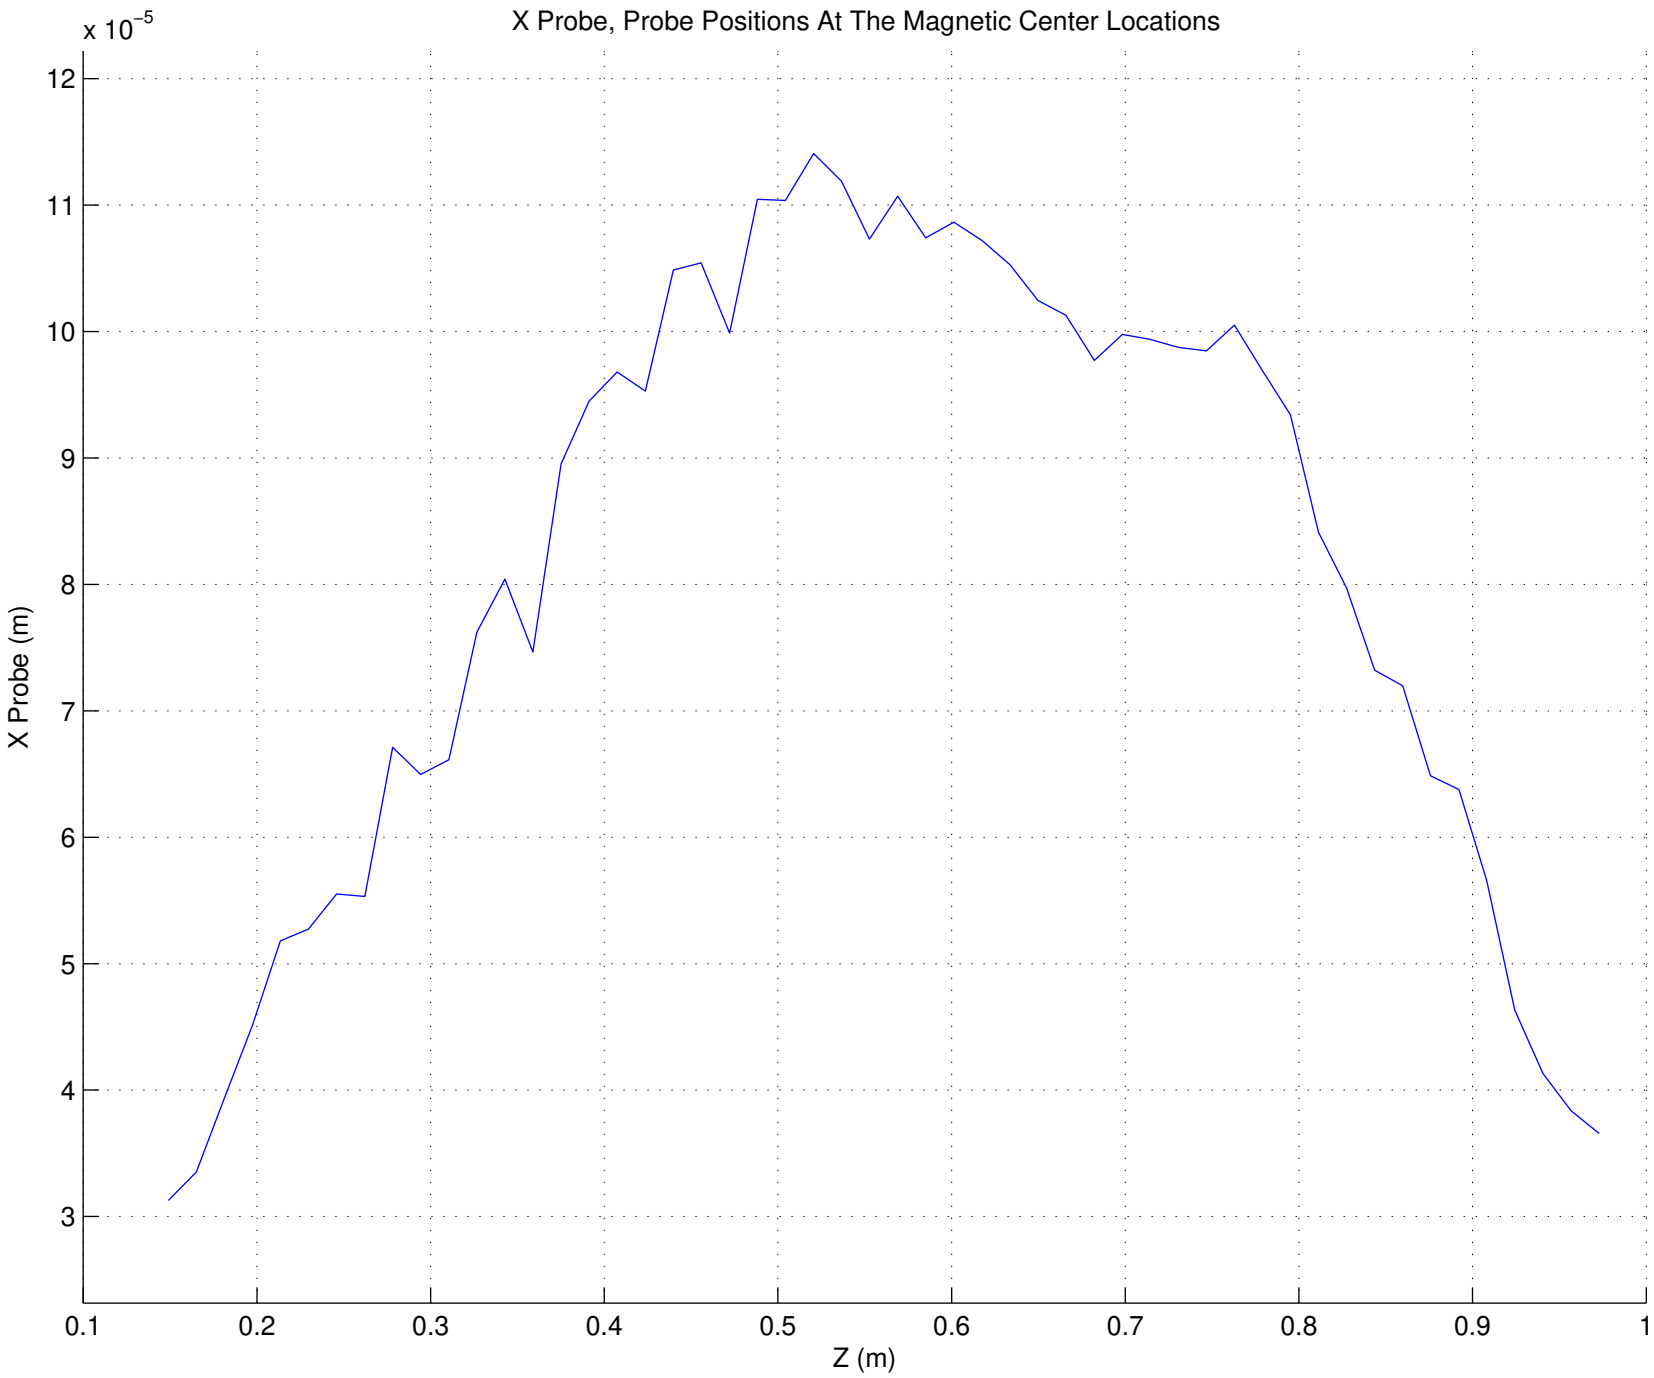
X Probe, Probe Positions At The Magnetic Center Locations
x 10^-5
X Probe (m)
Z (m)
12
11
10
9
8
7
6
5
4
3
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1

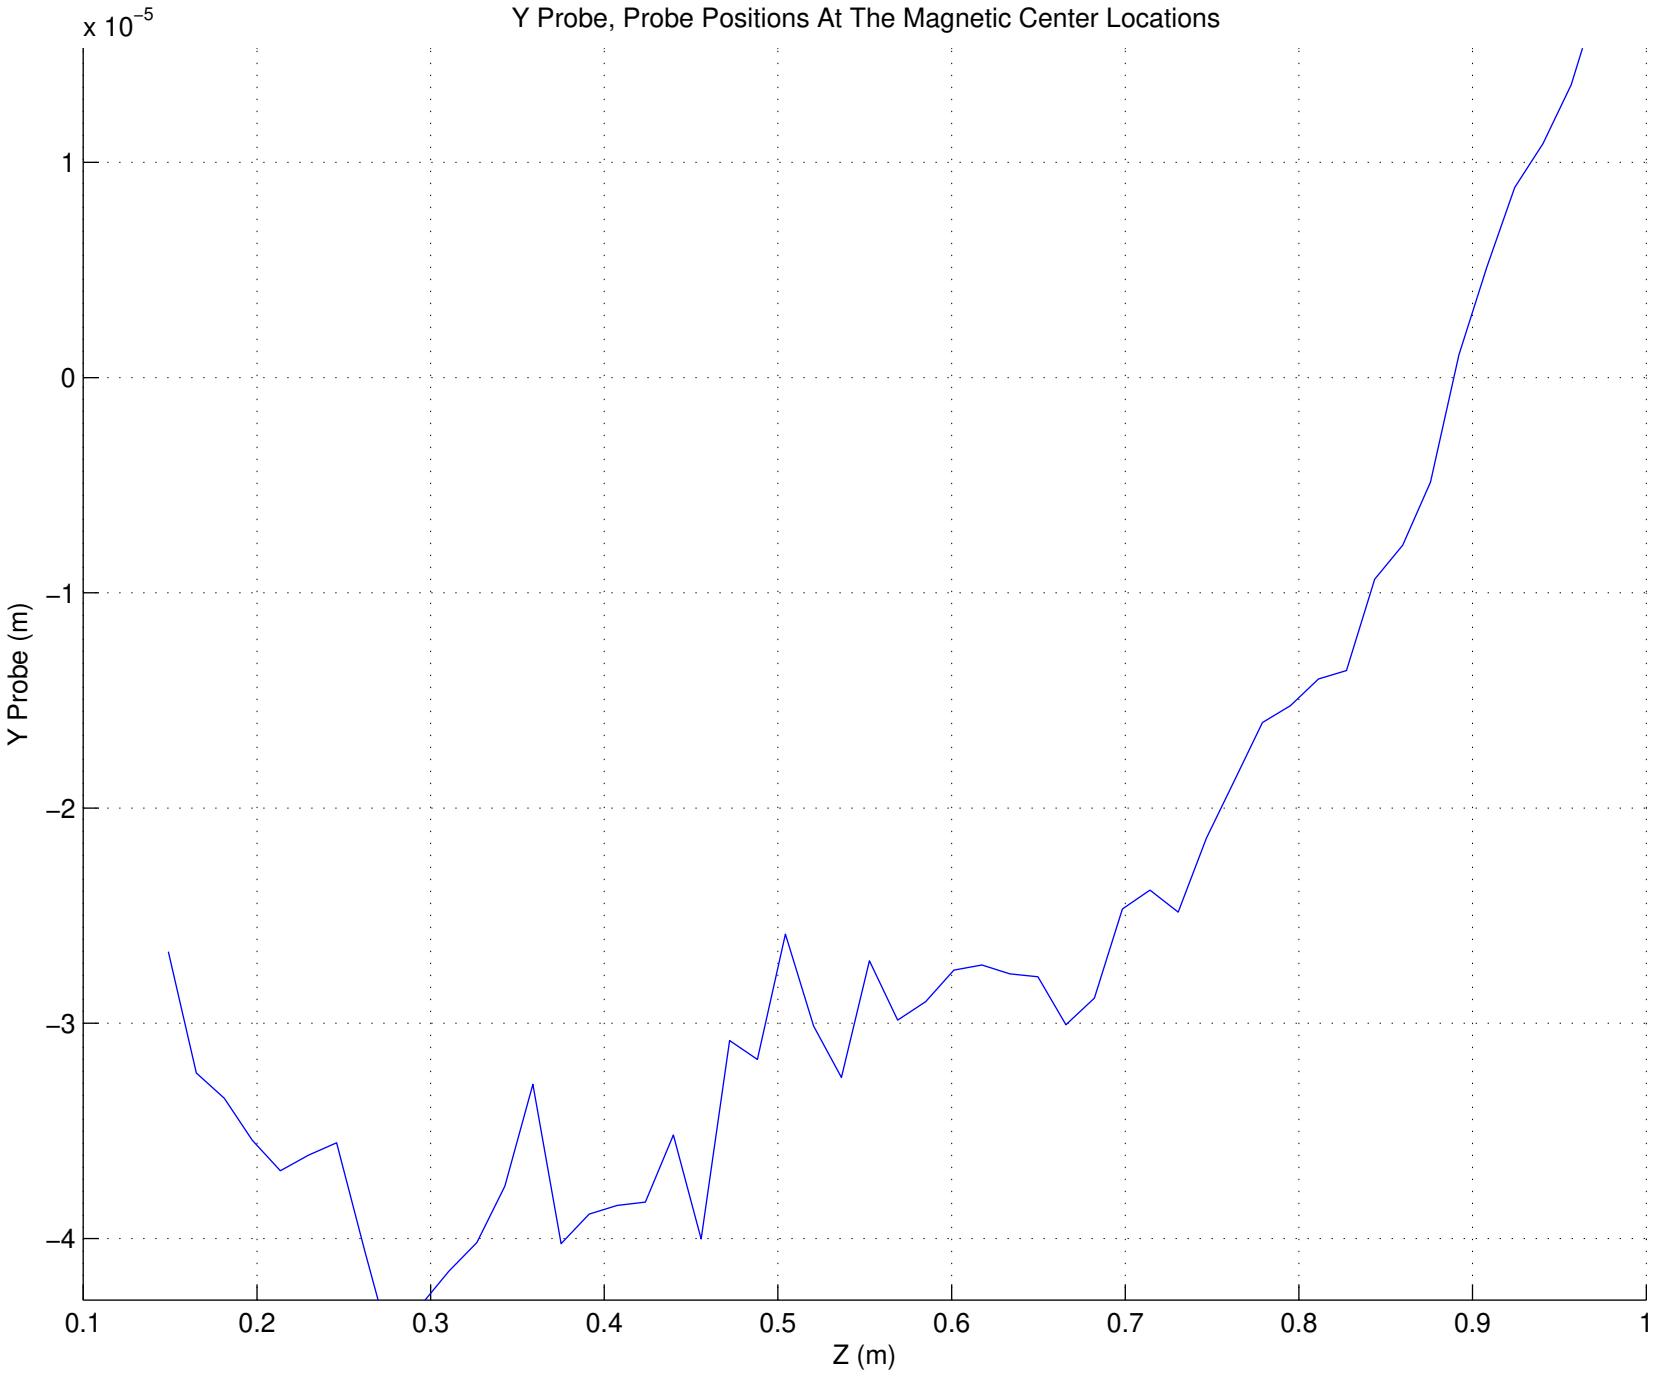
Y Probe, Probe Positions At The Magnetic Center Locations
x 10^-5
1
0
−1
−2
−3
−4
Y Probe (m)
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
Z (m)

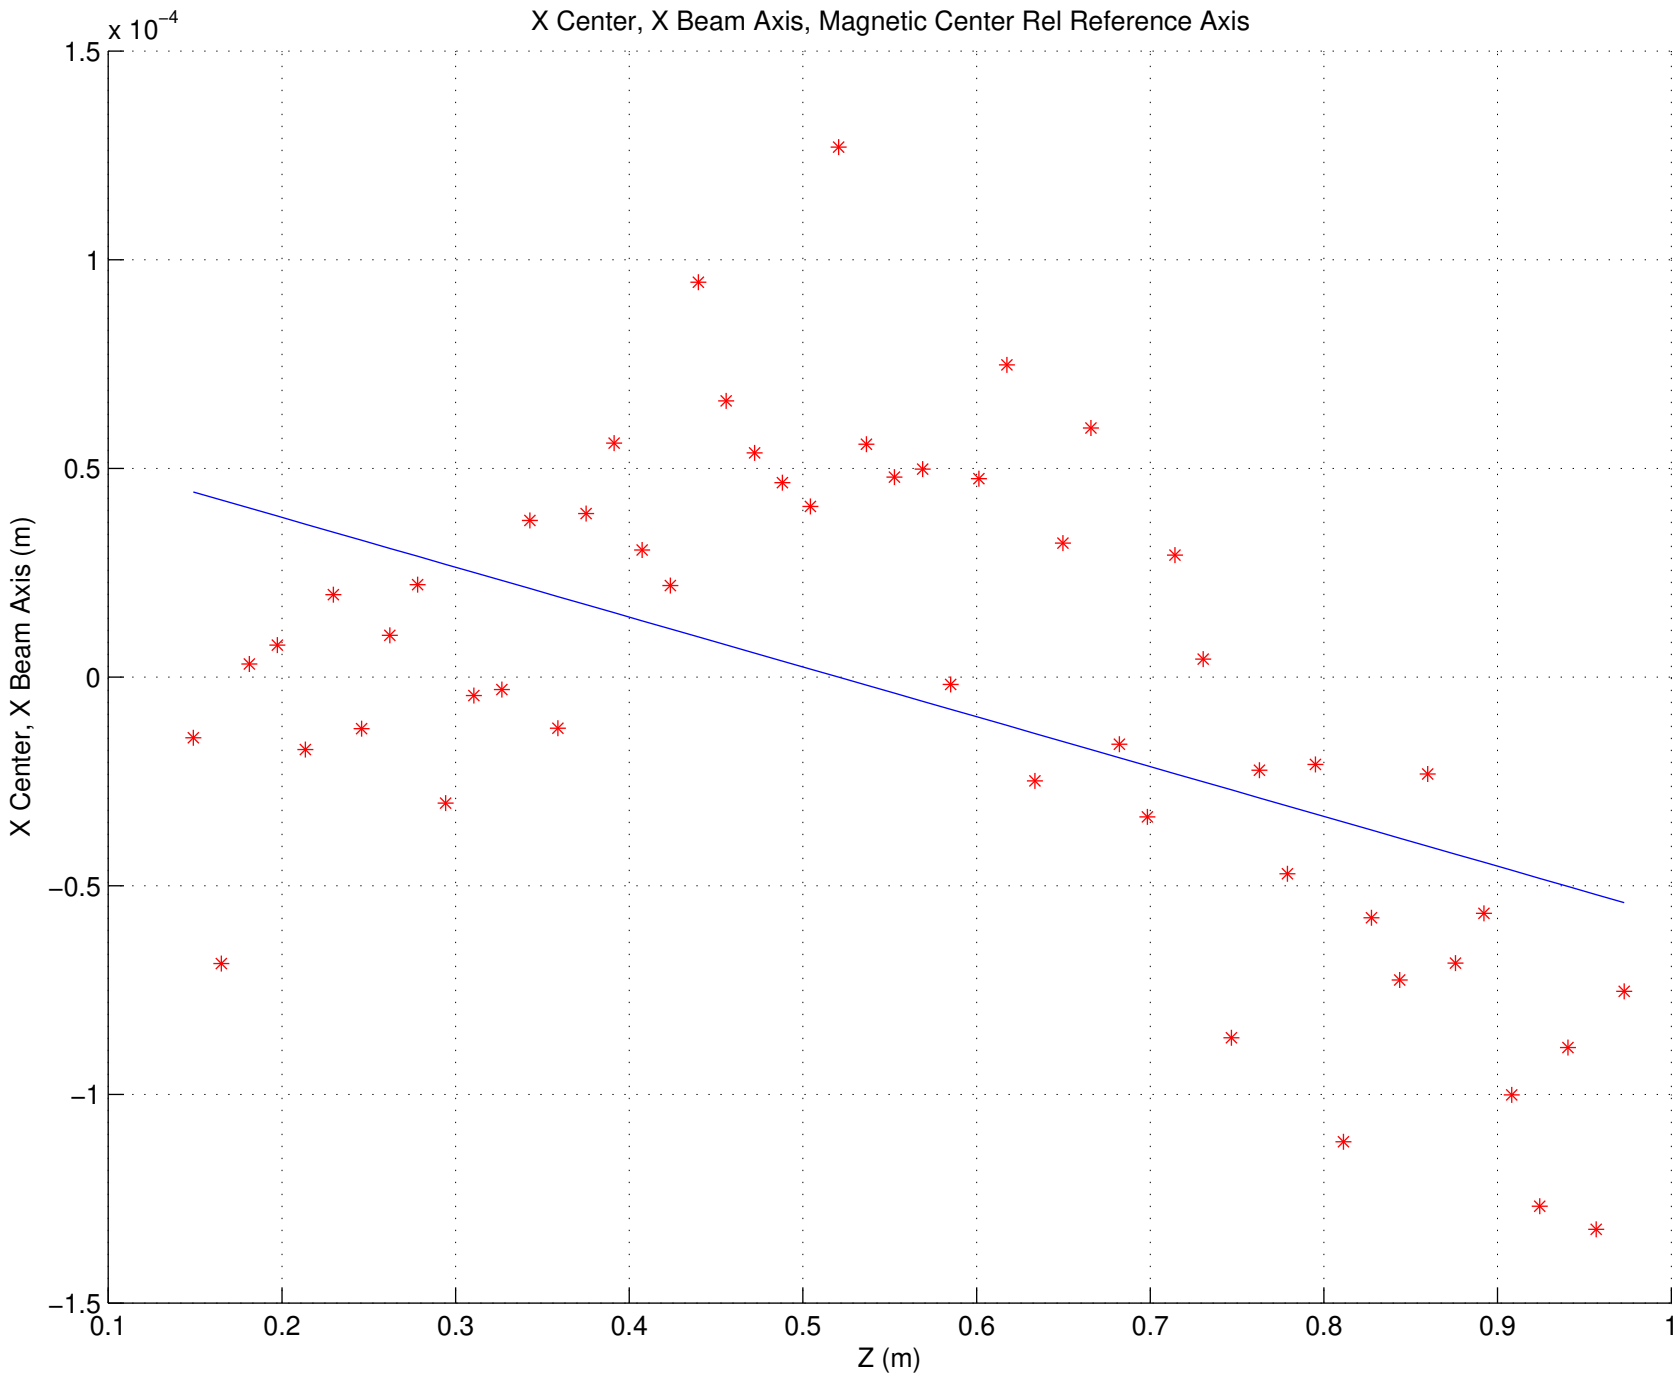
X Center, X Beam Axis, Magnetic Center Rel Reference Axis
x 10^-4
1.5
1
0.5
0
−0.5
−1
−1.5
X Center, X Beam Axis (m)
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1
Z (m)

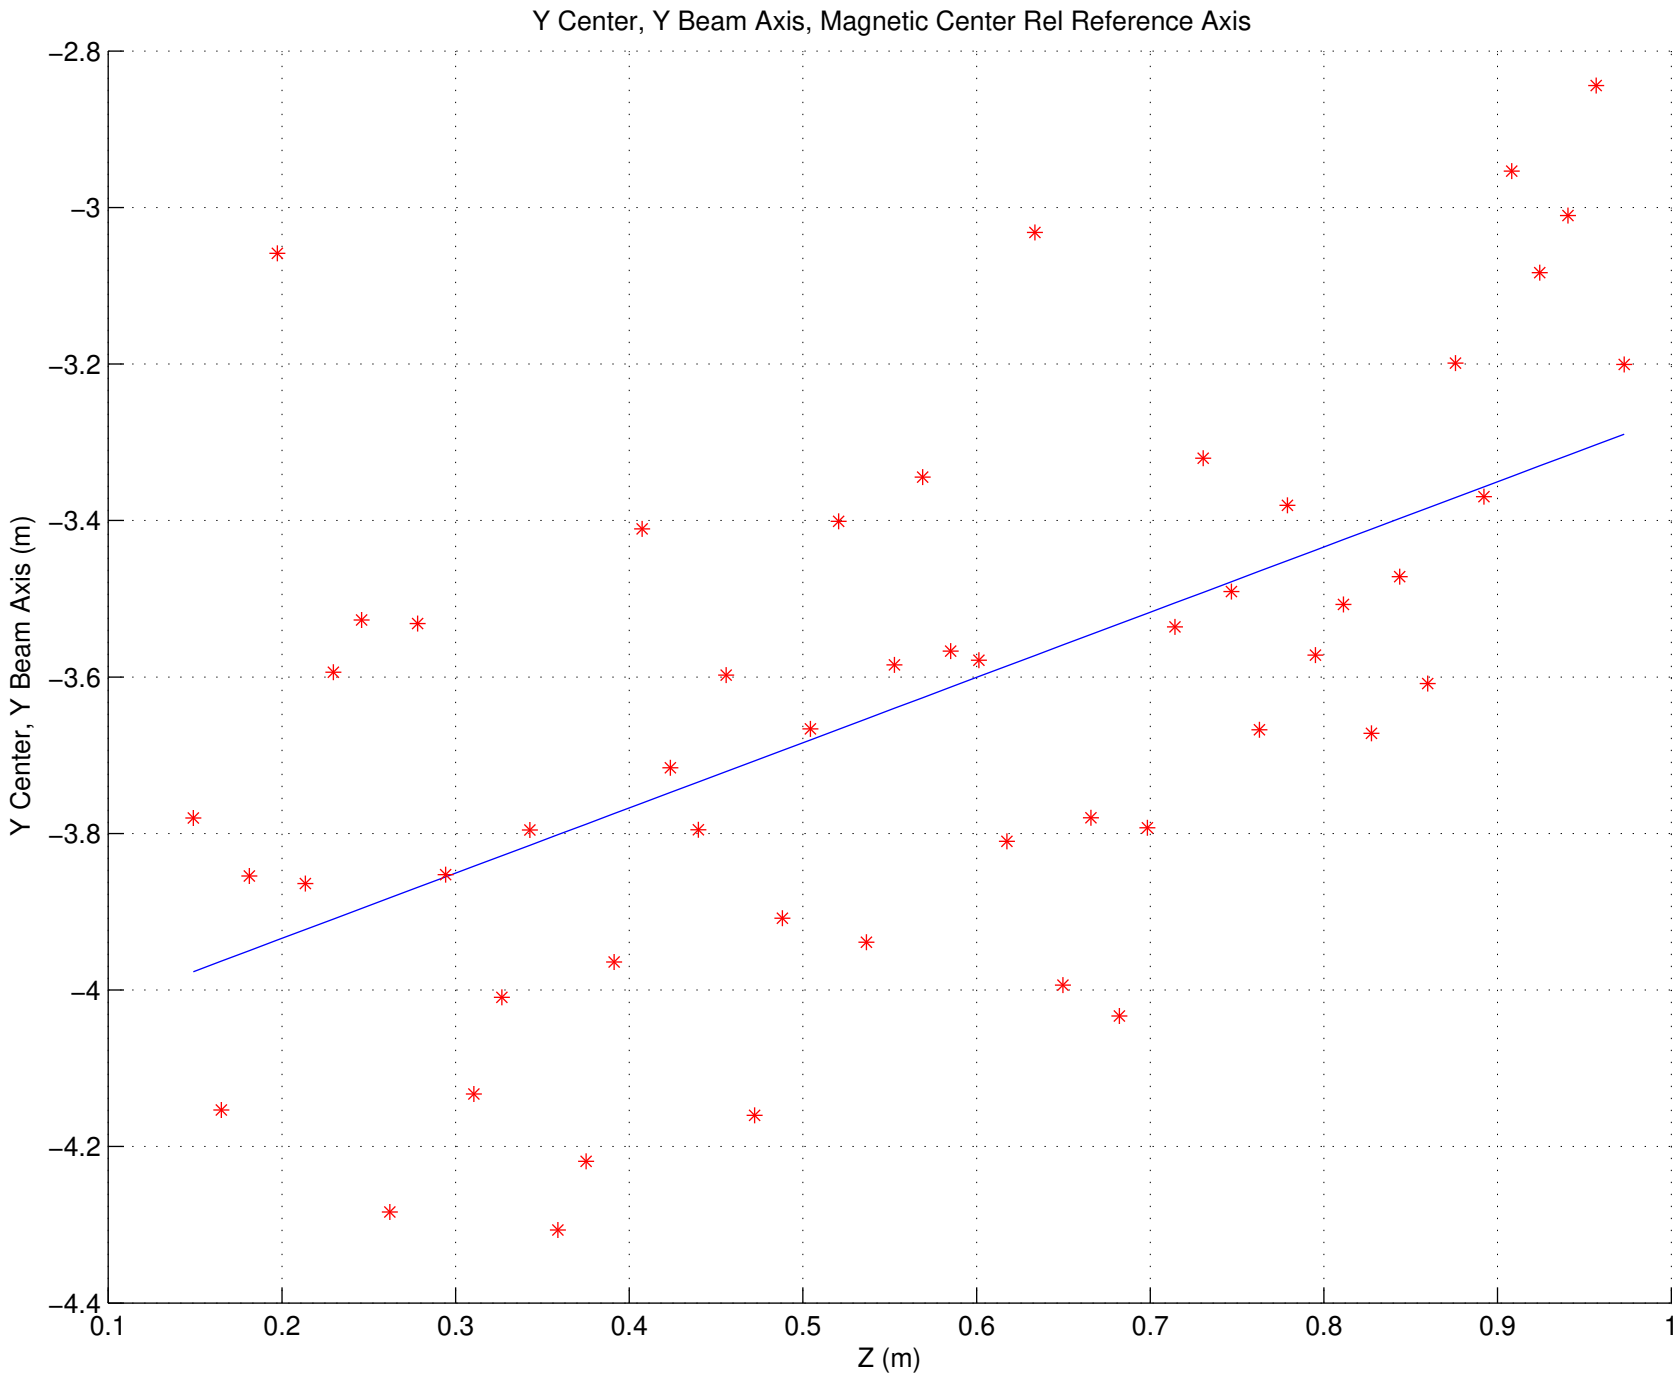
Y Center, Y Beam Axis, Magnetic Center Rel Reference Axis
Y Center, Y Beam Axis (m)
Z (m)
−2.8
−3
−3.2
−3.4
−3.6
−3.8
−4
−4.2
−4.4
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1

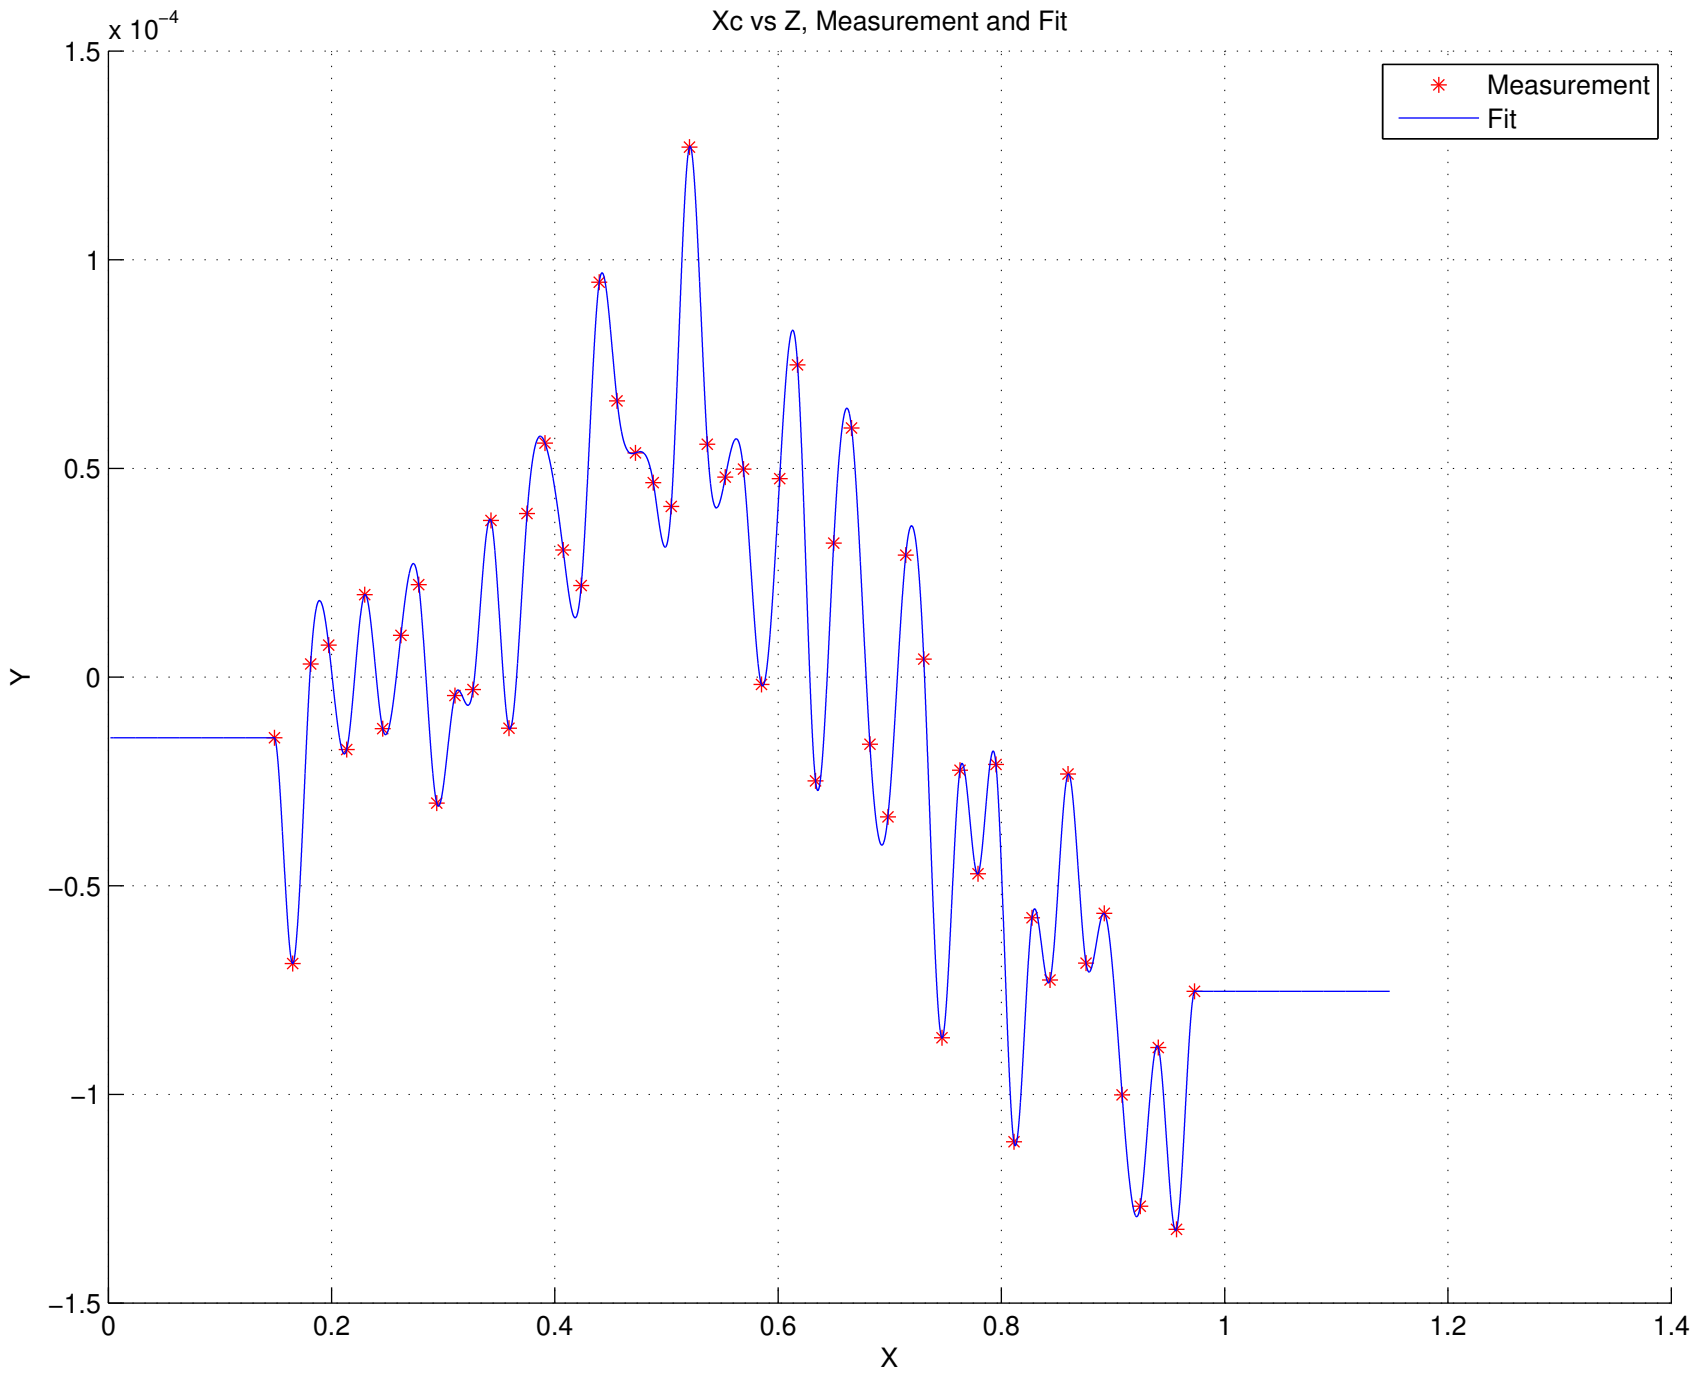
Xc vs Z, Measurement and Fit
x 10^-4
1.5
1
0.5
0
−0.5
−1
−1.5
Y
0
0.2
0.4
0.6
0.8
1
1.2
1.4
X
Measurement
Fit

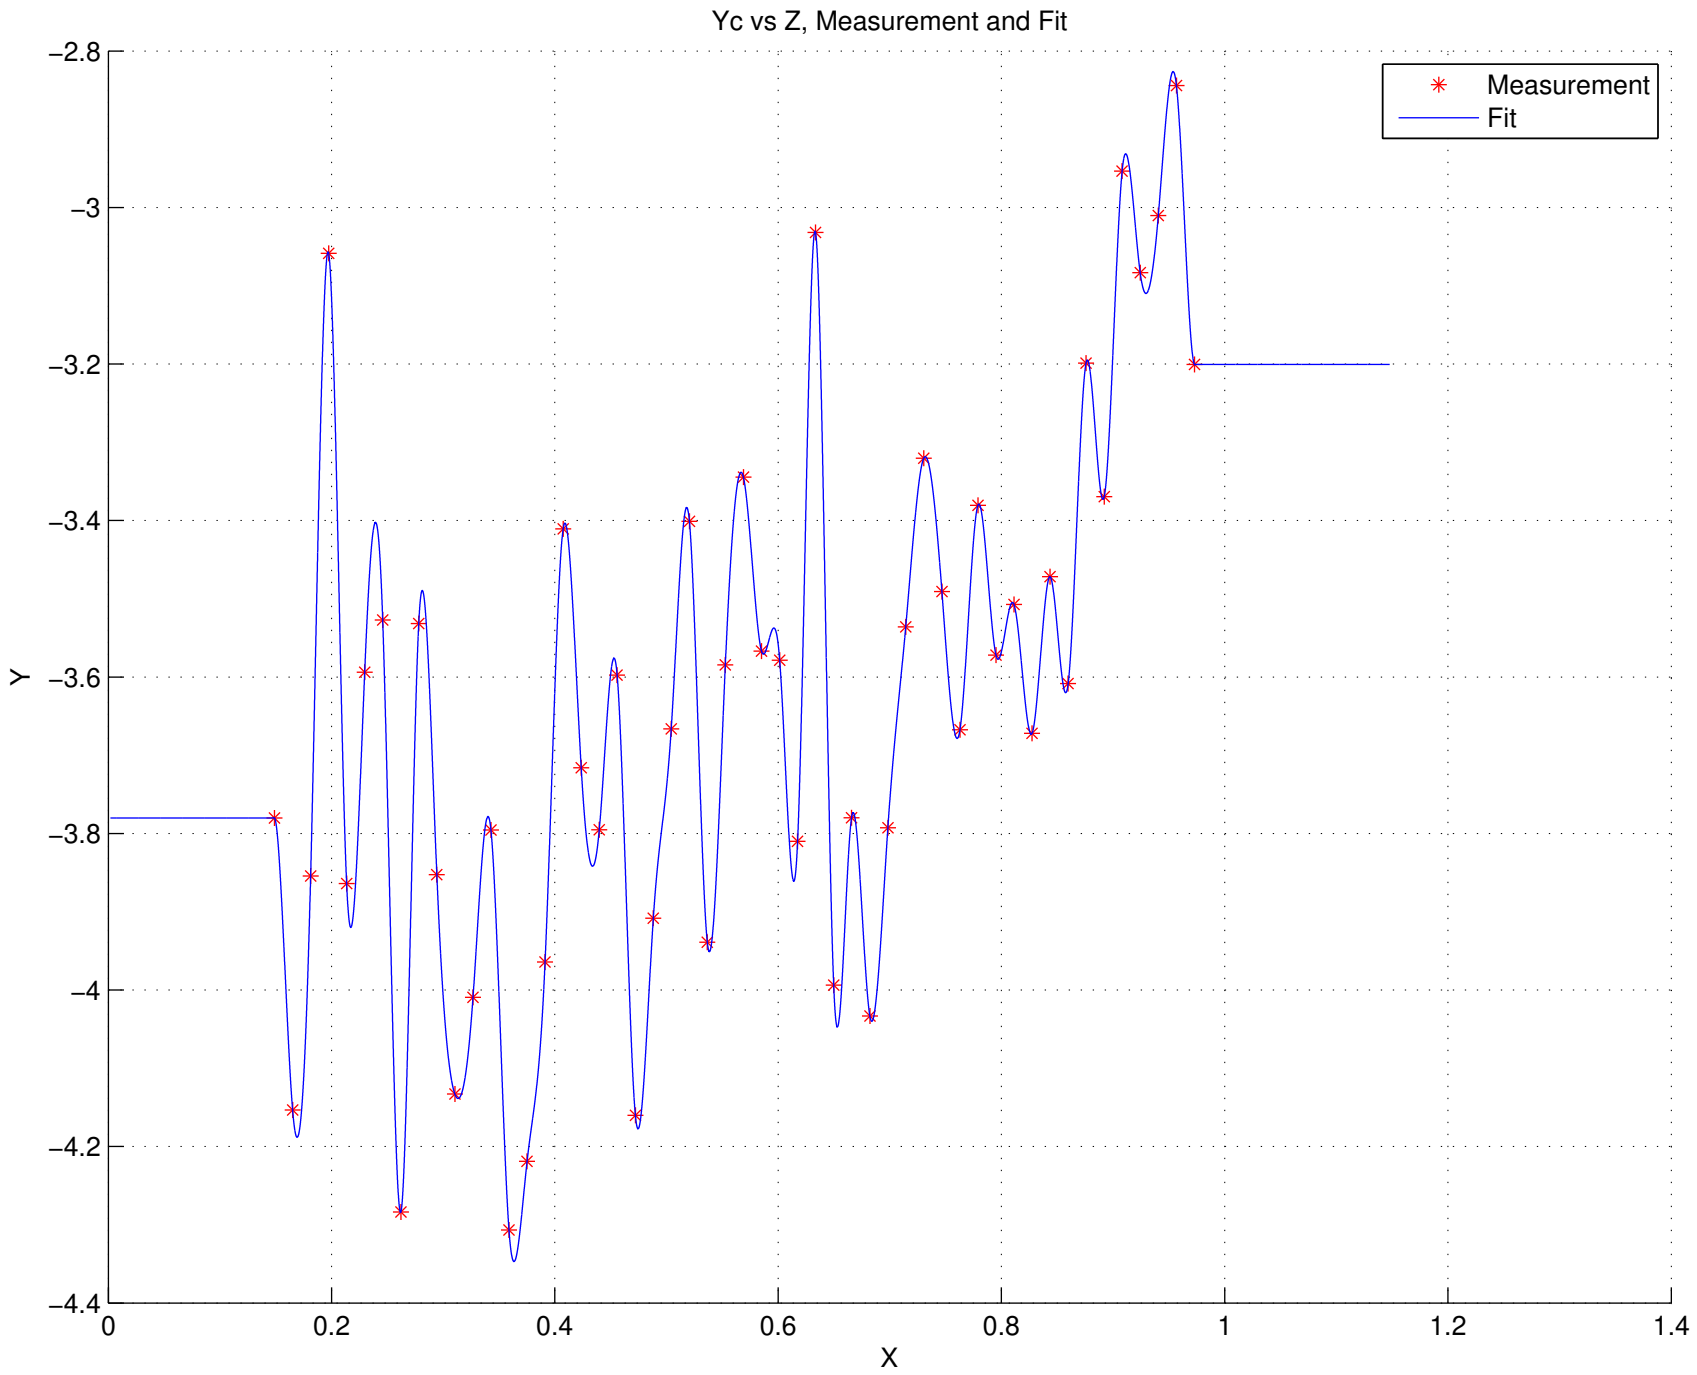
Yc vs Z, Measurement and Fit
Measurement
Fit
−2.8
−3
−3.2
−3.4
−3.6
−3.8
−4
−4.2
−4.4
Y
0
0.2
0.4
0.6
0.8
1
1.2
1.4
X

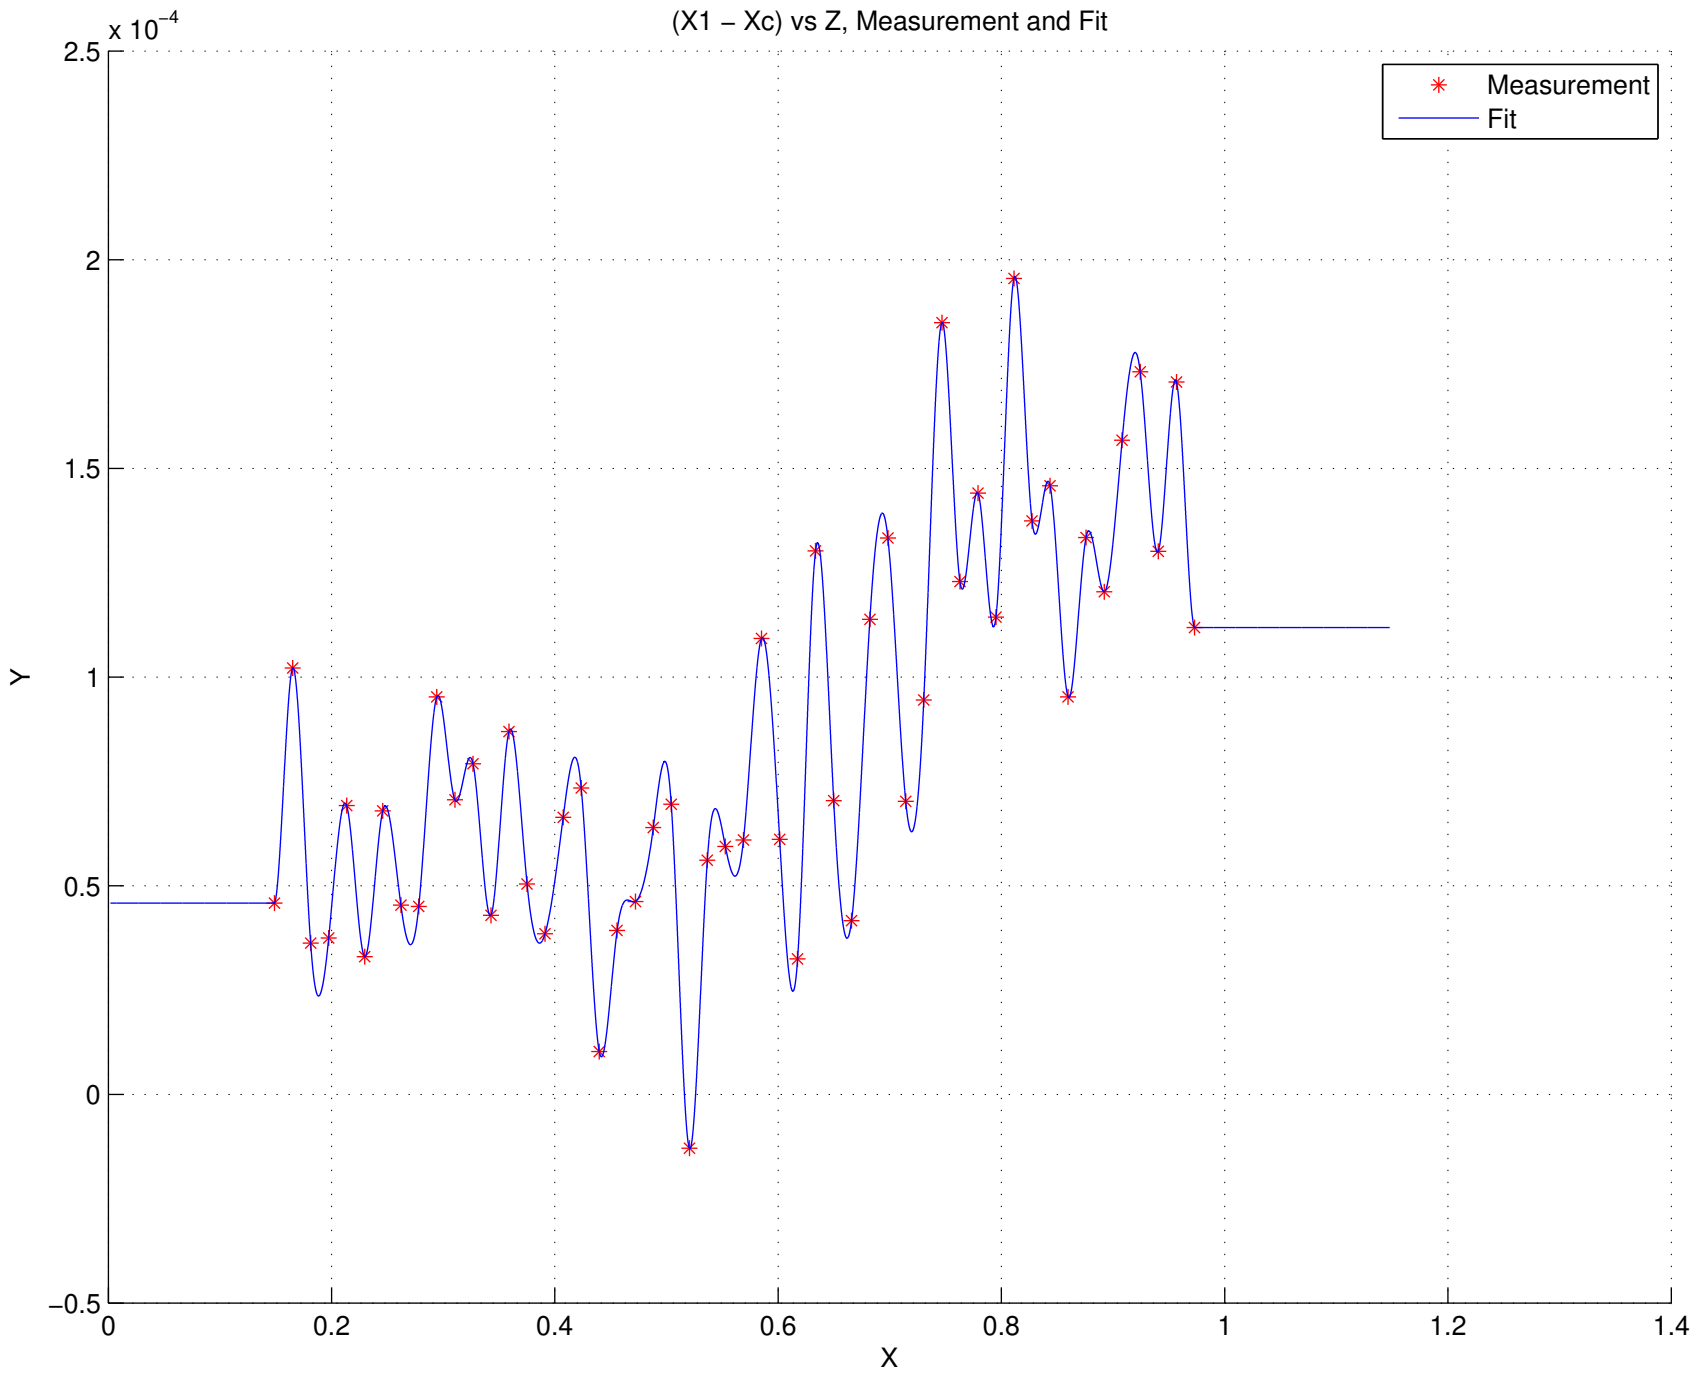
(X1 – Xc) vs Z, Measurement and Fit
x 10^-4
2.5
2
1.5
1
0.5
0
−0.5
Y
0
0.2
0.4
0.6
0.8
1
1.2
1.4
X
Measurement
Fit

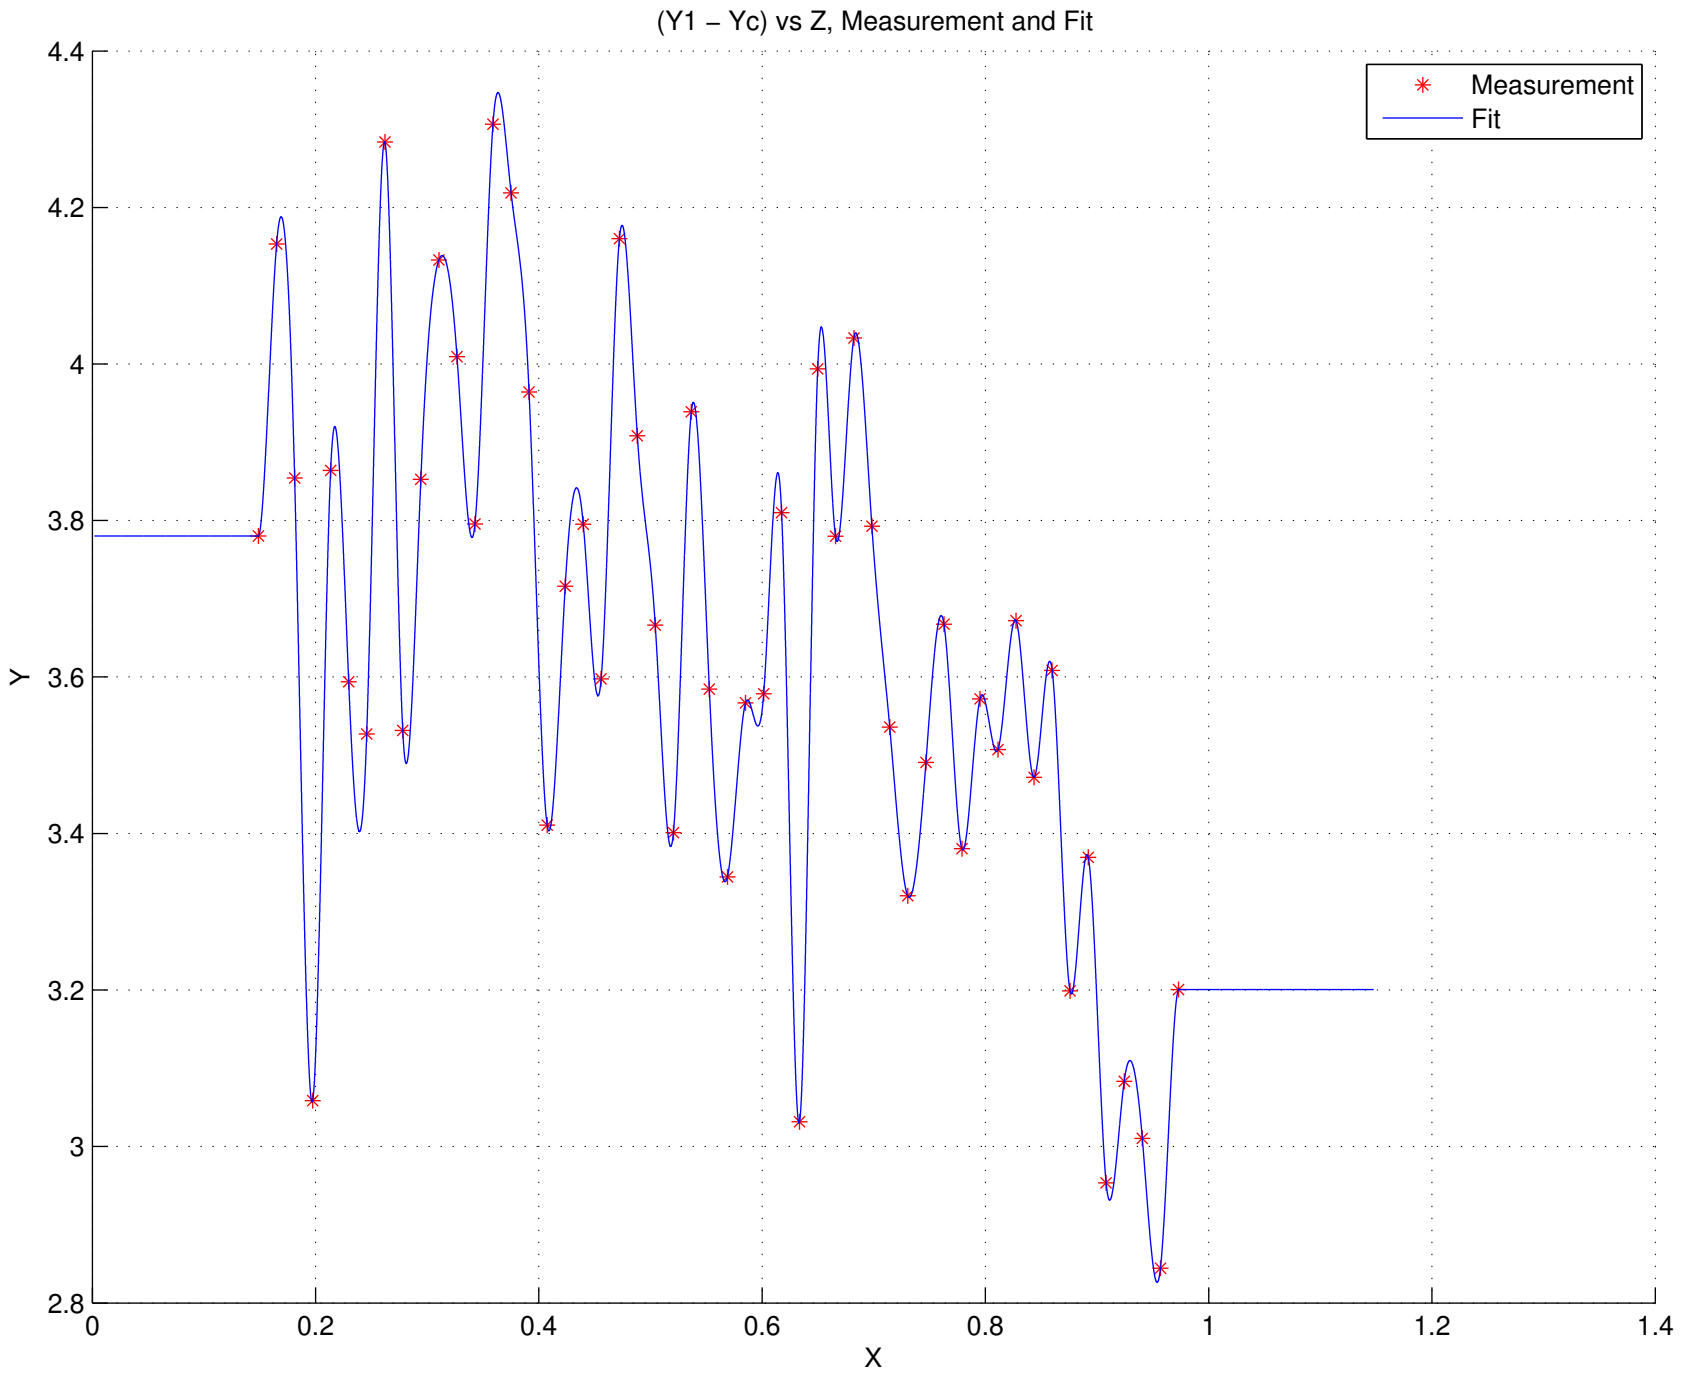
(Y1 – Yc) vs Z, Measurement and Fit
Measurement
Fit
Y
X
4.4
4.2
4
3.8
3.6
3.4
3.2
3
2.8
0
0.2
0.4
0.6
0.8
1
1.2
1.4

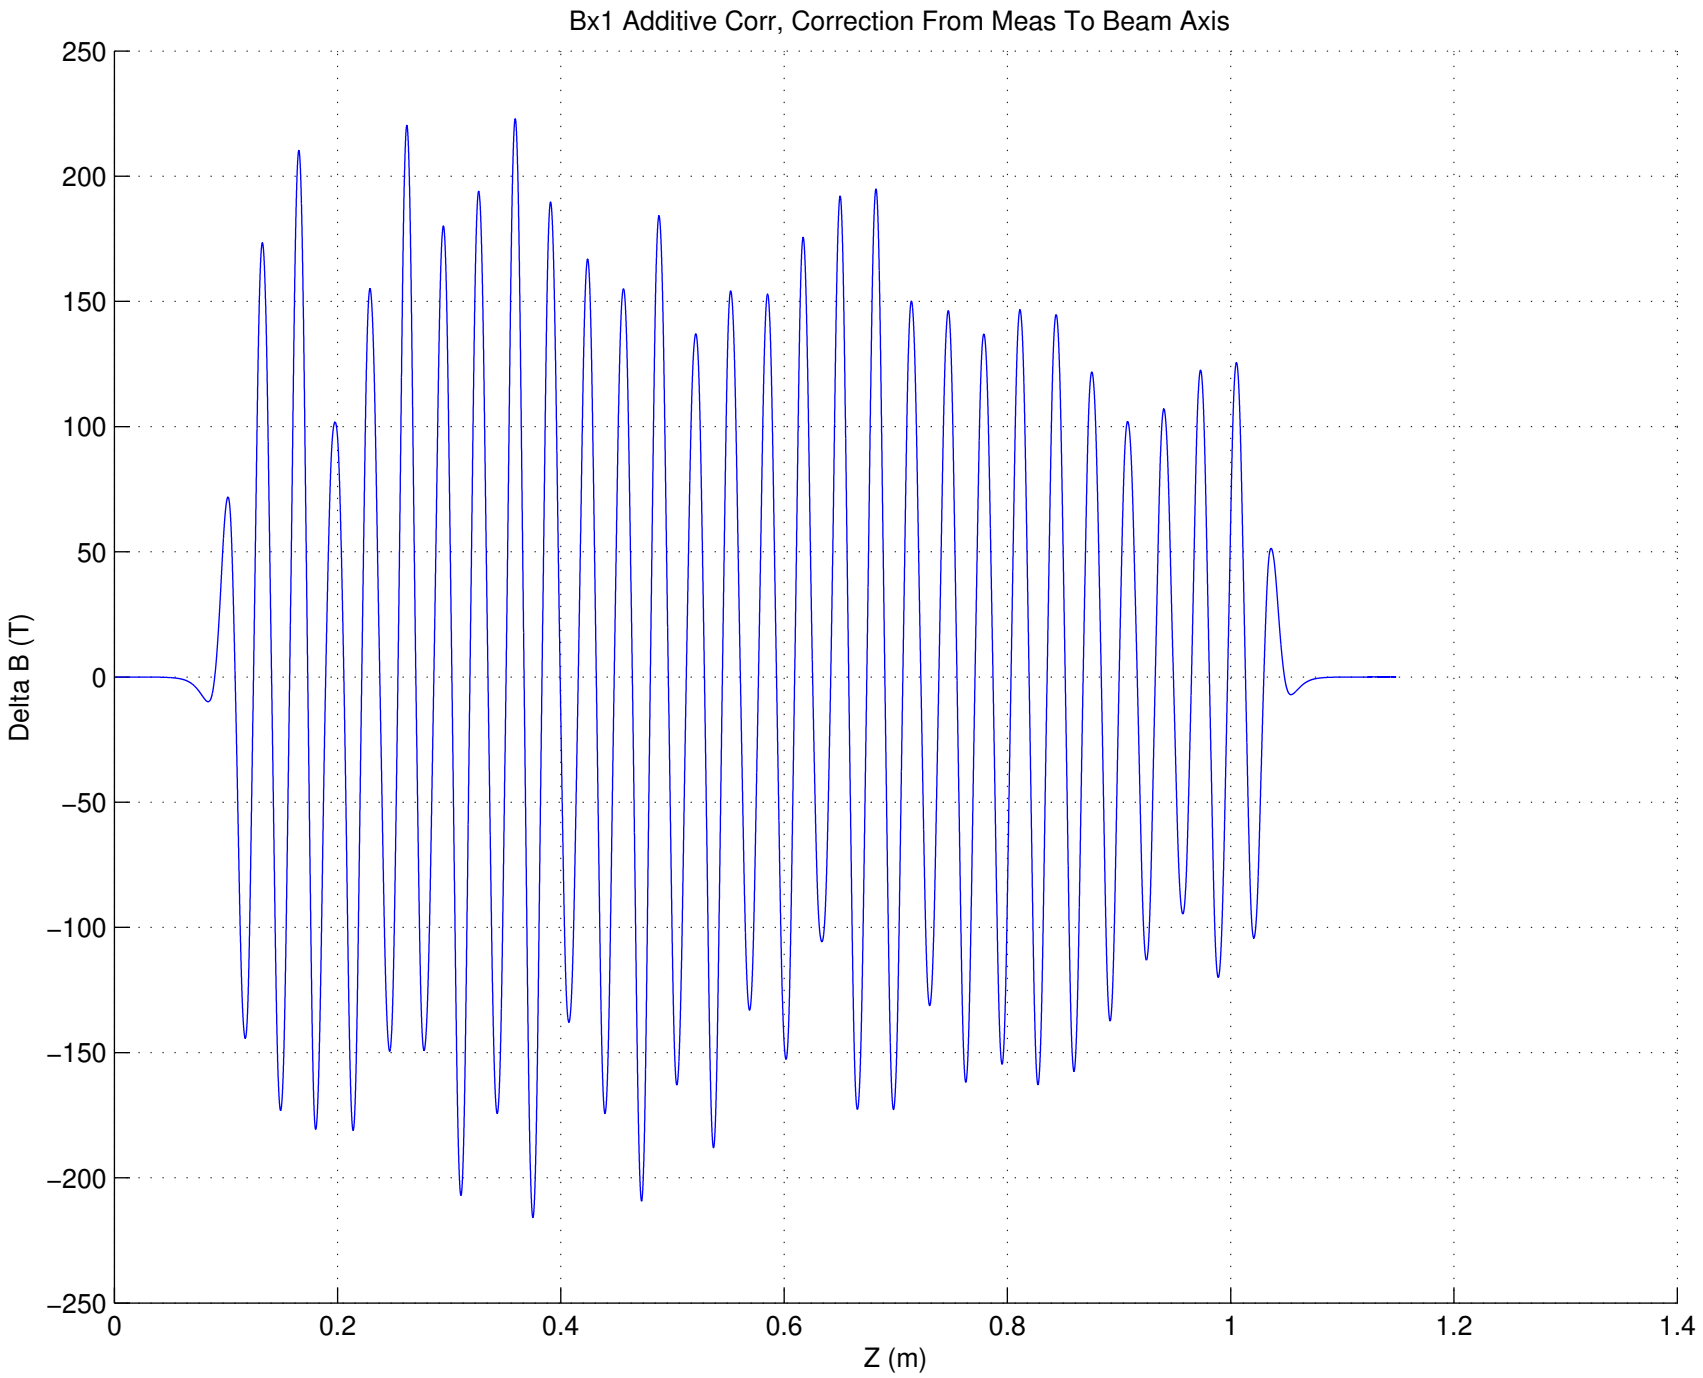
Bx1 Additive Corr, Correction From Meas To Beam Axis
Delta B (T)
Z (m)
250
200
150
100
50
0
−50
−100
−150
−200
−250
0
0.2
0.4
0.6
0.8
1
1.2
1.4

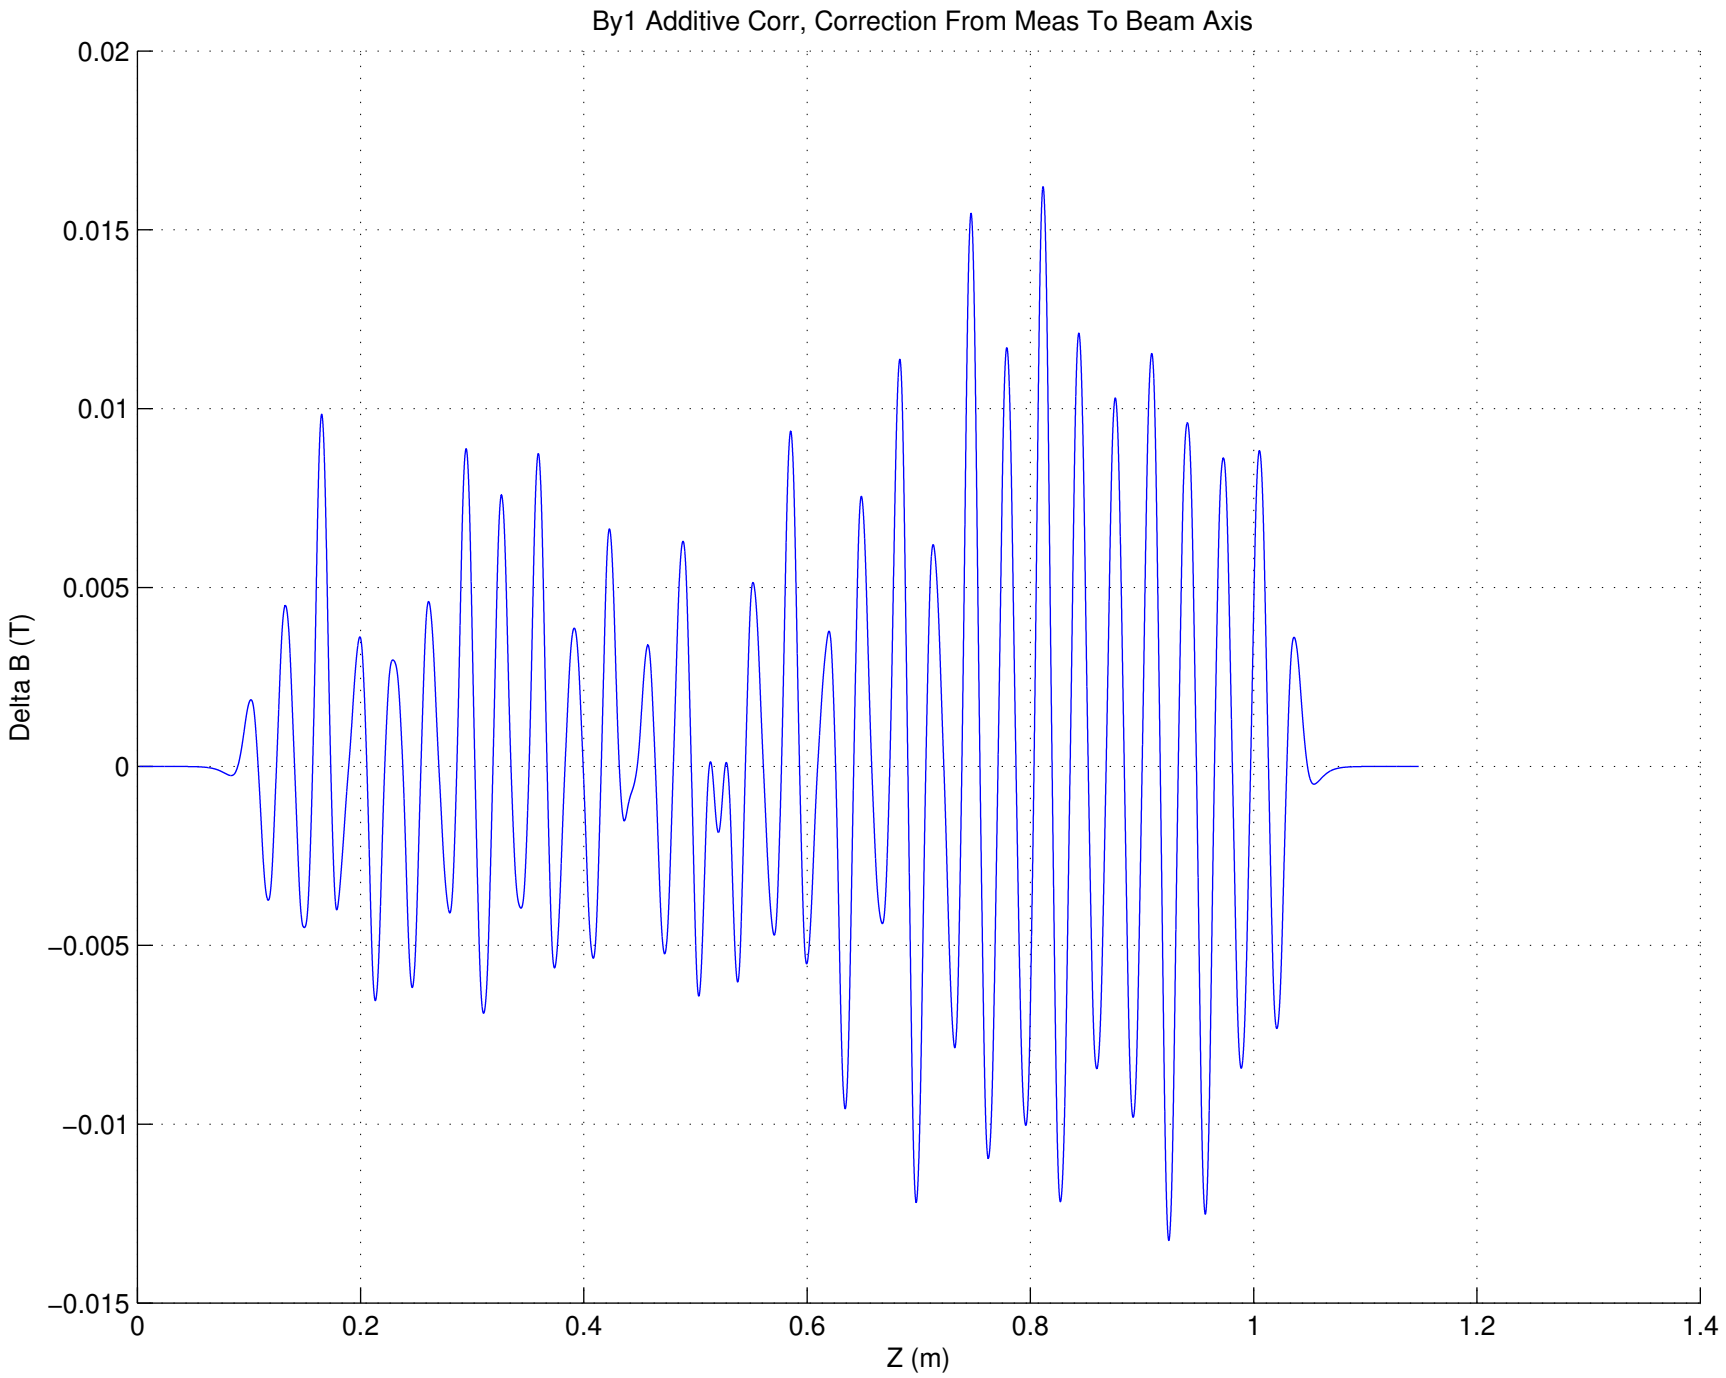
By1 Additive Corr, Correction From Meas To Beam Axis
0.02
0.015
0.01
0.005
0
−0.005
−0.01
−0.015
Delta B (T)
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z (m)

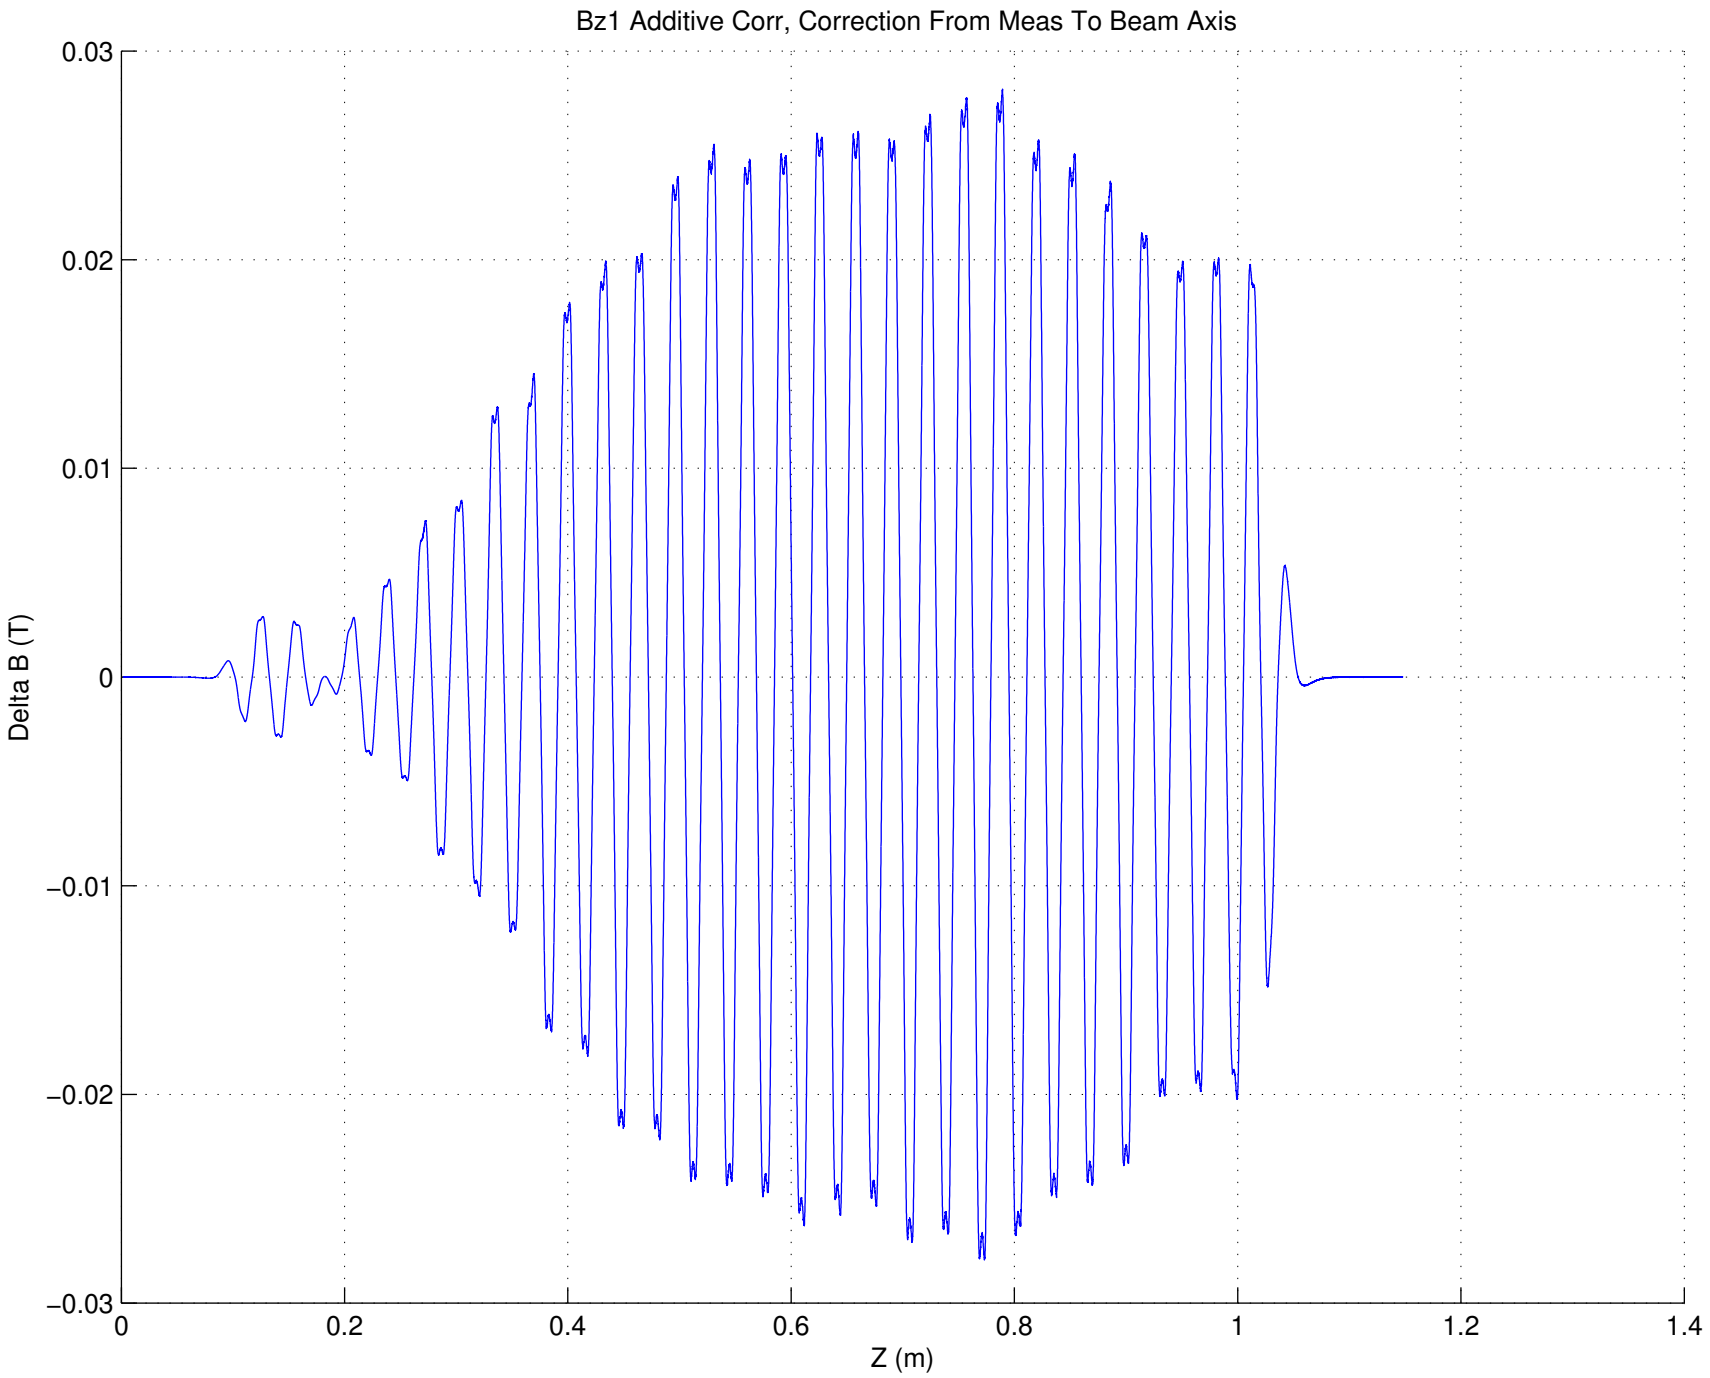
Bz1 Additive Corr, Correction From Meas To Beam Axis
Delta B (T)
Z (m)
0.03
0.02
0.01
0
−0.01
−0.02
−0.03
0
0.2
0.4
0.6
0.8
1
1.2
1.4

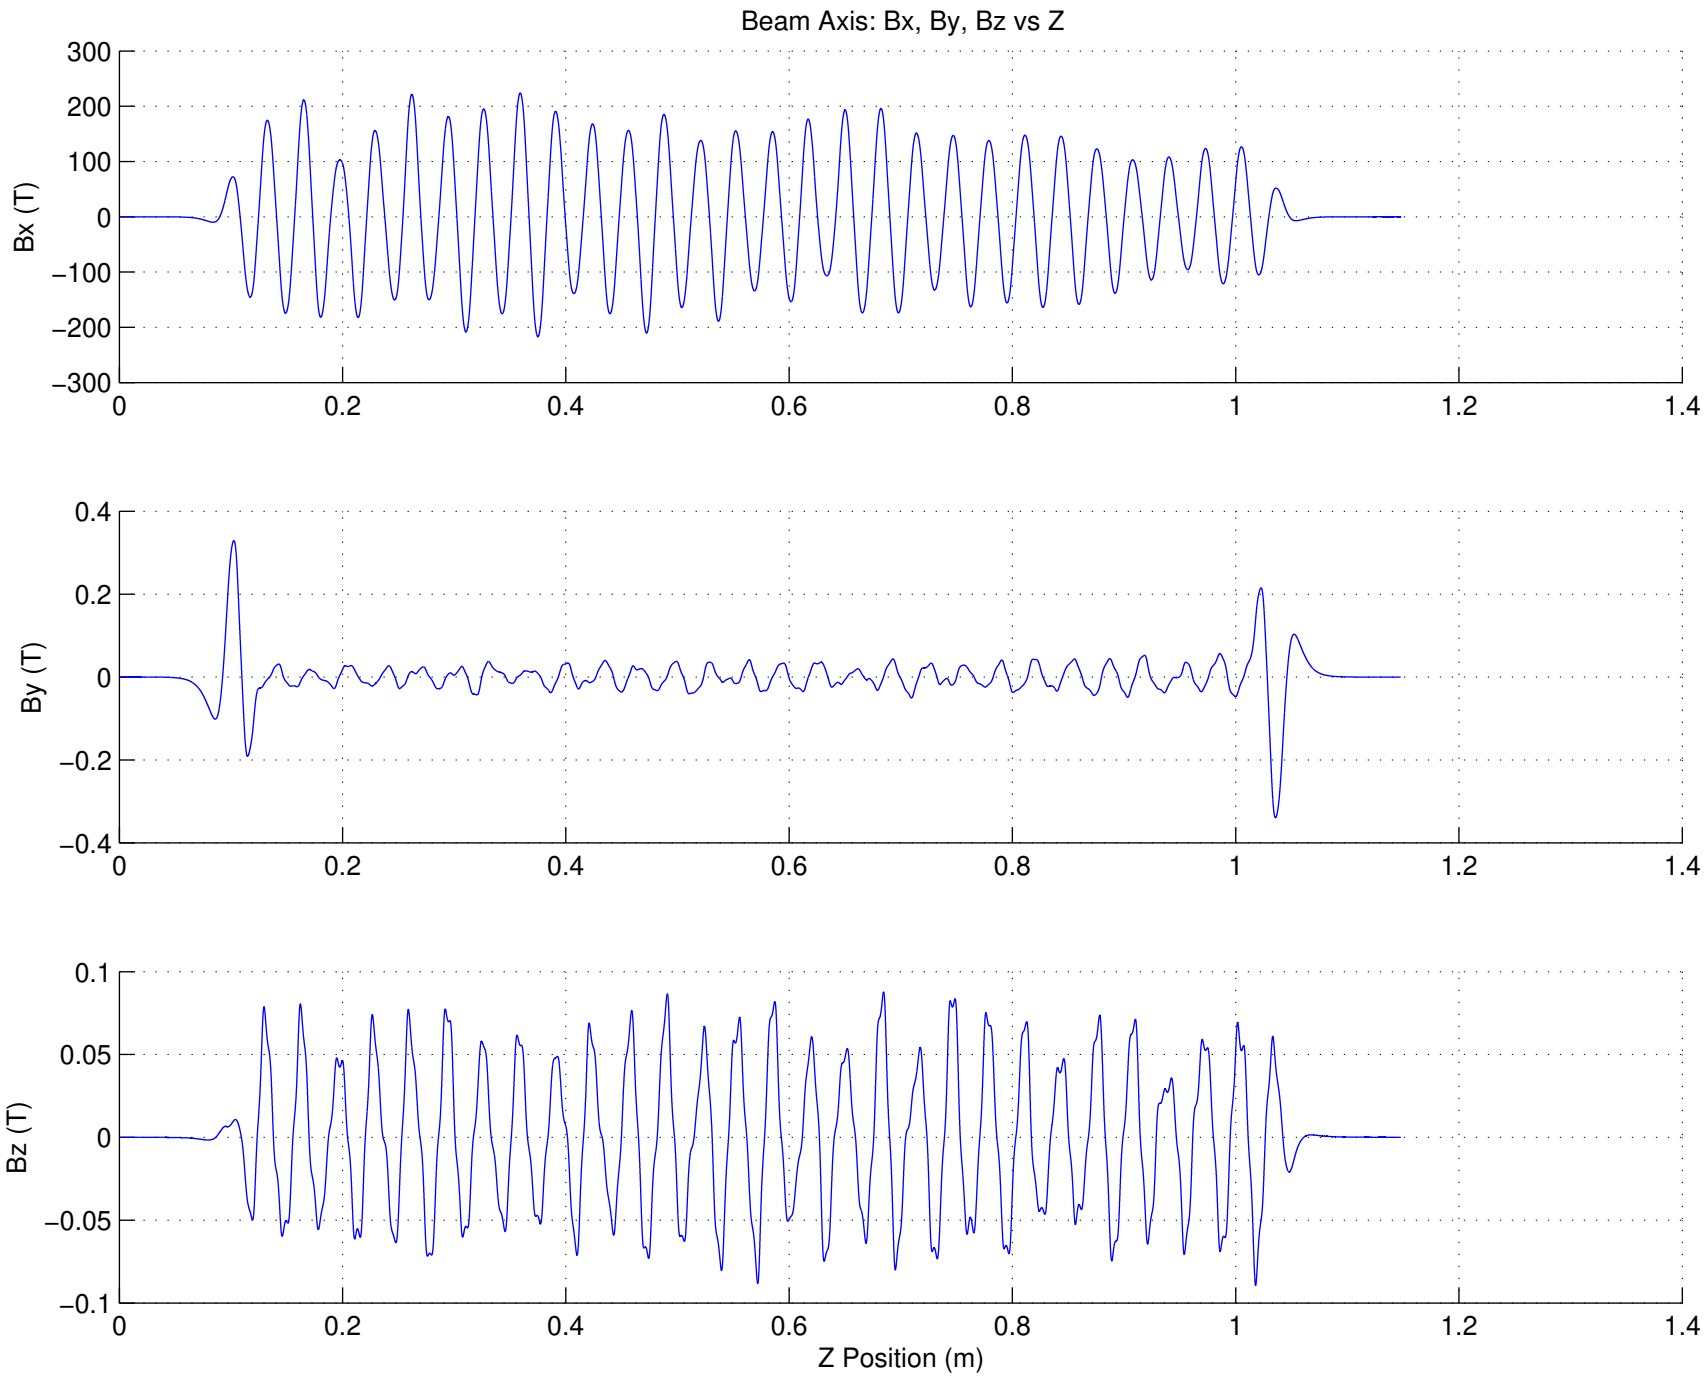
Beam Axis: Bx, By, Bz vs Z
Bx (T)
300
200
100
0
−100
−200
−300
By (T)
0.4
0.2
0
−0.2
−0.4
Bz (T)
0.1
0.05
0
−0.05
−0.1
0
0.2
0.4
0.6
0.8
1
1.2
1.4
Z Position (m)