SLAC Magnetic Measurements

Planar Insertion Device Analysis

SLAC Magnetic Measurements
Date: 06-26-2015
Time: 14:18:59

Project: LCLS
Device Type: Undulator
Data Type:
Serial Number: L143-112000-13
DATASET Number: 50
Tuning Stage: Fine Tuning
Run Number: 1
Measurement Type: Z Scans
Operator: YL
Comment: check trajectories
Session first run: 1
Measurement Device x:
Measurement Device y: $SENTRON_4$41

Data File: s:\magdata\LCLS\Undulator\L143-112000-13\DATASET0050\Fine Tuning\Z Scans\Run 001\bscanz.dat

Temperature (C)
L143-112000-13:--> T1 0.0 --> T2 0.0 --> T5 0.0 --> T3 0.0 --> Air 0.0 --> T4 0.0 --> KRefM 0.0
Axes position (m) X:0.039097 Y:0.000305
Initial Hall Probe Zero Measurements:
Vx_0i = 0.001068 V
Vy_0i = -0.003008 V

Final Hall Probe Zero Measurements:
Vx_0f = 0.001075 V

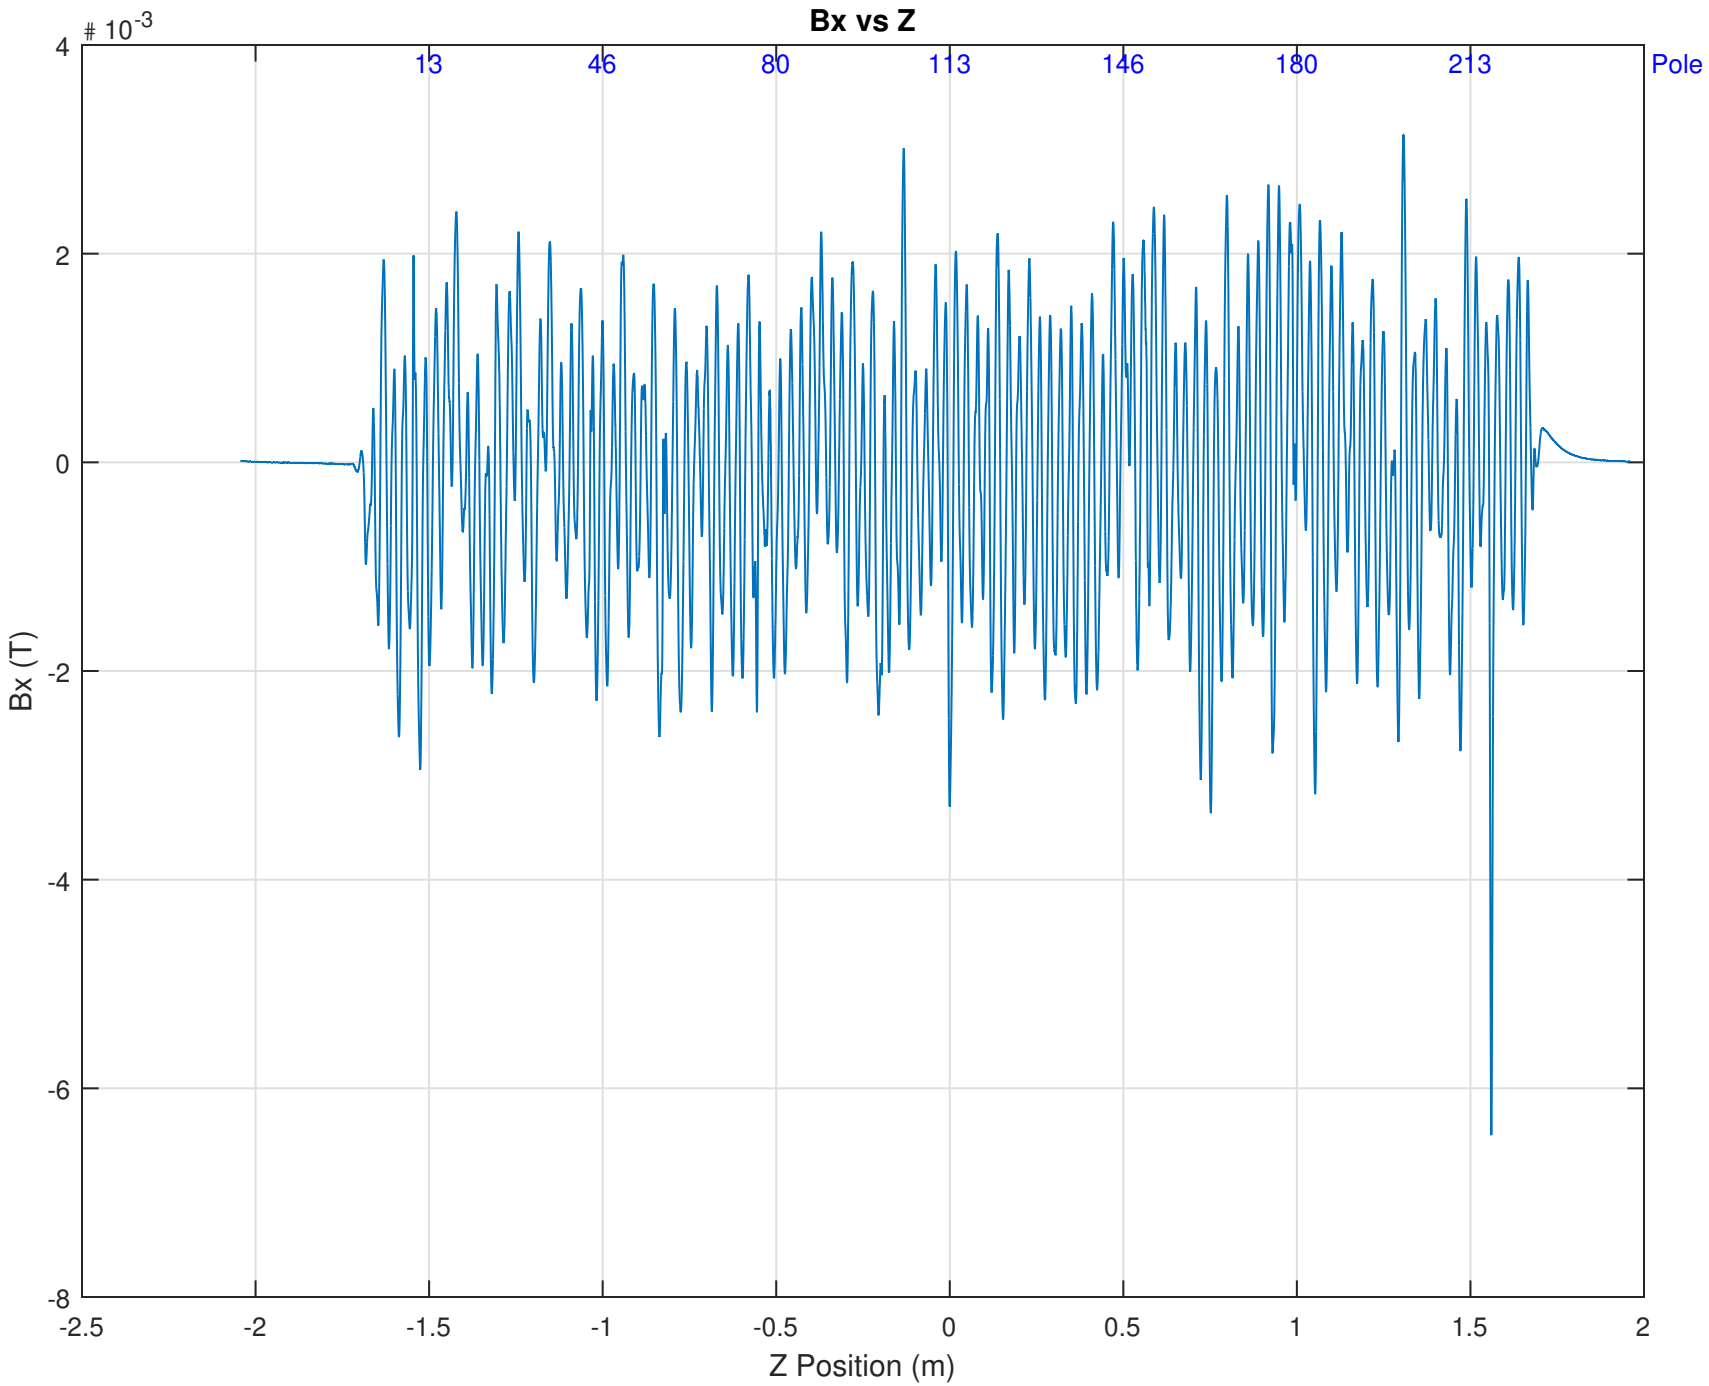
Bx vs Z
10^-3
4
2
0
-2
-4
-6
-8
Bx (T)
13
46
80
113
146
180
213
Pole
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z Position (m)

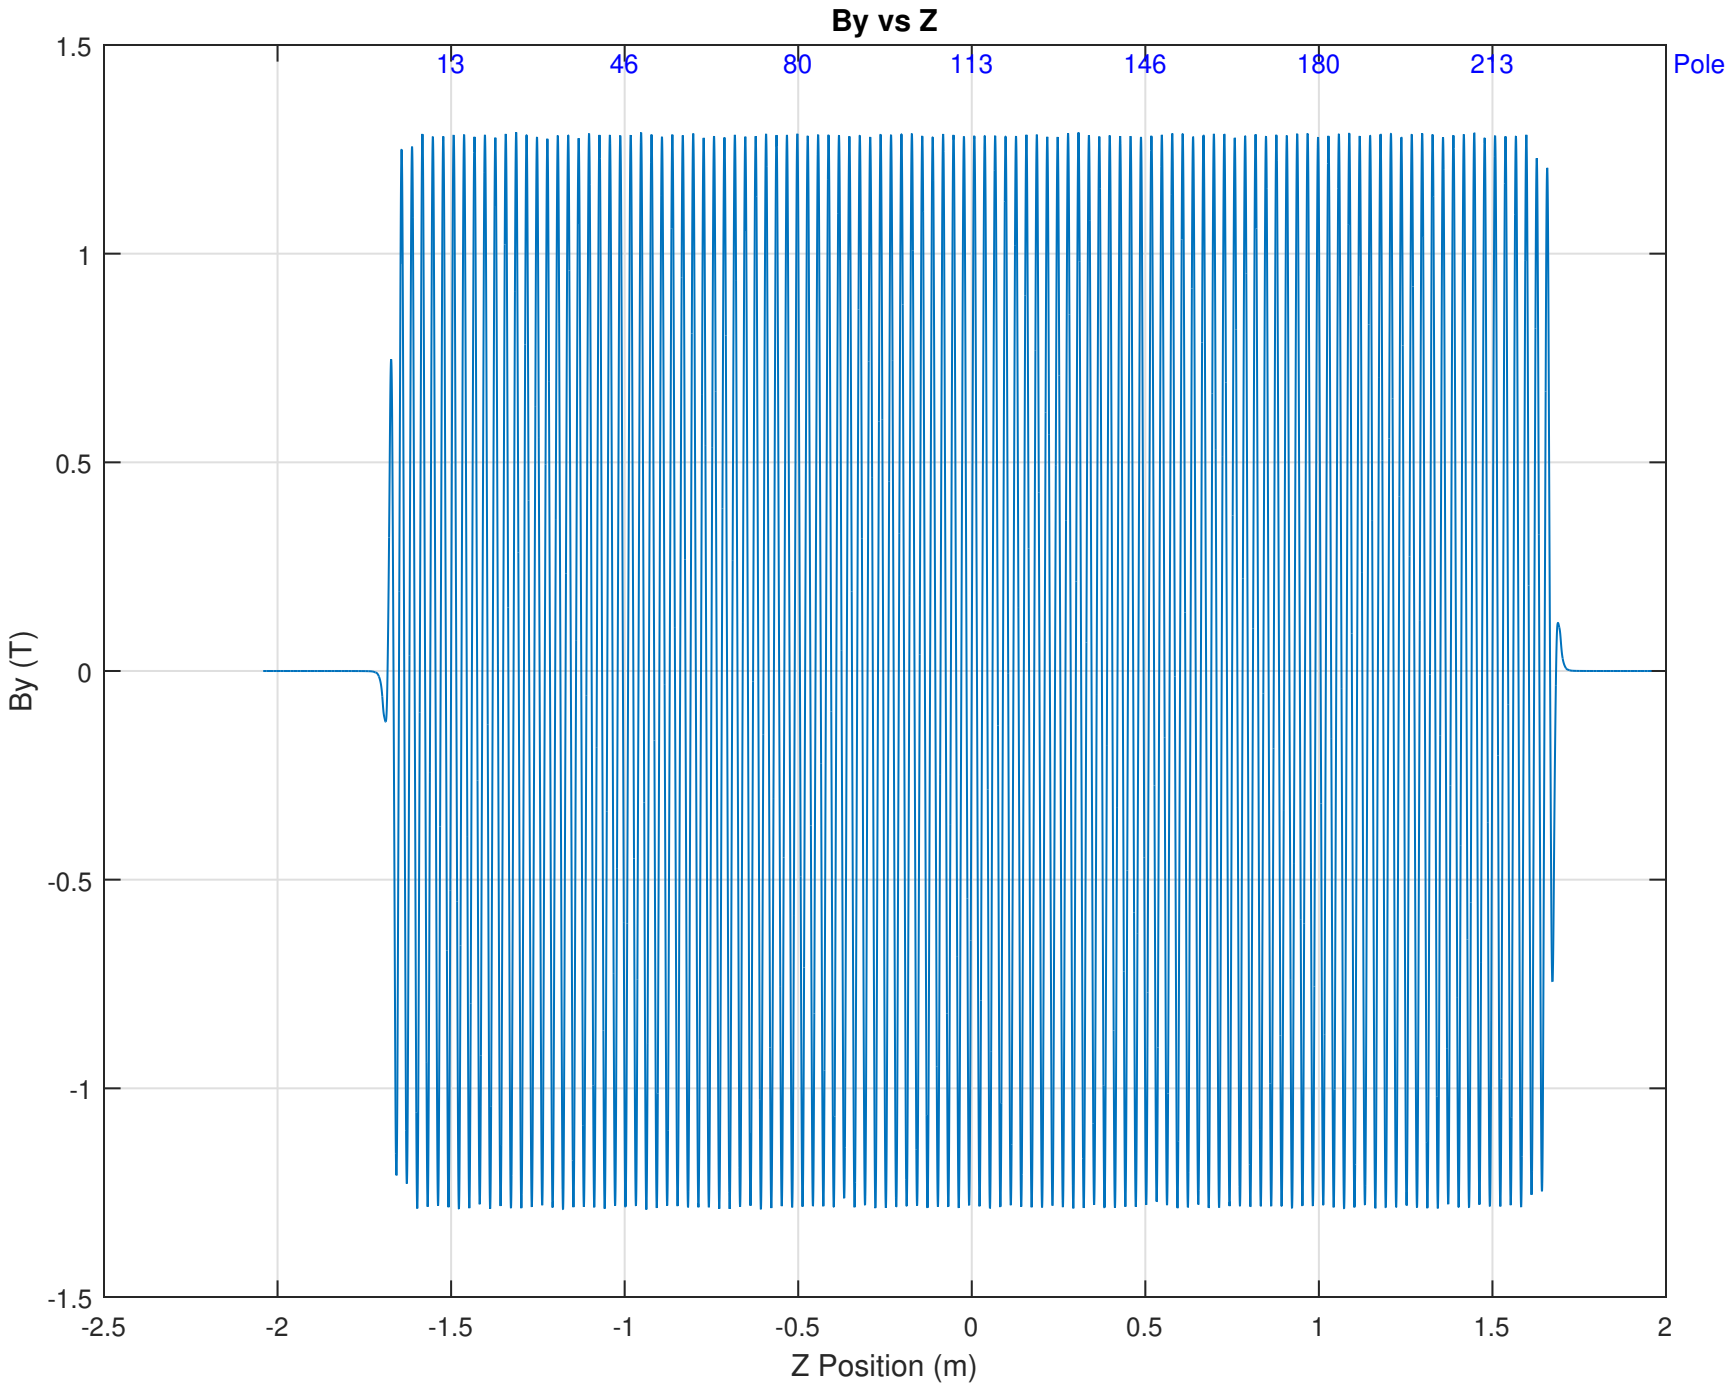
By vs Z
13
46
80
113
146
180
213
Pole
1.5
1
0.5
0
-0.5
-1
-1.5
By (T)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z Position (m)

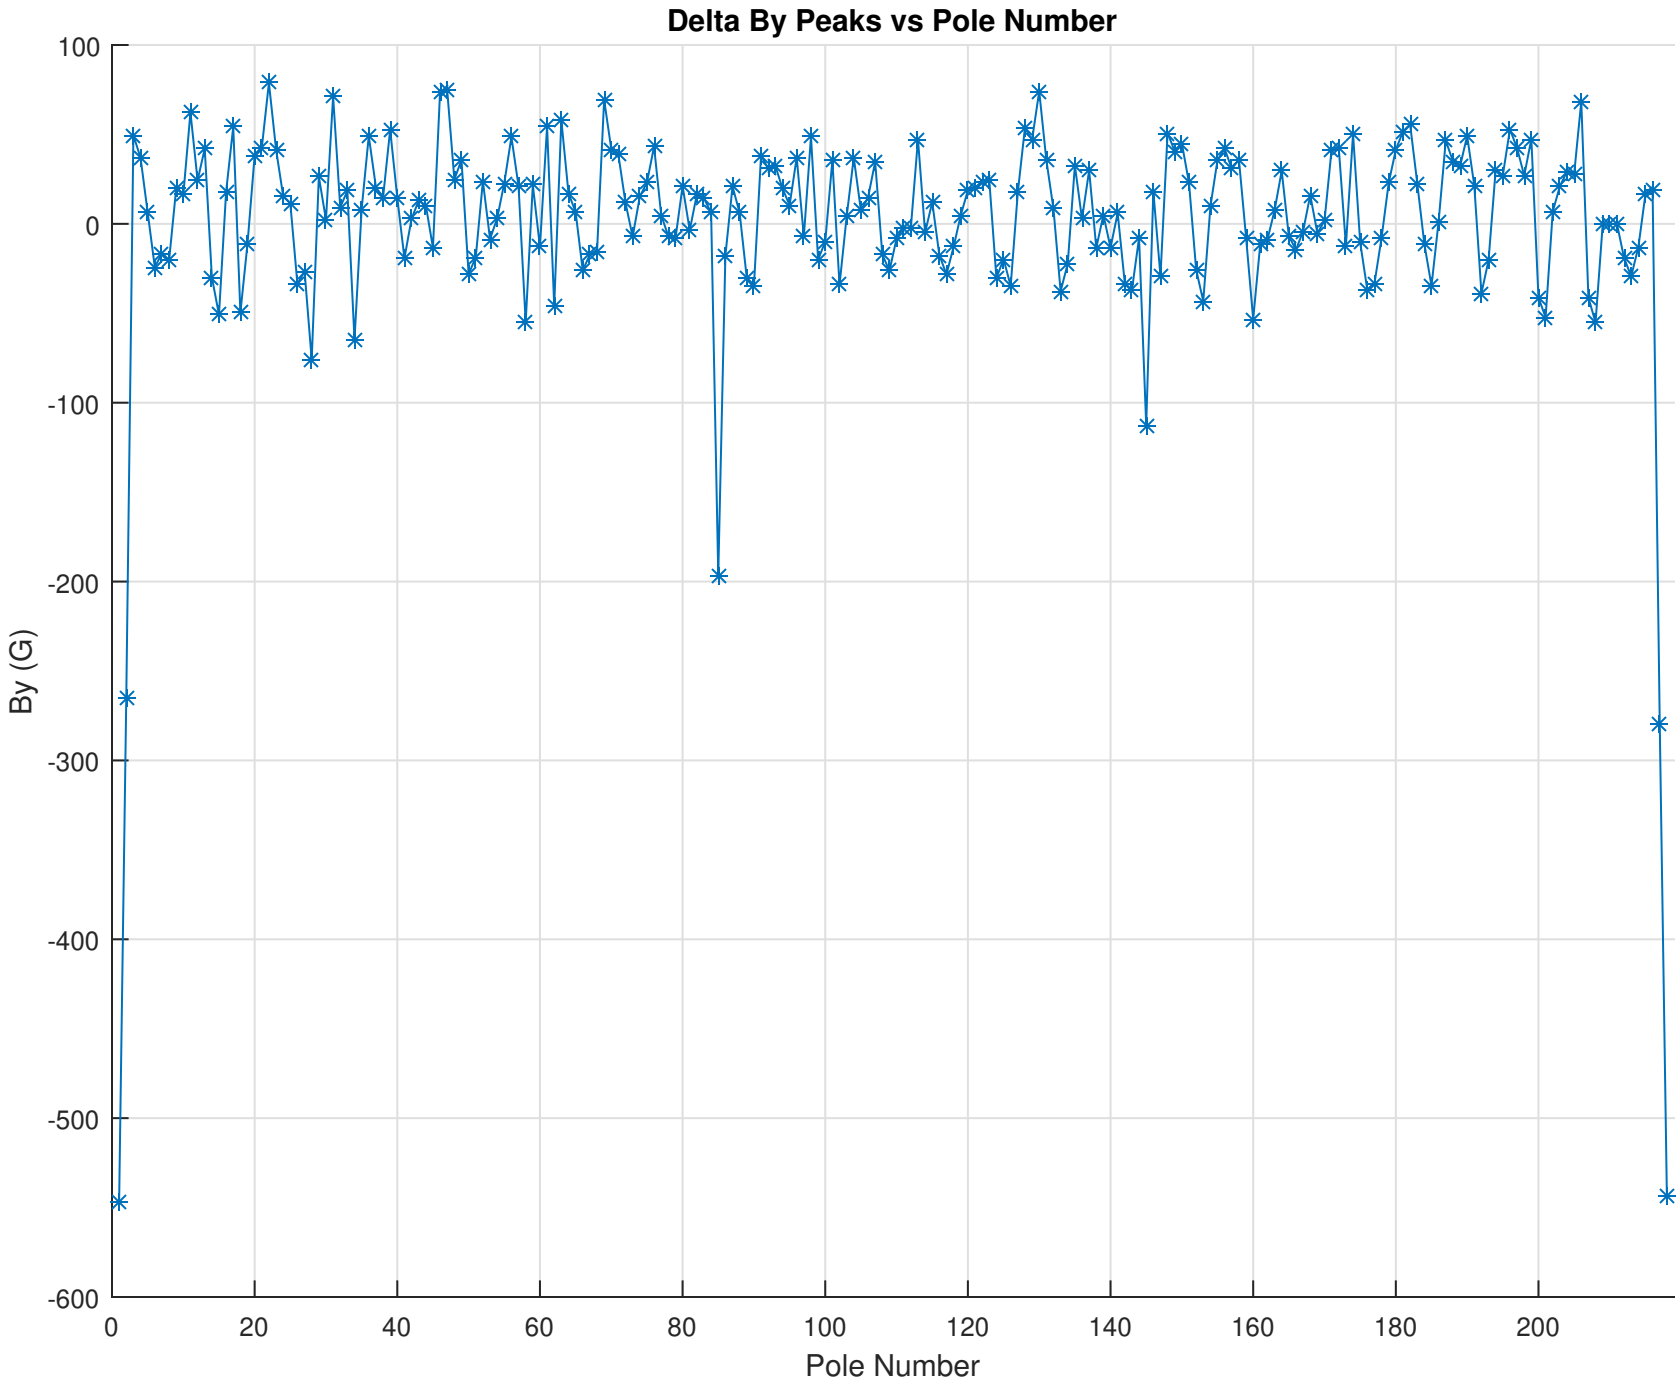
Delta By Peaks vs Pole Number
By (G)
Pole Number
100
0
-100
-200
-300
-400
-500
-600
0
20
40
60
80
100
120
140
160
180
200

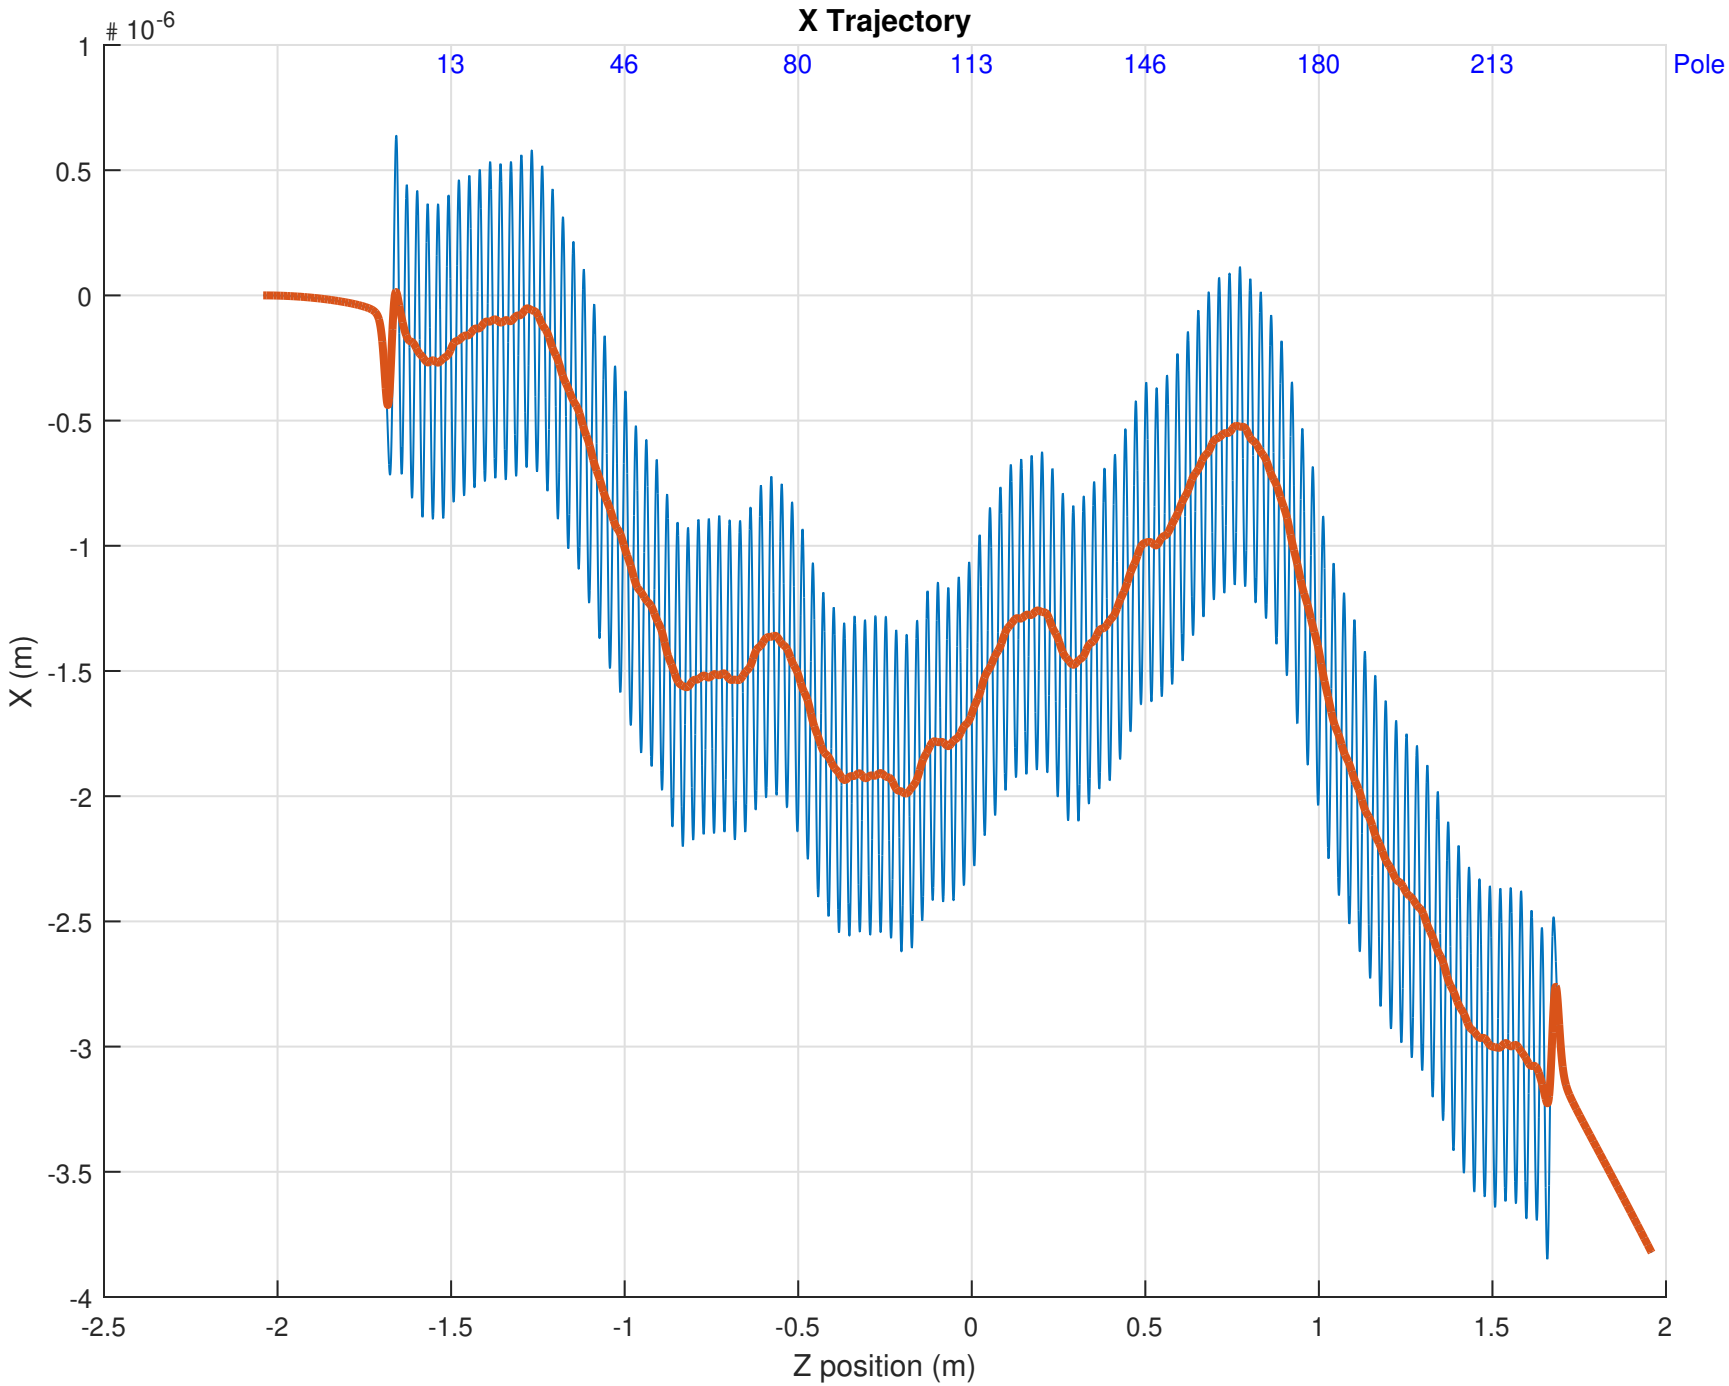
X Trajectory
10^-6
13
46
80
113
146
180
213
Pole
1
0.5
0
-0.5
-1
-1.5
-2
-2.5
-3
-3.5
-4
X (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z position (m)

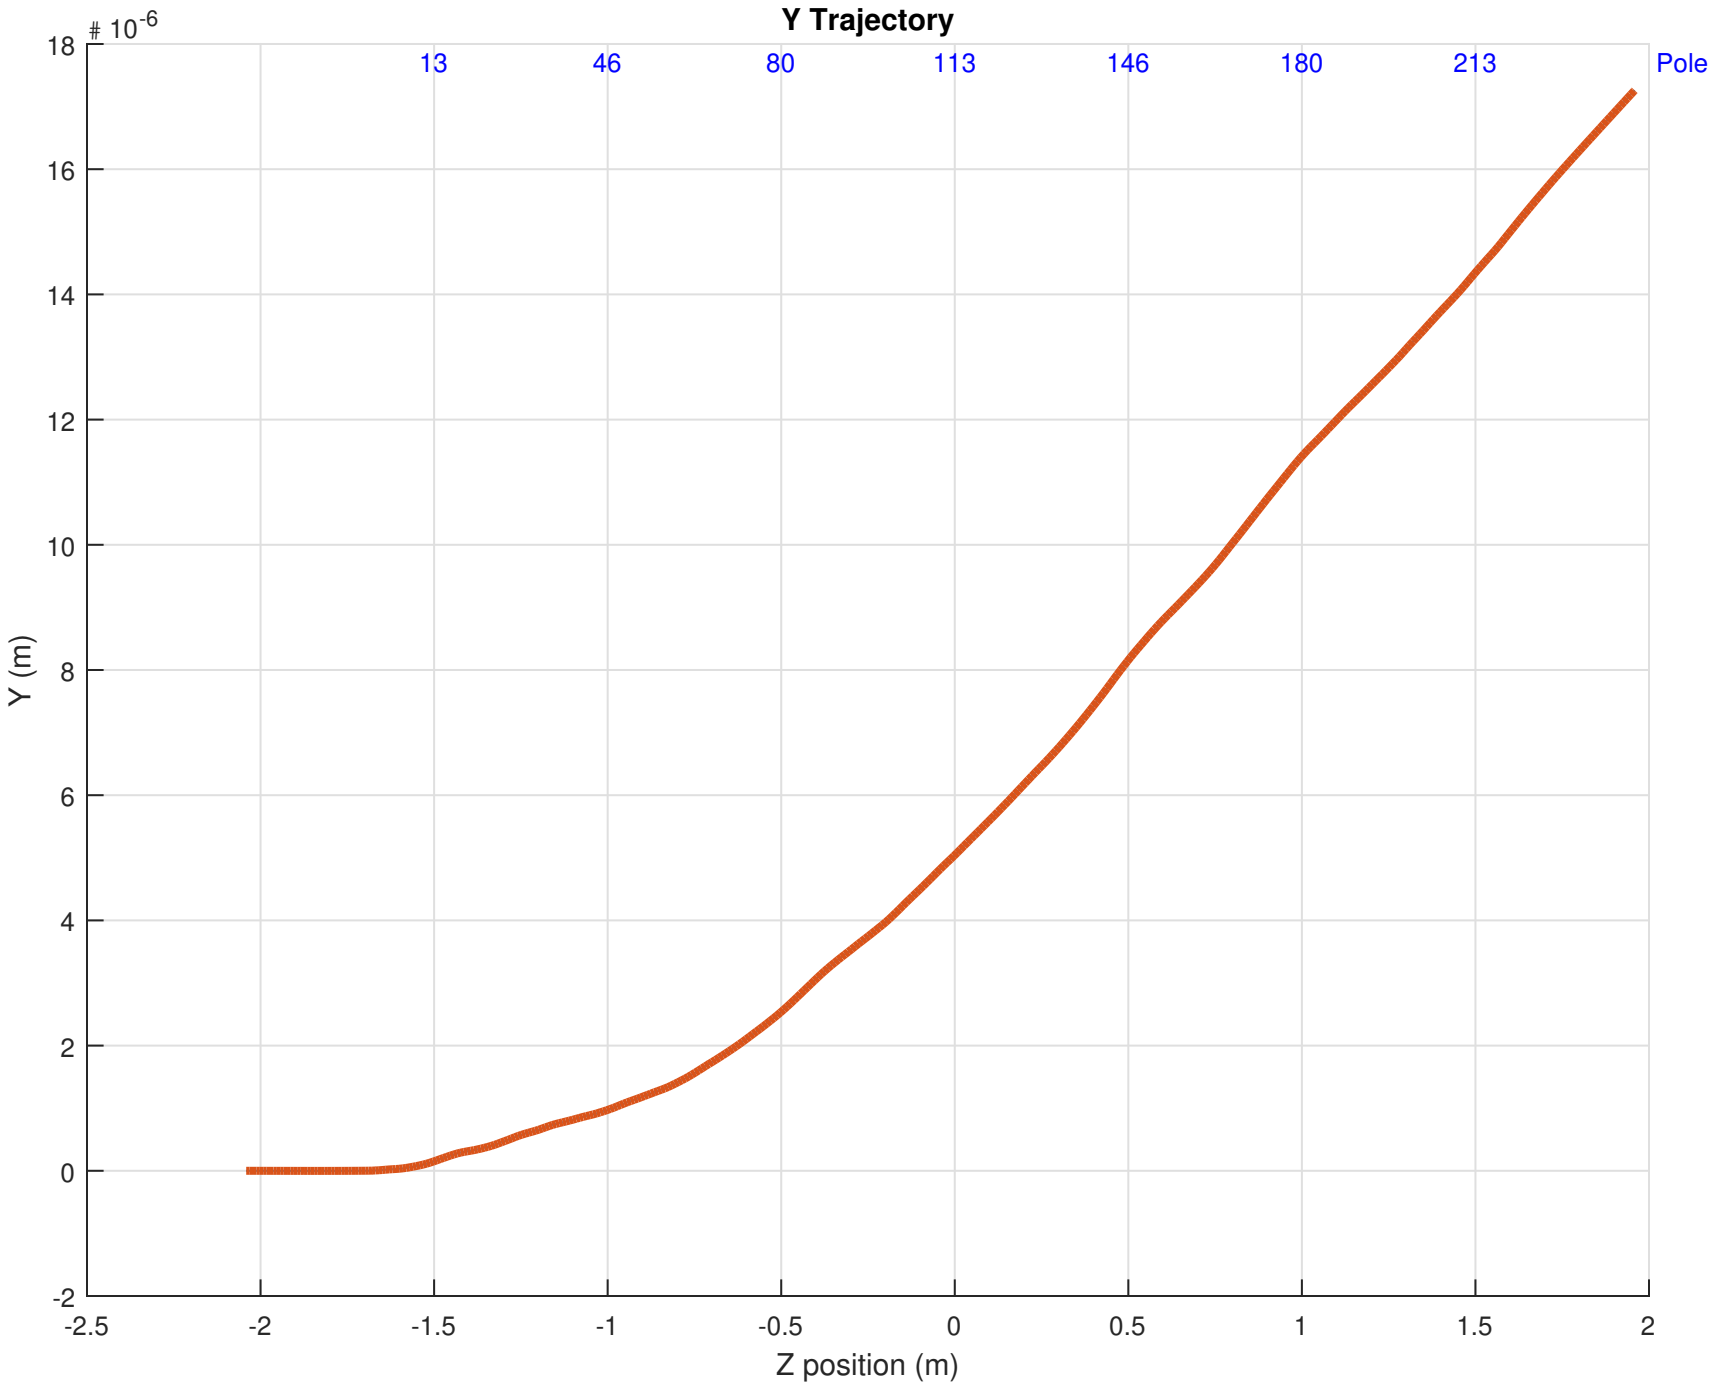
Y Trajectory
10-6
18
16
14
12
10
8
6
4
2
0
-2
13
46
80
113
146
180
213
Pole
Y (m)
-2.5
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z position (m)

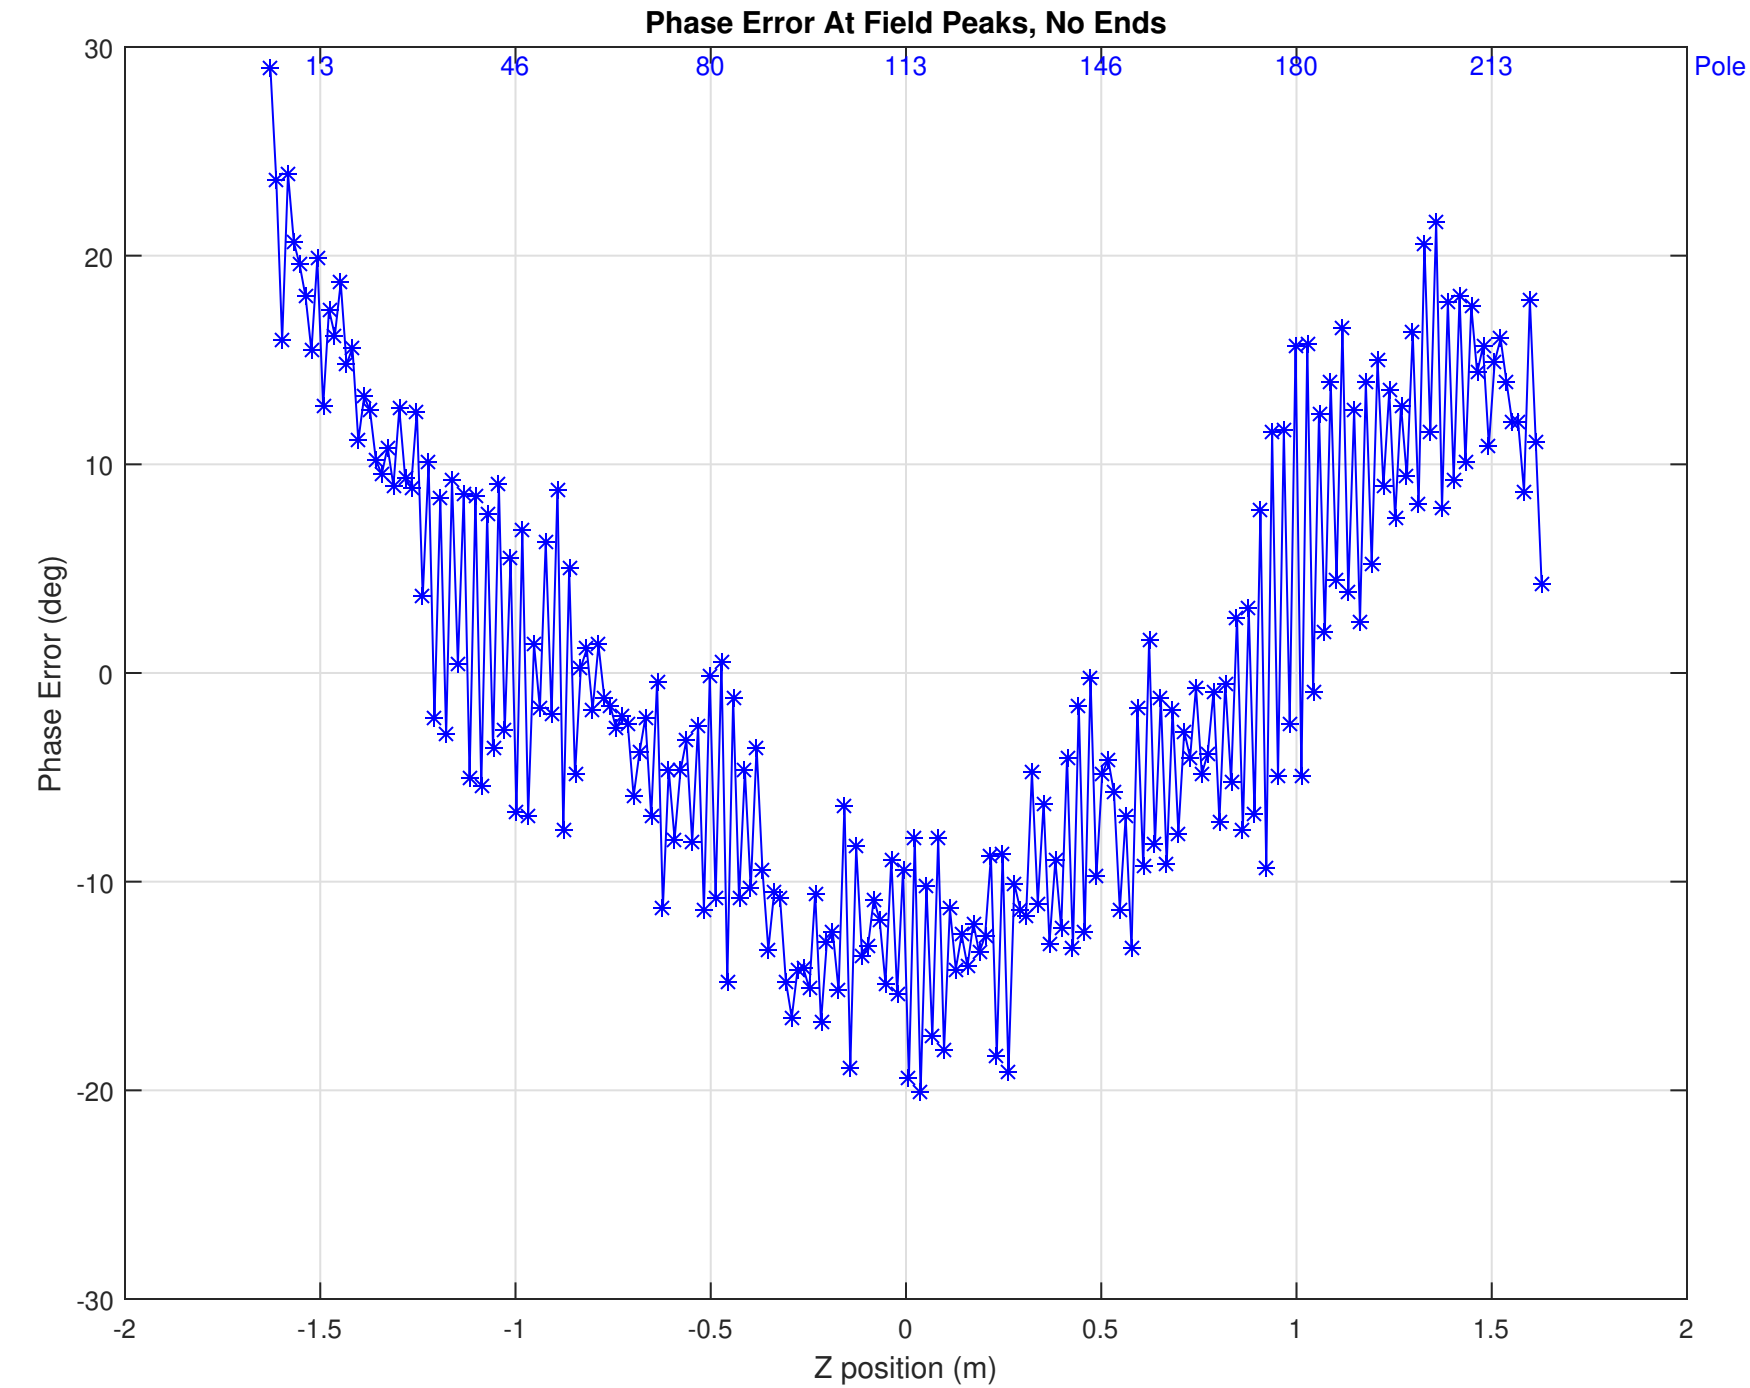

Phase Error: Ave = -0.000000 deg, RMS = 11.116308 deg

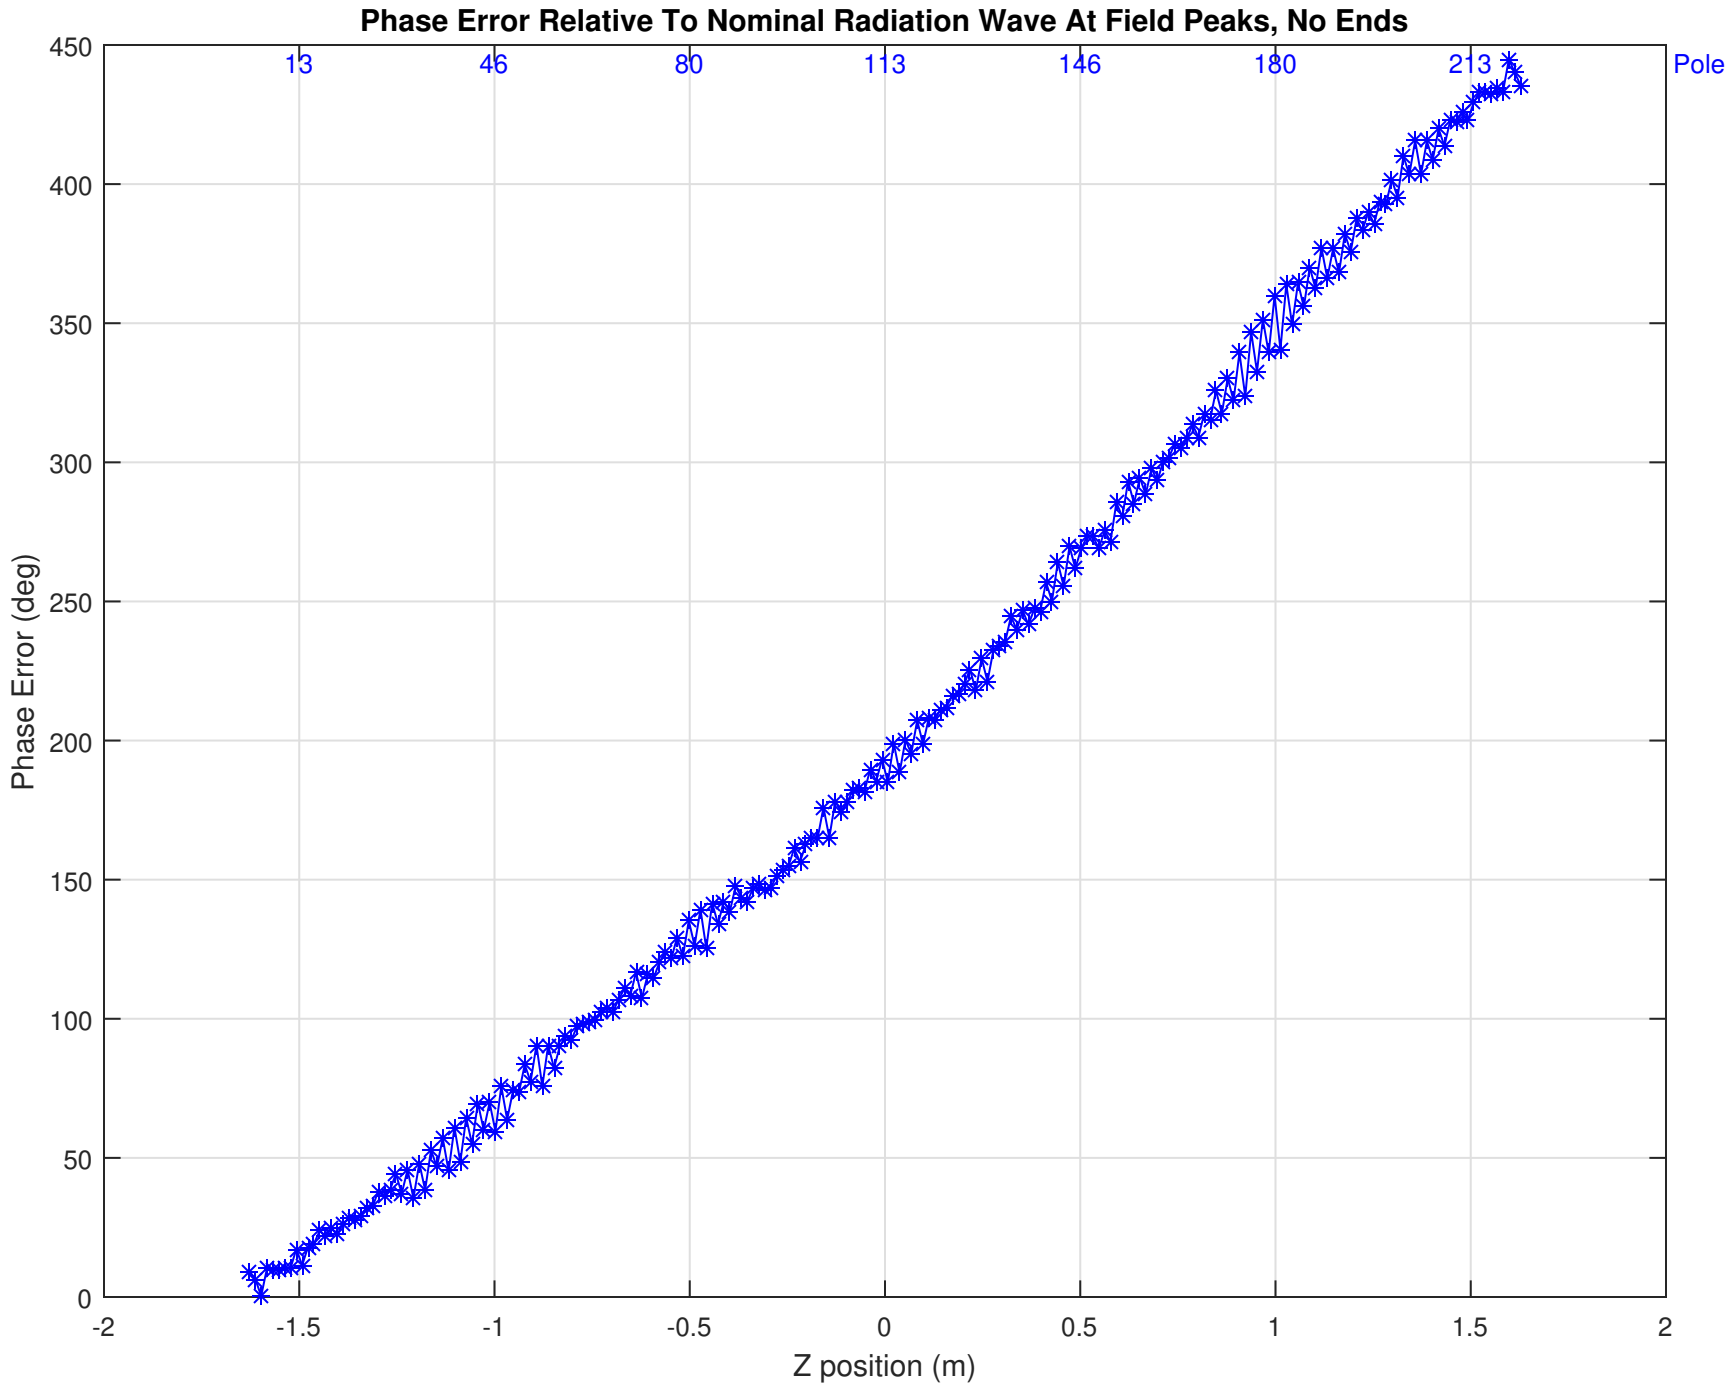
Phase Error Relative To Nominal Radiation Wave At Field Peaks, No Ends
13
46
80
113
146
180
213
Pole
450
400
350
300
250
200
150
100
50
0
Phase Error (deg)
-2
-1.5
-1
-0.5
0
0.5
1
1.5
2
Z position (m)